

Revision A:

- MXZ-2C30VA- E1, MXZ-2C40VA- E1, and MXZ-2C52VA- E1 have been added.

Please void OBH584.

OUTDOOR UNIT

SERVICE MANUAL




No. OBH584
REVISED EDITION-A

Models

MXZ-2C30VA - E1
MXZ-2C40VA - E1
MXZ-2C52VA - E1
MXZ-3C54VA - E1
MXZ-3C68VA - E1
MXZ-4C71VA - E1
MXZ-4C80VA - E1

MXZ-5C100VA - E1
MXZ-6C120VA - E1

Indoor unit service manual
 MSZ-FD•VA Series (OBH488)
 MSZ-GE•VA Series (OBH515)
 MSZ-EF•VE Series (OBH589)
 MSZ-SF•VA Series (OBH555)
 MFZ-KA•VA Series (OB409)
 MLZ-KA•VA Series (OBH483)
 SLZ-KA•VA Series (OC320)
 SEZ-KD•VA(L) Series (HWE07110)
 PLA-RP•BA Series (OCH412)
 PCA-RP•KA Series (OCH454)
 PEAD-RP•JA Series (HWE08130)

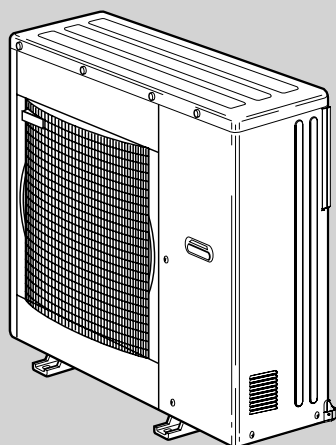

MXZ-4C80VA
MXZ-5C100VA

CONTENTS

1. TECHNICAL CHANGES	2
2. PART NAMES AND FUNCTIONS	3
3. SPECIFICATION	4
4. NOISE CRITERIA CURVES	13
5. OUTLINES AND DIMENSIONS	16
6. WIRING DIAGRAM	21
7. REFRIGERANT SYSTEM DIAGRAM	28
8. PERFORMANCE CURVES	36
9. ACTUATOR CONTROL	65
10. SERVICE FUNCTIONS	66
11. TROUBLESHOOTING	70
12. DISASSEMBLY INSTRUCTIONS	103

INDOOR UNITS COMBINATION SHEETS

PARTS CATALOG (OBB584)

NOTE:

RoHS compliant products have <G> mark on the spec name plate.



Use the specified refrigerant only

Never use any refrigerant other than that specified.

Doing so may cause a burst, an explosion, or fire when the unit is being used, serviced, or disposed of.

Correct refrigerant is specified in the manuals and on the spec labels provided with our products.

We will not be held responsible for mechanical failure, system malfunction, unit breakdown or accidents caused by failure to follow the instructions.

<Preparation before the repair service>

- Prepare the proper tools.
- Prepare the proper protectors.
- Provide adequate ventilation.
- After stopping the operation of the air conditioner, turn off the power-supply breaker and remove the power plug.
- Discharge the capacitor before the work involving the electric parts.

<Precautions during the repair service>

- Do not perform the work involving the electric parts with wet hands.
- Do not pour water into the electric parts.
- Do not touch the refrigerant.
- Do not touch the hot or cold areas in the refrigeration cycle.
- When the repair or the inspection of the circuit needs to be done without turning off the power, exercise great caution not to touch the live parts.

Revision A:

- MXZ-2C30VA- [E1], MXZ-2C40VA- [E1], and MXZ-2C52VA- [E1] have been added.

1

TECHNICAL CHANGES

MXZ-3B54VA -[E1] → MXZ-3C54VA -[E1]

MXZ-3B68VA -[E1] → MXZ-3C68VA -[E1]

MXZ-4B71VA -[E1] → MXZ-4C71VA -[E1]

MXZ-4B80VA -[E1] → MXZ-4C80VA -[E1]

MXZ-5A100VA -[E1] → MXZ-5C100VA -[E1]

1. Indoor units combinations have been added (MSZ-EF Series).
2. Outdoor fan motor has been changed.

MXZ-6C120VA -[E1]

1. New model

MXZ-2B30VA -[E1] → MXZ-2C30VA -[E1]

1. Indoor units combinations have been added (MSZ-EF Series).
2. Muffler has been added.


MXZ-2B40VA -[E1] → MXZ-2C40VA -[E1]

1. Indoor units combinations have been added (MSZ-EF Series).
2. Muffler has been added.


MXZ-2B52VA -[E1] → MXZ-2C52VA -[E1]

1. Indoor units combinations have been added (MSZ-EF Series).
2. Muffler has been added.


MXZ-2C30VA
MXZ-2C40VA
MXZ-2C52VA

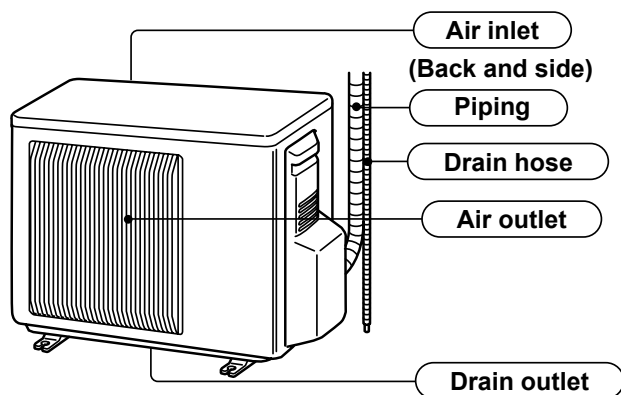


MXZ-3C54VA
MXZ-3C68VA
MXZ-4C71VA

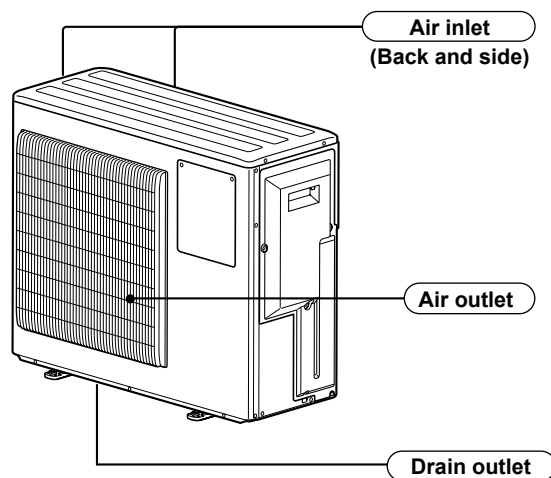

MXZ-4C80VA
MXZ-5C100VA

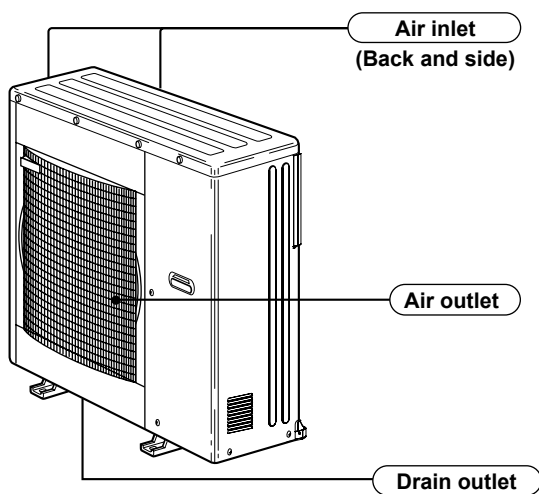

MXZ-6C120VA

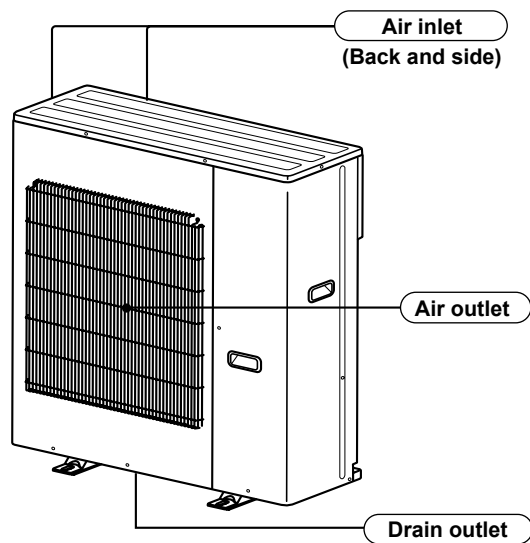

ACCESSORIES

①	Drain socket	1
②	Drain cap (MXZ-3C/4C/5C)	2

Outdoor model			MXZ-2C30VA	
Outdoor unit power supply			Single phase 230 V, 50 Hz	
System	Indoor units number		1 to 2	
	Piping total length	m	Max. 20	
	Connecting pipe length	m	Max. 15	
	Height difference (Indoor ~ Outdoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
	Height difference (Indoor ~ Indoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
Capacity	Function		Cooling	Heating
	Capacity [Rated (Min.-Max.) Hz]	kW	3.0 (1.1 - 4.0)	4.0 (1.0 - 4.4)
	Dehumidification	ℓ/h	—	—
	Outdoor air flow	m ³ /h	1,974	1,878
*2 Electrical data	Breaker capacity	A	10	
	Running current *1	A	2.71	3.94
	Power input *1	W	560	815
	Power factor *1	%	90	
	Starting current *1	A	3.94	
	Compressor motor current *1	A	2.36	3.59
	Fan motor current *1	A	0.35	
Coefficient of performance(C.O.P)*1 *2			5.36	4.91
Compressor	Model		KNB073FGDHC	
	Output	W	750	
	Winding resistance (at 20 °C)	Ω	U-V 1.70 V-W 1.70 W-U 1.70	
Fan motor	Model		RC0J50-CF	
	Winding resistance (at 20 °C)	Ω	BLK-WHT 14.2 WHT-RED 14.2 RED-BLK 14.2	
Special remarks	Dimensions W x H x D	mm	800 x 550 x 285	
	Weight	kg	33	
	Sound level (High)	dB	46	47
	Fan speed (High)	rpm	860	820
	Refrigerant filling capacity (R410A)	kg	1.15	
	Refrigeration oil (Model)	L	0.32 (NEO22)	

*1 Measured under rated operating frequency.

*2 Electrical data is for only outdoor unit.

NOTE: Test conditions are based on ISO 5151. (Refrigerant piping length (one way): 5 m)

COOLING INDOOR Dry-bulb temperature 27.0°C Wet-bulb temperature 19.0°C

OUTDOOR Dry-bulb temperature 35.0°C Wet-bulb temperature 24.0°C

HEATING INDOOR Dry-bulb temperature 20.0°C

OUTDOOR Dry-bulb temperature 7.0°C Wet-bulb temperature 6.0°C



Outdoor model			MXZ-2C40VA	
Outdoor unit power supply			Single phase 230 V, 50 Hz	
System	Indoor units number		1 to 2	
	Piping total length	m	Max. 30	
	Connecting pipe length	m	Max. 20	
	Height difference (Indoor ~ Outdoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
	Height difference (Indoor ~ Indoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
Function			Cooling	Heating
Capacity	Capacity [Rated (Min.-Max.) Hz]	kW	4.0 (1.1 - 4.5)	4.5 (1.0 - 5.0)
	Dehumidification	ℓ/h	—	—
	Outdoor air flow	m ³ /h	1,752	1,596
*2 Electrical data	Breaker capacity	A	15	
	Running current *1	A	4.00	3.98
	Power input *1	W	875	870
	Power factor *1	%	95	
	Starting current *1	A	4.00	
	Compressor motor current *1	A	3.65	3.60
	Fan motor current *1	A	0.35	
Coefficient of performance(C.O.P) *1 *2			4.57	5.17
Compressor	Model		KNB092FFDHC	
	Output	W	1,100	
	Winding resistance (at 20 °C)	Ω	U-V 1.70 V-W 1.70 W-U 1.70	
Fan motor	Model		RC0J50-CF	
	Winding resistance (at 20 °C)	Ω	BLK-WHT 14.2 WHT-RED 14.2 RED-BLK 14.2	
Dimensions W x H x D		mm	800 x 550 x 285	
Weight		kg	35	
Special remarks	Sound level	dB	47	48
	Fan speed	rpm	840	770
	Refrigerant filling capacity (R410A)	kg	1.3	
	Refrigeration oil (Model)	L	0.32 (NEO22)	

*1 Measured under rated operating frequency.

*2 Electrical data is for only outdoor unit.

NOTE: Test conditions are based on ISO 5151. (Refrigerant piping length (one way): 5 m)

COOLING INDOOR Dry-bulb temperature 27.0°C Wet-bulb temperature 19.0°C

OUTDOOR Dry-bulb temperature 35.0°C Wet-bulb temperature 24.0°C

HEATING INDOOR Dry-bulb temperature 20.0°C

OUTDOOR Dry-bulb temperature 7.0°C Wet-bulb temperature 6.0°C



Outdoor model			MXZ-2C52VA	
Outdoor unit power supply			Single phase 230 V, 50 Hz	
System	Indoor units number		1 to 2	
	Piping total length	m	Max. 30	
	Connecting pipe length	m	Max. 20	
	Height difference (Indoor ~ Outdoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
	Height difference (Indoor ~ Indoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
Function			Cooling	Heating
Capacity	Capacity [Rated (Min.-Max.) Hz]	kW	5.2 (1.1 - 6.0)	6.4 (1.0 - 7.0)
	Dehumidification	ℓ/h	—	—
	Outdoor air flow	m ³ /h	1,974	1,998
*2 Electrical data	Breaker capacity	A	15	
	Running current *1	A	5.83	7.22
	Power input *1	W	1,300	1,610
	Power factor *1	%	97	
	Starting current *1	A	7.22	
	Compressor motor current *1	A	5.48	6.87
	Fan motor current *1	A	0.35	
Coefficient of performance(C.O.P) *1 *2			4.00	3.98
Compressor	Model		SNB130FGBHT	
	Output	W	1,400	
	Winding resistance (at 20 °C)	Ω	U-V 0.98 V-W 0.98 W-U 0.98	
Fan motor	Model		RC0J50-CF	
	Winding resistance (at 20 °C)	Ω	BLK-WHT 14.2 WHT-RED 14.2 RED-BLK 14.2	
	Dimensions W x H x D	mm	800 x 550 x 285	
Special remarks	Weight	kg	38	
	Sound level (High/Low)	dB	49	50
	Fan speed (High/Low)	rpm	900	910
	Refrigerant filling capacity (R410A)	kg	1.3	
	Refrigeration oil (Model)	L	0.45 (NEO22)	

*1 Measured under rated operating frequency.

*2 Electrical data is for only outdoor unit.

NOTE: Test conditions are based on ISO 5151. (Refrigerant piping length (one way): 5 m)

COOLING INDOOR Dry-bulb temperature 27.0°C Wet-bulb temperature 19.0°C

OUTDOOR Dry-bulb temperature 35.0°C Wet-bulb temperature 24.0°C

HEATING INDOOR Dry-bulb temperature 20.0°C

OUTDOOR Dry-bulb temperature 7.0°C Wet-bulb temperature 6.0°C



Outdoor model			MXZ-3C54VA	
Outdoor unit power supply			Single phase 230 V, 50 Hz	
System	Indoor units number		1 to 3	
	Piping total length	m	Max. 50	
	Connecting pipe length	m	Max. 25	
	Height difference (Indoor ~ Outdoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
	Height difference (Indoor ~ Indoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
Capacity	Function		Cooling	Heating
	Capacity [Rated (Min.-Max.) Hz]	kW	5.4 (2.9-6.8)	7.0 (2.6-9.0)
	Dehumidification	ℓ /h	—	—
	Outdoor air flow	m ³ /h	2,526	2,580
*2 Electrical data	Breaker capacity	A	25	
	Running current *1	A	5.23	6.43
	Power input *1	W	1,190	1,465
	Power factor *1	%	99	
	Starting current *1	A	6.43	
	Compressor motor current *1	A	5.03	6.23
	Fan motor current *1	A	0.2	
Coefficient of performance(C.O.P) *1 *2			4.54	4.78
Compressor	Model		SNB130FGBH1T	
	Output	W	1,400	
	Winding resistance (at 20 °C)	Ω	U-V 0.98 V-W 0.98 W-U 0.98	
Fan motor	Model		RC0J60-CB	
	Winding resistance (at 20°C)	Ω	BLK-WHT 15.2 WHT-RED 15.2 RED-BLK 15.2	
Dimensions W x H x D		mm	840 x 710 x 330	
Weight		kg	57	
Special remarks	Sound level	dB	47	51
	Fan speed	rpm	650	660
	Refrigerant filling capacity (R410A)	kg	2.7	
	Refrigeration oil (Model)	L	0.7 (NEO22)	

*1 Measured under rated operating frequency.

*2 Electrical data is for only outdoor unit.

NOTE: Test conditions are based on ISO 5151. (Refrigerant piping length (one way): 5 m)

COOLING INDOOR Dry-bulb temperature 27.0°C Wet-bulb temperature 19.0°C

OUTDOOR Dry-bulb temperature 35.0°C Wet-bulb temperature 24.0°C

HEATING INDOOR Dry-bulb temperature 20.0°C

OUTDOOR Dry-bulb temperature 7.0°C Wet-bulb temperature 6.0°C



Outdoor model			MXZ-3C68VA	
Outdoor unit power supply			Single phase 230 V, 50 Hz	
System	Indoor units number		1 to 3	
	Piping total length	m	Max. 60	
	Connecting pipe length	m	Max. 25	
	Height difference (Indoor ~ Outdoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
	Height difference (Indoor ~ Indoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
Function			Cooling	Heating
Capacity	Capacity [Rated (Min.-Max.) Hz]	kW	6.8 (2.9-8.4)	8.6 (2.6-10.6)
	Dehumidification	ℓ /h	—	—
	Outdoor air flow	m ³ /h	2,526	2,580
*2 Electrical data	Breaker capacity	A	25	
	Running current *1	A	7.80	9.00
	Power input *1	W	1,775	2,050
	Power factor *1	%	99	
	Starting current *1	A	9.00	
	Compressor motor current *1	A	7.60	8.80
	Fan motor current *1	A	0.2	
Coefficient of performance(C.O.P) *1 *2			3.83	4.20
Compressor	Model		SNB172FEGH1T	
	Output	W	1,800	
	Winding resistance (at 20 °C)	Ω	U-V 0.72 V-W 0.72 W-U 0.72	
Fan motor	Model		RC0J60-CB	
	Winding resistance (at 20°C)	Ω	BLK-WHT 15.2 WHT-RED 15.2 RED-BLK 15.2	
Dimensions W x H x D		mm	840 x 710 x 330	
Weight		kg	57	
Special remarks	Sound level	dB	48	52
	Fan speed	rpm	650	660
	Refrigerant filling capacity (R410A)	kg	2.7	
	Refrigeration oil (Model)	L	0.7 (NEO22)	

*1 Measured under rated operating frequency.

*2 Electrical data is for only outdoor unit.

NOTE: Test conditions are based on ISO 5151. (Refrigerant piping length (one way): 5 m)

COOLING INDOOR Dry-bulb temperature 27.0°C Wet-bulb temperature 19.0°C

OUTDOOR Dry-bulb temperature 35.0°C Wet-bulb temperature 24.0°C

HEATING INDOOR Dry-bulb temperature 20.0°C

OUTDOOR Dry-bulb temperature 7.0°C Wet-bulb temperature 6.0°C



Outdoor model			MXZ-4C71VA	
Outdoor unit power supply			Single phase 230 V, 50 Hz	
System	Indoor units number		1 to 4	
	Piping total length	m	Max. 60	
	Connecting pipe length	m	Max. 25	
	Height difference (Indoor ~ Outdoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
	Height difference (Indoor ~ Indoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
Capacity	Function		Cooling	Heating
	Capacity [Rated (Min.-Max.) Hz]	kW	7.1 (3.7-8.8)	8.6 (3.4-10.7)
	Dehumidification	ℓ /h	—	—
	Outdoor air flow	m ³ /h	2,526	2,580
*2 Electrical data	Breaker capacity	A	25	
	Running current *1	A	7.38	7.49
	Power input *1	W	1,680	1,705
	Power factor *1	%	99	
	Starting current *1	A	7.49	
	Compressor motor current *1	A	7.18	7.29
	Fan motor current *1	A	0.2	
Coefficient of performance(C.O.P) *1 *2			4.23	5.04
Compressor	Model		SNB172FEGH1T	
	Output	W	2,000	
	Winding resistance (at 20 °C)	Ω	U-V 0.72 V-W 0.72 W-U 0.72	
Fan motor	Model		RC0J60-CB	
	Winding resistance (at 20°C)	Ω	BLK-WHT 15.2 WHT-RED 15.2 RED-BLK 15.2	
Dimensions W x H x D		mm	840 x 710 x 330	
Weight		kg	58	
Special remarks	Sound level	dB	48	52
	Fan speed	rpm	650	660
	Refrigerant filling capacity (R410A)	kg	2.7	
	Refrigeration oil (Model)	L	0.7 (NEO22)	

*1 Measured under rated operating frequency.

*2 Electrical data is for only outdoor unit.

NOTE: Test conditions are based on ISO 5151. (Refrigerant piping length (one way): 5 m)

COOLING INDOOR Dry-bulb temperature27.0°C Wet-bulb temperature 19.0°C

OUTDOOR Dry-bulb temperature35.0°C Wet-bulb temperature 24.0°C

HEATING INDOOR Dry-bulb temperature20.0°C

OUTDOOR Dry-bulb temperature7.0°C Wet-bulb temperature 6.0°C



Outdoor model			MXZ-4C80VA	
Outdoor unit power supply			Single phase 230 V, 50 Hz	
System	Indoor units number		1 to 4	
	Piping total length	m	Max. 70	
	Connecting pipe length	m	Max. 25	
	Height difference (Indoor ~ Outdoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
	Height difference (Indoor ~ Indoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
Function			Cooling	Heating
Capacity	Capacity [Rated (Min.-Max.) Hz]	kW	8.0 (3.7-9.2)	9.4 (3.4-11.6)
	Dehumidification	ℓ/h	—	—
	Outdoor air flow	m ³ /h	2,526	2,628
*2 Electrical data	Breaker capacity	A	25	
	Running current *1	A	8.59	8.48
	Power input *1	W	1,955	1,930
	Power factor *1	%	99	
	Starting current *1	A	8.59	
	Compressor motor current *1	A	8.39	8.28
	Fan motor current *1	A	0.2	
Coefficient of performance(C.O.P) *1 *2			4.09	4.87
Compressor	Model		TNB220FMCH	
	Output	W	2,100	
	Winding resistance (at 20 °C)	Ω	U-V 1.41 V-W 1.41 W-U 1.41	
Fan motor	Model		RC0J60-CA	
	Winding resistance (at 20°C)	Ω	BLK-WHT 15.2 WHT-RED 15.2 RED-BLK 15.2	
	Dimensions W x H x D	mm	900 x 900 x 320	
Weight		kg	67	
Special remarks	Sound level	dB	46	48
	Fan speed	rpm	560	580
	Refrigerant filling capacity (R410A)	kg	3.5	
	Refrigeration oil (Model)	L	0.87 (NEO22)	

*1 Measured under rated operating frequency.

*2 Electrical data is for only outdoor unit.

NOTE: Test conditions are based on ISO 5151. (Refrigerant piping length (one way): 5 m)

COOLING INDOOR Dry-bulb temperature 27.0°C Wet-bulb temperature 19.0°C

OUTDOOR Dry-bulb temperature 35.0°C Wet-bulb temperature 24.0°C

HEATING INDOOR Dry-bulb temperature 20.0°C

OUTDOOR Dry-bulb temperature 7.0°C Wet-bulb temperature 6.0°C



Outdoor model			MXZ-5C100VA	
Outdoor unit power supply			Single phase 230 V, 50 Hz	
System	Indoor units number		1 to 5	
	Piping total length	m	Max. 80	
	Connecting pipe length	m	Max. 25	
	Height difference (Indoor ~ Outdoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
	Height difference (Indoor ~ Indoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
Function			Cooling	Heating
Capacity	Capacity [Rated (Min.-Max.) Hz]	kW	10.0 (3.9 - 11.0)	12.0 (4.1 - 14.0)
	Dehumidification	ℓ /h	—	—
	Outdoor air flow	m³ /h	3,396	3,558
*2 Electrical data	Breaker capacity	A	25	
	Running current *1	A	12.30	12.45
	Power input *1	W	2,800	2,835
	Power factor *1	%	99	
	Starting current *1	A	12.45	
	Compressor motor current	A	12.1	12.25
	Fan motor current	A	0.2	
	Coefficient of performance(C.O.P) *1 *2		3.57	4.23
Compressor	Model		TNB220FMCH	
	Output	W	2,700	
	Winding resistance(at 20 °C)	Ω	U-V 1.41 V-W 1.41 W-U 1.41	
Fan motor	Model		RC0J60-CA	
	Winding resistance(at 20 °C)	Ω	BLK-WHT 15.2 WHT-RED 15.2 RED-BLK 15.2	
	Dimensions W x H x D	mm	900 x 900 x 320	
Weight		kg	68	
Special remarks	Sound level	dB	51	54
	Fan speed	rpm	720	750
	Refrigerant filling capacity(R410A)	kg	4.0	
	Refrigeration oil (Model)	L	0.87 (NEO22)	

*1 Measured under rated operating frequency.

*2 Electrical data is for only outdoor unit.

NOTE: Test conditions are based on ISO 5151. (Refrigerant piping length (one way): 5 m)

COOLING INDOOR Dry-bulb temperature27.0°C Wet-bulb temperature 19.0°C

OUTDOOR Dry-bulb temperature35.0°C Wet-bulb temperature 24.0°C

HEATING INDOOR Dry-bulb temperature20.0°C

OUTDOOR Dry-bulb temperature7.0°C Wet-bulb temperature 6.0°C



Outdoor model			MXZ-6C120VA	
Outdoor unit power supply			Single phase 230 V, 50 Hz	
System	Indoor units number		1 to 6	
	Piping total length	m	Max. 80	
	Connecting pipe length	m	Max. 25	
	Height difference (Indoor ~ Outdoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
	Height difference (Indoor ~ Indoor)	m	Refer to 7 REFRIGERANT SYSTEM DIAGRAM.	
Function			Cooling	Heating
Capacity	Capacity [Rated (Min.-Max.) Hz]	kW	12.0 (3.5 - 13.5)	14.0 (3.5 - 16.5)
	Dehumidification	ℓ /h	—	—
	Outdoor air flow	m ³ /h	3,324	4,194
*2 Electrical data	Breaker capacity	A	32	
	Running current *1	A	15.85	15.24
	Power input *1	W	3,610	3,470
	Power factor *1	%	99	
	Starting current *1	A	15.85	
	Compressor motor current	A	15.55	14.94
	Fan motor current	A	0.3	
Coefficient of performance(C.O.P) *1 *2			3.32	4.03
Compressor	Model		TNB306FPGM3	
	Output	W	3,000	
	Winding resistance(at 20 °C)	Ω	U-V 0.53 V-W 0.53 W-U 0.53	
Fan motor	Model		SIC-81FW-D888-1	
Dimensions W x H x D		mm	900 x 1,070 x 320	
Weight		kg	88	
Special remarks	Sound level	dB	55	57
	Fan speed	rpm	590	730
	Refrigerant filling capacity(R410A)	kg	5.0	
	Refrigeration oil (Model)	L	1.61 (FV50S)	

*1 Measured under rated operating frequency.

*2 Electrical data is for only outdoor unit.

NOTE: Test conditions are based on ISO 5151. (Refrigerant piping length (one way): 5 m)

COOLING INDOOR Dry-bulb temperature 27.0°C Wet-bulb temperature 19.0°C


OUTDOOR Dry-bulb temperature 35.0°C Wet-bulb temperature 24.0°C

HEATING INDOOR Dry-bulb temperature 20.0°C

OUTDOOR Dry-bulb temperature 7.0°C Wet-bulb temperature 6.0°C


MXZ-2C30VA

FAN SPEED	FUNCTION	SPL(dB(A))	LINE
High	Cooling	46	●—●
High	Heating	47	○—○

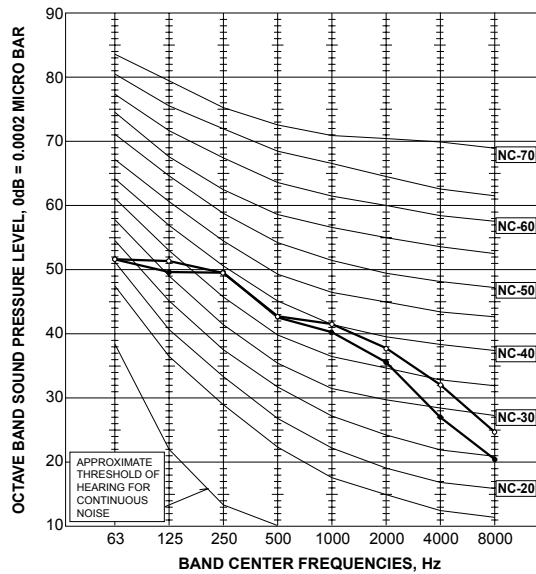


MXZ-2C40VA

FAN SPEED	FUNCTION	SPL(dB(A))	LINE
High	Cooling	47	●—●
High	Heating	48	○—○

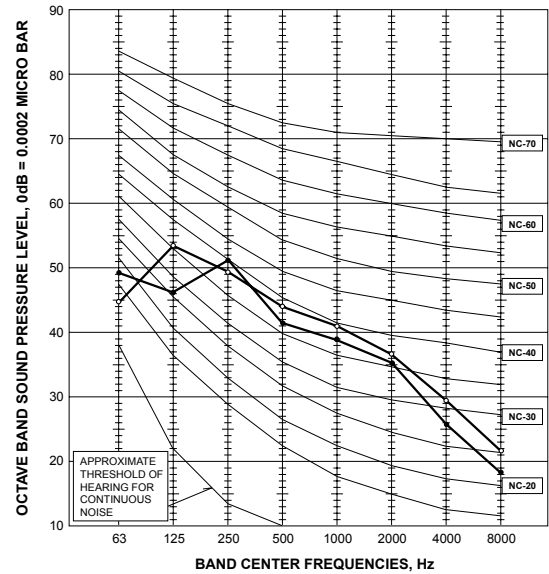


MXZ-2C52VA

FAN SPEED	FUNCTION	SPL(dB(A))	LINE
High	Cooling	49	●—●
High	Heating	50	○—○

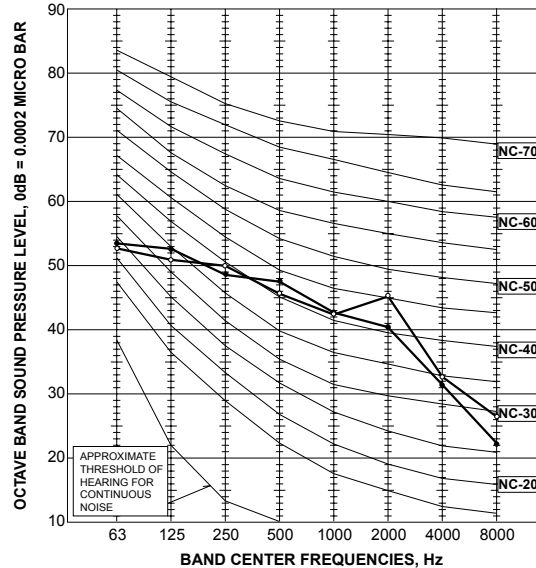


MXZ-3C54VA

FAN SPEED	FUNCTION	SPL(dB(A))	LINE
High	Cooling	47	●—●
High	Heating	51	○—○

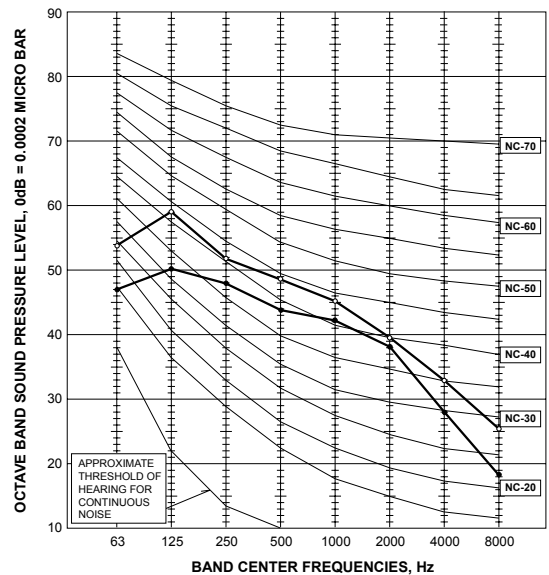


MXZ-3C68VA

FAN SPEED	FUNCTION	SPL(dB(A))	LINE
High	Cooling	48	●—●
High	Heating	52	○—○

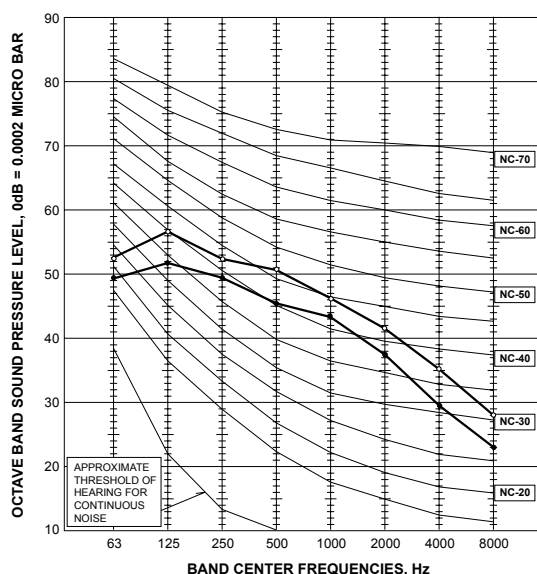


MXZ-4C71VA

FAN SPEED	FUNCTION	SPL(dB(A))	LINE
High	Cooling	48	●—●
High	Heating	52	○—○

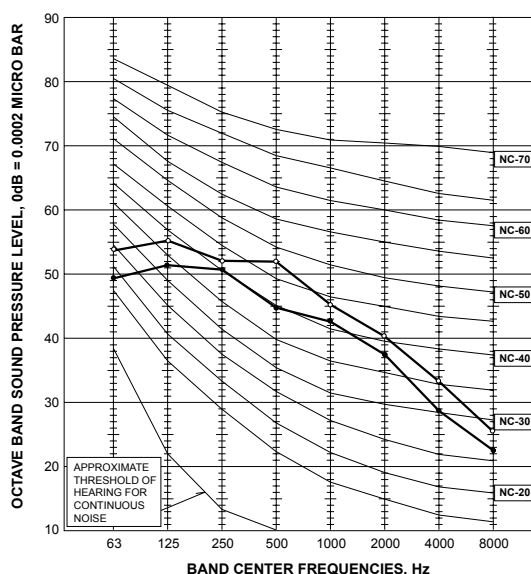


MXZ-4C80VA

FAN SPEED	FUNCTION	SPL(dB(A))	LINE
High	Cooling	46	●—●
High	Heating	48	○—○

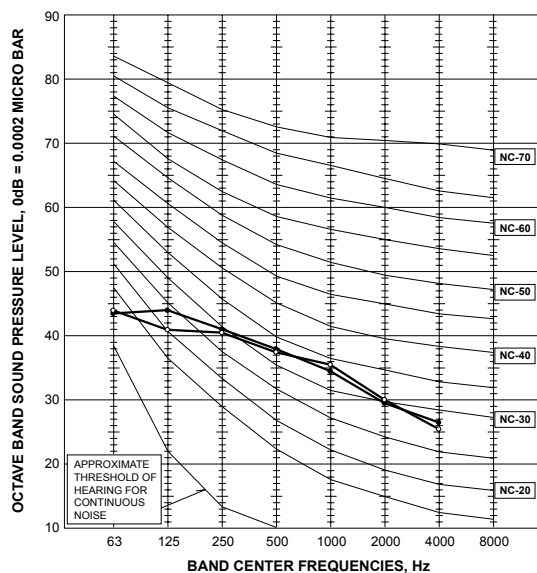

MXZ-5C100VA



FAN SPEED	FUNCTION	SPL(dB(A))	LINE
High	Cooling	51	●—●
High	Heating	54	○—○

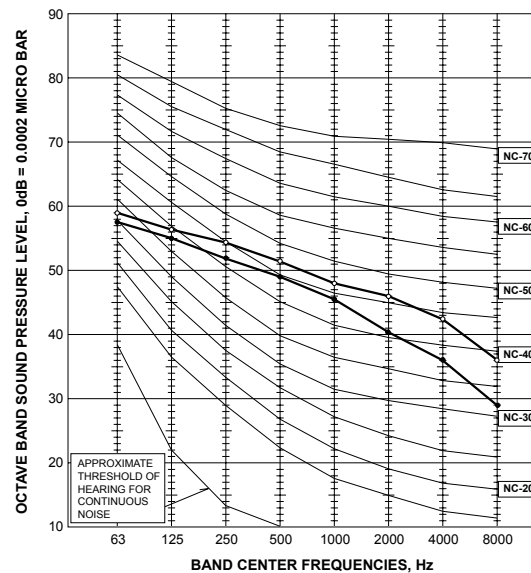



MXZ-6C120VA


FAN SPEED	FUNCTION	SPL(dB(A))	LINE
High	Cooling	55	●—●
High	Heating	57	○—○

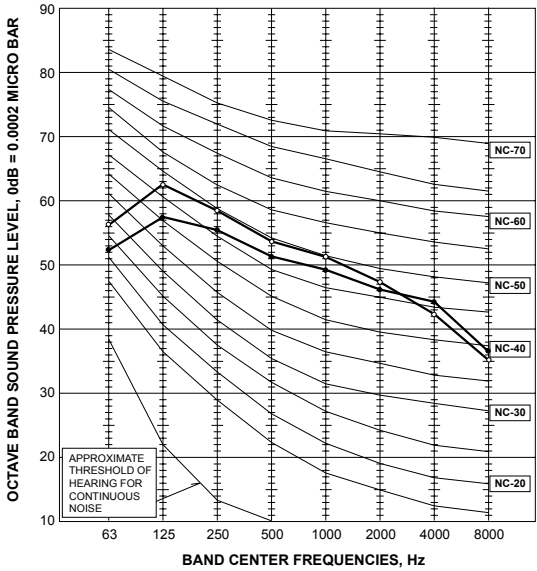

Test conditions
Cooling :Dry-bulb temperature 35°C Wet-bulb temperature 24°C
Heating :Dry-bulb temperature 7°C Wet-bulb temperature 6°C


MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA

Unit: mm

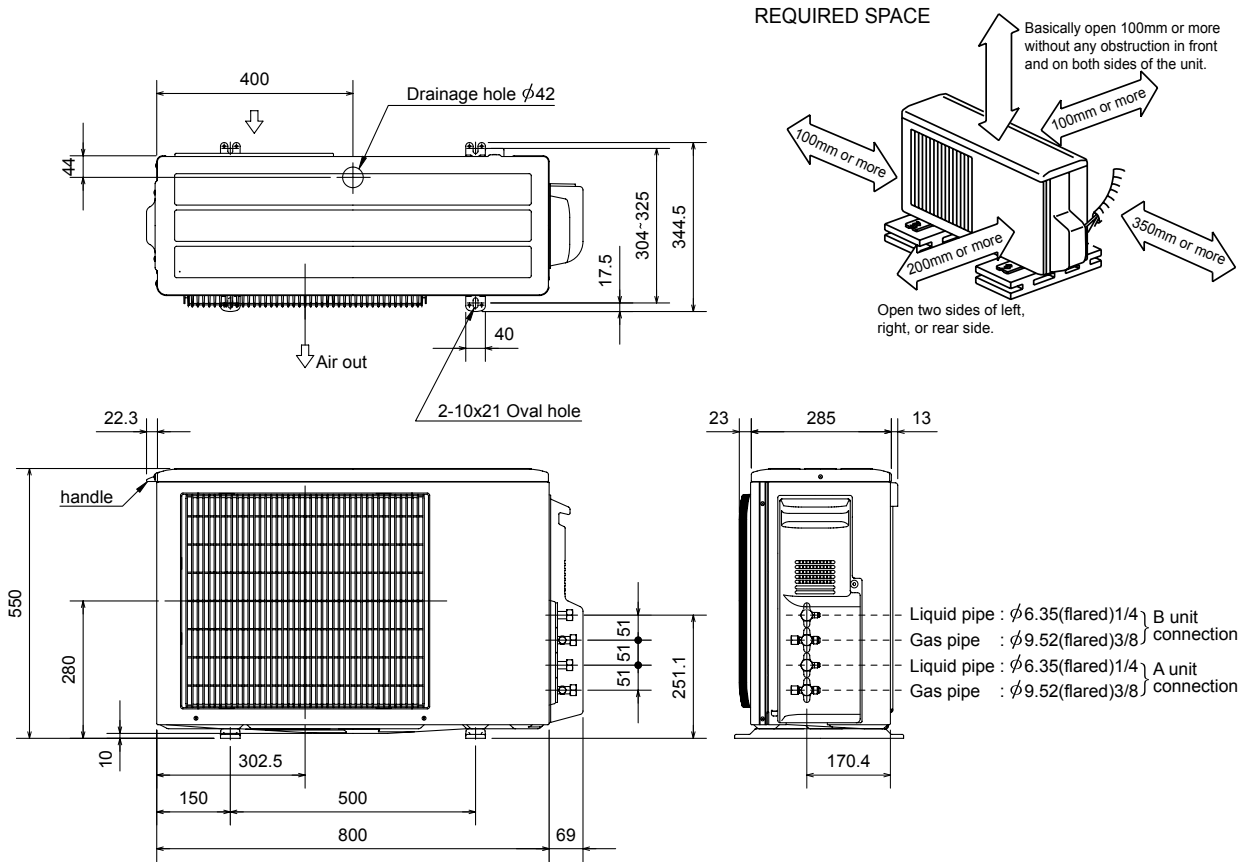


MXZ-3C54VA MXZ-3C68VA

Unit: mm

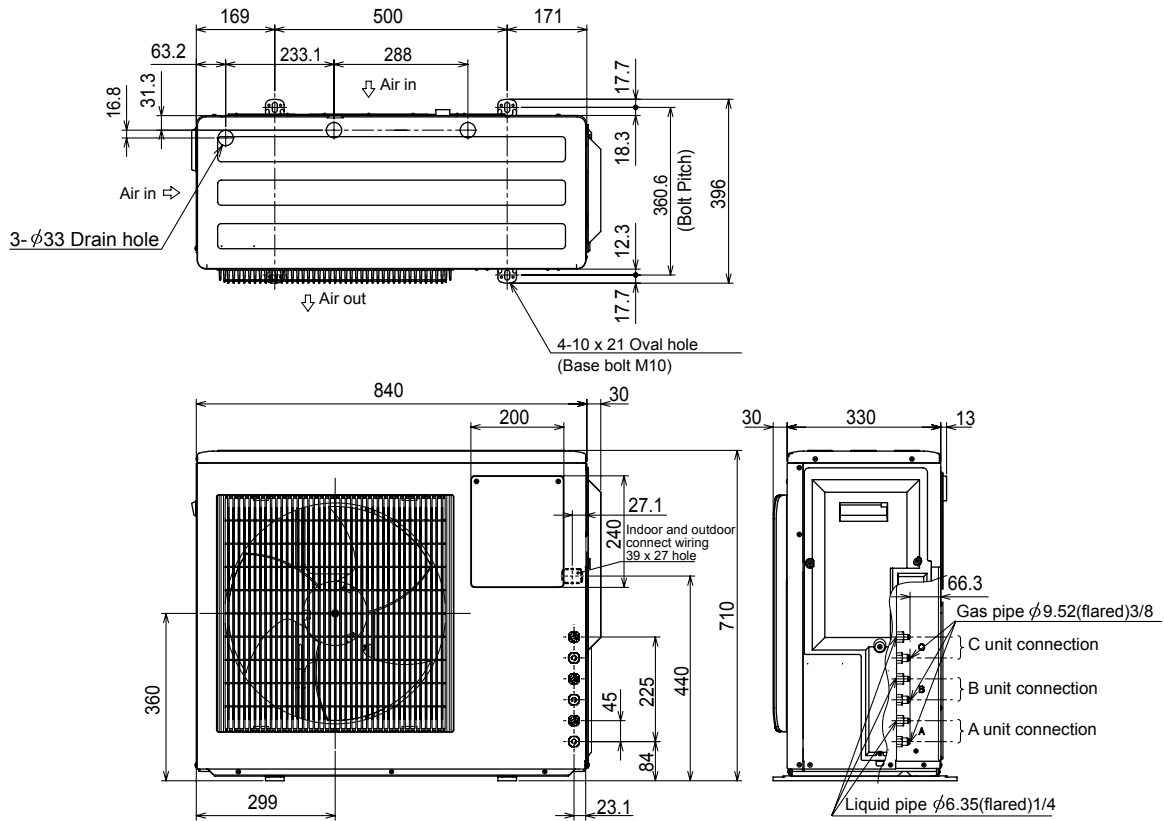


1.Installation space


Note : Leave front and both sides free of obstruction.




Note : Leave front and overhead free of obstruction.

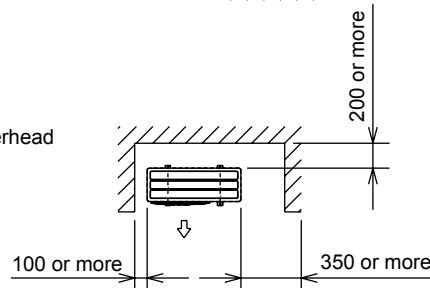

Note : Leave rear, overhead and both sides free of obstruction.





2.Service space

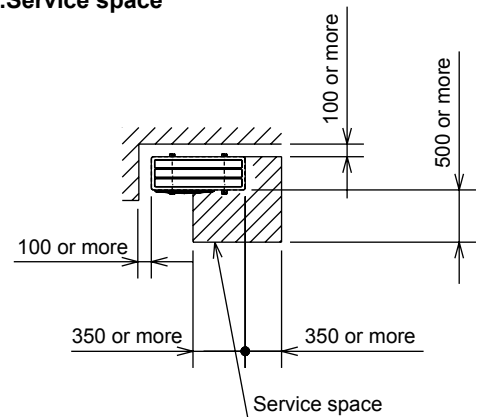


MXZ-4C71VA

Unit: mm

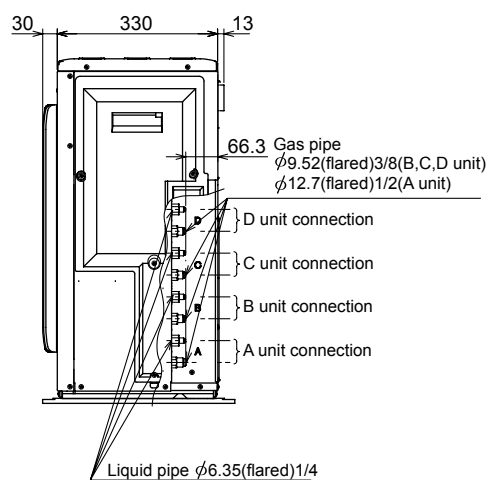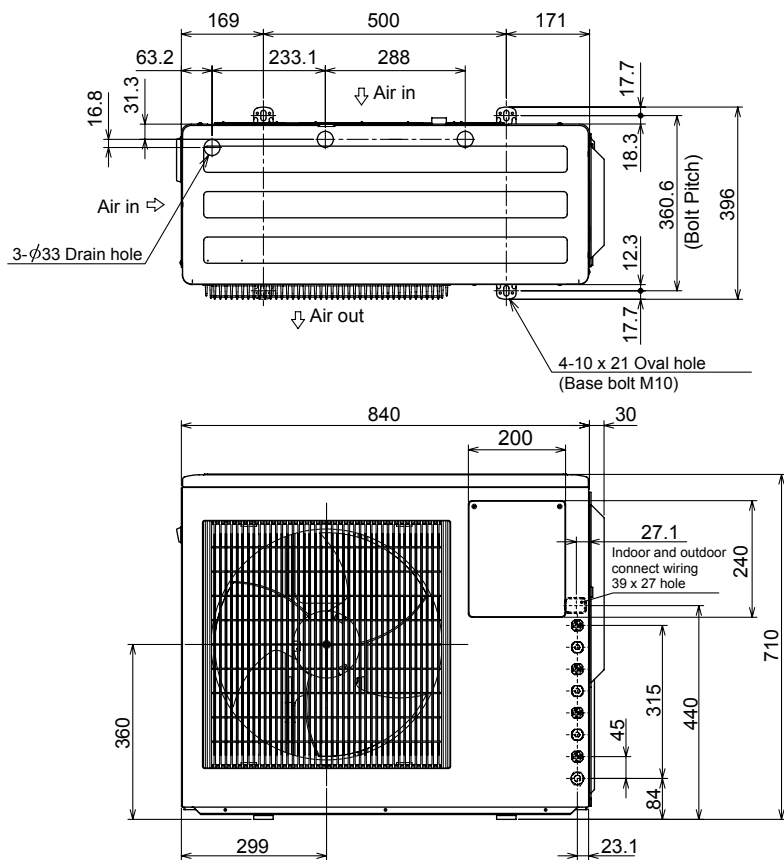


1.Installation space


Note : Leave front and both sides free of obstruction.




Note : Leave front and overhead free of obstruction.

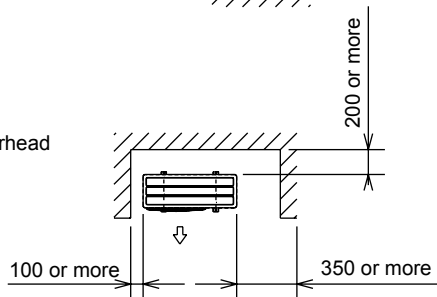

Note : Leave rear, overhead and both sides free of obstruction.





2.Service space

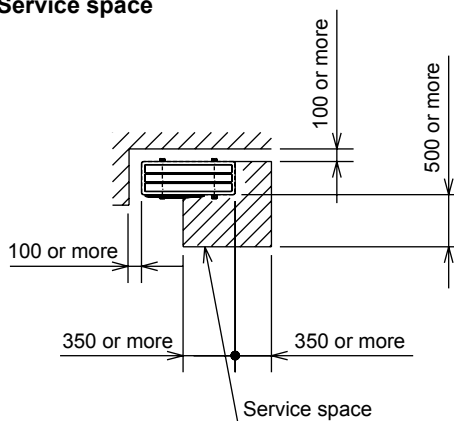


MXZ-4C80VA MXZ-5C100VA

Unit: mm

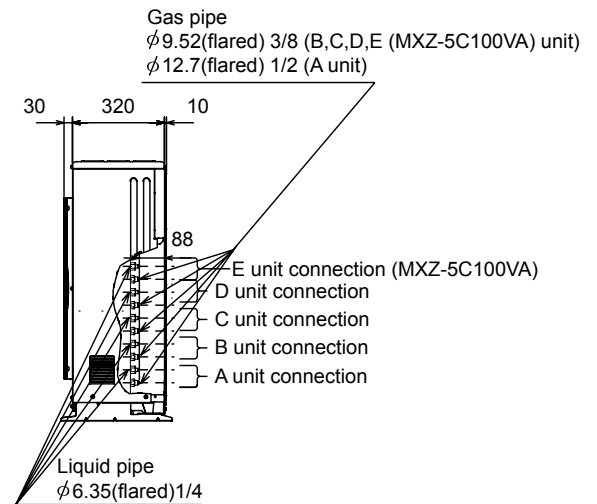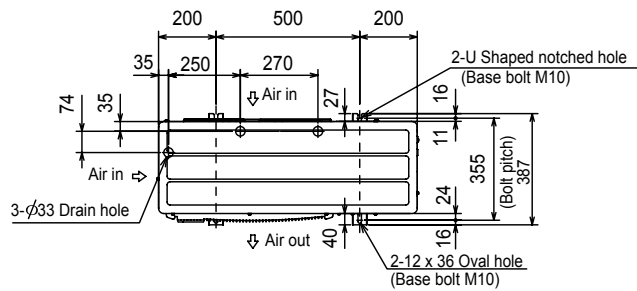


1. Installation space


Note : Leave front and both sides free of obstruction.




Note : Leave front and overhead free of obstruction.

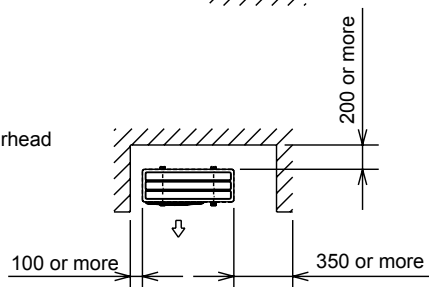

Note : Leave rear, overhead and both sides free of obstruction.






2. Service space

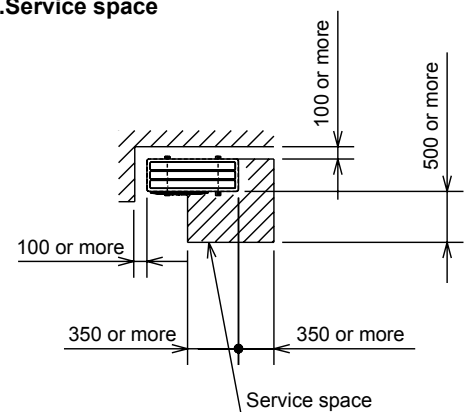


MXZ-6C120VA

Unit: mm

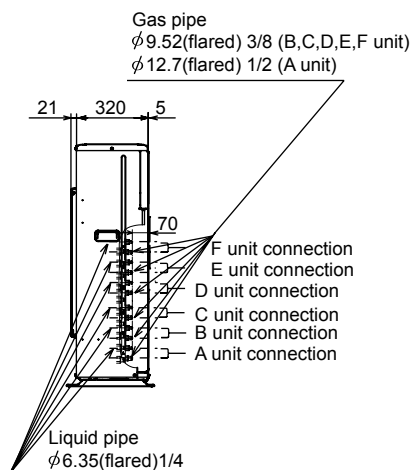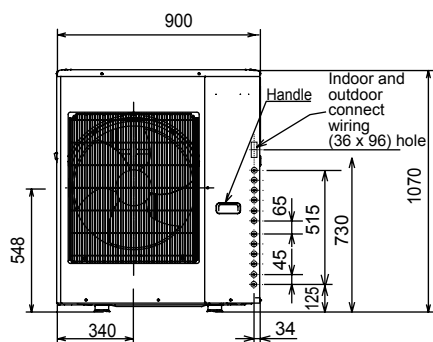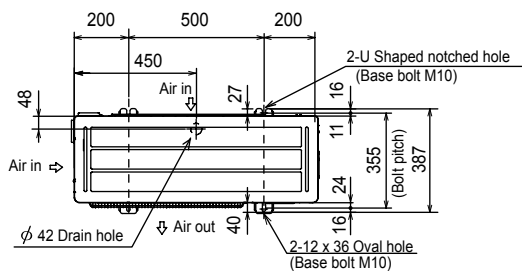


1.Installation space


Note : Leave front and both sides free of obstruction.




Note : Leave front and overhead free of obstruction.

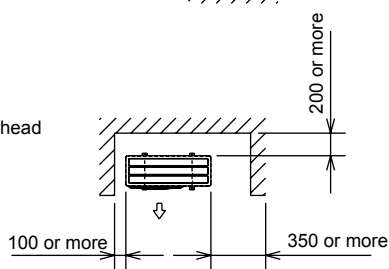


Note : Leave rear, overhead and both sides free of obstruction.



2.Service space

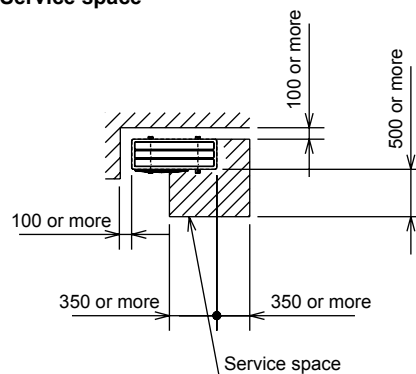

MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA

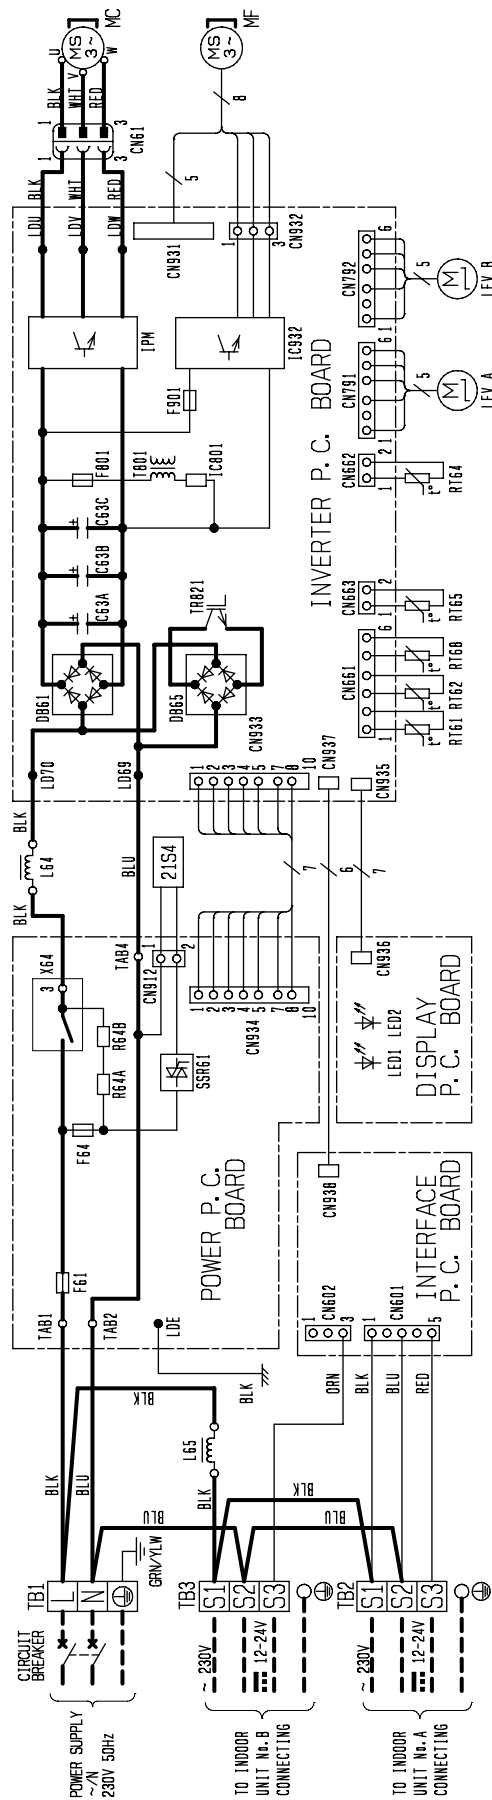


NOTES:


1. About the indoor side electric wiring refer to the indoor unit electric wiring diagram for servicing.
2. Use copper conductors only. (For field wiring).
3. Symbols below indicate.

: Terminal block
 : Connector


SYMBOL	NAME	SYMBOL	NAME	SYMBOL	NAME
C63A, C63B, C63C	SMOOTHING CAPACITOR	MC	COMPRESSOR	SSR61	SOLENOID COIL RELAY
DB61, DB65	DIODE MODULE	MF	FAN MOTOR	TB1, TB2, TB3	TERMINAL BLOCK
F61	FUSE (T20AL250V)	RT61	DEFROST THERMISTOR	TR821	SWITCHING POWER TRANSISTOR
F64, F801, F802	FUSE (T3.15AL250V)	RT62	DISCHARGE TEMP. THERMISTOR	T801	SWITCHING TRANS RELAY
IPM, IC932	POWER DEVICE	RT64	FIN TEMP. THERMISTOR	X64	REVERSING VALVE COIL
LED1, LED2	POWER MODULE	RT65	AMBIENT TEMP. THERMISTOR	21S4	REVERSING VALVE COIL
LEV A, LEV B	EXPANSION VALVE COIL	RT68	OUTDOOR HEAT EXCHANGER TEMP. THERMISTOR		
L64, L65	REACTOR	R64A, R64B	CURRENT-LIMITING RESISTOR		

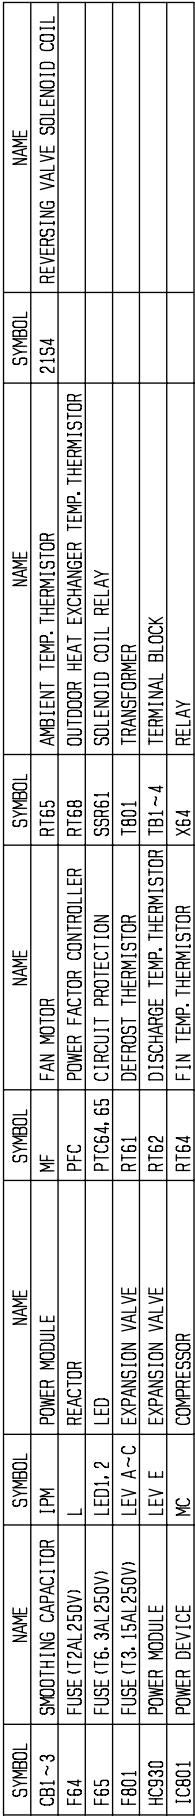


MXZ-3C68VA

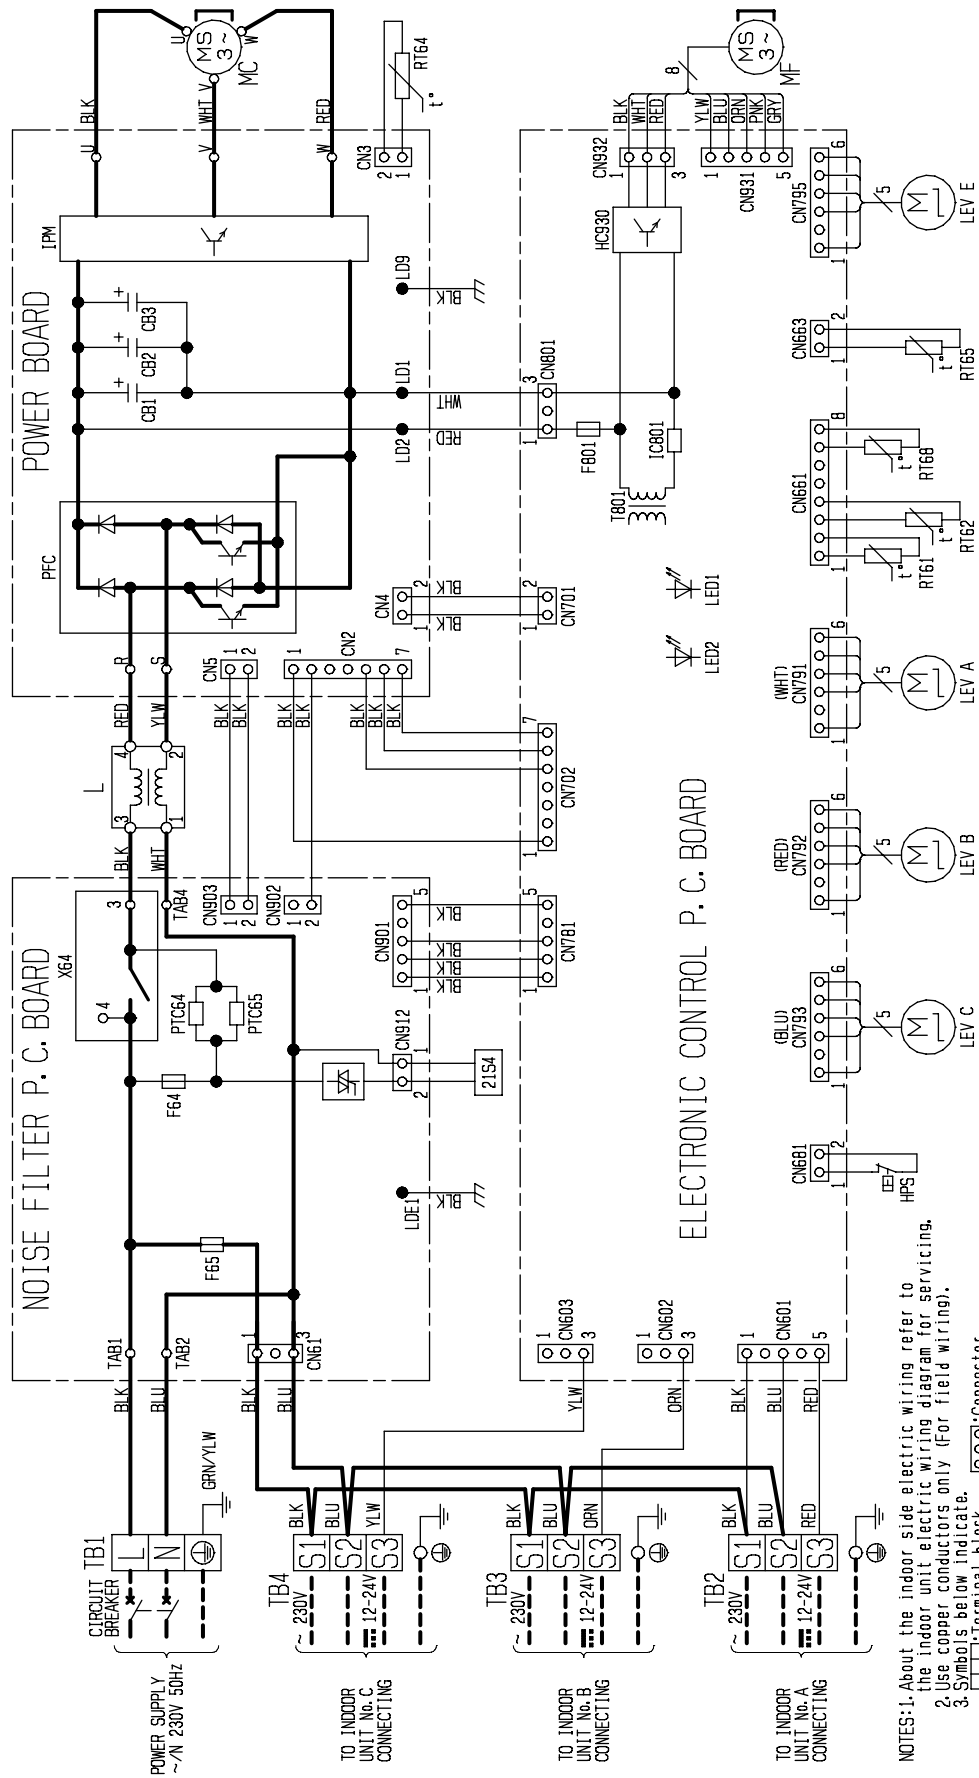

SYMBOL	NAME	SYMBOL	NAME	SYMBOL	NAME	SYMBOL	NAME
CB1~3	SMOOTHING CAPACITOR	IC801	POWER DEVICE	MC	COMPRESSOR	RT64	F IN TEMP. THERMISTOR
F64	FUSE (T2AL/250V)	IPM	POWER MODULE	MF	FAN MOTOR	RT65	AMBIENT TEMP. THERMISTOR
F65	FUSE (T6.3A/250V)	L	REACTOR	PFC	POWER FACTOR CONTROLLER	RT68	OUTDOOR HEAT EXCHANGER TEMP. THERMISTOR
F801	FUSE (T3.15A/250V)	LED1, 2	LED	PTC64, 65	CIRCUIT PROTECTION	SSR61	SOLENOID COIL RELAY
HC930	POWER MODULE	LEV A~C	EXPANSION VALVE	RT61	DEFROST THERMISTOR	T801	TRANSFORMER
HPS	HIGH PRESSURE SWITCH	LEV E	EXPANSION VALVE	RT62	DISCHARGE TEMP. THERMISTOR	TB1~4	TERMINAL BLOCK

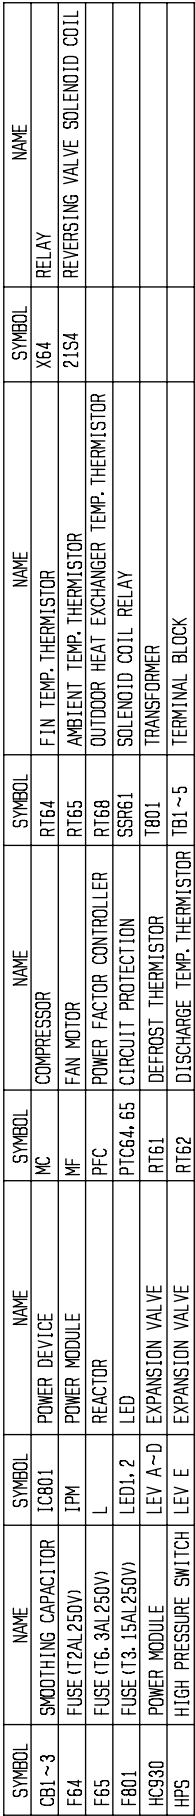

MXZ-4C80VA

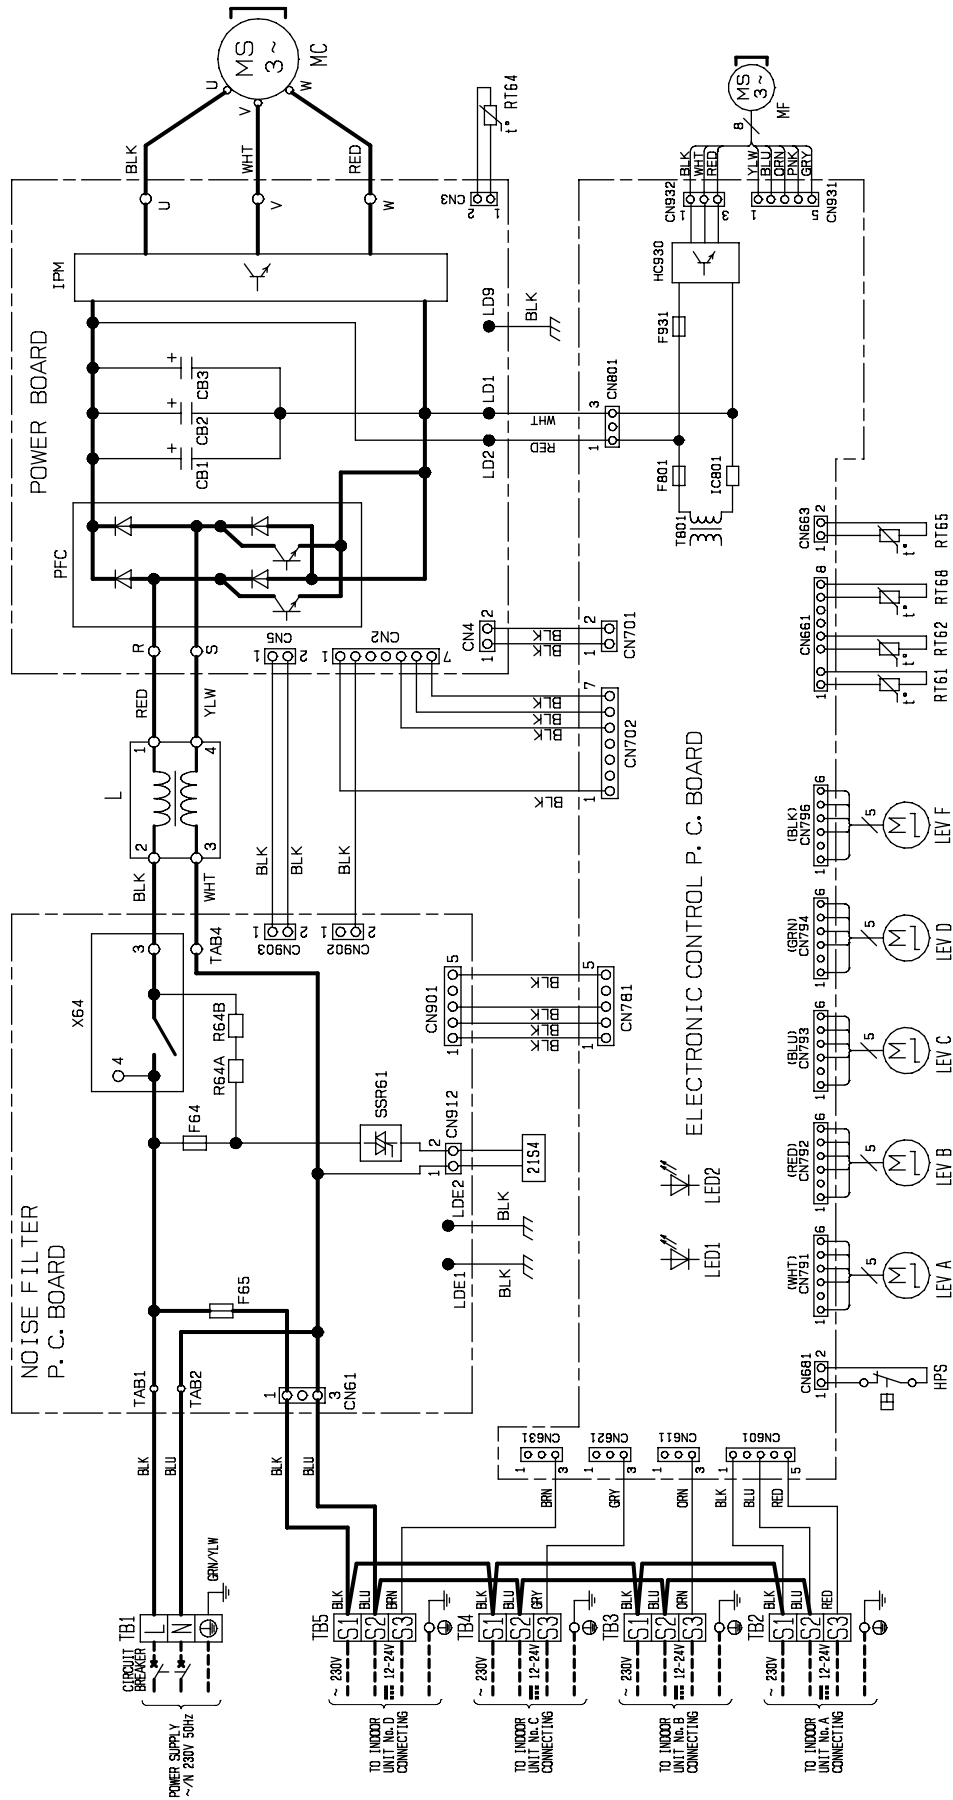

- NOTES:
- About the indoor side electric wiring refer to the indoor unit electric wiring diagram for servicing.
 - Use copper conductors only (for field wiring).
 - Symbols below indicate.
 - : terminal block
 - : connector


SYMBOL	NAME	SYMBOL	NAME	SYMBOL	NAME	SYMBOL	NAME
CB1~3	SMOOTHING CAPACITOR	HPS	HIGH PRESSURE SWITCH	LEV F	EXPANSION VALVE	RT62	DISCHARGE TEMP. THERMISTOR
F64	FUSE (T2AL250V)	IC801	POWER DEVICE	MC	COMPRESSOR	RT64	FIN TEMP. THERMISTOR
F65	FUSE (T6.3AL250V)	IPM	POWER MODULE	MF	FAN MOTOR	RT65	AMBIENT TEMP. THERMISTOR
F801	FUSE (T3.15AL250V)	L	REACTOR	PFC	POWER FACTOR CONTROLLER	RT68	OUTDOOR HEAT EXCHANGER TEMPERATURE THERMISTOR
F931	FUSE (T3.15AL250V)	LED 1,2	LED	R64A, B	RESISTOR	SSR61	SOLENOID COIL RELAY
HC930	POWER MODULE	LEV A~D	EXPANSION VALVE	RT61	DEFROST THERMISTOR		



- NOTES:**
1. About the indoor side electric wiring refer to the indoor unit electric wiring diagram for servicing.
 2. Use copper conductors only (for field wiring).
 3. Symbols below indicate.
□□□□ : Terminal block
□□□□ : connector

[illegible]

MXZ-6C120VA

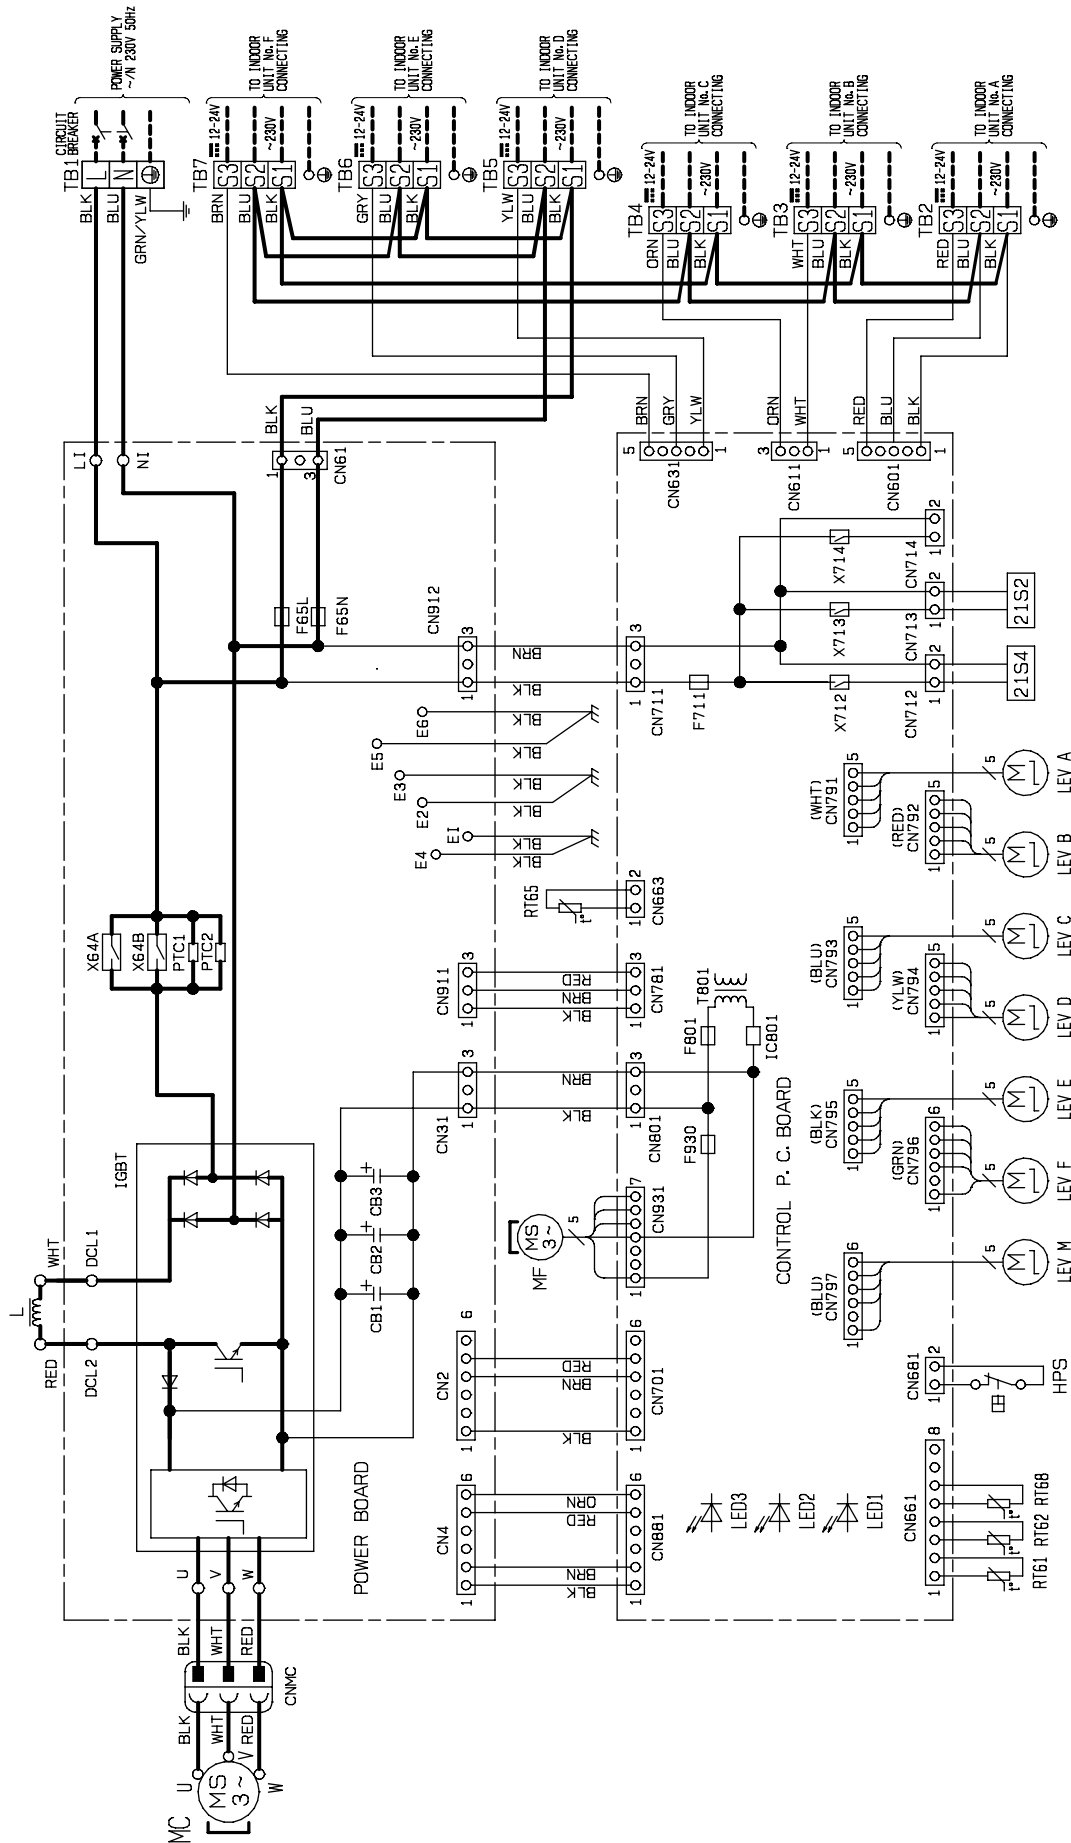


- NOTES:
1. About the indoor side electric wiring refer to the indoor unit electric wiring diagram for servicing.
 2. Use copper conductors only (for field wiring).
 3. Symbols below indicate.
 - □ □ : Terminal block
 - ○ ○ : connector

SYMBOL	NAME	SYMBOL	NAME	SYMBOL	NAME	SYMBOL	NAME
CB1~3	SMOOTHING CAPACITOR	IC801	POWER DEVICE	T801	FAN MOTOR	21S4	REVERSING VALVE SOLENOID COIL
F65L	FUSE (T6. 3AL 250V)	IGBT	POWER MODULE	PTC1~7	CIRCUIT PROTECTION	21S4	TERMINAL BLOCK
F65N	FUSE (T6. 3AL 250V)	L	REACTOR	X64A, B	DEFROST THERMISTOR	X712	RELAY
F711	FUSE (T3. 15AL 250V)	LED 1~3	LED	RT62	DISCHARGE TEMP. THERMISTOR	X713	RELAY
F801	FUSE (T3. 15AL 250V)	LEV A~F	EXPANSION VALVE	RT65	AMBIENT TEMP. THERMISTOR	X714	RELAY
F930	FUSE (T3. 15AL 250V)	LEV M	EXPANSION VALVE	RT66	OUTDOOR HEAT EXCHANGER	21S2	2WAY VALVE SOLENOID COIL
HPS	HIGH PRESSURE SWITCH	MC	COMPRESSOR				

REFRIGERANT SYSTEM DIAGRAM

MXZ-2C30VA

UNIT: mm

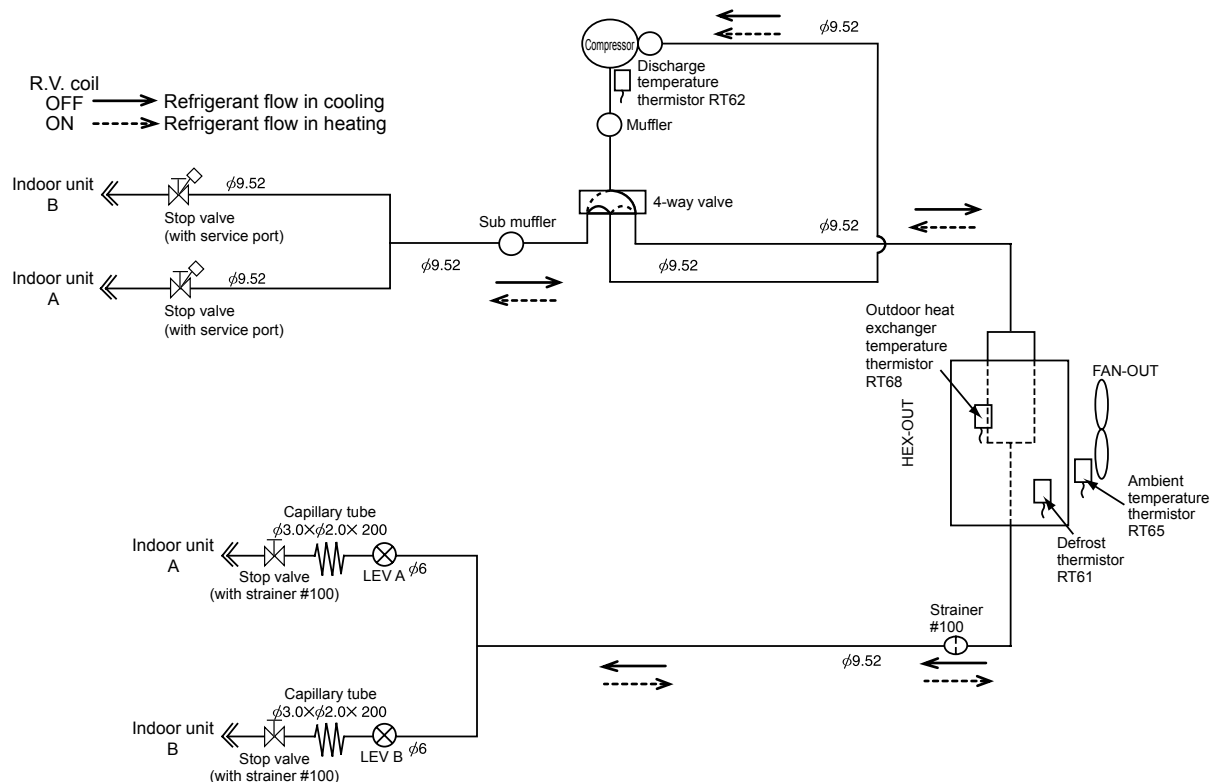


MAX REFRIGERANT PIPING LENGTH

Piping length each indoor unit (a, b)	15m
Total piping length (a+b)	20m
Bending point for each unit	15
Total bending point	20

*It is irrelevant which unit is higher.

ADDITIONAL REFRIGERANT CHARGE

Outdoor unit precharged (g)	Refrigerant piping length (one way, 2 unit total)
	20m
1,150	0

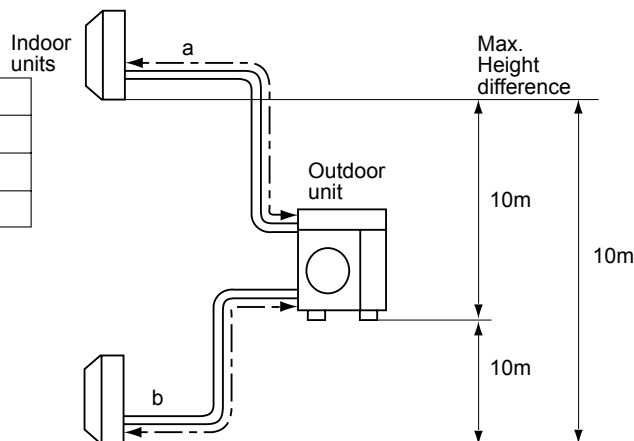


- Refrigerant pipe diameter is different according to indoor unit to be connected. When using extension pipes, refer to the tables below.

UNIT: mm (inch)

Outdoor unit union diameter		
For		
Indoor unit A	Liquid	6.35(1/4)
	Gas	9.52(3/8)
Indoor unit B	Liquid	6.35(1/4)
	Gas	9.52(3/8)

MXZ-2C40VA

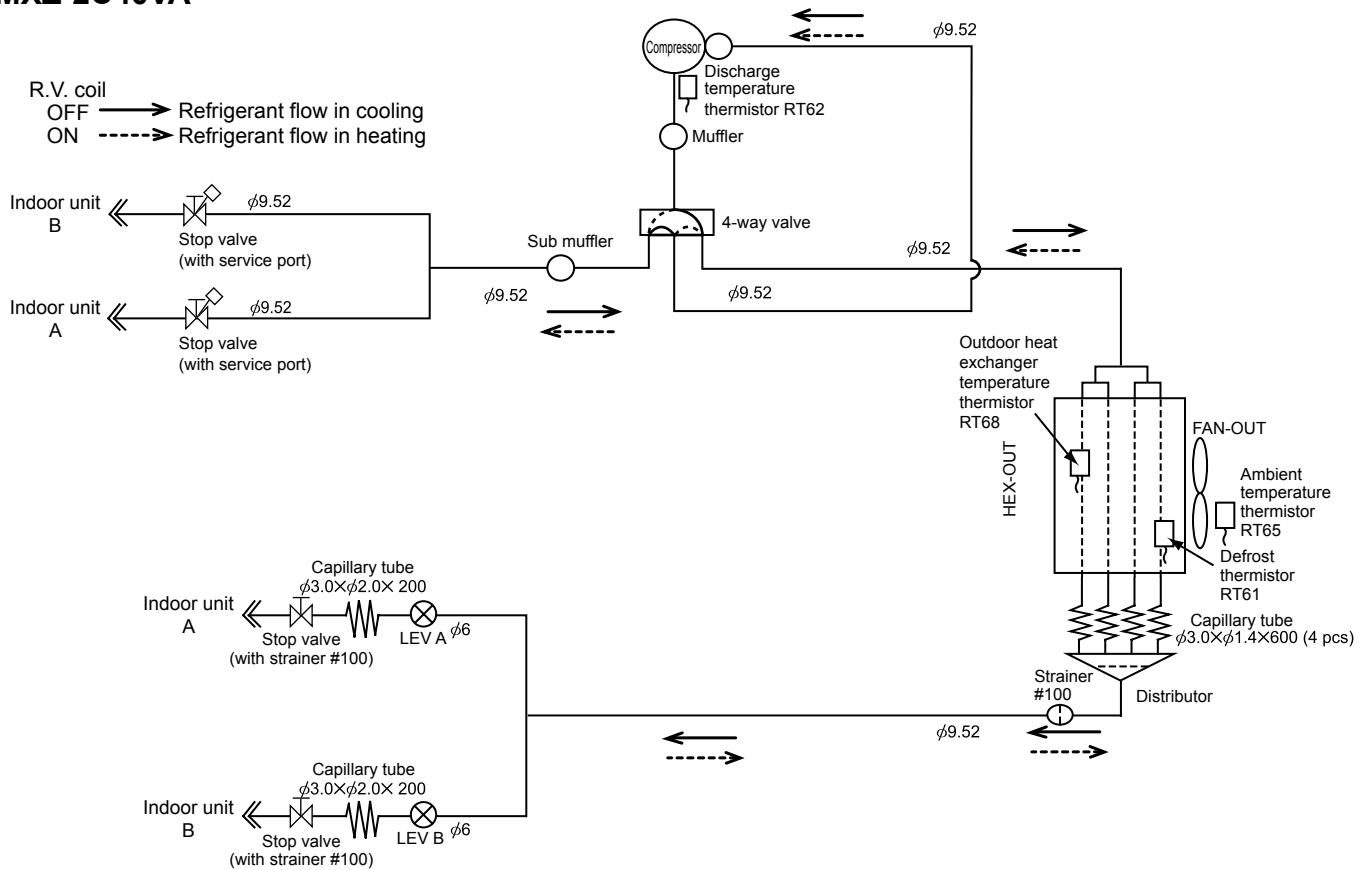

MAX REFRIGERANT PIPING LENGTH

Piping length each indoor unit (a, b)	20m
Total piping length (a+b)	30m
Bending point for each unit	20
Total bending point	30


*It is irrelevant which unit is higher.

ADDITIONAL REFRIGERANT CHARGE

Outdoor unit precharged (g)	Refrigerant piping length (one way, 2 unit total)	
	20m	30m
1,300	0	200

Calculation : $X_g = 20 \text{ g/m} \times (\text{Refrigerant piping length (m)} - 20)$

- Refrigerant pipe diameter is different according to indoor unit to be connected. When using extension pipes, refer to the tables below.

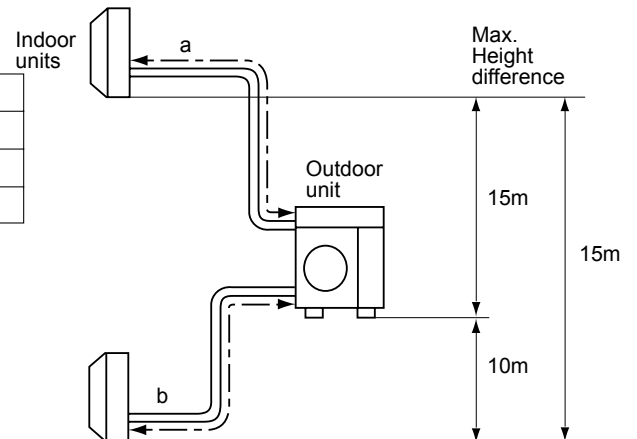


UNIT: mm (inch)

Outdoor unit union diameter		
For		
Indoor unit A	Liquid	6.35(1/4)
	Gas	9.52(3/8)
Indoor unit B	Liquid	6.35(1/4)
	Gas	9.52(3/8)

MXZ-2C52VA

UNIT: mm

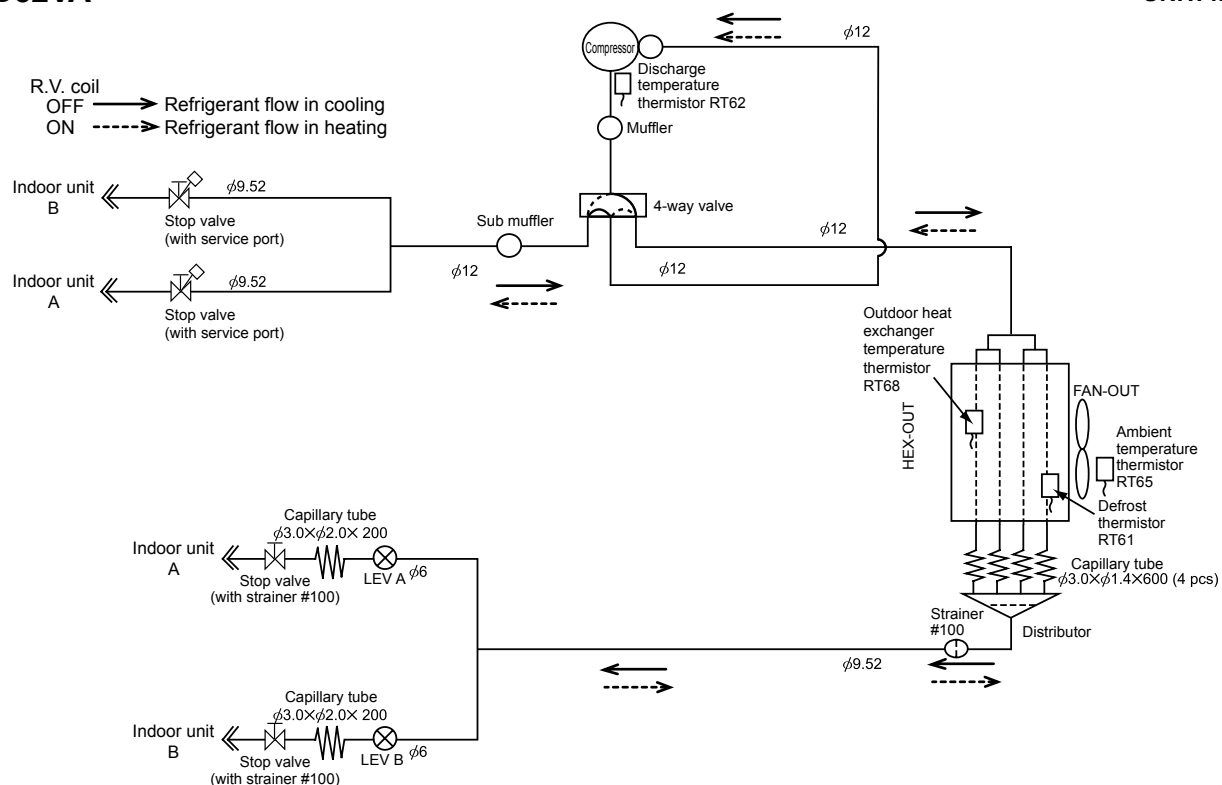

MAX REFRIGERANT PIPING LENGTH

Piping length each indoor unit (a, b)	20m
Total piping length (a+b)	30m
Bending point for each unit	20
Total bending point	30


*It is irrelevant which unit is higher.

ADDITIONAL REFRIGERANT CHARGE

Outdoor unit precharged (g)	Refrigerant piping length (one way, 2 unit total)	
	20m	30m
1,300	0	200

Calculation : $X_g = 20 \text{ g/m} \times (\text{Refrigerant piping length(m)} - 20)$

- Refrigerant pipe diameter is different according to indoor unit to be connected. When using extension pipes, refer to the tables below.

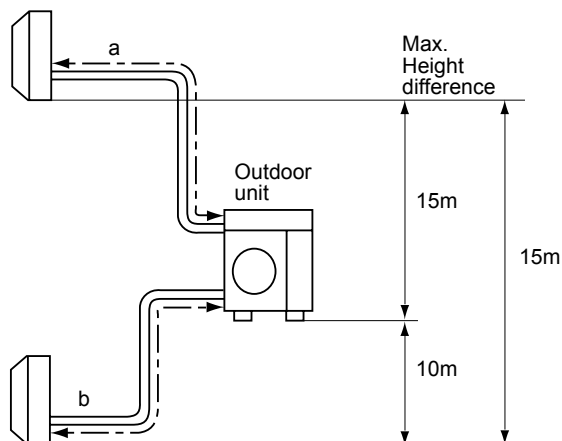


UNIT: mm (inch)

Outdoor unit union diameter		
For		
Indoor unit A	Liquid	6.35(1/4)
	Gas	9.52(3/8)
Indoor unit B	Liquid	6.35(1/4)
	Gas	9.52(3/8)

MXZ-3C54VA MXZ-3C68VA

UNIT: mm

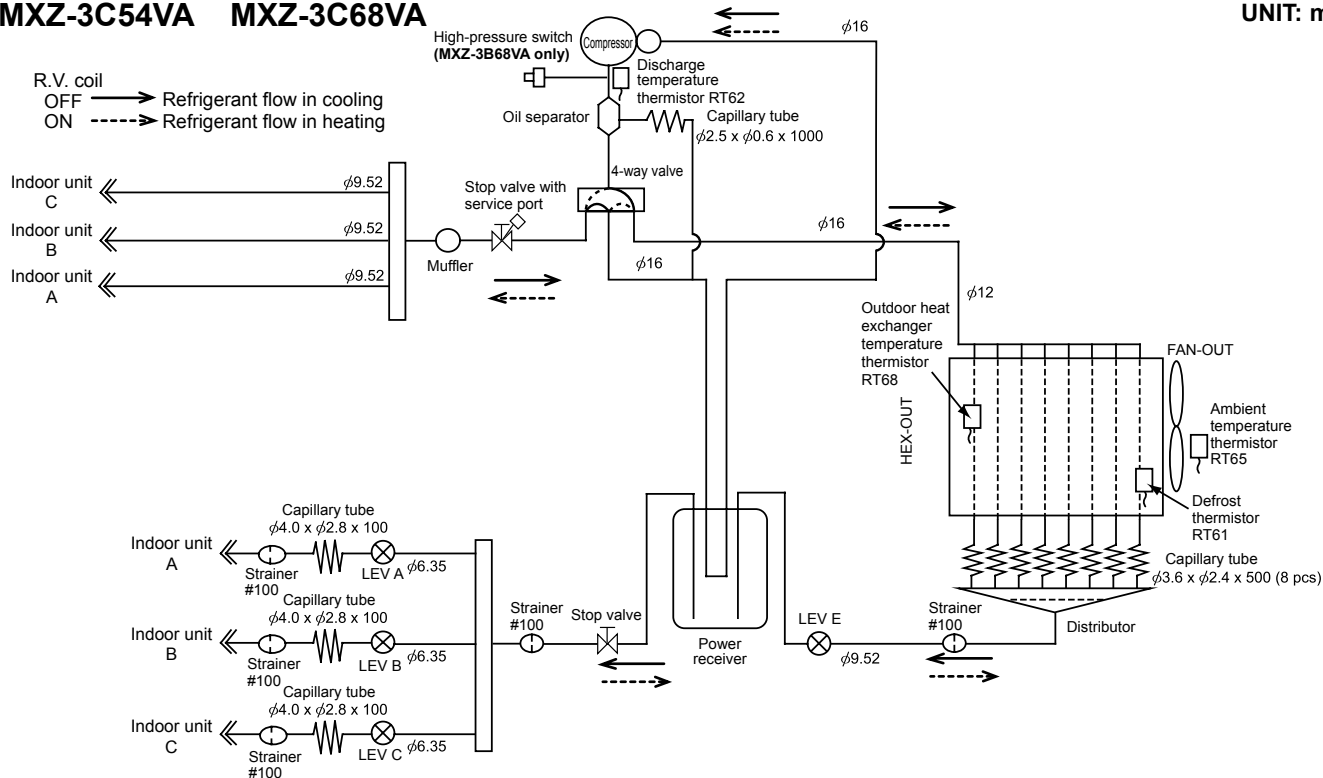

MAX REFRIGERANT PIPING LENGTH

	3C54	3C68
Piping length each indoor unit (a, b, c)	25m	25m
Total piping length (a+b+c)	50m	60m
Bending point for each unit	25	25
Total bending point	50	50

*It is irrelevant which unit is higher.

ADDITIONAL REFRIGERANT CHARGE

Outdoor unit precharged (g)	Refrigerant piping length (one way, 3 unit total)		
	40m	50m	60m
2,700	0	200	400

Calculation : $X_g = 20 \text{ g/m} \times (\text{Refrigerant piping length (m)} - 40)$


- Refrigerant pipe diameter is different according to indoor unit to be connected. When using extension pipes, refer to the tables below.
- When diameter of refrigerant pipe is different from that of outdoor unit union, use optional Different-diameter pipe. For further information on Different-diameter pipe, refer to "PARTS CATALOG".

UNIT: mm (inch)

Outdoor unit union diameter		
For		
Indoor unit A	Liquid	6.35(1/4)
	Gas	9.52(3/8)
Indoor unit B	Liquid	6.35(1/4)
	Gas	9.52(3/8)
Indoor unit C	Liquid	6.35(1/4)
	Gas	9.52(3/8)

MXZ-4C71VA

UNIT: mm

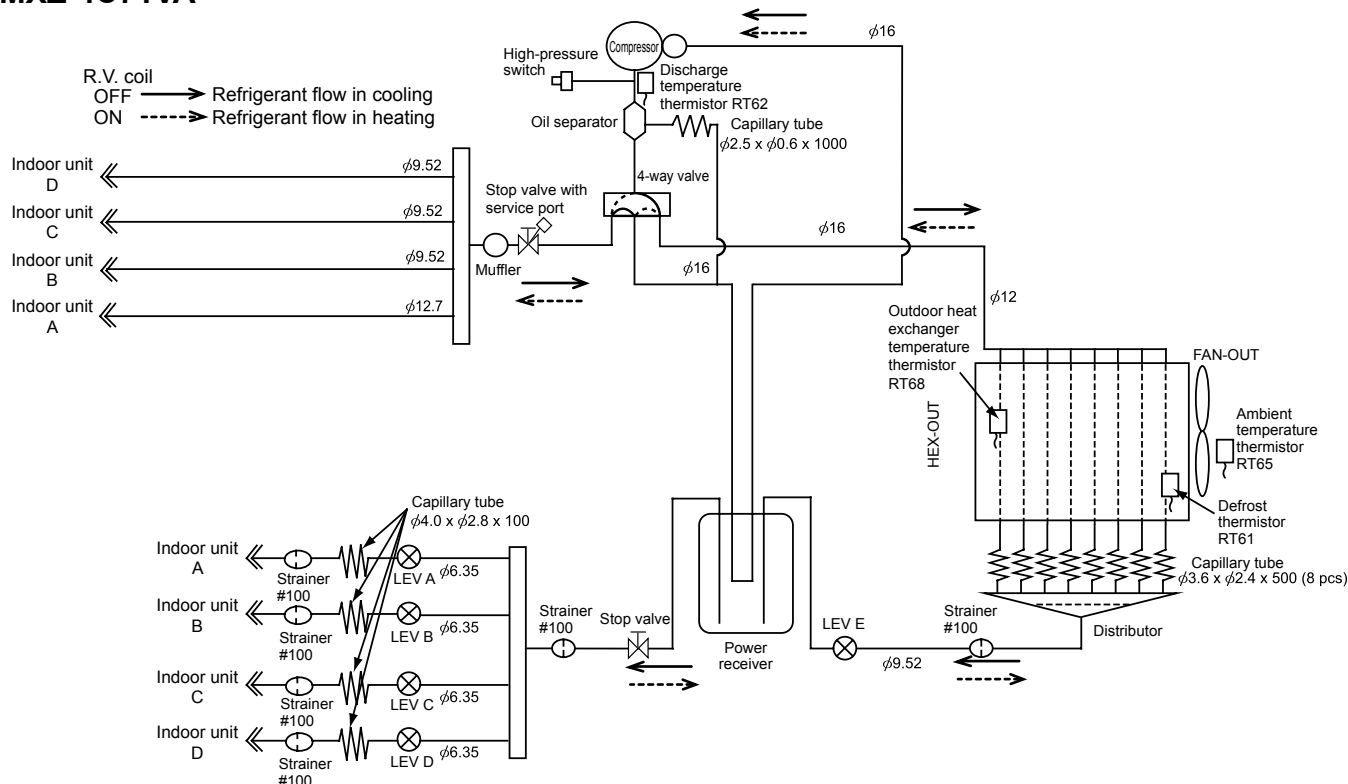

MAX REFRIGERANT PIPING LENGTH

Piping length each indoor unit (a, b, c, d)	25m
Total piping length (a+b+c+d)	60m
Bending point for each unit	25
Total bending point	60

*It is irrelevant which unit is higher.

ADDITIONAL REFRIGERANT CHARGE

Outdoor unit precharged (g)	Refrigerant piping length (one way, 4 unit total)		
	40m	50m	60m
2,700	0	200	400

Calculation : $X_g = 20 \text{ g/m} \times (\text{Refrigerant piping length (m)} - 40)$


- Refrigerant pipe diameter is different according to indoor unit to be connected. When using extension pipes, refer to the tables below.
- When diameter of refrigerant pipe is different from that of outdoor unit union, use optional Different-diameter pipe. For further information on Different-diameter pipe, refer to "PARTS CATALOG".

UNIT: mm (inch)

Outdoor unit union diameter		
For		
Indoor unit A	Liquid	6.35(1/4)
	Gas	12.7(1/2)
Indoor unit B	Liquid	6.35(1/4)
	Gas	9.52(3/8)
Indoor unit C	Liquid	6.35(1/4)
	Gas	9.52(3/8)
Indoor unit D	Liquid	6.35(1/4)
	Gas	9.52(3/8)

MXZ-4C80VA

UNIT: mm

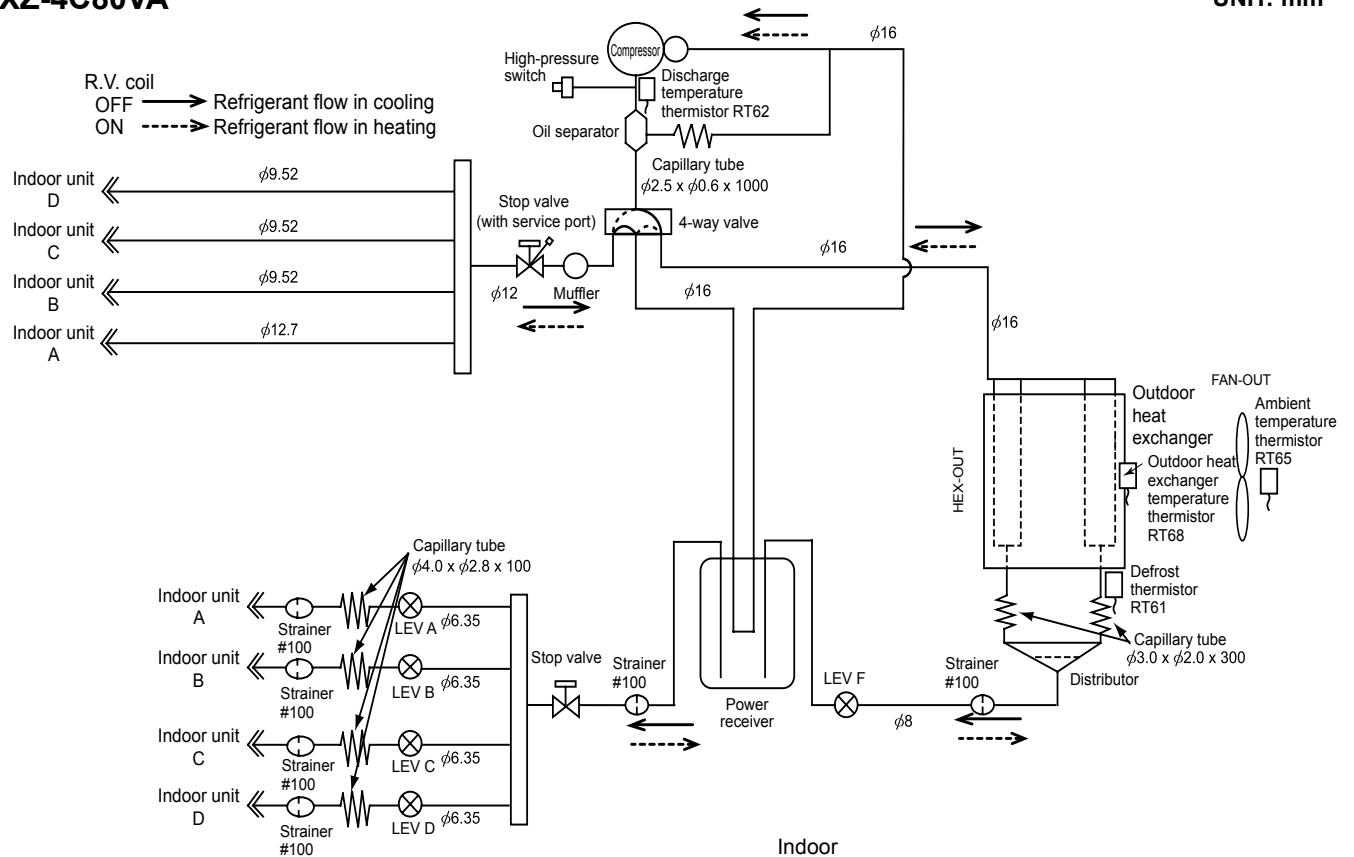

MAX REFRIGERANT PIPING LENGTH

Piping length each indoor unit (a, b, c, d)	25m
Total piping length (a+b+c+d)	70m
Bending point for each unit	25
Total bending point	70

*It is irrelevant which unit is higher.

ADDITIONAL REFRIGERANT CHARGE

Outdoor unit precharged (g)	Refrigerant piping length (one way, 4 unit total)			
	40m	50m	60m	70m
3,500	0	200	400	600

Calculation : $Xg = 20 \text{ g/m} \times (\text{Refrigerant piping length (m)} - 40)$


- Refrigerant pipe diameter is different according to indoor unit to be connected. When using extension pipes, refer to the tables below.
- When diameter of refrigerant pipe is different from that of outdoor unit union, use optional Different-diameter pipe. For further information on Different-diameter pipe, refer to "PARTS CATALOG".

UNIT: mm (inch)

Outdoor unit union diameter		
For		
Indoor unit A	Liquid	6.35(1/4)
	Gas	12.7(1/2)
Indoor unit B	Liquid	6.35(1/4)
	Gas	9.52(3/8)
Indoor unit C	Liquid	6.35(1/4)
	Gas	9.52(3/8)
Indoor unit D	Liquid	6.35(1/4)
	Gas	9.52(3/8)

MXZ-5C100VA

UNIT: mm

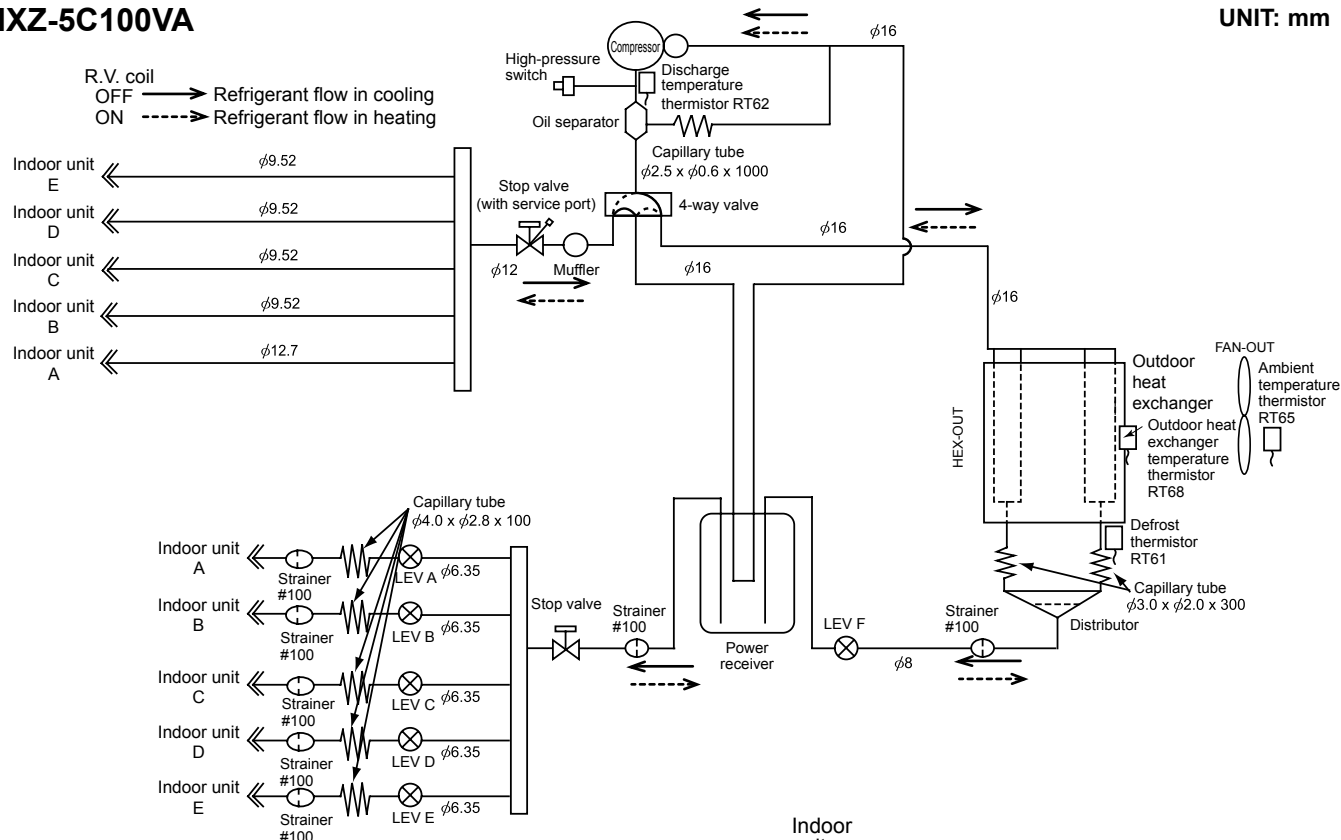

MAX REFRIGERANT PIPING LENGTH


Piping length each indoor unit (a, b, c, d, e)	25m
Total piping length (a+b+c+d+e)	80m
Bending point for each unit	25
Total bending point	80

*It is irrelevant which unit is higher.

ADDITIONAL REFRIGERANT CHARGE

Outdoor unit precharged (g)	Refrigerant piping length (one way, 5 unit total)				
	40m	50m	60m	70m	80m
4,000	0	200	400	600	800

Calculation : $X_g = 20 \text{ g/m} \times (\text{Refrigerant piping length (m)} - 40)$

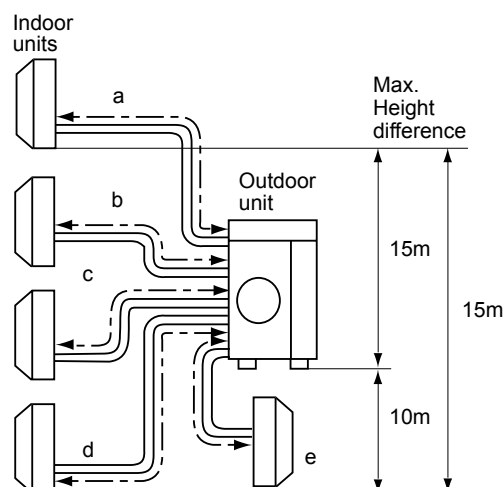


- Refrigerant pipe diameter is different according to indoor unit to be connected. When using extension pipes, refer to the tables below.
- When diameter of refrigerant pipe is different from that of outdoor unit union, use optional Different-diameter pipe. For further information on Different-diameter pipe, refer to "PARTS CATALOG".

UNIT: mm (inch)

Outdoor unit union diameter		
For		
Indoor unit A	Liquid	6.35(1/4)
	Gas	12.7(1/2)
Indoor unit B	Liquid	6.35(1/4)
	Gas	9.52(3/8)
Indoor unit C	Liquid	6.35(1/4)
	Gas	9.52(3/8)
Indoor unit D	Liquid	6.35(1/4)
	Gas	9.52(3/8)
Indoor unit E	Liquid	6.35(1/4)
	Gas	9.52(3/8)

MXZ-6C120VA

UNIT: mm

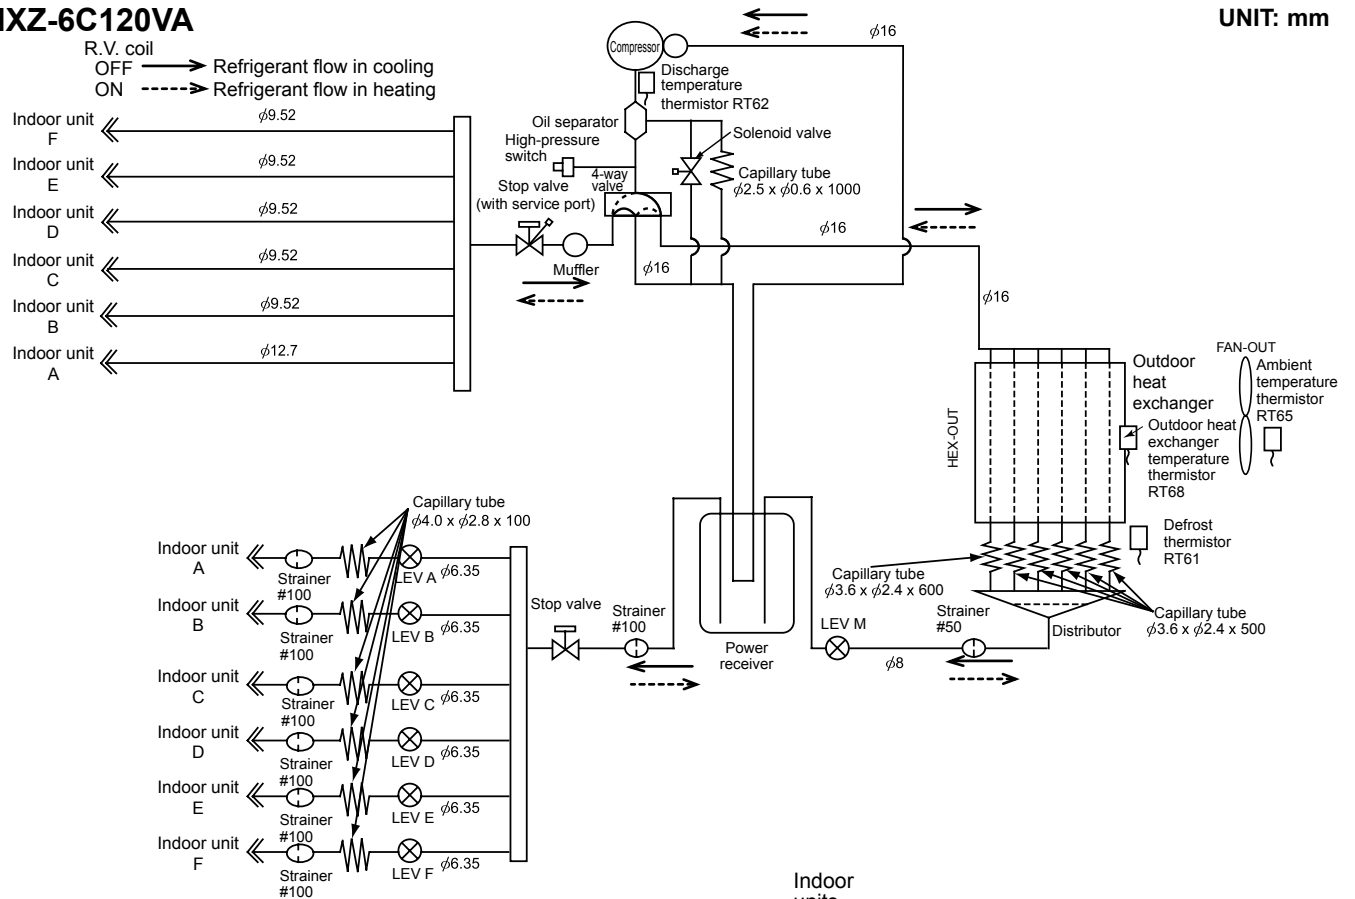

MAX REFRIGERANT PIPING LENGTH


Piping length each indoor unit (a, b, c, d, e, f)	25m
Total piping length (a+b+c+d+e+f)	80m
Bending point for each unit	25
Total bending point	80

*It is irrelevant which unit is higher.

ADDITIONAL REFRIGERANT CHARGE

Outdoor unit precharged (g)	Refrigerant piping length (one way, 6 unit total)				
	40m	50m	60m	70m	80m
5,000	0	0	0	200	400

Calculation : $Xg = 20 \text{ g/m} \times (\text{Refrigerant piping length (m)} - 60)$

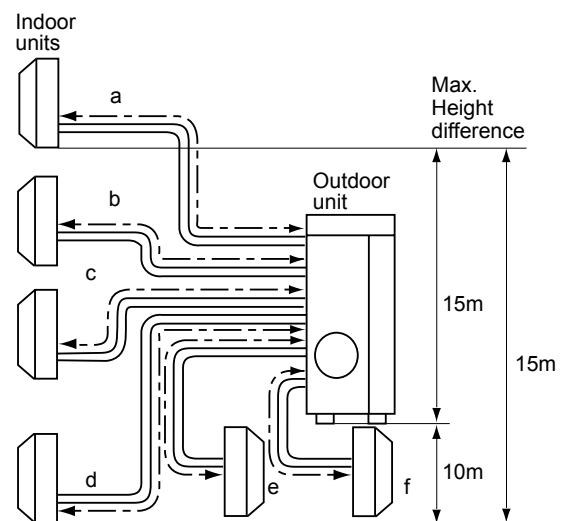

- Refrigerant pipe diameter is different according to indoor unit to be connected.
For the diameter of connection pipe of the indoor unit, refer to the indoor unit installation manual.
- When diameter of refrigerant pipe is different from that of outdoor unit union, use optional Different-diameter pipe.
For further information on Different-diameter pipe, refer to "PARTS CATALOG".

UNIT: mm (inch)

Outdoor unit union diameter		
For		
Indoor unit D	Liquid	6.35(1/4)
	Gas	9.52(3/8)
Indoor unit E	Liquid	6.35(1/4)
	Gas	9.52(3/8)
Indoor unit F	Liquid	6.35(1/4)
	Gas	9.52(3/8)

**MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA MXZ-3C54VA MXZ-3C68VA MXZ-4C71VA
MXZ-4C80VA MXZ-5C100VA MXZ-6C120VA**

The standard specifications apply only to the operation of the air conditioner under normal conditions.

Since operating conditions vary according to the areas where these units are installed, the following information has been provided to clarify the operating characteristics of the air conditioner under the conditions indicated by the performance curve.

(1) GUARANTEED VOLTAGE

198~264 V 50 Hz

(2) AIR FLOW

Air flow should be set at MAX.



(3) MAIN READINGS

(1) Indoor intake air wet-bulb temperature :	°CWB	} Cooling
(2) Indoor outlet air wet-bulb temperature :	°CWB	
(3) Outdoor intake air dry-bulb temperature :	°CDB	
(4) Total input:	W	} Heating
(5) Indoor intake air dry-bulb temperature :	°CDB	
(6) Outdoor intake air wet-bulb temperature :	°CWB	
(7) Total input :	W	

Indoor air wet and dry bulb temperature difference on the left side of the following chart shows the difference between the indoor intake air wet and dry bulb temperature and the indoor outlet air wet and dry bulb temperature for your reference at service.


How to measure the indoor air wet and dry bulb temperature difference

1. Attach at least 2 sets of wet and dry bulb thermometers to the indoor air intake as shown in the figure, and at least 2 sets of wet and dry bulb thermometers to the indoor air outlet. The thermometers must be attached to the position where air speed is high.
2. Attach at least 2 sets of wet and dry bulb thermometers to the outdoor air intake. Cover the thermometers to prevent direct rays of the sun.
3. Check that the air filter is cleaned.
4. Open windows and doors of room.
5. Press the EMERGENCY OPERATION switch once (twice) to start the EMERGENCY COOL (HEAT) MODE.
6. When system stabilizes after more than 15 minutes, measure temperature and take an average temperature.
7. 10 minutes later, measure temperature again and check that the temperature does not change.

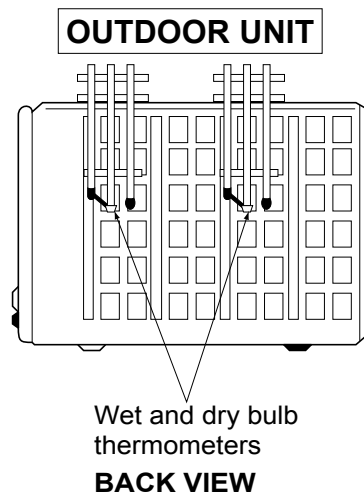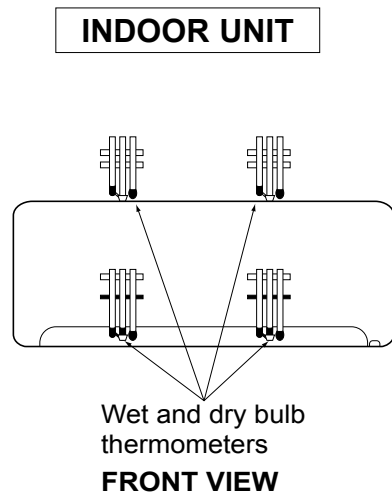


8-1. CAPACITY AND THE INPUT CURVES

MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA

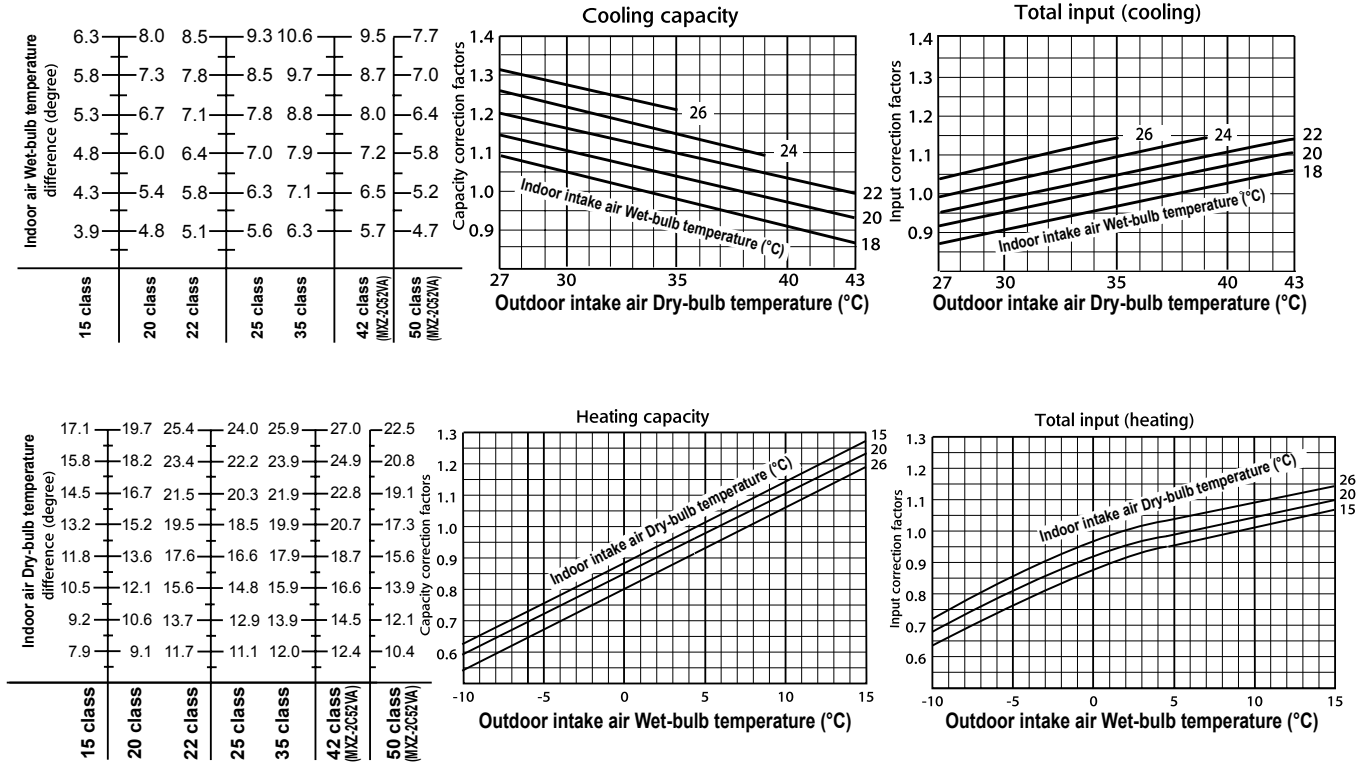


MXZ-3C54VA MXZ-3C68VA MXZ-4C71VA

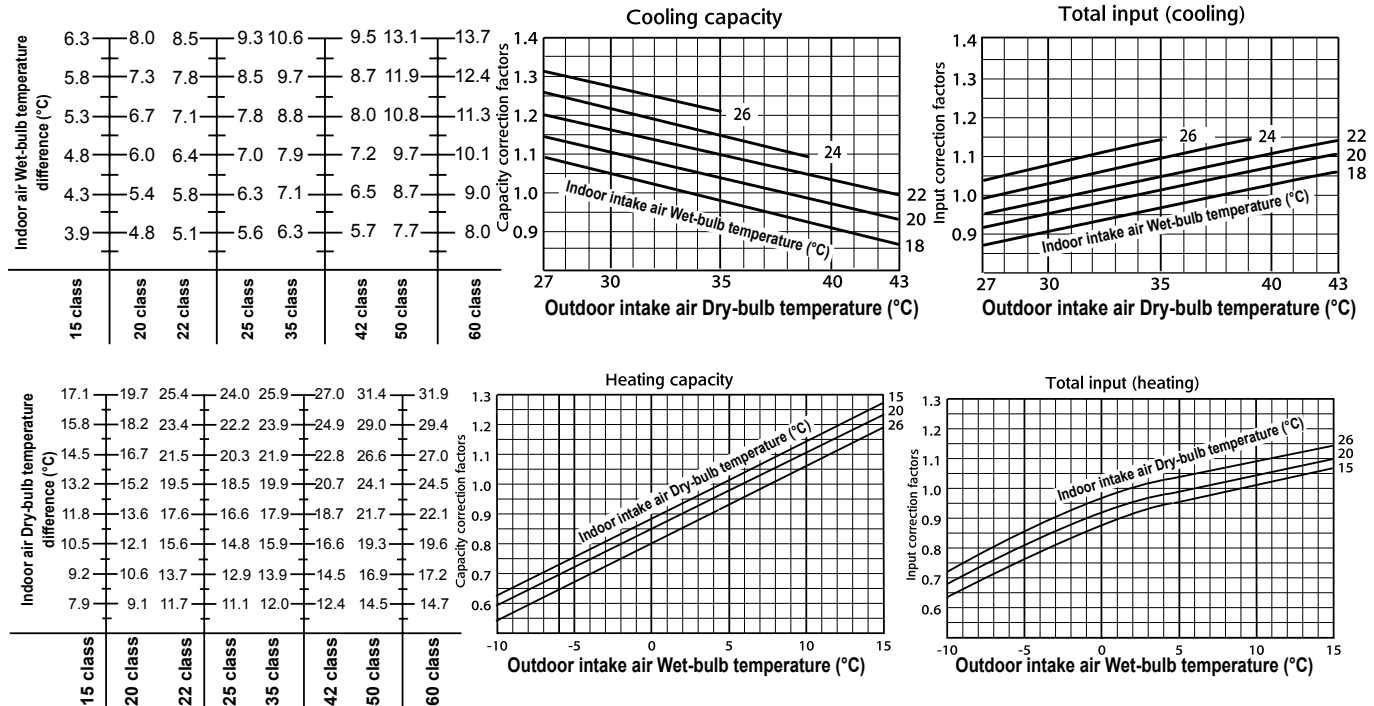


MXZ-4C80VA MXZ-5C100VA MXZ-6C120VA


6.3	8.0	8.5	9.3	10.6	9.5	13.1	13.7	17.0
5.8	7.3	7.8	8.5	9.7	8.7	11.9	12.4	15.4
5.3	6.7	7.1	7.8	8.8	8.0	10.8	11.3	13.9
4.8	6.0	6.4	7.0	7.9	7.2	9.7	10.1	12.5
4.3	5.4	5.8	6.3	7.1	6.5	8.7	9.0	11.1
3.9	4.8	5.1	5.6	6.3	5.7	7.7	8.0	9.7
15 class	20 class	22 class	25 class	35 class	42 class	50 class	60 class	71 class

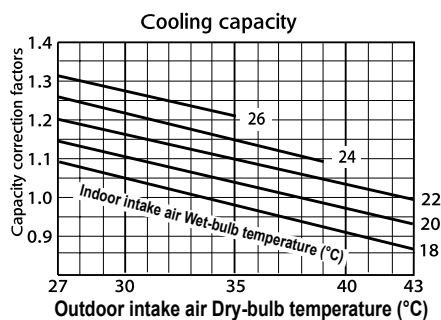


6.3	8.0	8.5	9.3	10.6	9.5	13.1	13.7	17.0
5.8	7.3	7.8	8.5	9.7	8.7	11.9	12.4	15.4
5.3	6.7	7.1	7.8	8.8	8.0	10.8	11.3	13.9
4.8	6.0	6.4	7.0	7.9	7.2	9.7	10.1	12.5
4.3	5.4	5.8	6.3	7.1	6.5	8.7	9.0	11.1
3.9	4.8	5.1	5.6	6.3	5.7	7.7	8.0	9.7
15 class	20 class	22 class	25 class	35 class	42 class	50 class	60 class	71 class

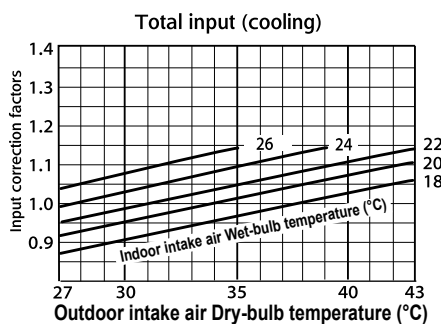

17.1	19.7	25.4	24.0	25.9	27.0	31.4	31.9	35.1
15.8	18.2	23.4	22.2	23.9	24.9	29.0	29.4	32.4
14.5	16.7	21.5	20.3	21.9	22.8	26.6	27.0	29.7
13.2	15.2	19.5	18.5	19.9	20.7	24.1	24.5	27.0
11.8	13.6	17.6	16.6	17.9	18.7	21.7	22.1	24.3
10.5	12.1	15.6	14.8	15.9	16.6	19.3	19.6	21.6
9.2	10.6	13.7	12.9	13.9	14.5	16.9	17.2	18.9
7.9	9.1	11.7	11.1	12.0	12.4	14.5	14.7	16.2
15 class	20 class	22 class	25 class	35 class	42 class	50 class	60 class	71 class

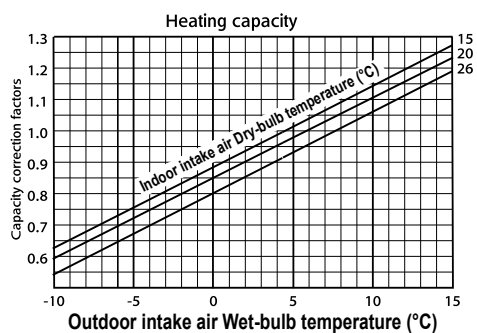


17.1	19.7	25.4	24.0	25.9	27.0	31.4	31.9	35.1
15.8	18.2	23.4	22.2	23.9	24.9	29.0	29.4	32.4
14.5	16.7	21.5	20.3	21.9	22.8	26.6	27.0	29.7
13.2	15.2	19.5	18.5	19.9	20.7	24.1	24.5	27.0
11.8	13.6	17.6	16.6	17.9	18.7	21.7	22.1	24.3
10.5	12.1	15.6	14.8	15.9	16.6	19.3	19.6	21.6
9.2	10.6	13.7	12.9	13.9	14.5	16.9	17.2	18.9
7.9	9.1	11.7	11.1	12.0	12.4	14.5	14.7	16.2
15 class	20 class	22 class	25 class	35 class	42 class	50 class	60 class	71 class

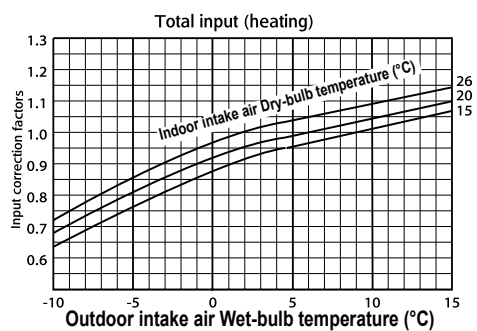


8-2. CAPACITY AND INPUT CORRECTION BY INVERTER OUTPUT FREQUENCY (single operation)

MXZ-2C30VA


15-class unit

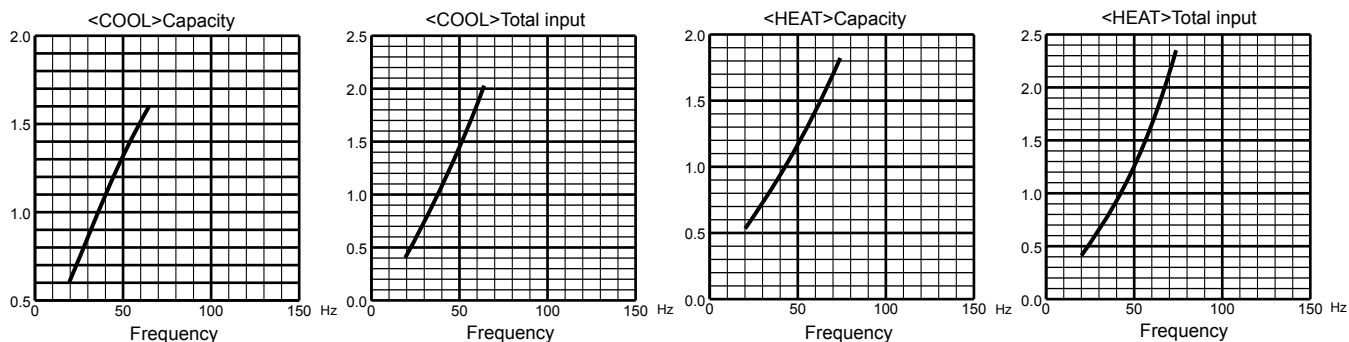


20-class unit

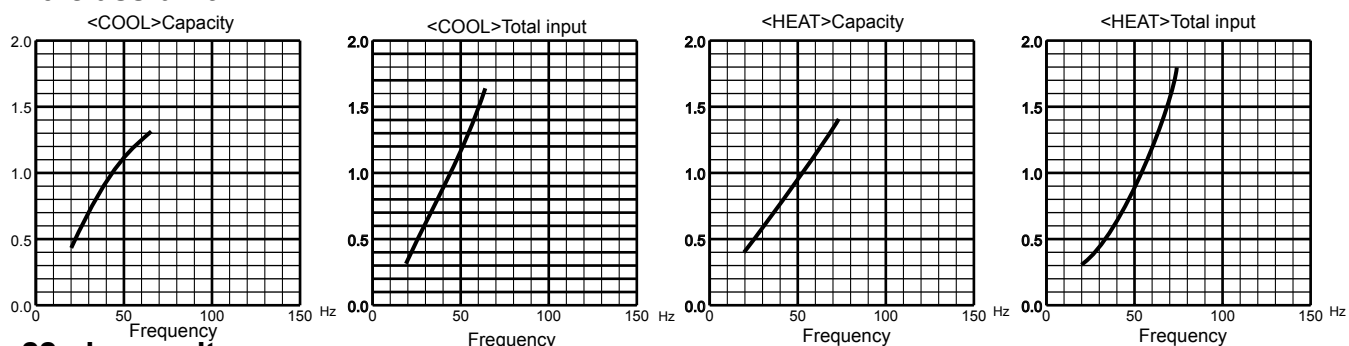

22-class unit

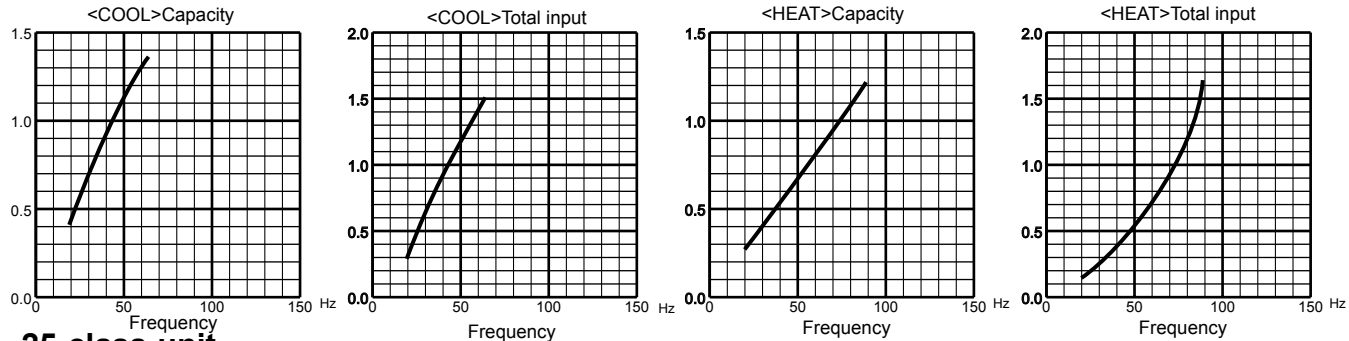


25-class unit

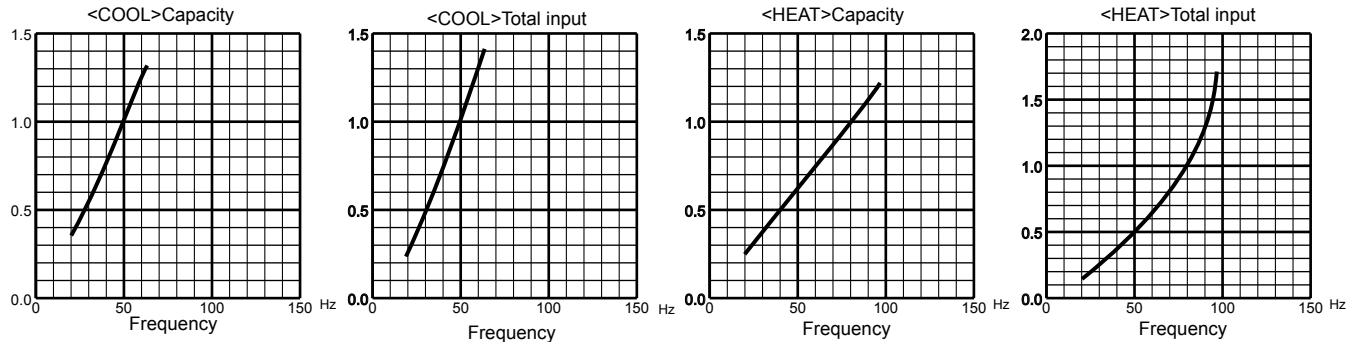


MXZ-2C40VA


15-class unit

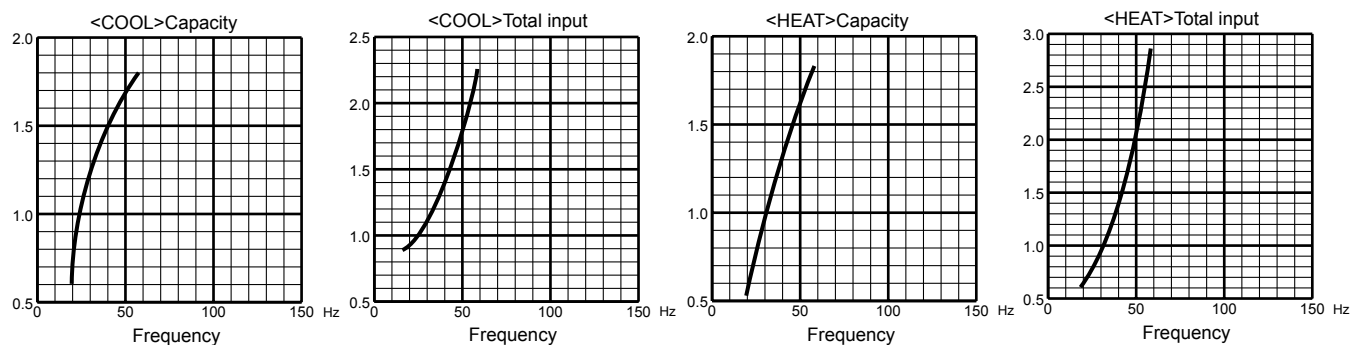


20-class unit

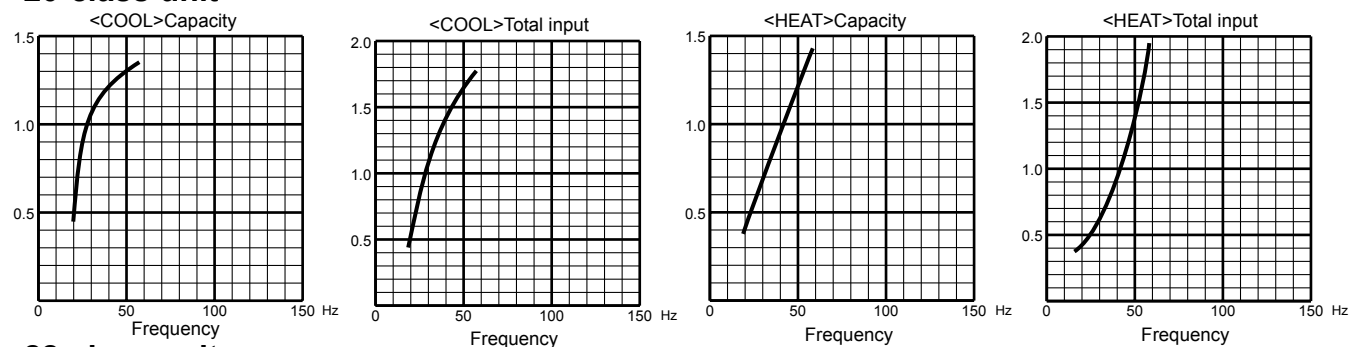


22-class unit

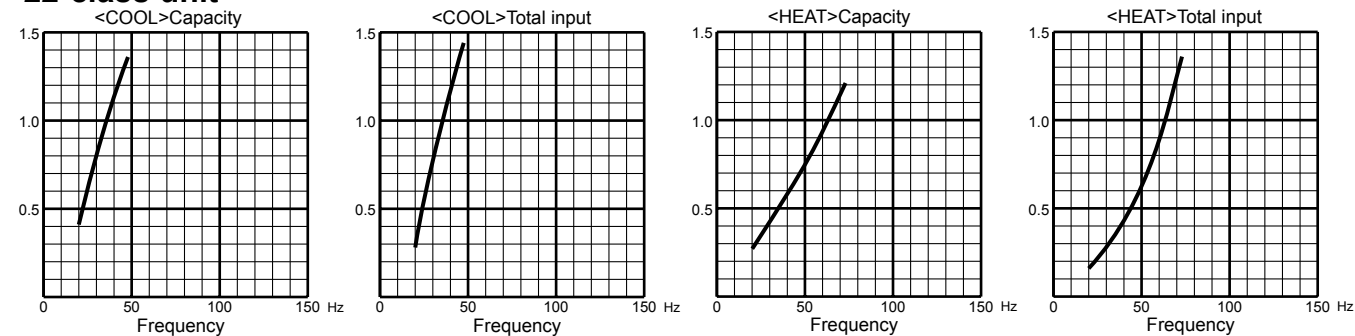

25-class unit

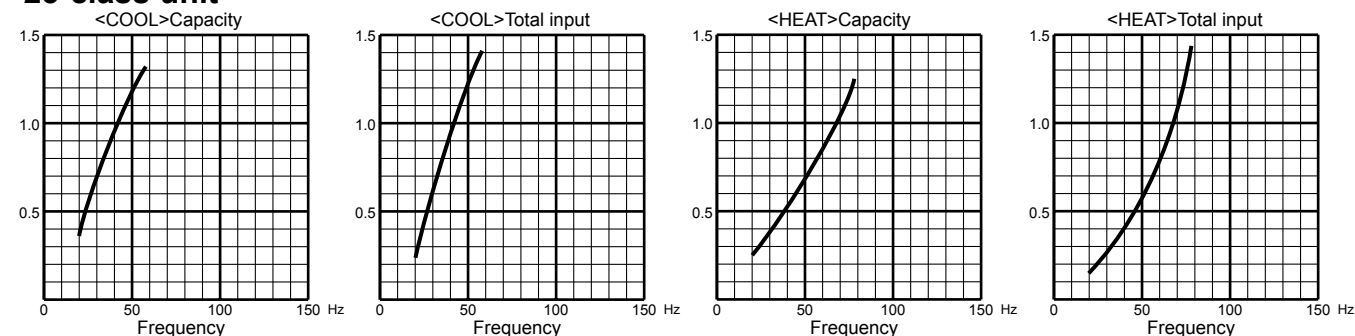


35-class unit

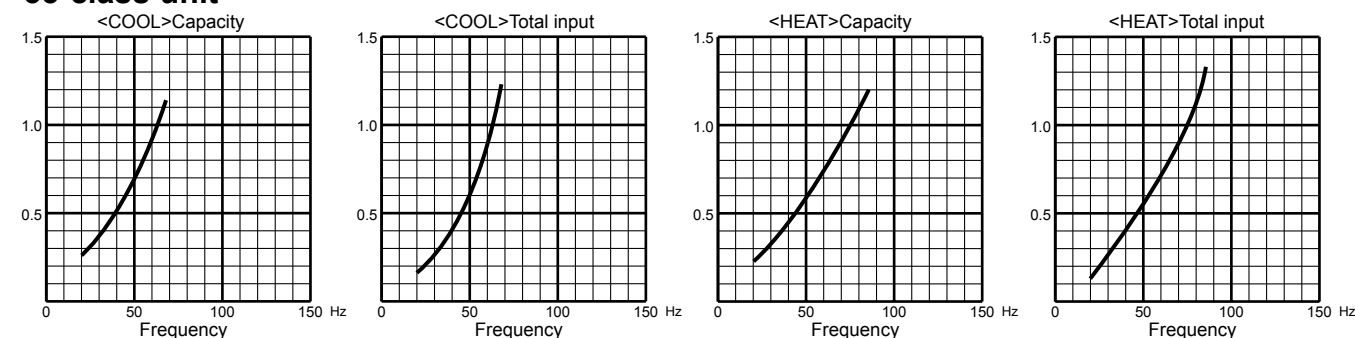


MXZ-2C52VA


15-class unit

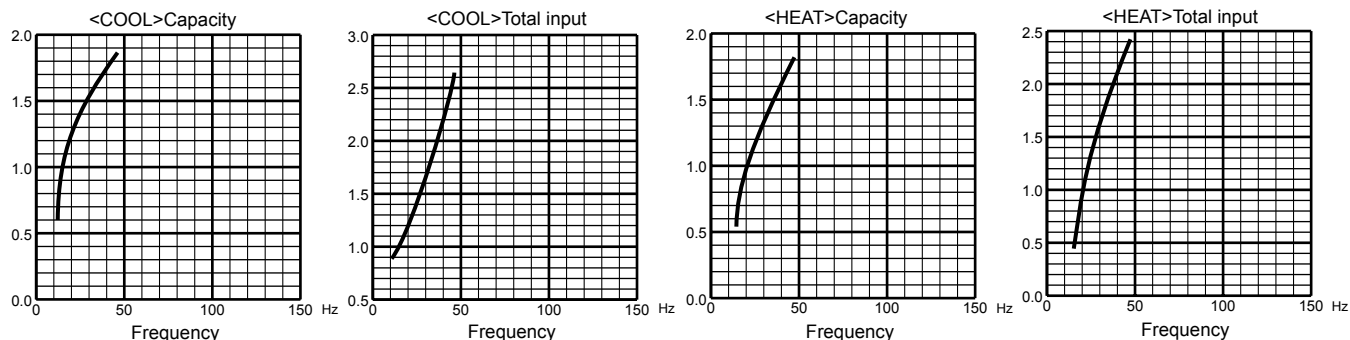


20-class unit

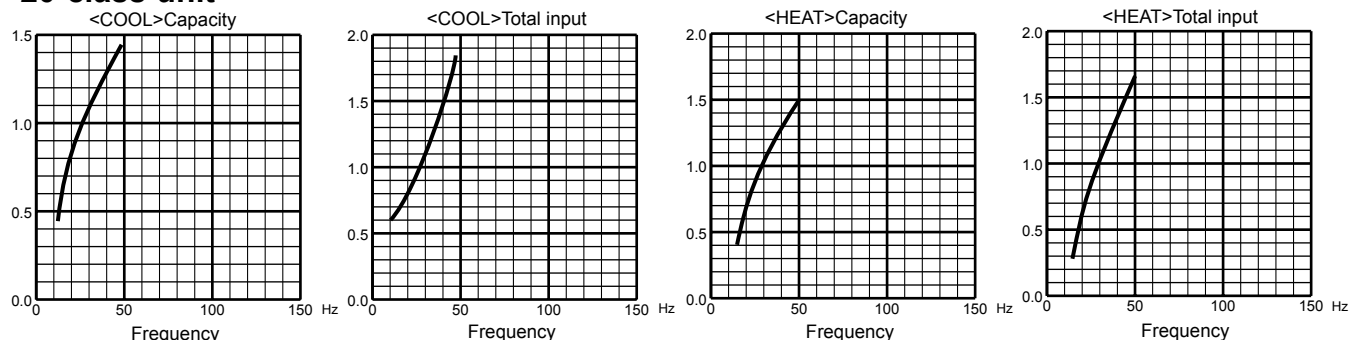


22-class unit

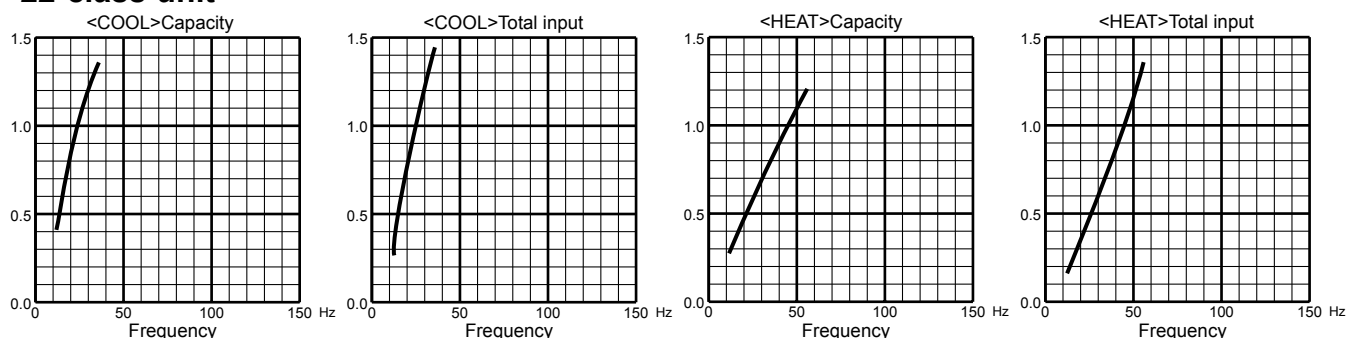


25-class unit

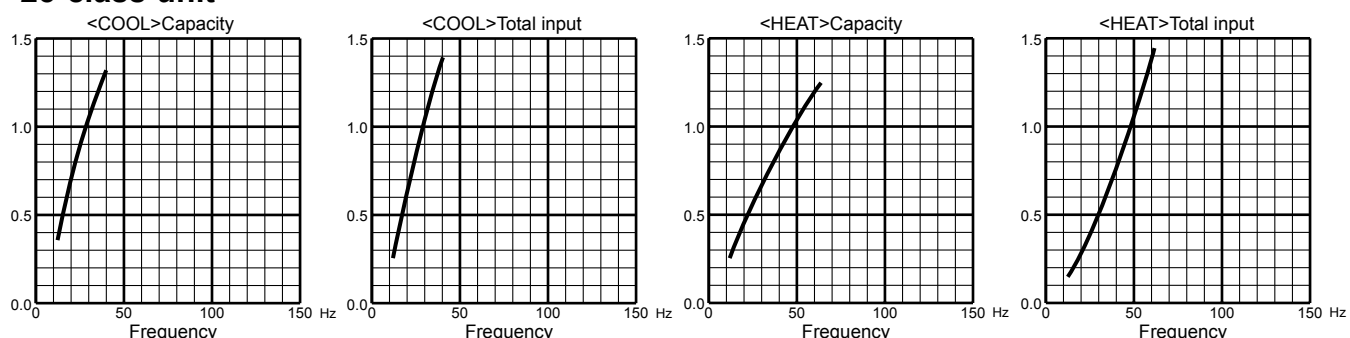


35-class unit

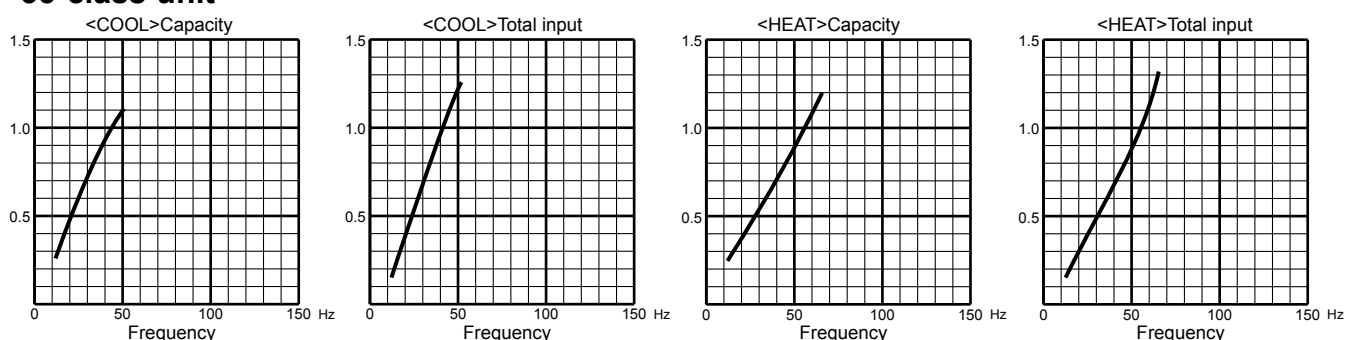

42-class unit

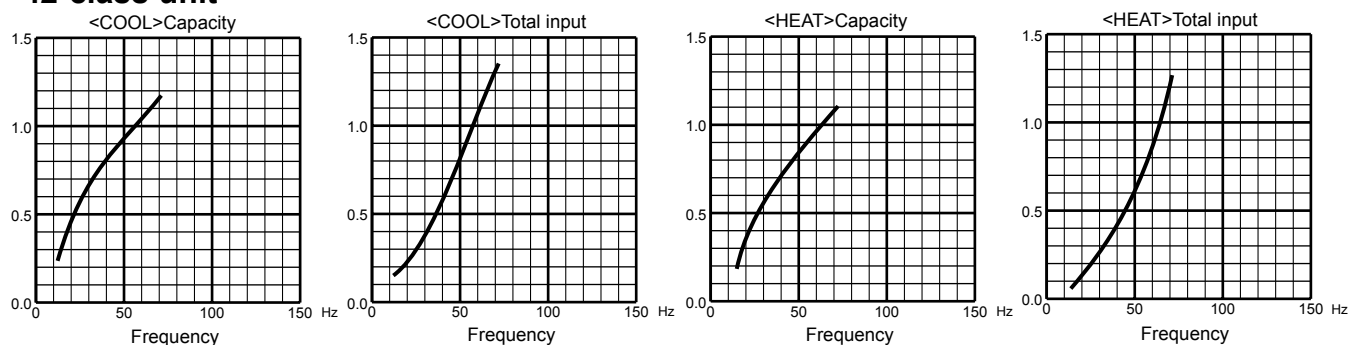


50-class unit

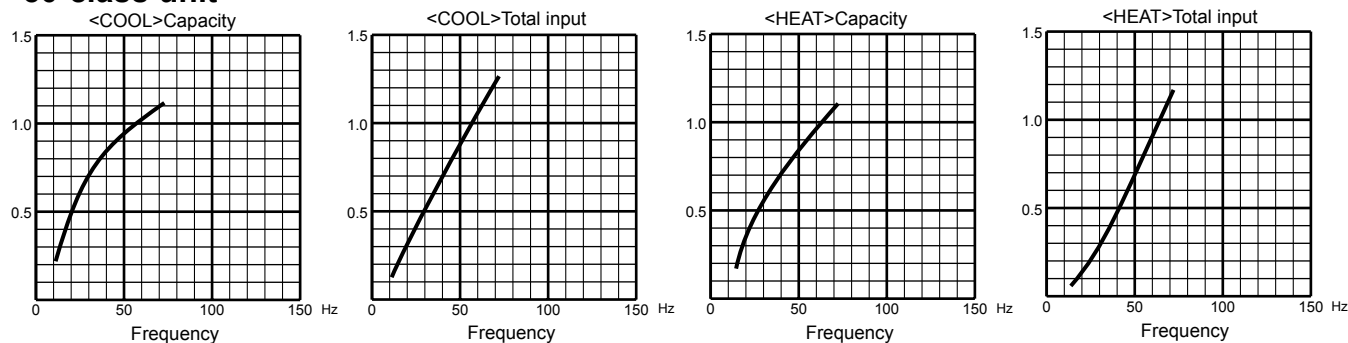


MXZ-3C54VA


15-class unit

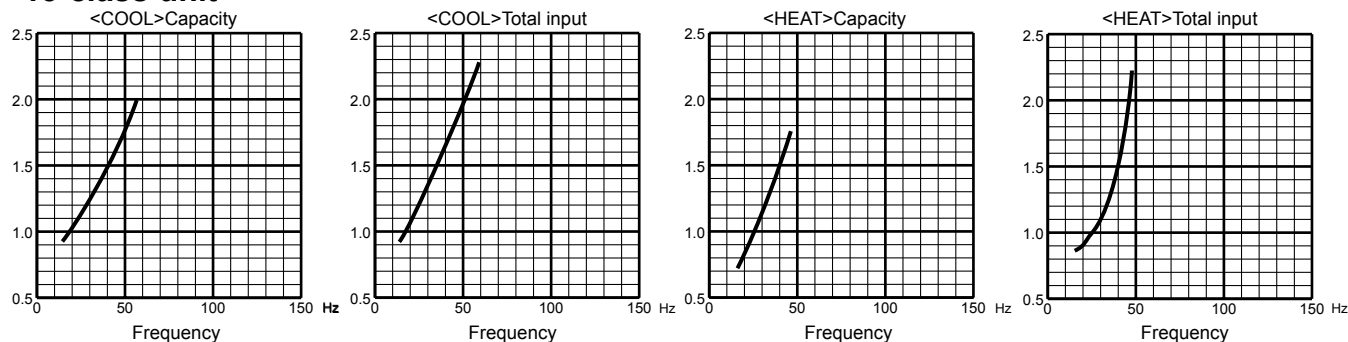

20-class unit

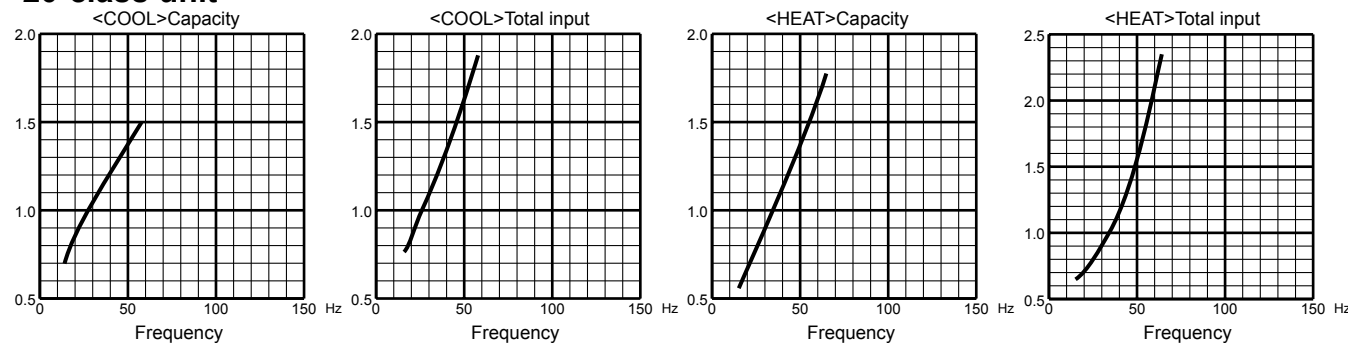


22-class unit

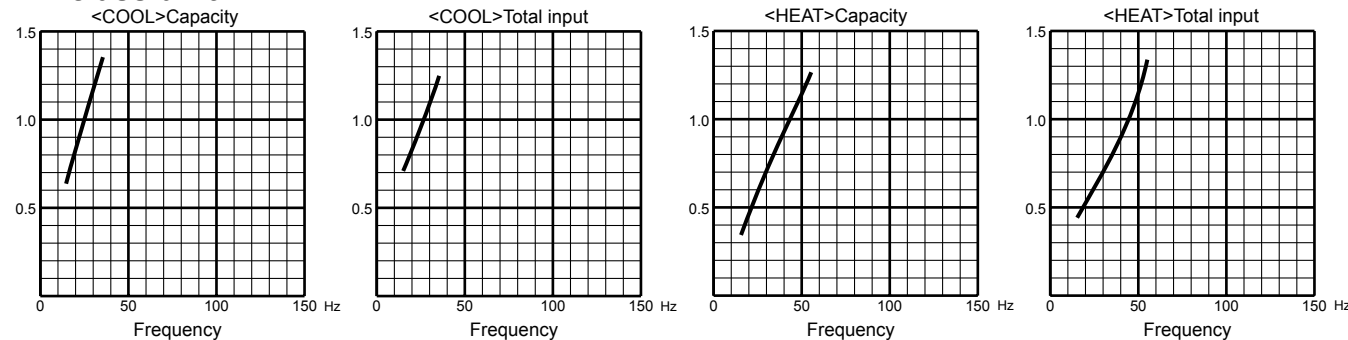


MXZ-3C54VA


25-class unit

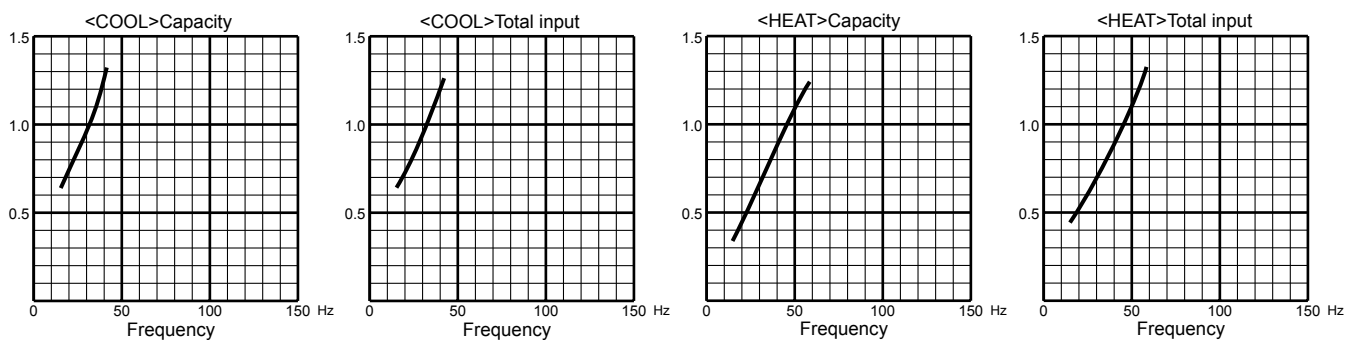


35-class unit

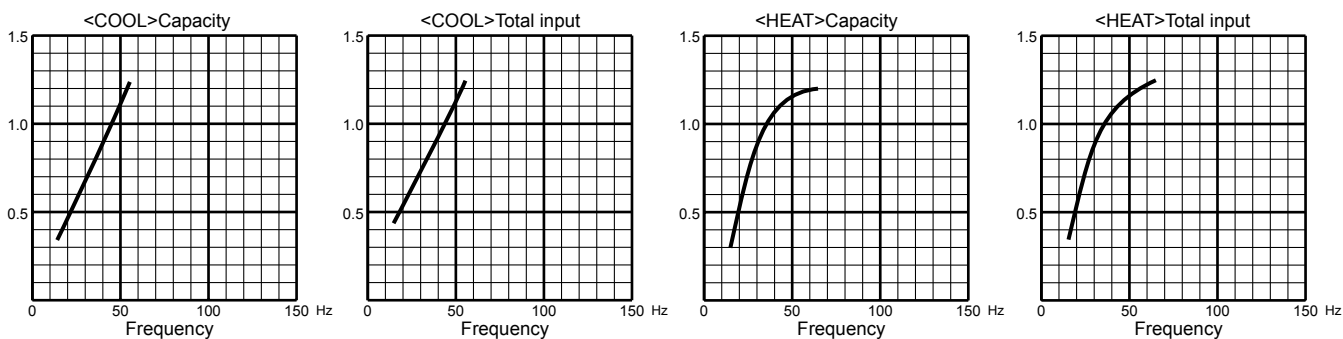

42-class unit

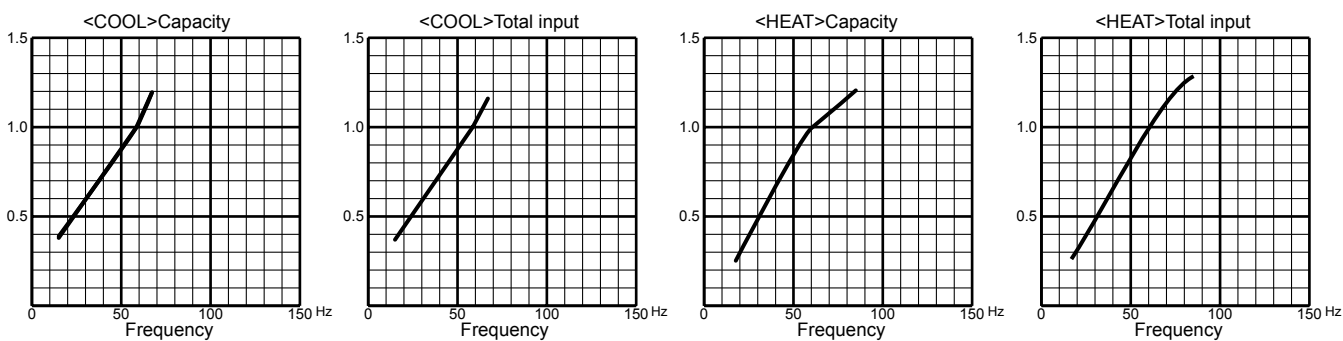


50-class unit

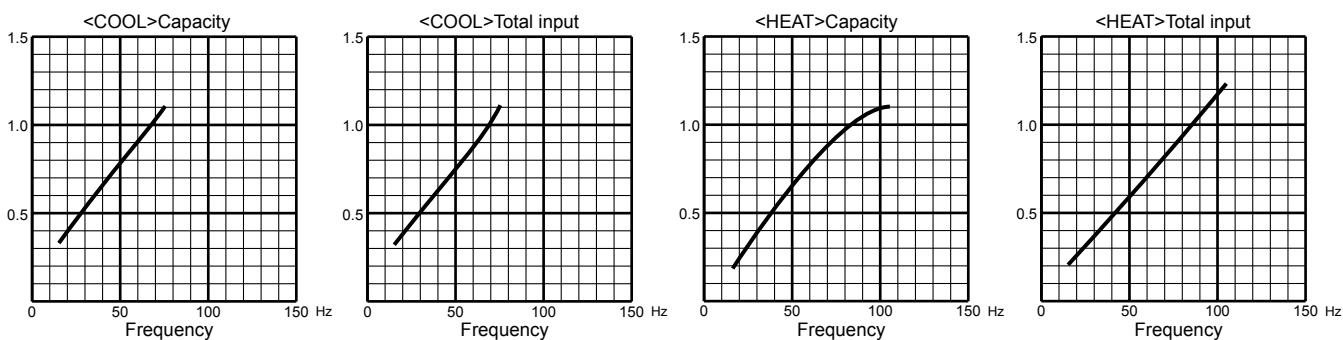


MXZ-3C68VA


15-class unit

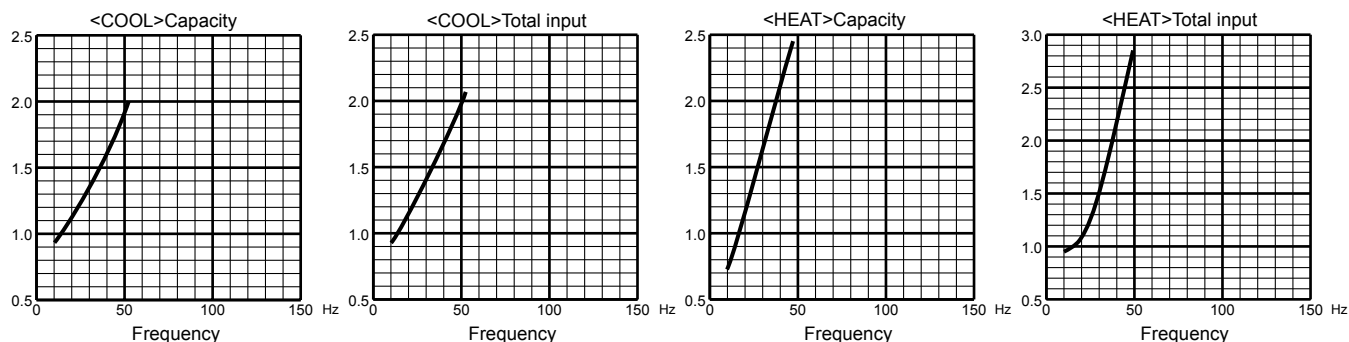


20-class unit

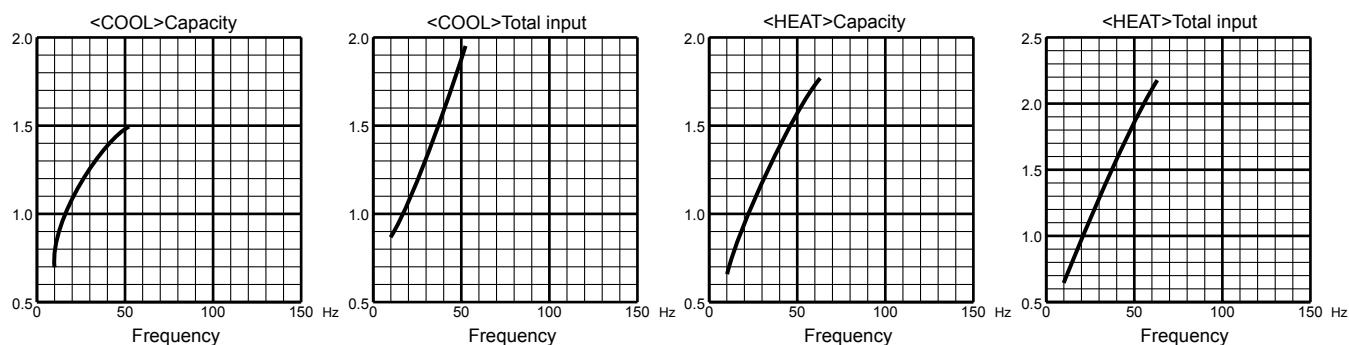

22-class unit

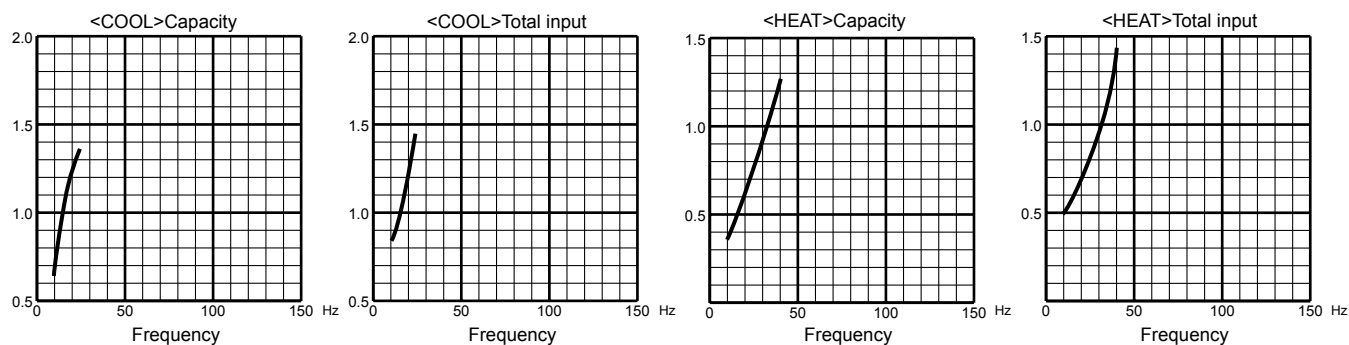


25-class unit

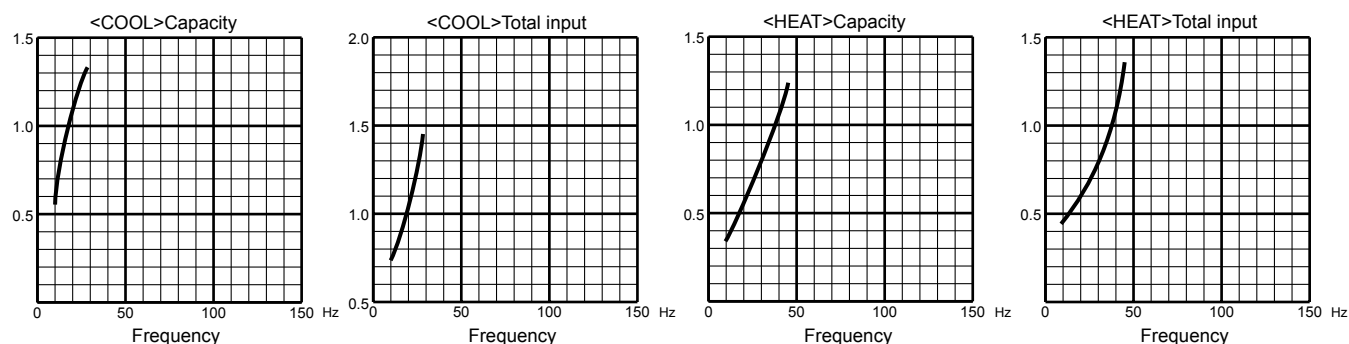


MXZ-3C68VA


35-class unit

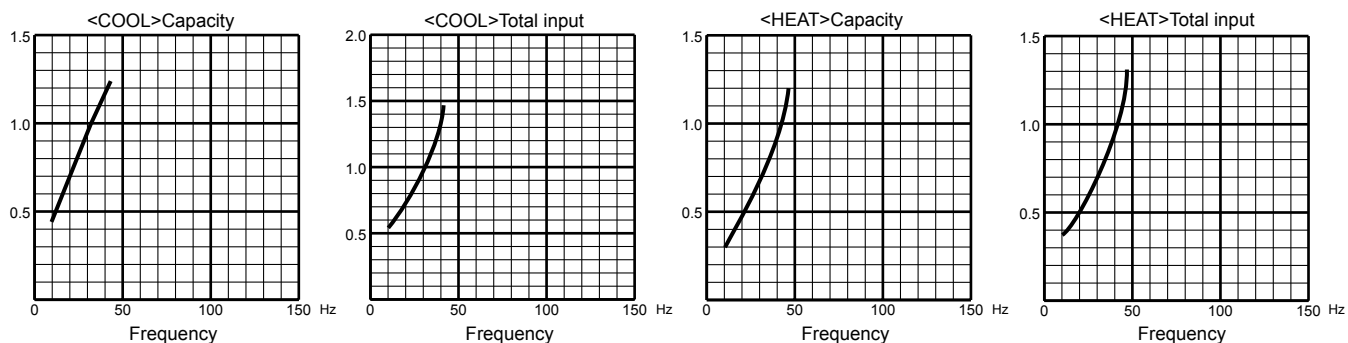


42-class unit

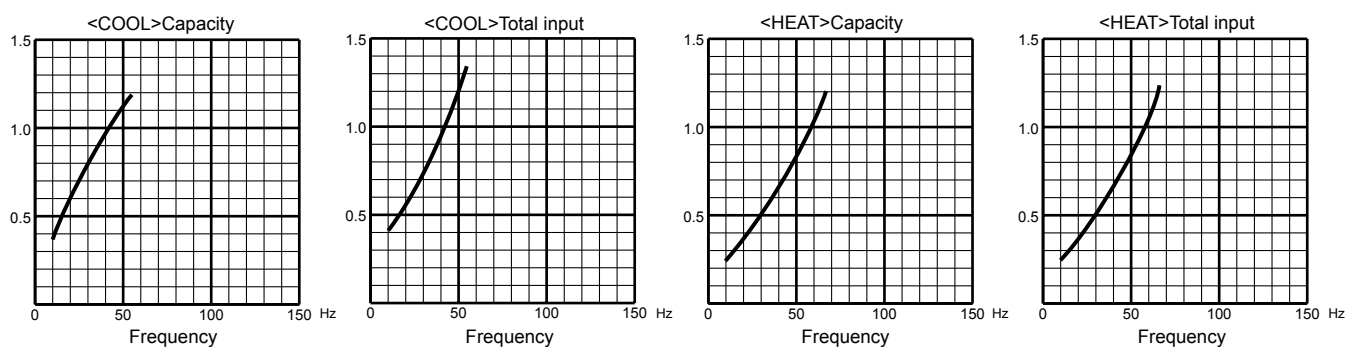

50-class unit

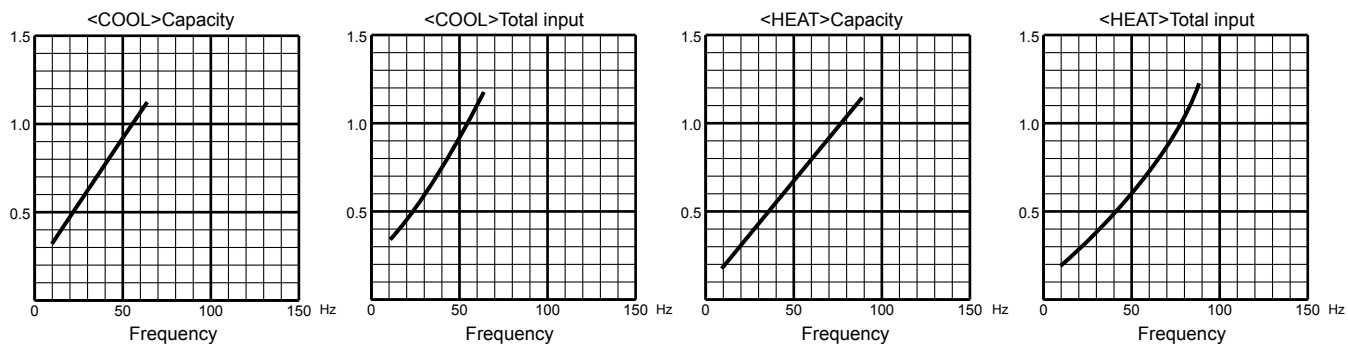


60-class unit

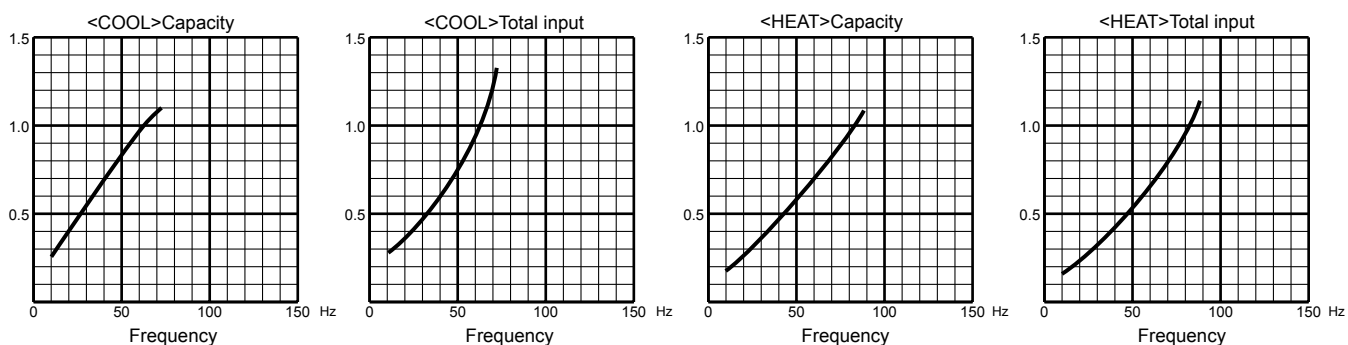


MXZ-4C71VA


15-class unit

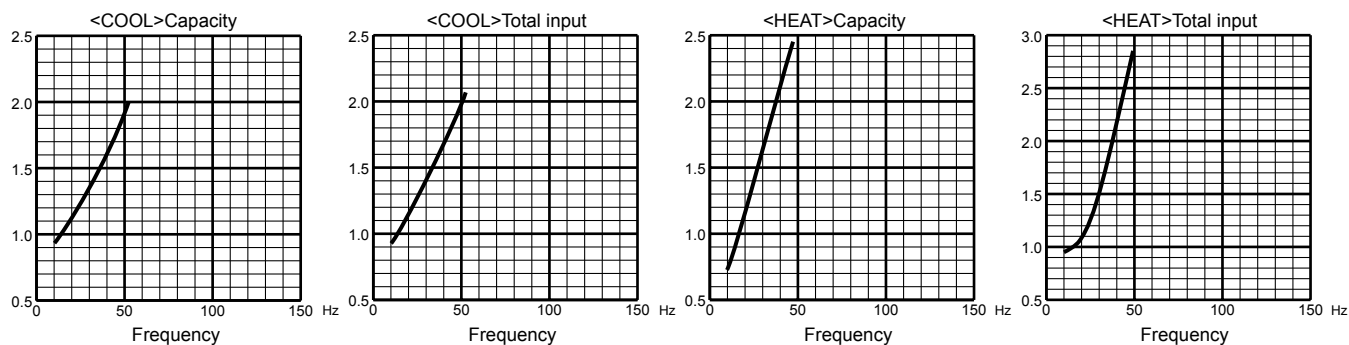


20-class unit

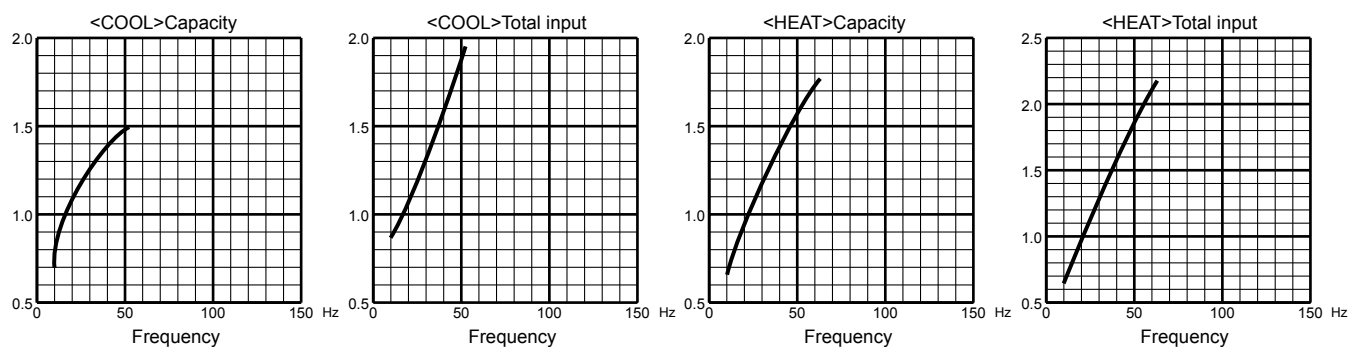

22-class unit

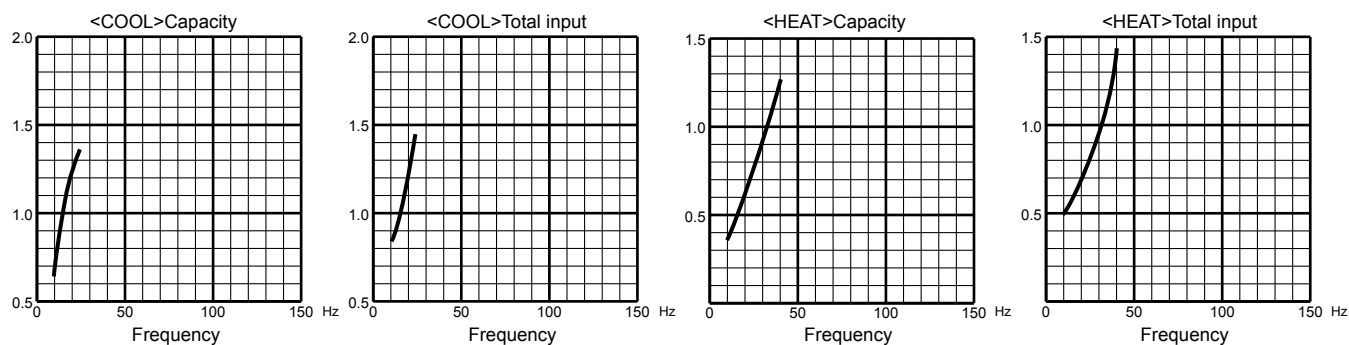


25-class unit

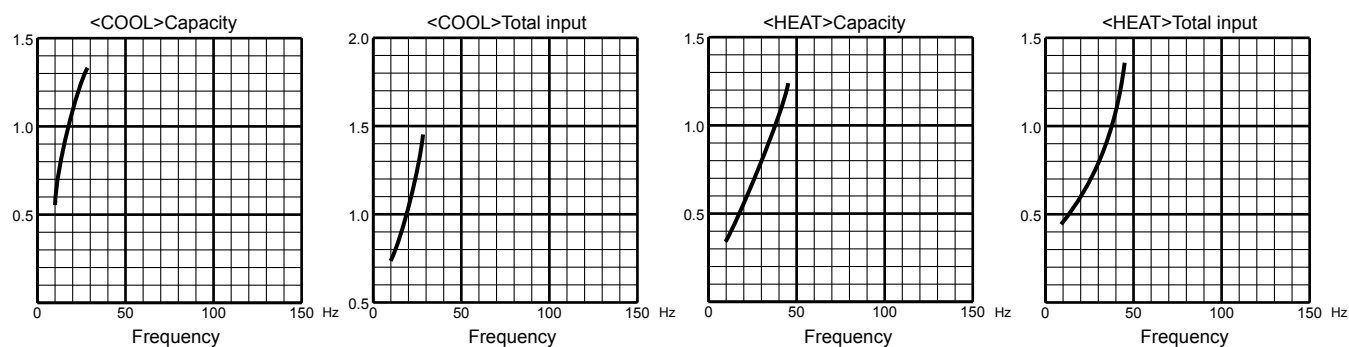


MXZ-4C71VA


35-class unit

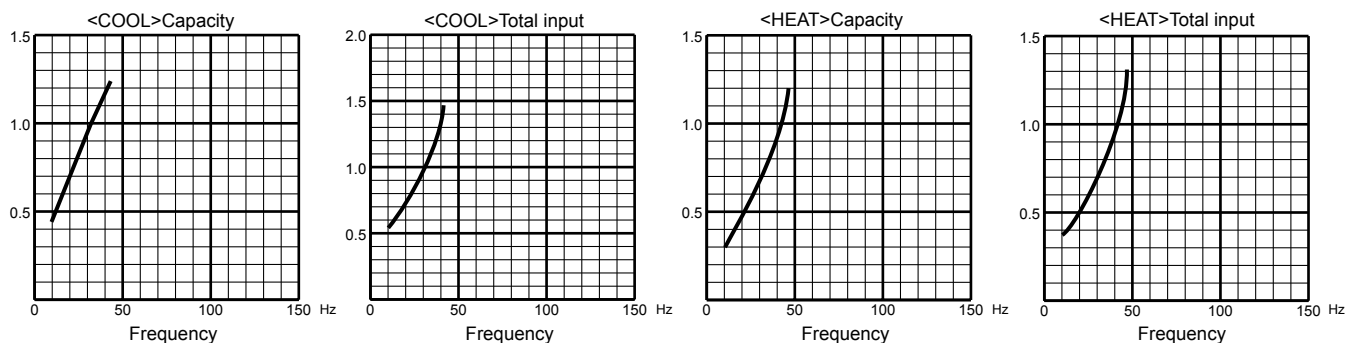


42-class unit

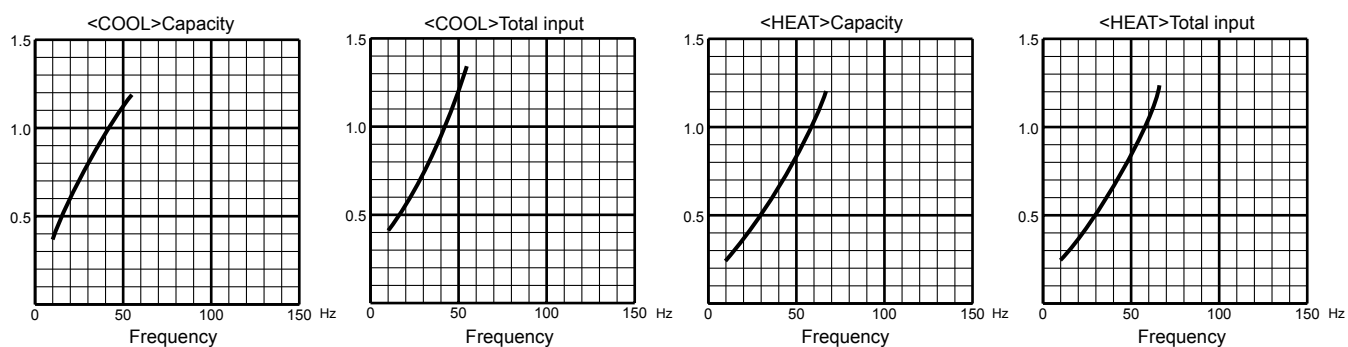

50-class unit

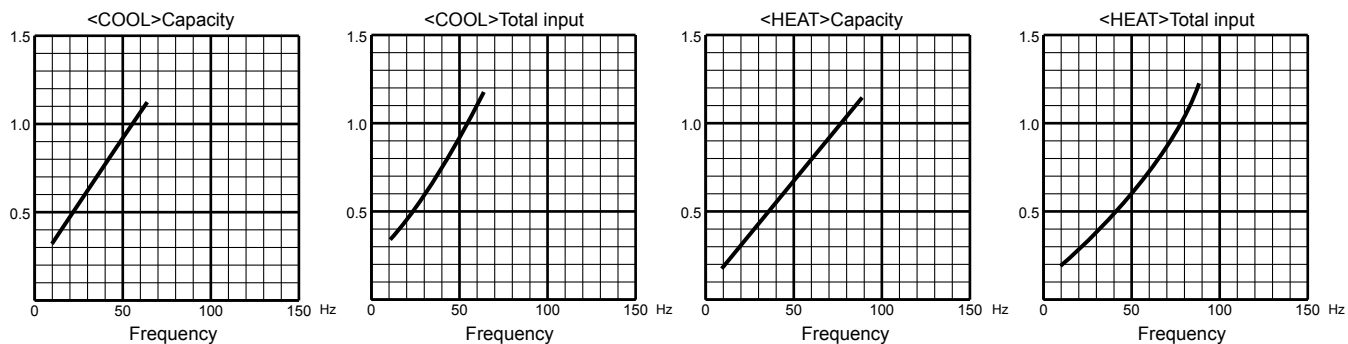


60-class unit

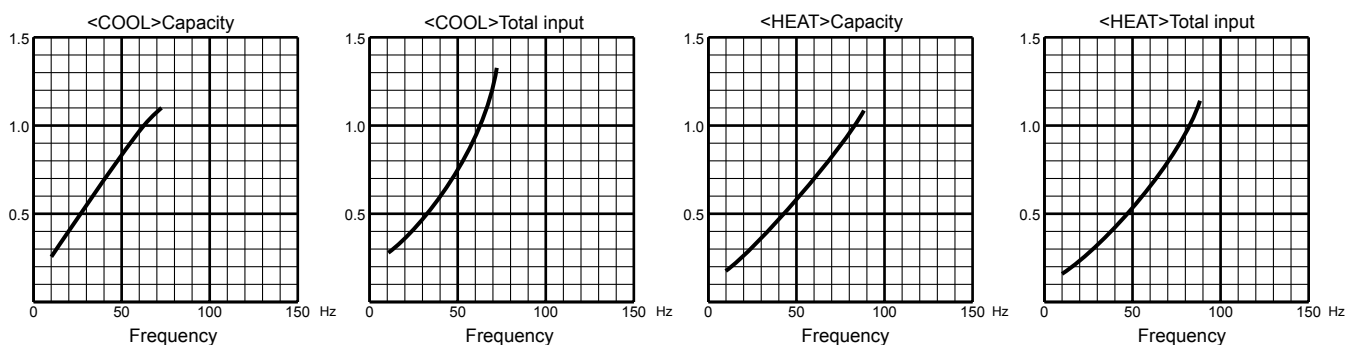


MXZ-4C80VA


15-class unit

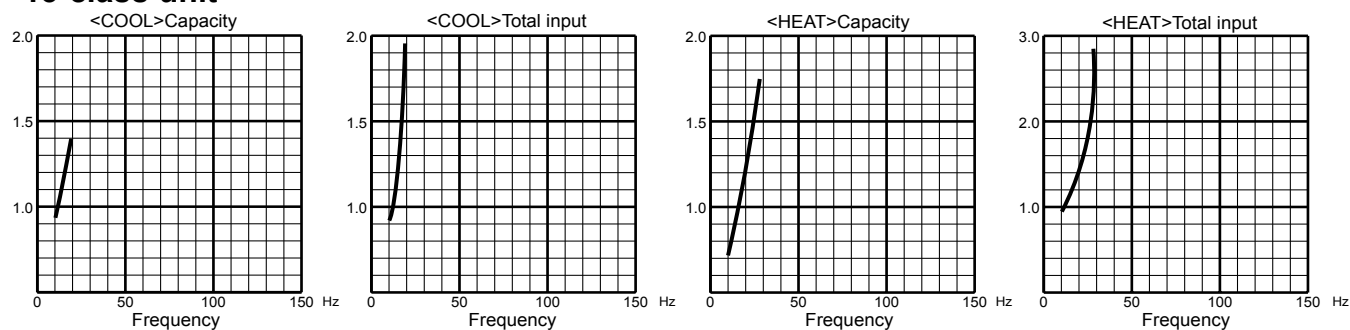


20-class unit

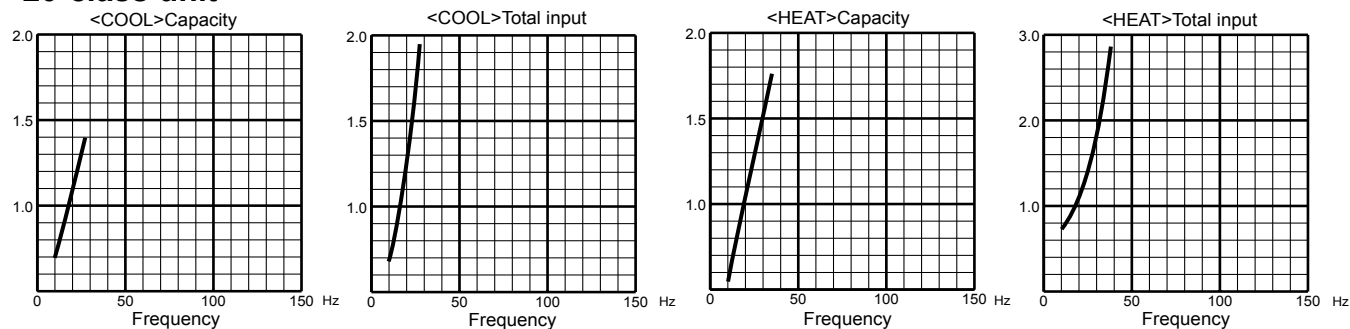


22-class unit

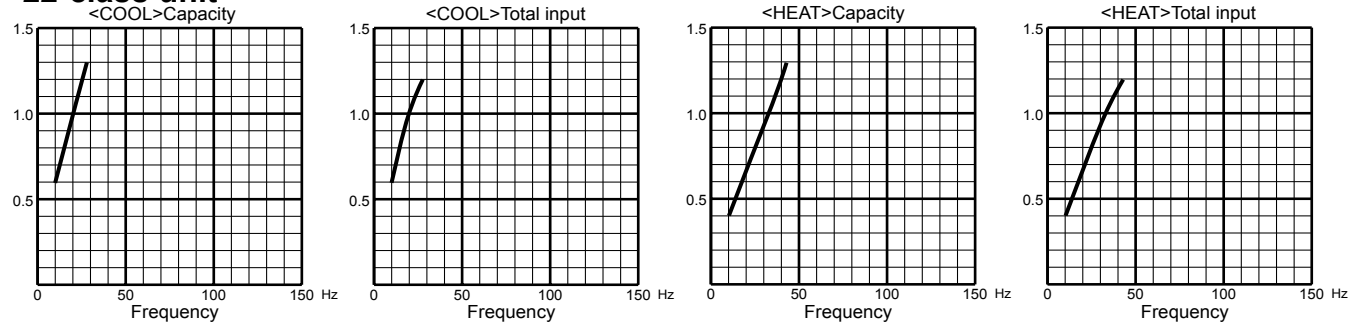

25-class unit

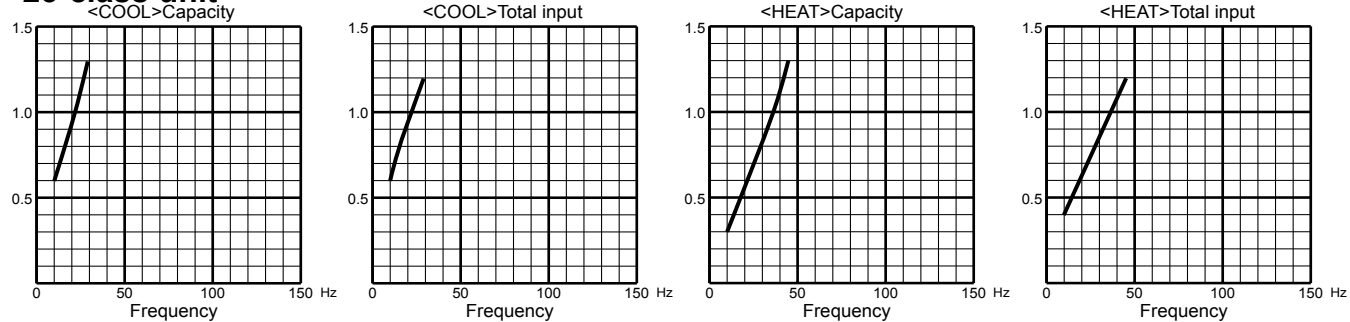


35-class unit

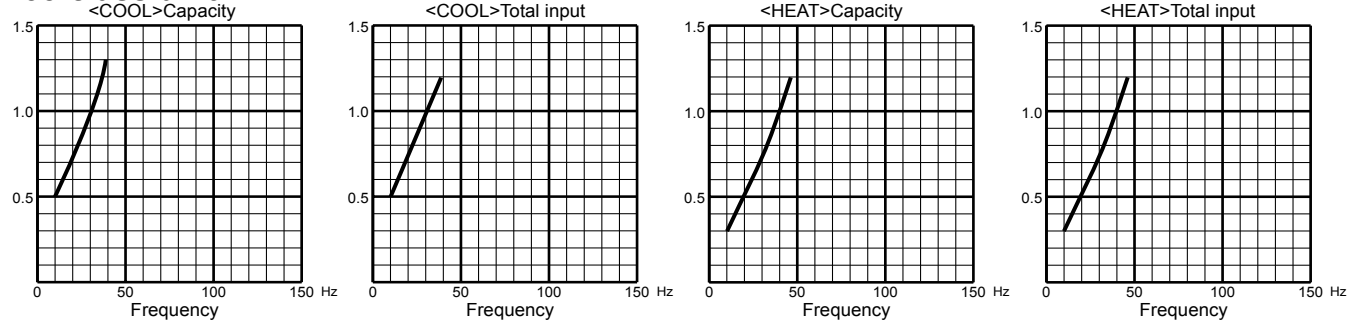


MXZ-4C80VA


42-class unit

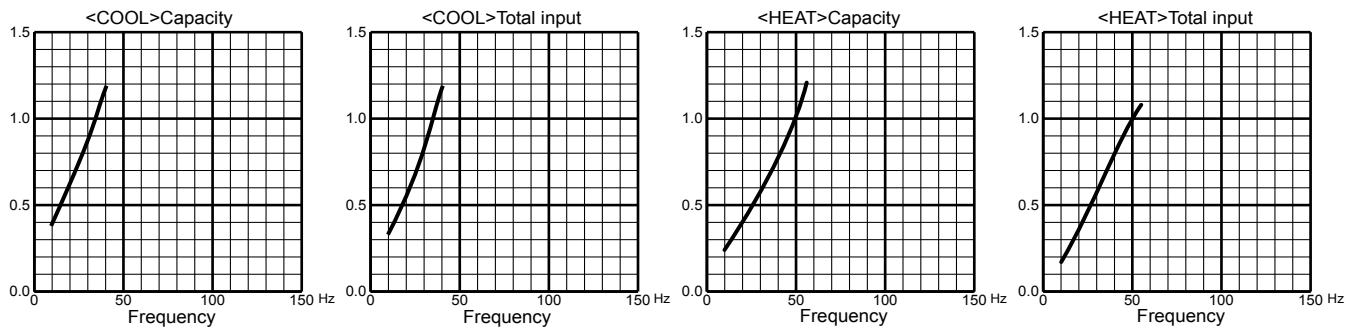


50-class unit

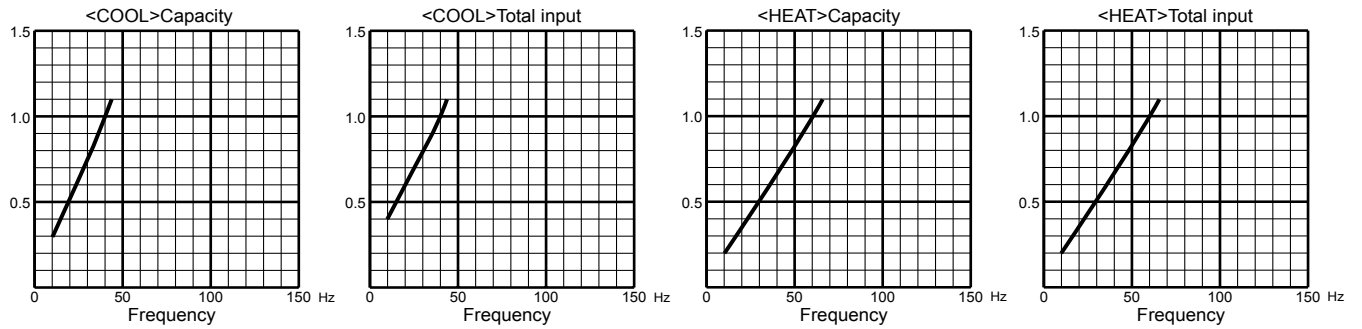

60-class unit

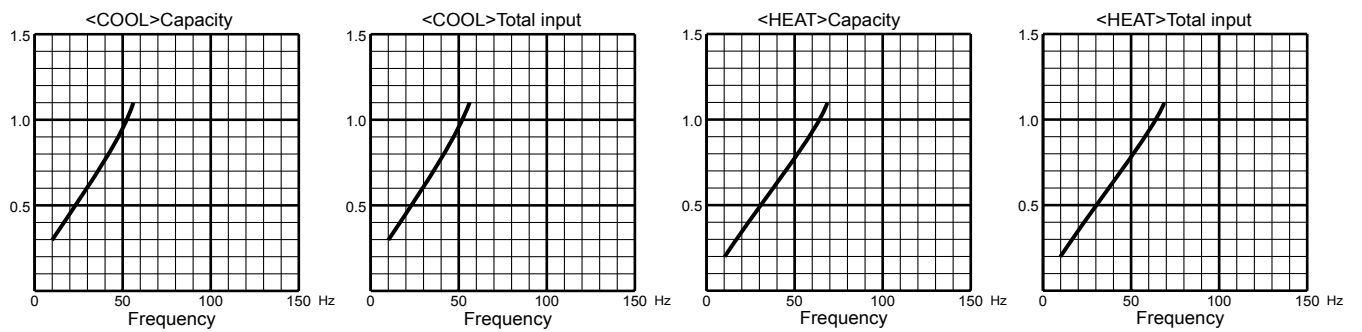


71-class unit

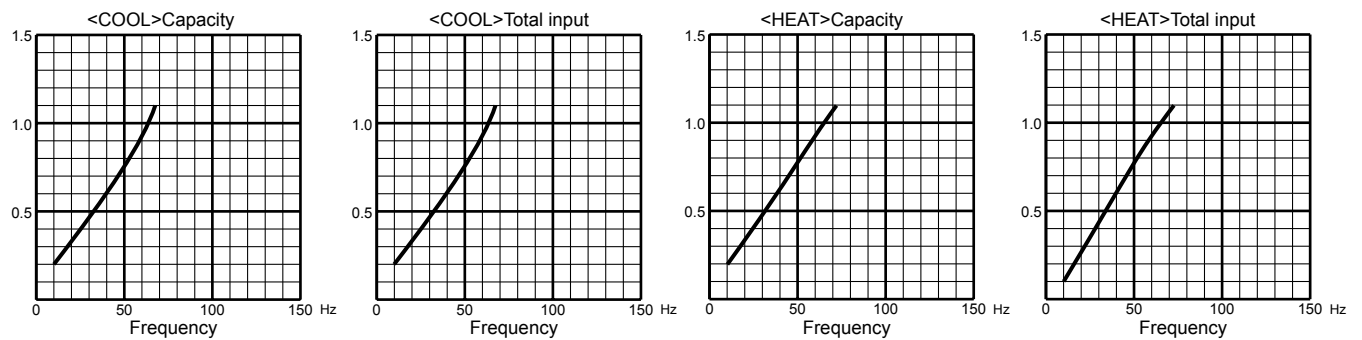


MXZ-5C100VA


15-class unit

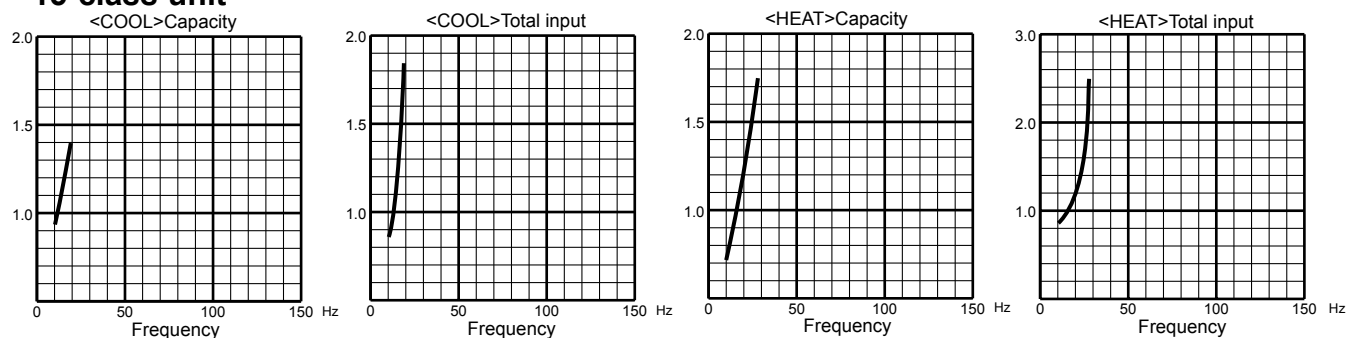


20-class unit

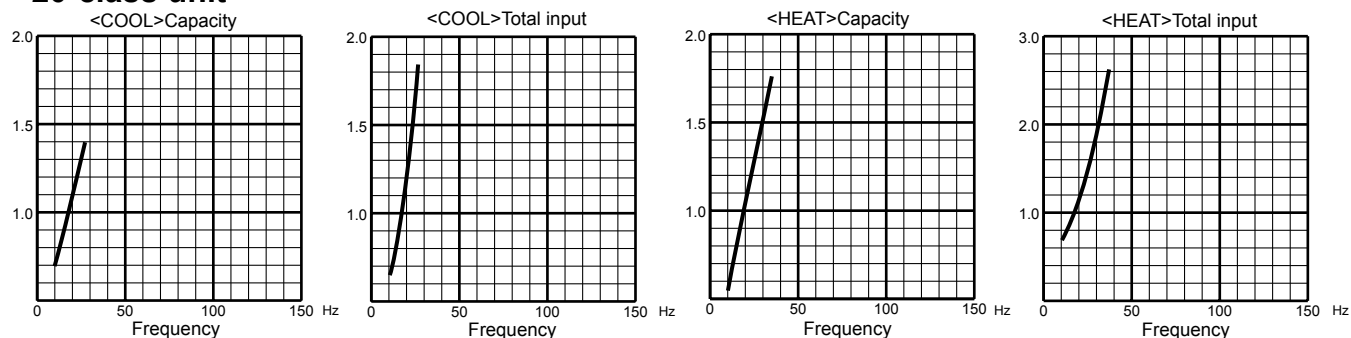


22-class unit

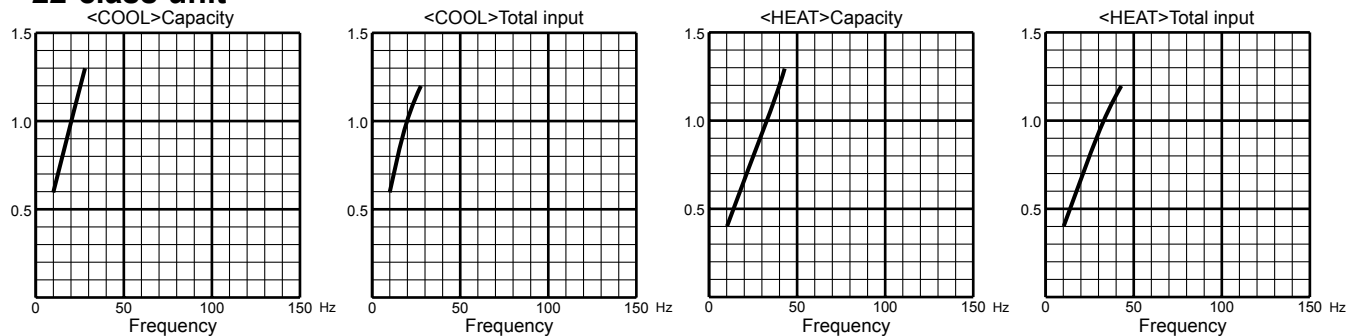

25-class unit

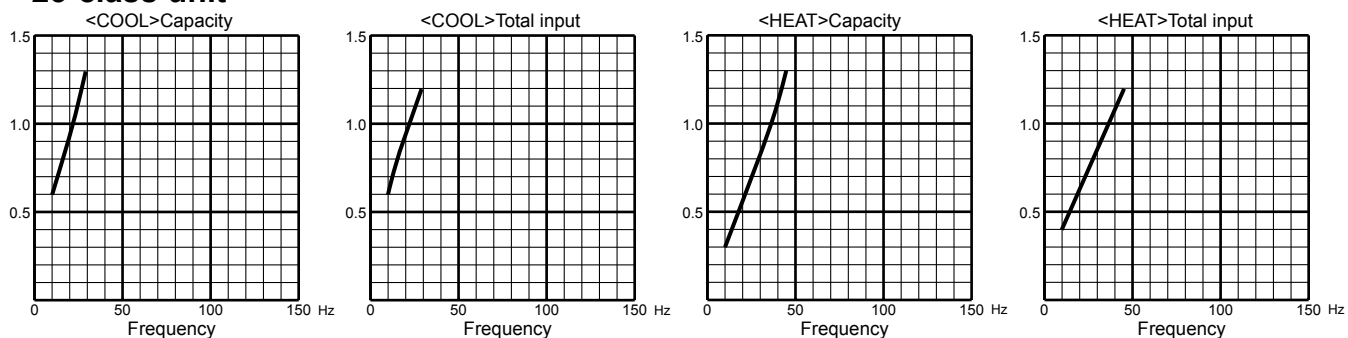


35-class unit

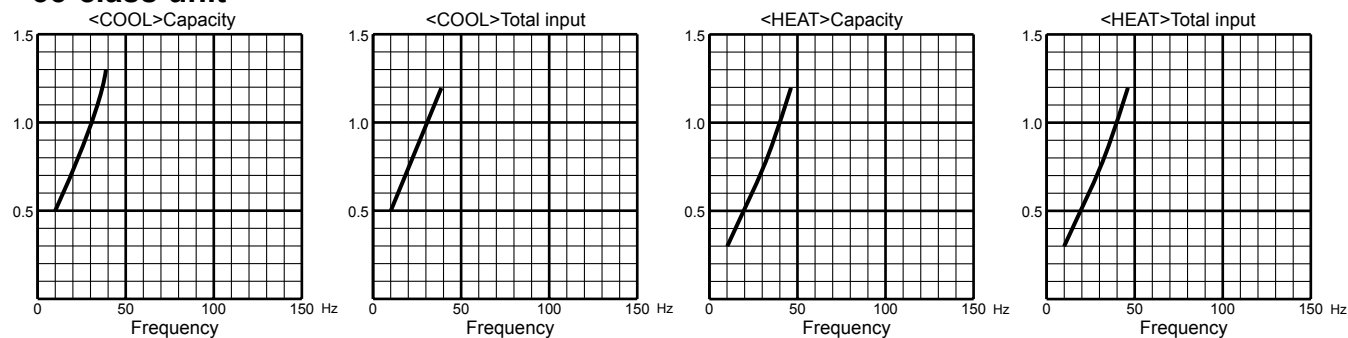


MXZ-5C100VA


42-class unit

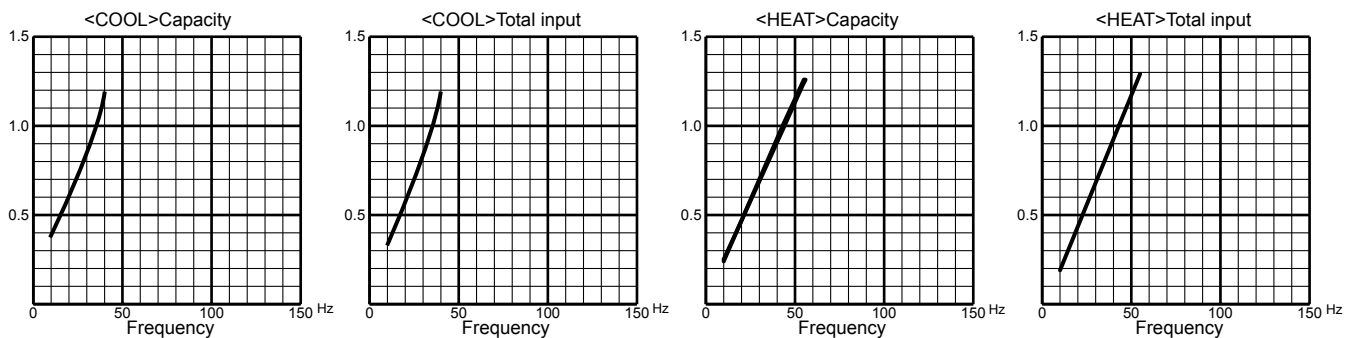


50-class unit

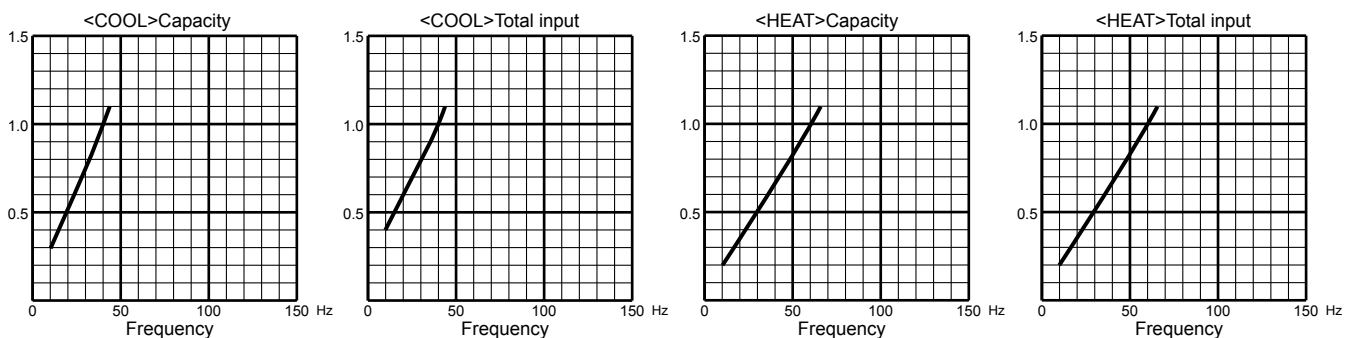

60-class unit




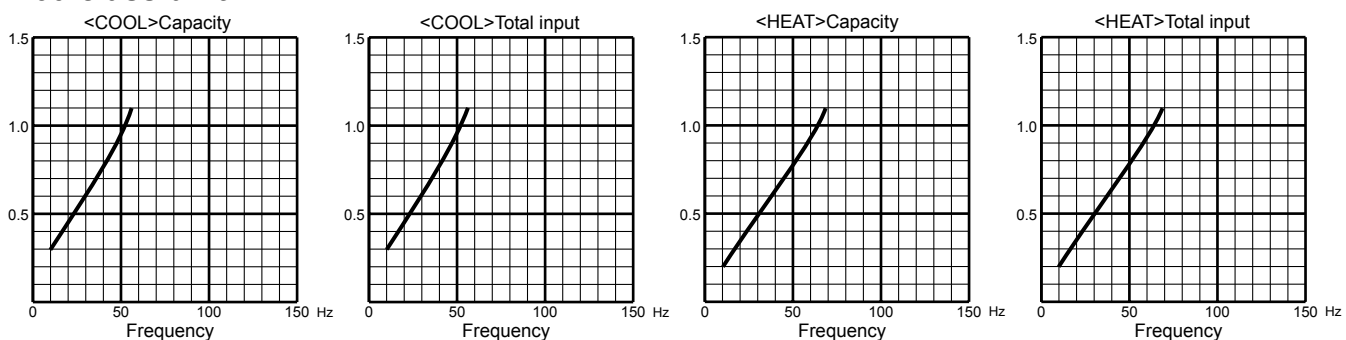


71-class unit




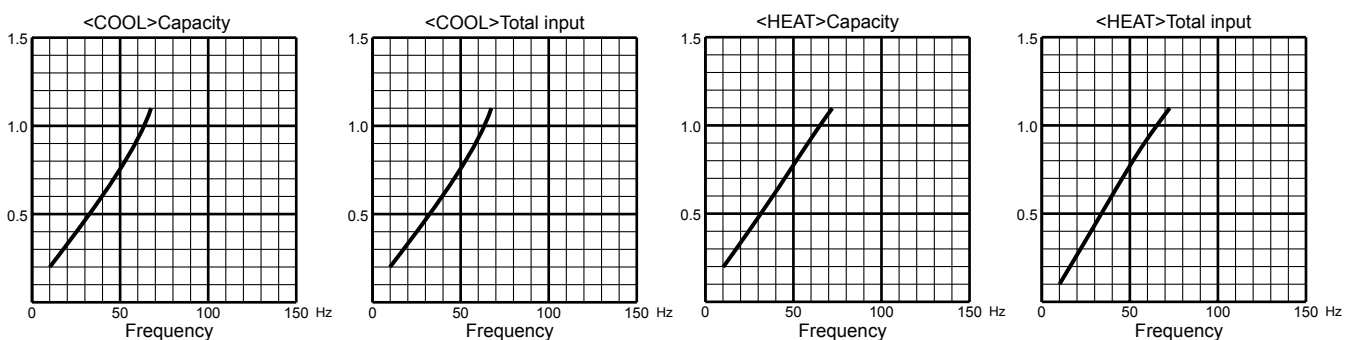


MXZ-6C120VA





15-class unit







20-class unit







22-class unit



25-class unit







35-class unit







MXZ-6C120VA





42-class unit







50-class unit



60-class unit



71-class unit



8-3. HOW TO OPERATE FIXED-FREQUENCY OPERATION <Test run operation>

1. Press EMERGENCY OPERATION switch to COOL or HEAT mode (COOL : Press once, HEAT : Press twice).
2. Test run operation starts and continues to operate for 30 minutes.
3. Compressor operates at rated frequency.
4. Indoor fan operates at High speed.
5. After 30 minutes, test run operation finishes and EMERGENCY OPERATION starts (Operation frequency of compressor varies).
6. To cancel test run operation (EMERGENCY OPERATION), press EMERGENCY OPERATION switch or any button on remote controller.

8-4. OUTDOOR LOW PRESSURE AND OUTDOOR UNIT CURRENT CURVE (single operation)

NOTE: The unit of pressure has been changed to MPa on the international system of units (SI unit system).
The conversion factor is : **1 (MPa[Gauge]) = 10.2(kgf/cm² [Gauge])**


(1) COOL operation

- ① Both indoor and outdoor unit are under the same temperature/humidity condition.
- ② Operation : TEST RUN OPERATION (Refer to 8-3.)


Dry-bulb temperature (°C)	Relative humidity (%)
20	50
25	60
30	70

MXZ-2C30VA


15-class unit

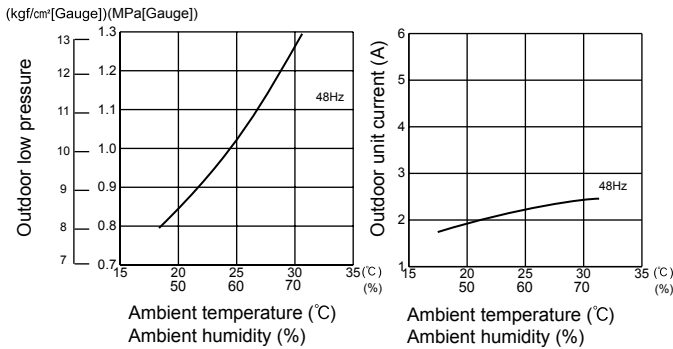


20-class unit

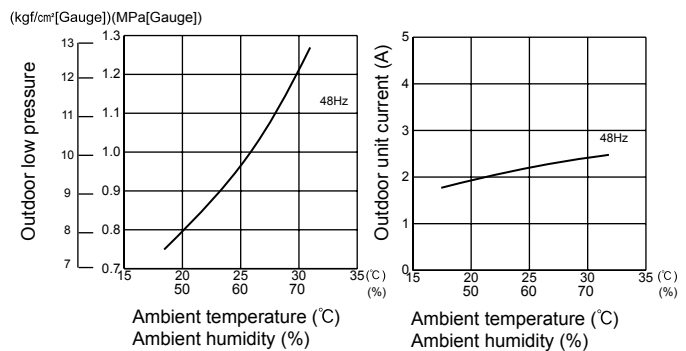

22-class unit

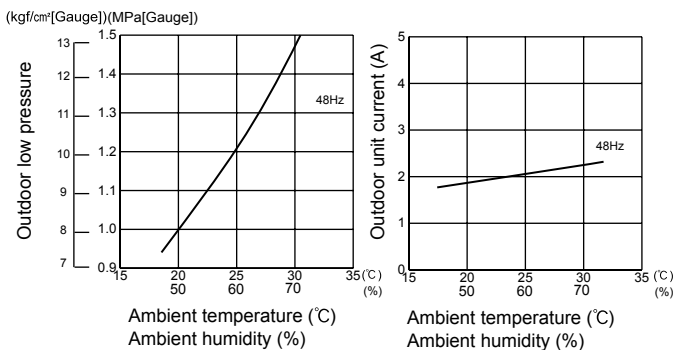


25-class unit

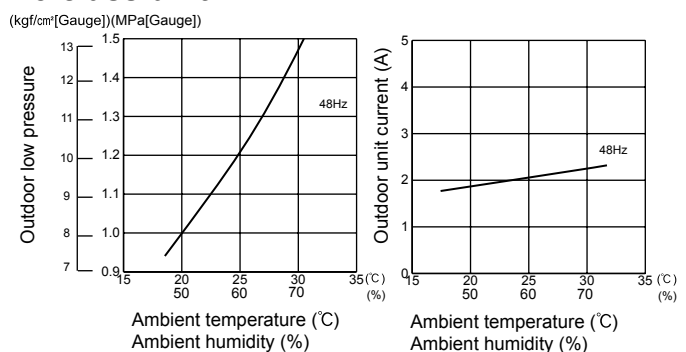


MXZ-2C40VA

15-class unit

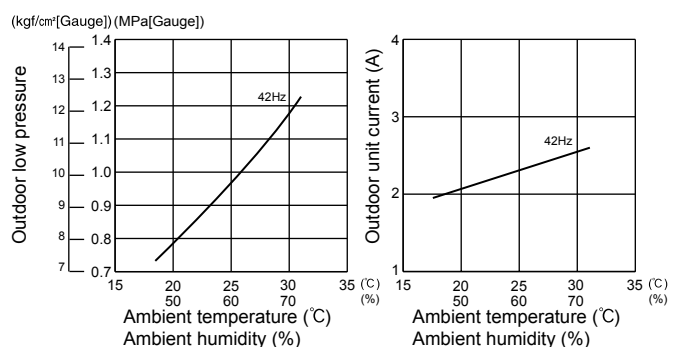

20-class unit

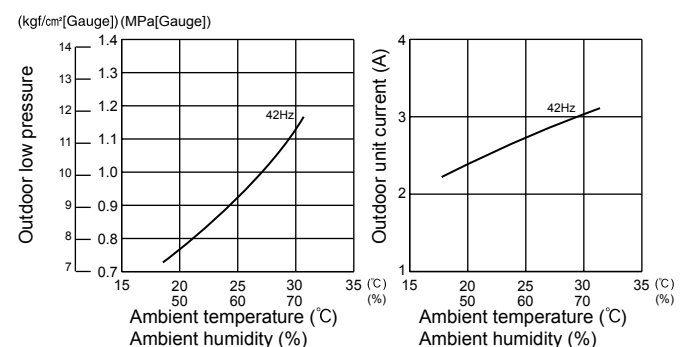

The left graph shows the relationship between ambient temperature and humidity for outdoor low pressure. The y-axis is labeled 'Outdoor low pressure' and has two scales: kgf/cm²[Gauge] (7 to 14) and MPa[Gauge] (0.7 to 1.4). The x-axis is labeled 'Ambient temperature (°C)' and 'Ambient humidity (%)' with values 15, 20, 25, 30, 35. A line labeled '42Hz' starts at approximately (18, 9.0) and ends at (30, 14.0).

The right graph shows the relationship between ambient temperature and humidity for outdoor unit current. The y-axis is labeled 'Outdoor unit current (A)' with values 1, 2, 3, 4. The x-axis is labeled 'Ambient temperature (°C)' and 'Ambient humidity (%)' with values 15, 20, 25, 30, 35. A line labeled '42Hz' starts at approximately (18, 2.0) and ends at (30, 2.5).

The figure contains two graphs. The left graph plots 'Outdoor low pressure' against 'Ambient temperature (°C)' and 'Ambient humidity (%)'. The y-axis has two scales: kgf/cm²[Gauge] (7 to 14) and MPa[Gage] (0.7 to 1.4). The x-axis has two scales: °C (15 to 35) and % (50 to 70). A line labeled '42Hz' shows a linear increase in pressure with temperature/humidity. The right graph plots 'Outdoor unit current (A)' against the same x-axis scales. A line labeled '42Hz' shows a slight increase in current with temperature/humidity.

Ambient Temperature (°C)	Ambient Humidity (%)	Outdoor Low Pressure (kgf/cm²)	Outdoor Low Pressure (MPa)
18	50	9.0	0.9
25	60	11.5	1.15
32	70	14.0	1.4

Ambient Temperature (°C)	Ambient Humidity (%)	Outdoor Unit Current (A)
18	50	2.0
25	60	2.3
32	70	2.6

The left graph shows Outdoor low pressure (kgf/cm²[Gauge] / MPa[Gauge]) on the y-axis (7 to 14) versus Ambient temperature (°C) and Ambient humidity (%) on the x-axis (15 to 35). A line labeled 42Hz starts at approximately (18, 9.0) and ends at (30, 14.0).

The right graph shows Outdoor unit current (A) on the y-axis (1 to 4) versus Ambient temperature (°C) and Ambient humidity (%) on the x-axis (15 to 35). A line labeled 42Hz starts at approximately (18, 2.0) and ends at (32, 2.5).

Outdoor low pressure

Y-axis: kgf/cm²[Gauge] (7.0 to 13.0), MPa[Gauge] (0.7 to 1.3)

X-axis: Ambient temperature (°C) (15 to 35), Ambient humidity (%) (50 to 70)

30Hz

Ambient temperature (°C)	Ambient humidity (%)	Outdoor low pressure (kgf/cm²)	Outdoor low pressure (MPa)
15	50	7.0	0.7
25	60	9.0	0.9
30	70	11.8	1.18

Outdoor unit current (A)

Y-axis: 1 to 6

X-axis: Ambient temperature (°C) (15 to 35), Ambient humidity (%) (50 to 70)

30Hz

Ambient temperature (°C)	Ambient humidity (%)	Outdoor unit current (A)
15	50	1.8
25	60	2.2
30	70	2.5

Figure 10 consists of two graphs. The left graph shows Outdoor low pressure (kgf/cm²[Gauge] and MPa[Gauge]) on the y-axis (7 to 13 kgf/cm², 0.7 to 1.3 MPa) versus Ambient temperature (°C) and Ambient humidity (%) on the x-axis (15 to 35 °C, 15 to 35 %). The right graph shows Outdoor unit current (A) on the y-axis (0 to 5) versus Ambient temperature (°C) and Ambient humidity (%) on the x-axis (15 to 35 °C, 15 to 35 %). Both graphs include a curve for 30Hz.

Ambient temperature (°C)	Ambient humidity (%)	Outdoor low pressure (kgf/cm ²)	Outdoor low pressure (MPa)	Outdoor unit current (A)
15	15	7.2	0.72	1.5
20	20	8.0	0.80	1.7
25	25	9.0	0.90	1.9
30	30	10.2	1.02	2.0
35	35	11.8	1.18	2.0

The left graph shows Outdoor low pressure (kgf/cm²[Gauge]/MPa[Gauge]) on the y-axis (7 to 14) versus Ambient temperature (°C) and Ambient humidity (%) on the x-axis (15 to 35). The right graph shows Outdoor unit current (A) on the y-axis (1 to 4) versus Ambient temperature (°C) and Ambient humidity (%) on the x-axis (15 to 35). Both graphs include a curve labeled '30Hz'.

Ambient Temperature (°C)	Ambient Humidity (%)	Outdoor Low Pressure (kgf/cm²)	Outdoor Low Pressure (MPa)	Outdoor Unit Current (A)
15	15	7.8	0.75	2.0
20	20	9.2	0.90	2.1
25	25	10.8	1.05	2.2
30	30	12.5	1.20	2.3
35	35	13.5	1.30	2.4


The left graph shows the relationship between ambient temperature/humidity and outdoor low pressure. The y-axis represents Outdoor low pressure in kgf/cm² (Gauge) and MPa (Gauge), ranging from 7 to 14. The x-axis represents Ambient temperature (°C) and Ambient humidity (%), ranging from 15 to 35. A curve labeled 30Hz shows that outdoor low pressure increases as ambient temperature/humidity increases.

Ambient temperature (°C) / Ambient humidity (%)	Outdoor low pressure (kgf/cm²) / (MPa)
15	0.8
20	0.9
25	1.1
30	1.3
35	1.4


The right graph shows the relationship between ambient temperature/humidity and outdoor unit current. The y-axis represents Outdoor unit current (A), ranging from 1 to 4. The x-axis represents Ambient temperature (°C) and Ambient humidity (%), ranging from 15 to 35. A line labeled 30Hz shows that outdoor unit current increases as ambient temperature/humidity increases.

Ambient temperature (°C) / Ambient humidity (%)	Outdoor unit current (A)
15	2.0
20	2.1
25	2.2
30	2.3
35	2.4


35-class unit

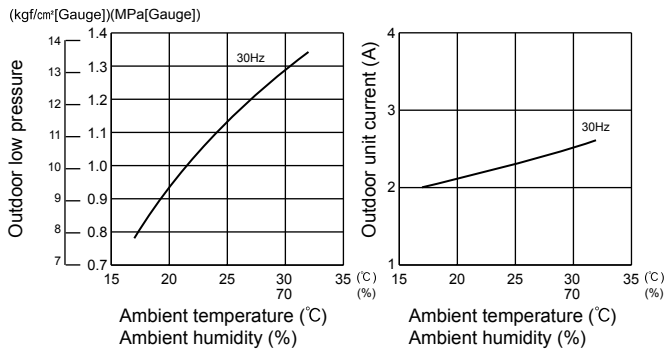

42-class unit

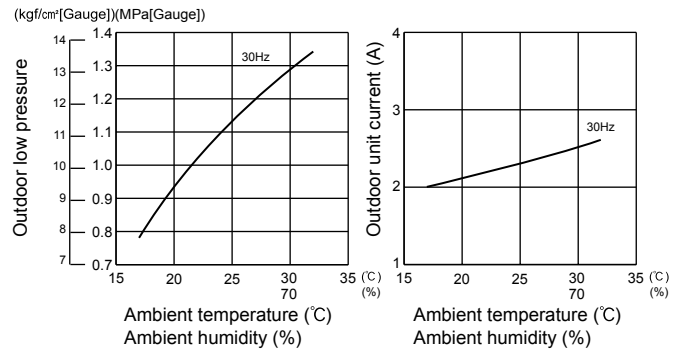


50-class unit

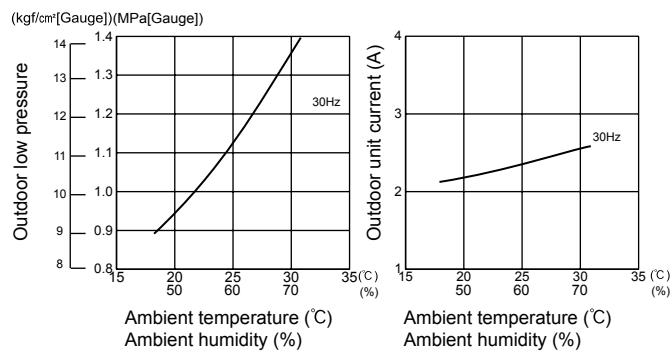


MXZ-3C54VA


15-class unit

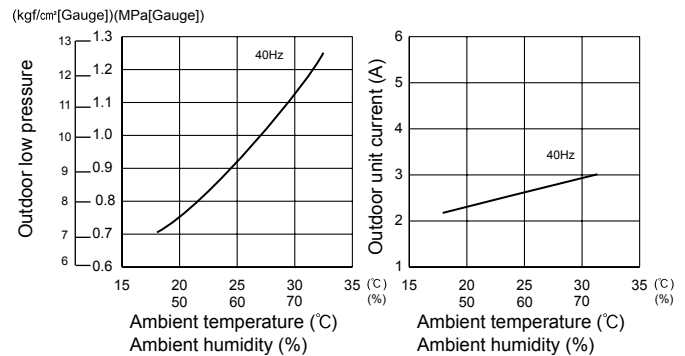


20-class unit

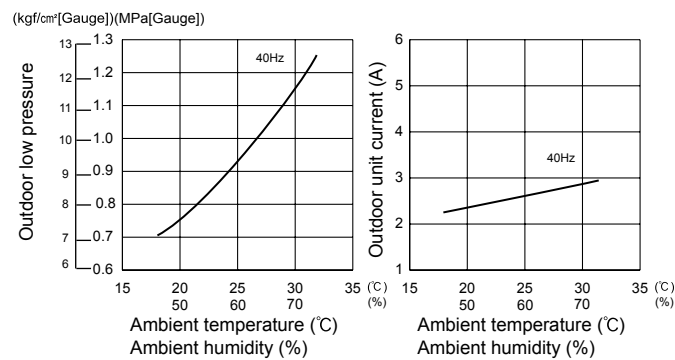


22-class unit

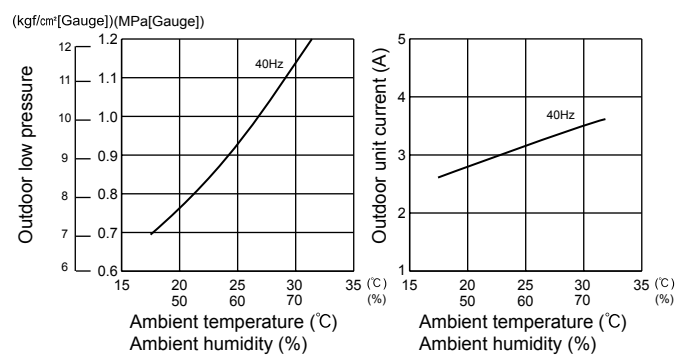


25-class unit

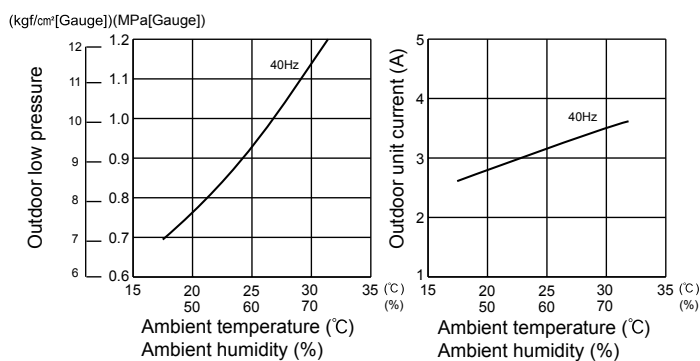


35-class unit

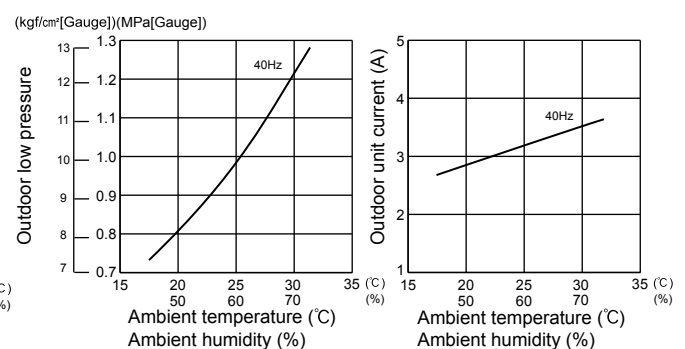

42-class unit

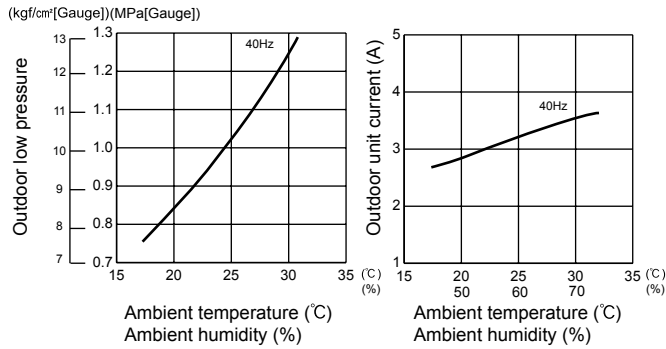


50-class unit

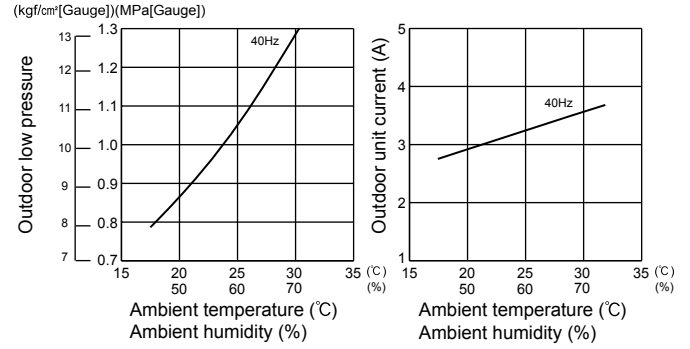


MXZ-3C68VA MXZ-4C71VA


15-class unit

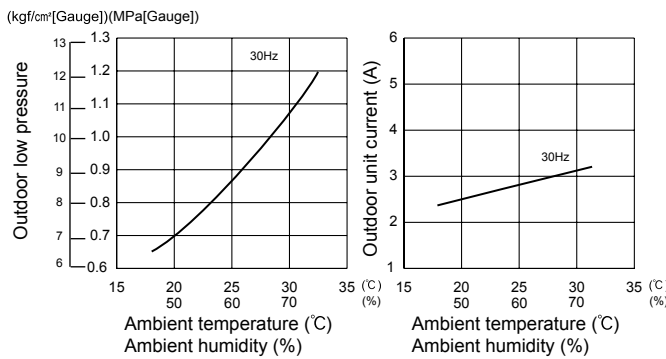


20-class unit

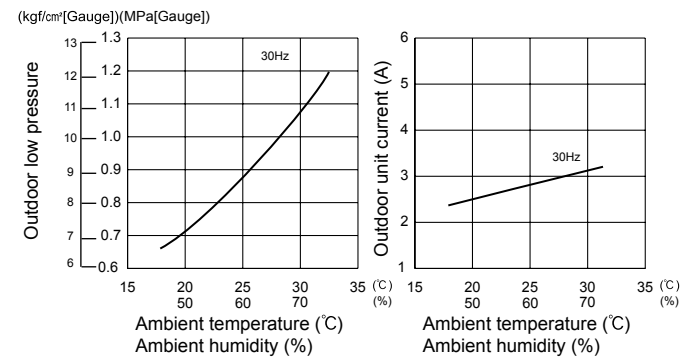


22-class unit

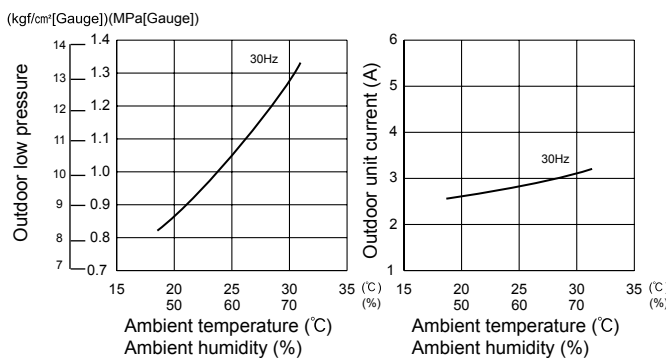


25-class unit

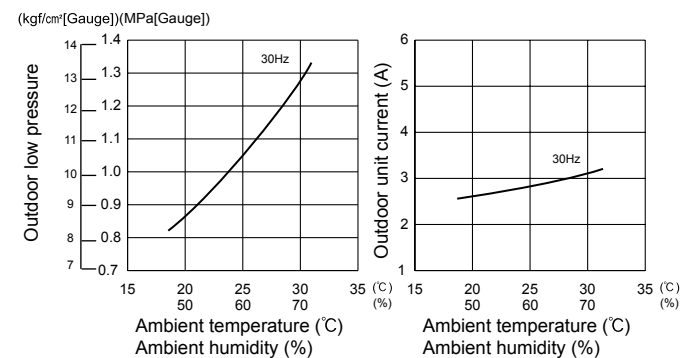

35-class unit

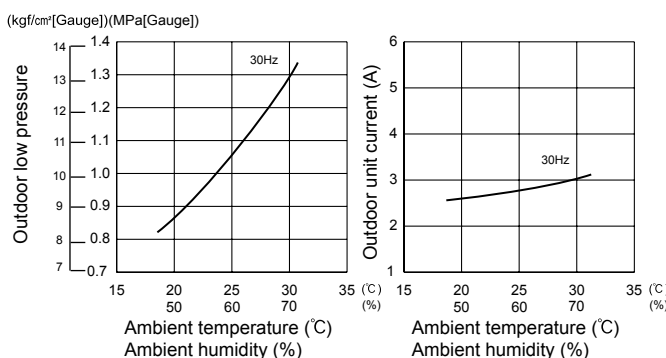

42-class unit

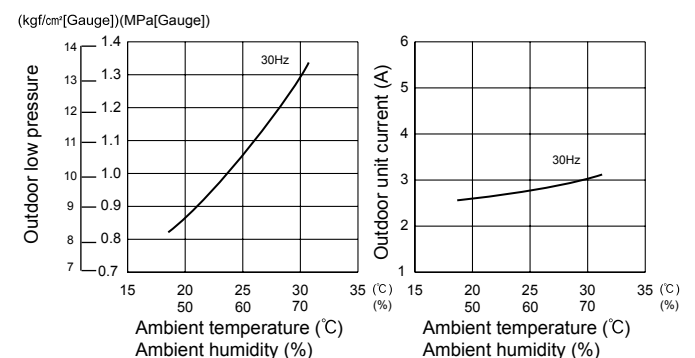

The left graph shows Outdoor low pressure (kgf/cm²[Gauge]) on the y-axis (7 to 14) versus Ambient temperature (°C) and Ambient humidity (%) on the x-axis (15 to 35). A curve labeled 30Hz shows pressure increasing from approximately 8.5 kgf/cm² at 18°C to 13.5 kgf/cm² at 30°C.

The right graph shows Outdoor unit current (A) on the y-axis (1 to 6) versus Ambient temperature (°C) and Ambient humidity (%) on the x-axis (15 to 35). A curve labeled 30Hz shows current increasing from approximately 2.5 A at 18°C to 3.1 A at 30°C.

Figure 1 consists of two graphs. The left graph shows Outdoor low pressure (kgf/cm²[Gauge]/MPa[Gauge]) on the Y-axis (7 to 14) versus Ambient temperature (°C) and Ambient humidity (%) on the X-axis (15 to 35 °C, 50 to 70 %). The right graph shows Outdoor unit current (A) on the Y-axis (1 to 6) versus Ambient temperature (°C) and Ambient humidity (%) on the X-axis (15 to 35 °C, 50 to 70 %). Both graphs are for 30Hz operation.

Ambient temperature (°C)	Ambient humidity (%)	Outdoor low pressure (kgf/cm²[Gauge]/MPa[Gauge])
18	50	8.5
20	60	9.0
25	60	11.0
30	70	13.2

Ambient temperature (°C)	Ambient humidity (%)	Outdoor unit current (A)
18	50	2.5
20	60	2.6
25	60	2.8
30	70	3.1

The left graph shows Outdoor low pressure (kgf/cm²[Gauge]) and (MPa[Gauge]) on the y-axis (7 to 13) versus Ambient temperature (°C) and Ambient humidity (%) on the x-axis (15 to 35). The pressure increases linearly with temperature. A label '24Hz' is present.

Ambient temperature (°C)	Ambient humidity (%)	Outdoor low pressure (kgf/cm ²)	Outdoor low pressure (MPa)
15	50	7.0	0.7
20	60	8.0	0.8
25	70	9.0	0.9
30	80	10.0	1.0
35	90	11.0	1.1

The right graph shows Outdoor unit current (A) on the y-axis (1 to 6) versus Ambient temperature (°C) and Ambient humidity (%) on the x-axis (15 to 35). The current increases with temperature and levels off. A label '24Hz' is present.

Ambient temperature (°C)	Ambient humidity (%)	Outdoor unit current (A)
15	50	2.0
20	60	2.5
25	70	3.0
30	80	3.5
35	90	3.6

The left graph shows Outdoor low pressure (kgf/cm²[Gauge]/MPa[Gauge]) on the y-axis (7 to 13) versus Ambient temperature (°C) and Ambient humidity (%) on the x-axis (15 to 35). The pressure increases linearly with temperature. A label '24Hz' is present.

Ambient temperature (°C)	Ambient humidity (%)	Outdoor low pressure (kgf/cm ²)	Outdoor low pressure (MPa)
18	50	7.0	0.7
25	60	9.0	0.9
32	70	12.0	1.2

The right graph shows Outdoor unit current (A) on the y-axis (1 to 6) versus Ambient temperature (°C) and Ambient humidity (%) on the x-axis (15 to 35). The current increases linearly with temperature. A label '24Hz' is present.

Ambient temperature (°C)	Ambient humidity (%)	Outdoor unit current (A)
18	50	2.5
25	60	3.0
32	70	3.5

The left graph shows the relationship between outdoor low pressure and ambient temperature/humidity. The y-axis represents outdoor low pressure in kgf/cm² [Gauge] and MPa [Gauge], ranging from 0.6 to 1.2. The x-axis represents ambient temperature in °C (15 to 35) and ambient humidity in % (50 to 70). A curve labeled '24Hz' shows that pressure increases with temperature and humidity.

The right graph shows the relationship between outdoor unit current and ambient temperature/humidity. The y-axis represents outdoor unit current in Amperes (A), ranging from 1 to 5. The x-axis represents ambient temperature in °C (15 to 35) and ambient humidity in % (50 to 70). A line labeled '24Hz' shows that current increases with temperature and humidity.

Outdoor low pressure characteristics

Ambient temperature (°C)	Ambient humidity (%)	Outdoor low pressure (kgf/cm²[Gauge]/MPa[Gauge])
15	50	0.7
20	60	0.8
25	70	0.9
30	80	1.1
35	90	1.2

Outdoor unit current characteristics

Ambient temperature (°C)	Ambient humidity (%)	Outdoor unit current (A)
15	50	2.6
20	60	2.8
25	70	3.0
30	80	3.2
35	90	3.4

The left graph shows Outdoor low pressure (kgf/cm²[Gauge]) on the y-axis (7 to 13) versus Ambient temperature (°C) and Ambient humidity (%) on the x-axis (15 to 35). The curve for 24Hz shows a positive correlation, starting at approximately 7.5 kgf/cm² at 15°C and rising to about 12.5 kgf/cm² at 30°C.

The right graph shows Outdoor unit current (A) on the y-axis (1 to 5) versus Ambient temperature (°C) and Ambient humidity (%) on the x-axis (15 to 35). The line for 24Hz shows a positive correlation, starting at approximately 2.8 A at 15°C and rising to about 3.8 A at 30°C.

Figure 10 consists of two graphs. The left graph plots Outdoor low pressure (kgf/cm² [Gauge] and MPa [Gauge]) against Ambient temperature (°C) and Ambient humidity (%). The right graph plots Outdoor unit current (A) against Ambient temperature (°C) and Ambient humidity (%). Both graphs show a 24Hz operating point.


Left Graph: Outdoor low pressure vs. Ambient temperature and humidity

Ambient temperature (°C)	Ambient humidity (%)	Outdoor low pressure (kgf/cm² [Gauge])	Outdoor low pressure (MPa [Gauge])
15	50	7.5	0.75
20	60	8.5	0.85
25	70	10.0	1.00
30	80	12.5	1.25


Right Graph: Outdoor unit current vs. Ambient temperature and humidity

Ambient temperature (°C)	Ambient humidity (%)	Outdoor unit current (A)
15	50	2.6
20	60	2.8
25	70	3.0
30	80	3.2


50-class unit

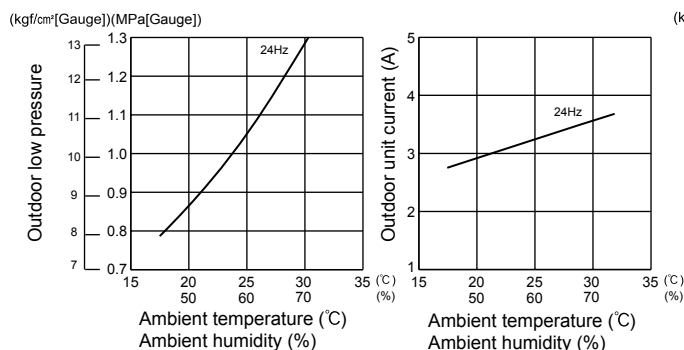

60-class unit

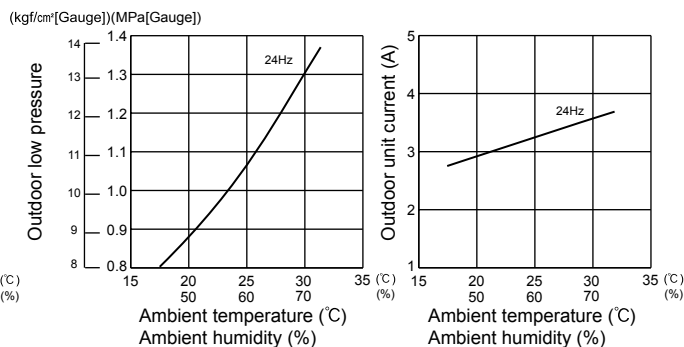


71-class unit

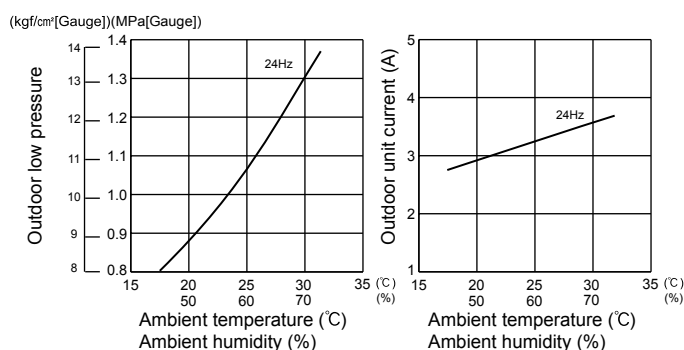


MXZ-5C100VA


15-class unit

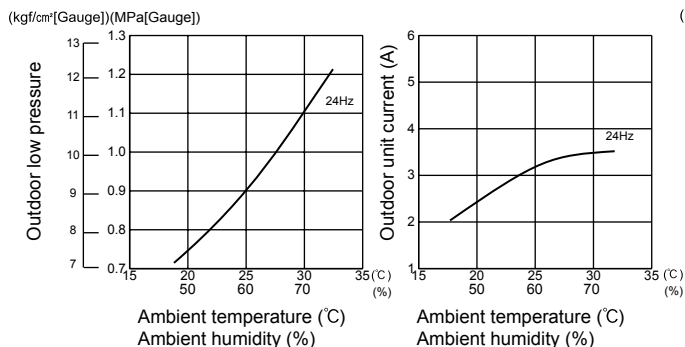


20-class unit

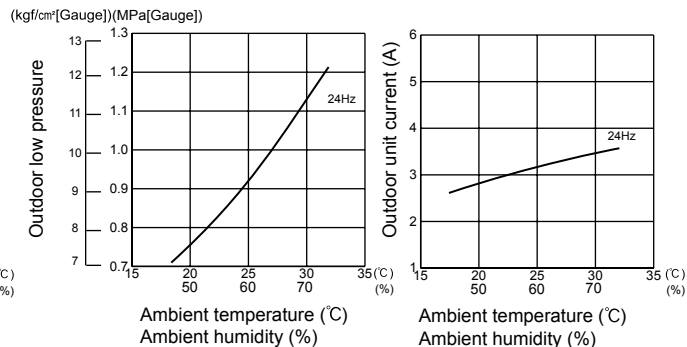


22-class unit

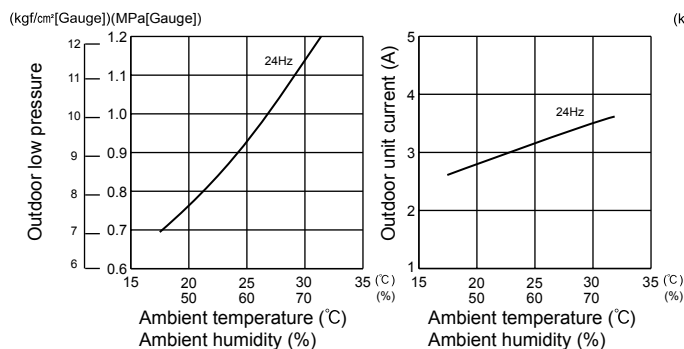


25-class unit

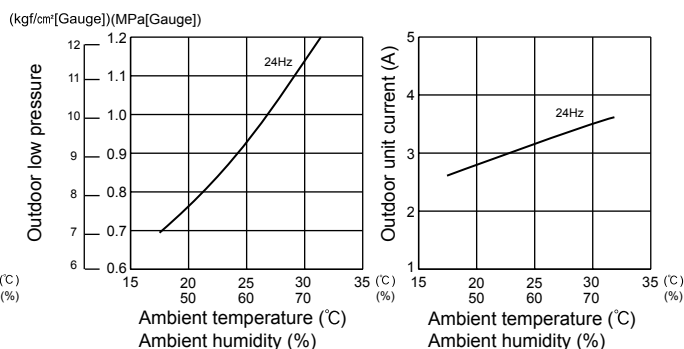


35-class unit

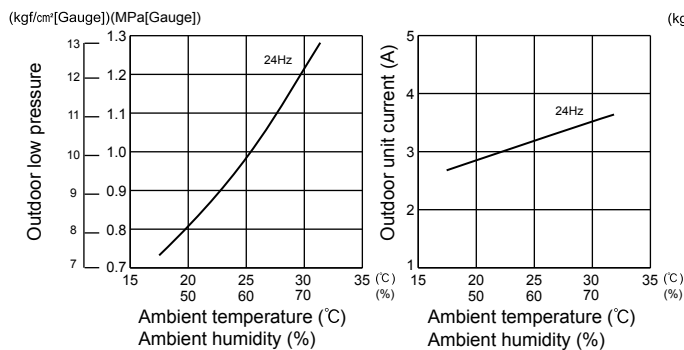


42-class unit

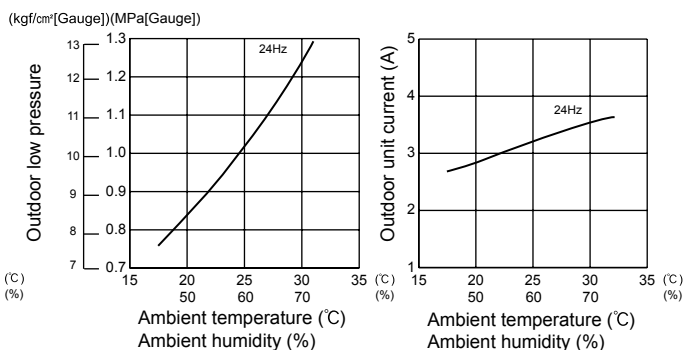


50-class unit

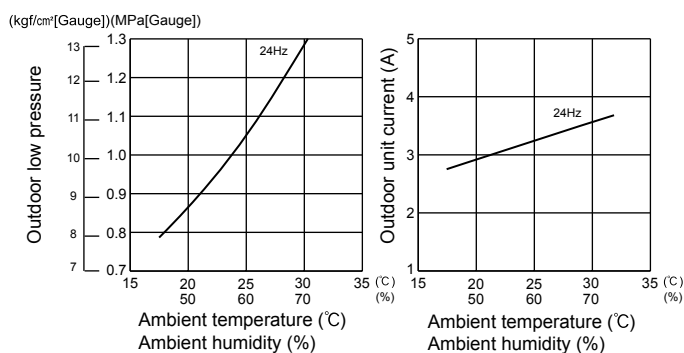

60-class unit

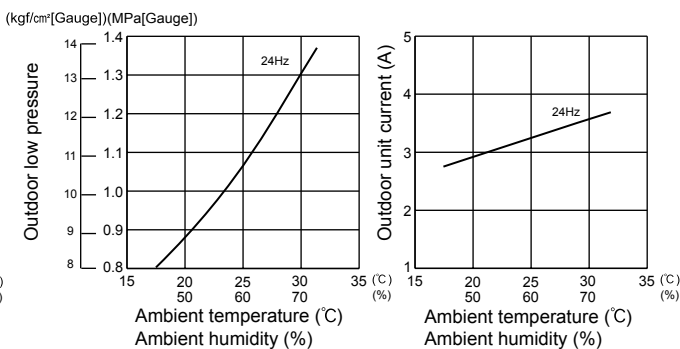


71-class unit

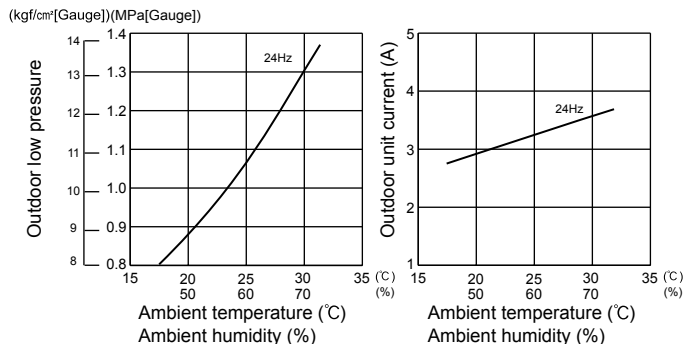


MXZ-6C120VA


15-class unit

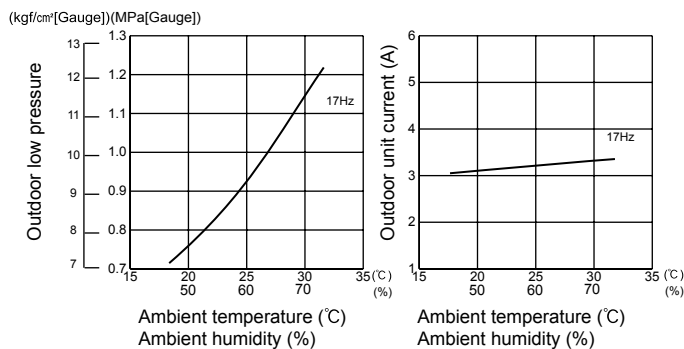


20-class unit

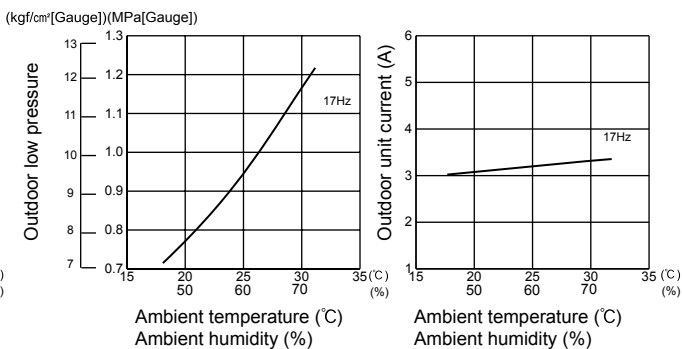


22-class unit

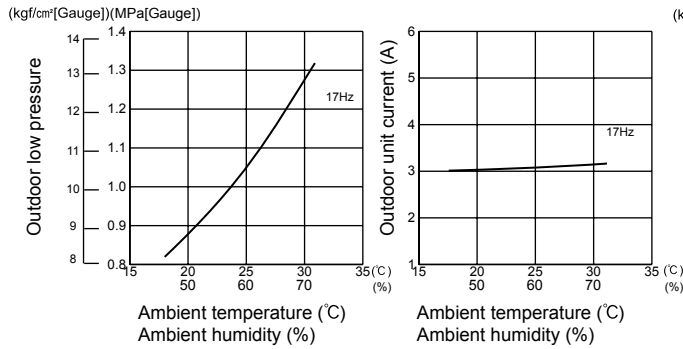


25-class unit

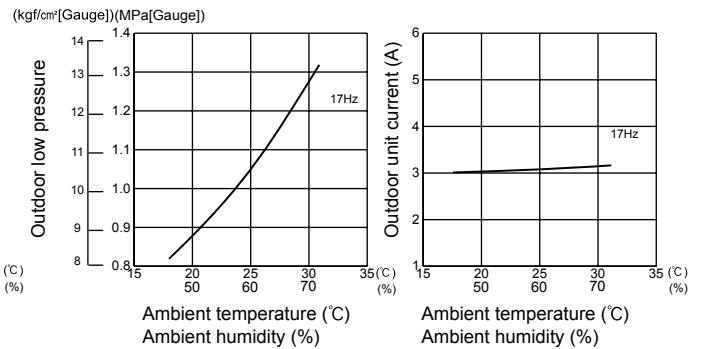


35-class unit

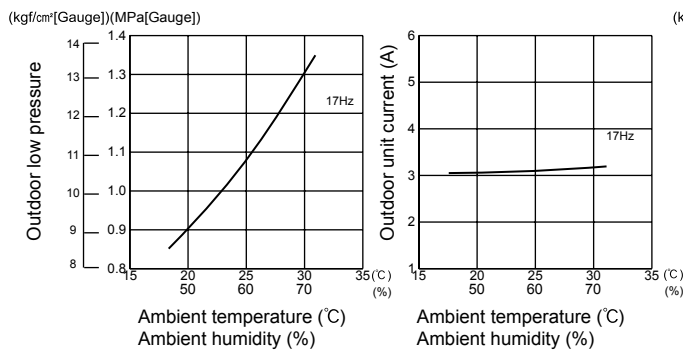


42-class unit

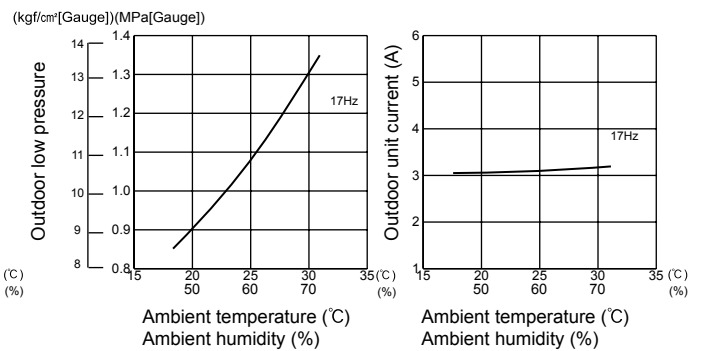


50-class unit

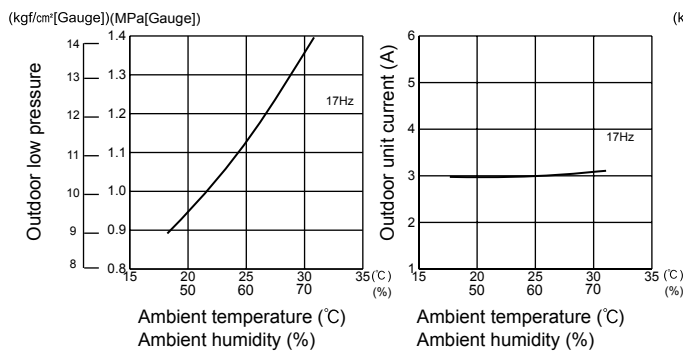

60-class unit

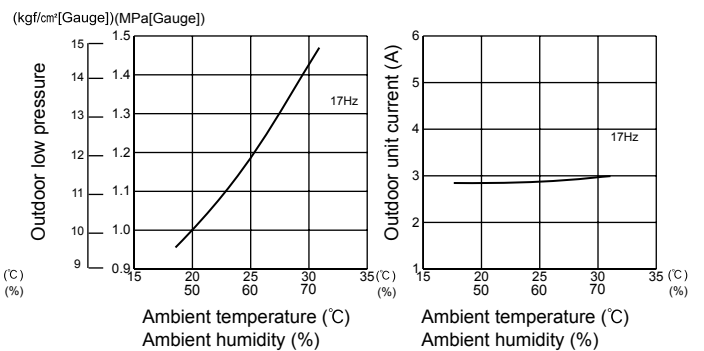

71-class unit

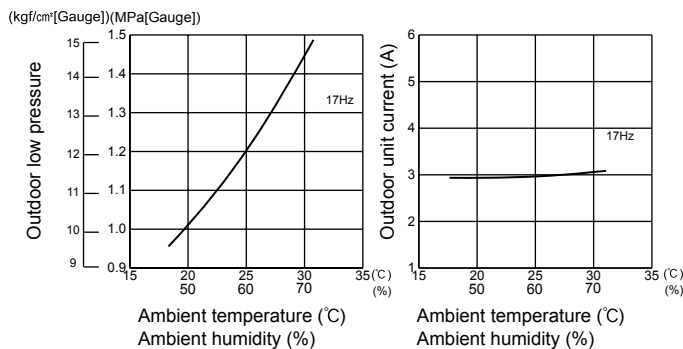

(2) HEAT operation


① Condition :

	Indoor	Outdoor			
Dry bulb temperature (°C)	20.0	2	7	15	20.0
Wet bulb temperature (°C)	14.5	1	6	12	14.5


② Operation : TEST RUN OPERATION (Refer to 8-3.)

MXZ-2C30VA


15-class unit




20-class unit



22-class unit




25-class unit




MXZ-2C40VA


15-class unit




20-class unit




22-class unit



25-class unit




35-class unit




MXZ-2C52VA


15-class unit




20-class unit



22-class unit




25-class unit




MXZ-4C80VA


15-class unit




20-class unit




22-class unit




25-class unit




35-class unit




42-class unit



50-class unit




60-class unit




MXZ-5C100VA


71-class unit




15-class unit




20-class unit




22-class unit




25-class unit




35-class unit




42-class unit




50-class unit



60-class unit




71-class unit




MXZ-6C120VA


15-class unit




20-class unit




22-class unit




25-class unit




35-class unit




42-class unit




50-class unit



60-class unit



71-class unit



9

ACTUATOR CONTROL

**MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA MXZ-3C54VA MXZ-3C68VA MXZ-4C71VA
MXZ-4C80VA MXZ-5C100VA MXZ-6C120VA**

Relation between main sensor and actuator

Sensor	Purpose	Actuator				
		Compressor	LEV	Outdoor fan motor	Reversing valve	Solenoid valve (MXZ-6C120VA)
Discharge temperature thermistor	Protection	○	○			○
Indoor coil thermistor	Defrosting Protection	○	○	○		○
Defrost thermistor	Defrosting	○	○	○	○	
Fin temperature thermistor	Protection	○		○		
Ambient temperature thermistor	Control	○	○	○		○
Outdoor heat exchanger temperature	Protection	○	○	○		○
Capacity code	Control	○	○			

MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA MXZ-3C54VA MXZ-3C68VA MXZ-4C71VA MXZ-4C80VA MXZ-5C100VA MXZ-6C120VA

10-1. LOCKING THE OPERATION MODE OF THE AIR CONDITIONER (COOL, DRY, HEAT)



Description of the function:

With this function, you can lock the operation mode of the outdoor unit. Once the operation mode is locked to either COOL/DRY mode or HEAT mode, the air conditioner operates in that mode only.

Initial setting is required to activate this function. Please explain about this function to your customers and ask them whether they want to use it.

[How to lock the operation mode]

- ① Turn OFF the power supply for the air conditioner before making the setting.
- ② Set SW1 on the display P.C. board or outdoor P.C. board as shown in the right figure.
- ③ Turn ON the power supply for the air conditioner.

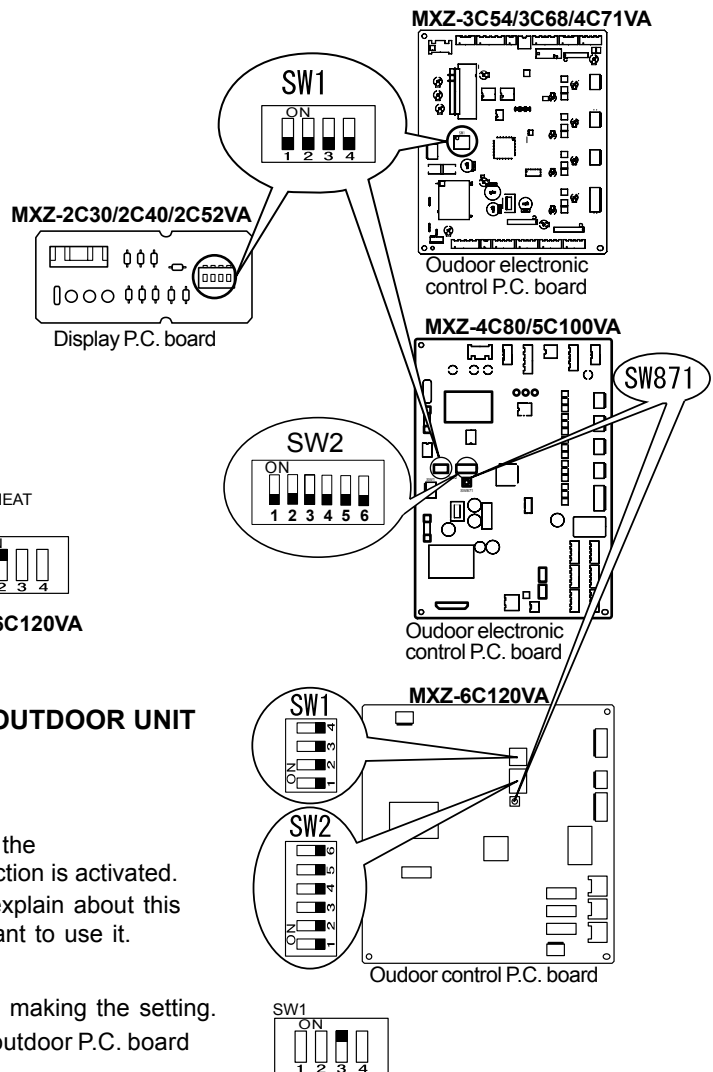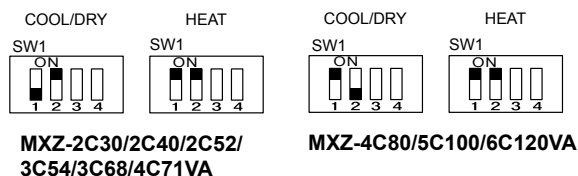

10-2. LOWERING THE OPERATING NOISE OF THE OUTDOOR UNIT

Description of the function:

With this function, you can lower the operating noise of the outdoor unit when the operation load is small, for example, during nighttime in COOL mode. However, please note that the cooling and heating capacity can also be lowered if this function is activated. Initial setting is required to activate this function. Please explain about this function to your customers and ask them whether they want to use it.

[How to lower the operating noise]

- ① Turn OFF the power supply for the air conditioner before making the setting.
- ② Set the "3" Switch of SW1 on the display P.C. board or the outdoor P.C. board to ON to enable this function.
- ③ Turn ON the power supply for the air conditioner.

10-3. PRE-HEAT CONTROL

If moisture gets into the refrigerant cycle, or when refrigerant is liquefied and collected in the compressor, it may interfere the start-up of the compressor.

To improve start-up condition, the compressor is energized even while it is not operating.

This is to generate heat at the winding.

The compressor uses about 50 W when pre-heat control is turned ON.

Pre-heat control is ON at initial setting.


[How to deactivate pre-heat control]

- ① Turn OFF the power supply for the air conditioner before making the setting.
- ② Set the "4" of SW2 on the outdoor P.C. board to ON to deactivate pre-heat control function (MXZ-4C80VA, MXZ-5C100VA, MXZ-6C120VA). Set the "4" of SW1 on the outdoor control P.C. board to ON to deactivate pre-heat control function (MXZ-3C54VA, MXZ-3C68VA, MXZ-4C71VA). Cut the JK wire of the inverter P.C. board to deactivate pre-heat control function (MXZ-2C30VA, MXZ-2C40VA, MXZ-2C52VA).
- ③ Turn ON the power supply for the air conditioner.


NOTE: Pre-heat control will be turned OFF when the breaker is turned OFF.



MXZ-4C80/5C100/6C120VA



MXZ-3C54/3C68/4C71VA



10-4. AUTO LINE CORRECTING

Outdoor unit has an auto line correcting function which automatically detects and corrects improper wiring or piping.

<MXZ-2C30VA, MXZ-2C40VA, MXZ-2C52VA>


Improper wiring or piping can be automatically detected when one indoor unit is operated in COOL mode for 30 minutes. When improper wiring or piping is detected, wiring lines are corrected (A to B/ B to A) with the software.

NOTE:


This function may not work due to the condition or environment of the unit, such as the following:

- gas leak, closed stop valve
- unit failure such as defective LEV
- indoor/outdoor temperature


<Correct line>

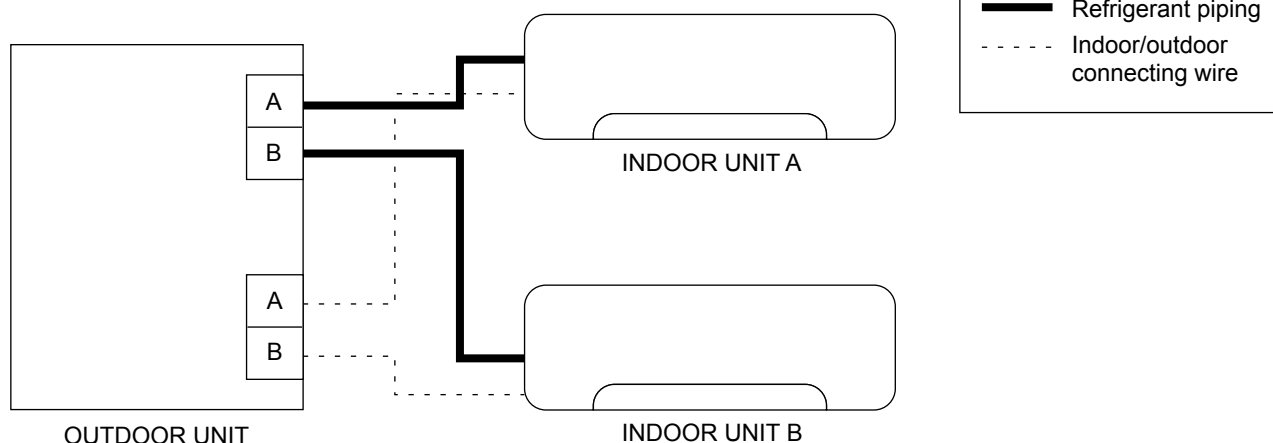

<Incorrect wiring>

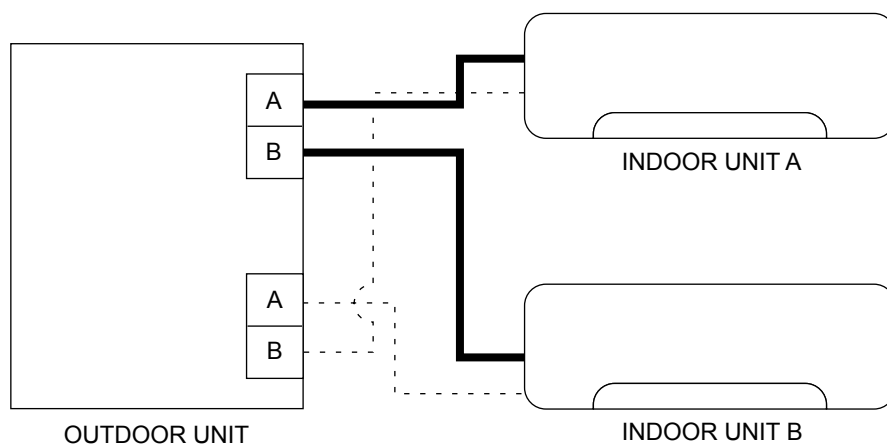


<Incorrect piping>

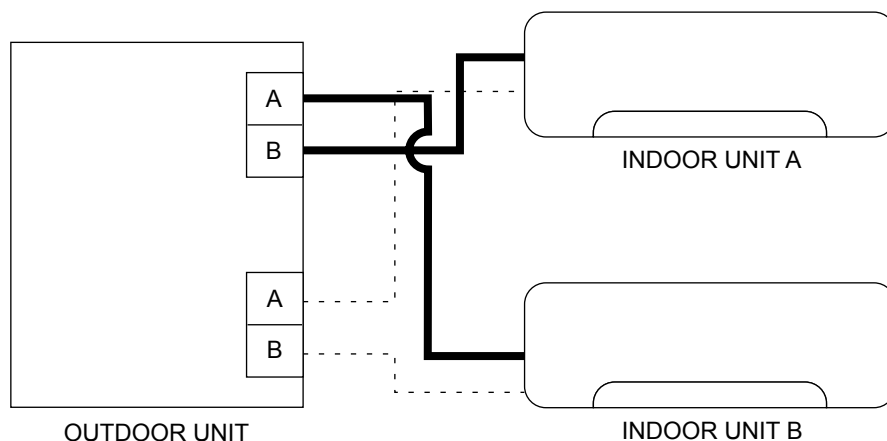

The record of auto line correcting can be confirmed in the following way:

- ① Turn OFF the power supply.
- ② Turn ON the "4" of SW1 on the display P.C. board.
- ③ Turn ON the power supply.
- ④ Confirm the correction by the blinking of LED.

Number of blinks		Wiring line
LED1 (Red)	LED2 (Yellow)	
Once	Once	Not corrected
3 times	3 times	Corrected



- ⑤ Turn OFF the power supply after the confirmation, and turn OFF the "4" of SW1 on the display P.C. board.
- ⑥ Turn ON the power supply.

NOTE: This function does not work when the jumper wire JGO on the inverter P.C. board is cut.

<MXZ-4C80VA, MXZ-5C100VA, MXZ-6C120VA>

Improper wiring or piping can be automatically detected by pressing the piping/wiring correction switch (SW871). When improper wiring or piping is detected, wiring lines are corrected. This will be completed in about 10 to 20 minutes.

[How to activate this function]

1. Check that outside temperature is above 0°C .
(This function does not work when outside temperature is not above 0°C.)
2. Check that the stop valves of the liquid pipe and gas pipe are open.
3. Check that the wiring between indoor and outdoor unit is correct.
(If the wiring is not correct, this function does not work.)
4. Turn ON the power supply and wait at least 1 minute.
5. Press the piping/wiring correction switch (SW871) on the outdoor P.C. board.
Do not touch energized parts.

LED indication during detection:

LED1(Red)	LED2(Yellow)	LED3(Green)
Lighting	Lighting	Blinking

LED indication after detection:

LED1(Red)	LED2(Yellow)	LED3(Green)	Indication
Lighting	Goes out	Lighting	Completed (Detected successfully)
Blinking	Blinking	Blinking	Cannot be corrected
Other indications			Refer to "SAFETY PRECAUTIONS WHEN LED FLASHES" located behind the service panel.

*Make sure that the valves are open and the pipes are not collapsed or clogged.

6. Press the switch to cancel.

LED indication after cancel:

LED1(Red)	LED2(Yellow)	LED3(Green)
Lighting	Lighting	Goes Out

NOTE: Indoor unit cannot be operated while this function is activated.

When this function is activated while indoor unit is operating, the operation will be stopped.

Operate indoor unit after the auto line correcting is finished.

Pressing the switch during detection cancels this function.

The record of auto line correcting can be confirmed in the following way:

Press the switch for more than 5 sec.

LED will show the record of auto correcting for about 30 sec. as shown in the table below:

Number of blinks			Wiring line
LED1(Red)	LED2(Yellow)	LED3(Green)	
Once	Once	Lighting	Not corrected
3 times	3 times	Lighting	Corrected

NOTE: Activate this function to confirm the correct wiring after replacing the outdoor P.C. board.

(Previous records are deleted when the outdoor P.C. board or the control P.C. board is replaced.)

The record cannot be shown if auto line correcting is not canceled (Refer to "How to activate this function").

10-5. INCREASING MAXIMUM COMPRESSOR OPERATIONAL FREQUENCY AND FAN SPEED OF THE OUTDOOR UNIT

<MXZ-4C80VA, MXZ-5C100VA>


Compressor operational frequency and fan speed can be increased.
Capacity of the unit can be improved with this function.

NOTE:

Compressor operational frequency may not be increased under primary current restriction or high pressure protection.
Compressor operational frequency will not be increased when 1 or 2 indoor units are operating.
This function does not work when the function which lowers the operating noise of the outdoor unit is activated.
Noise level of the outdoor unit will increase (You may need to explain this to your customers.)

[How to increase maximum compressor operational frequency and fan speed]

- ① Turn OFF the power supply for the air conditioner before making the setting.
- ② Set the "3" of SW2 on the outdoor P.C. board to ON to enable this function.
- ③ Turn ON the power supply for the air conditioner.



10-6. CHANGING DEFROST FINISH TEMPERATURE AND HEAT OPERATION TIME


<MXZ-4C80VA, MXZ-5C100VA, MXZ-6C120VA>

If defrosting operation starts more than necessary, the defrost finish temperature and heat operation time can be changed.
The number of defrosting operation and defrosting time can be reduced with this function.

	Initial setting		Changed
	4C/5C	6C	4C/5C/6C
Defrost finish temperature (°C)	10	13	5
Heat operation time (min.)	31	31	40

[How to change defrost finish temperature and heat operation time]

- ① Turn OFF the power supply for the air conditioner before making the setting.
- ② Set the "1" of SW2 on the outdoor P.C. board to ON to enable this function.
- ③ Turn ON the power supply for the air conditioner.



10-7. CHANGING THE AMPERE LIMIT

<MXZ-4C80VA, MXZ-5C100VA, MXZ-6C120VA>

With this function, you can change the current that flows in the outdoor unit.

NOTE:

Use this function only when the amount of current exceeds the allowed value.

[How to change the ampere limit]

- ① Turn OFF the power supply for the air conditioner before making the setting.
- ② Make the setting referring to the table on the right.
- ③ Turn ON the power supply for the air conditioner.

SW2	MXZ-4C80VA MXZ-5C100VA	MXZ-6C120VA
	10.5A	20A
	15.5A	25A
	Initial setting Full	

MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA MXZ-3C54VA MXZ-3C68VA MXZ-4C71VA MXZ-4C80VA MXZ-5C100VA MXZ-6C120VA

11-1. CAUTIONS ON TROUBLESHOOTING


1. Before troubleshooting, check the following:

- 1) Check the power supply voltage.
- 2) Check the indoor/outdoor connecting wire for miswiring.

2. Take care of the following during servicing


- 1) Before servicing the air conditioner, be sure to turn OFF the unit first with the remote controller, and after confirming the horizontal vane is closed, turn OFF the breaker and/or disconnect the power plug.
- 2) Be sure to turn OFF the power supply before removing the front panel, the cabinet, the top panel, and the electronic control P.C. board.
- 3) When removing the electrical parts, be careful of the residual voltage of smoothing capacitor.
- 4) When removing the electronic control P.C. board, hold the edge of the board with care NOT to apply stress on the components.
- 5) When connecting or disconnecting the connectors, hold the housing of the connector. DO NOT pull the lead wires.

<Incorrect>



Lead wiring

<Correct>



Housing point

3. Troubleshooting procedure

- 1) First, check if the OPERATION INDICATOR lamp on the indoor unit is flashing on and off to indicate an abnormality. To make sure, check how many times the OPERATION INDICATOR lamp is flashing on and off before starting service work.
- 2) Before servicing, check that the connector and terminal are connected properly.
- 3) When the electronic control P.C. board seems to be defective, check the copper foil pattern for disconnection and the components for bursting and discoloration.
- 4) Refer to 11-2, 11-3 and 11-4.

11-2. FAILURE MODE RECALL FUNCTION

This air conditioner can memorize the abnormal condition which has occurred once.

Even though LED indication listed on the troubleshooting check table (11-4) disappears, the memorized failure details can be recalled.

This mode is very useful when the unit needs to be repaired for the abnormality which does not recur.

1. Type of failure mode recall function

There are 2 types in failure mode recall function as shown below.

① Indoor and outdoor unit failure mode recall function

With this function, failure mode of indoor unit and a part of failure mode of outdoor unit can be recalled.

② The details of outdoor unit failure mode recall function

With this function, more detailed failure mode of outdoor unit can be recalled.

Refer to the service manual of indoor unit for how to recall the failure mode and the details of indoor unit failure mode.

The outdoor unit failure mode is indicated by the operation indicator lamp on the indoor unit and the LED of outdoor unit. See "11-2.2. Outdoor unit failure mode table".

2. Outdoor unit failure mode table

MXZ-2C

Upper or left lamp of OPERATION INDICATOR lamp (Indoor unit)	Abnormal point (Failure mode / protection)	LED indication (Outdoor P.C. board)		Condition	Remedy	Indoor/outdoor unit failure mode recall function
		LED 1	LED 2			
OFF	None (Normal)	Lighting	Lighting	—	—	—
2-time flash	Outdoor power system	Lighting	Lighting	Overcurrent protection cut-out operates 3 consecutive times within 1 minute after the compressor gets started.	• Check the connection of the compressor connecting wire. • Refer to 11-6. ⑥ "How to check inverter/compressor". • Check the stop valve.	○
3-time flash	Discharge temperature thermistor	Lighting	Once	Thermistor shorts or opens during compressor running.	• Refer to 11-6. ⑥ "Check of outdoor thermistors".	○
	Defrost thermistor	Lighting	Once			
	Ambient temperature thermistor	Lighting	Twice			
	Fin temperature thermistor	Lighting	3 times			
	P.C. board temperature thermistor	Lighting	4 times			
	Outdoor heat exchanger temperature thermistor	Lighting	9 times			
4-time flash	Overcurrent	Once	Goes out	14 A (MXZ-2C30VA)/18 A (MXZ-2C40VA, MXZ-2C52VA) current flows into intelligent power module.	• Reconnect compressor connector. • Refer to 11-6. ⑥ "How to check inverter/compressor". • Check the stop valve.	—
	Compressor	Twice	Goes out	The possibility of intercepting the overcurrent by the compressor lock is high.	• Check the connection of the compressor connecting wire. • Refer to 11-6. ⑥ "How to check inverter/compressor".	—
		9 times	Goes out	The compressor doesn't synchronize with the operating power.		
5-time flash	Discharge temperature	Lighting	Lighting	Discharge temperature exceeds 116°C during operation. Compressor can restart if discharge temperature thermistor reads 100°C or less 3 minutes later.	• Check refrigerant circuit and refrigerant amount. • Refer to 11-6. ⑩ "Check of LEV".	—
6-time flash	High pressure	Lighting	Lighting	The outdoor heat exchanger temperature exceeds 70°C during cooling or the indoor gas pipe temperature exceeds 70°C during heating.	• Check refrigerant circuit and refrigerant amount. • Check the stop valve.	—
7-time flash	Fin temperature	3 times	Goes out	The fin temperature exceeds 90°C during operation.	• Check around outdoor unit. • Check outdoor unit air passage. • Refer to 11-6. ⑩ "Check of outdoor fan motor".	—
	P.C. board temperature	4 times	Goes out	The P.C. board temperature exceeds 78°C during operation.		
8-time flash	Outdoor fan motor	Lighting	Lighting	Failure occurs 3 consecutive times within 30 seconds after the fan gets started.	• Refer to 11-6. ⑩ "Check of outdoor fan motor".	—
9-time flash	Nonvolatile memory data	Lighting	5 times	Nonvolatile memory data cannot be read properly.	• Replace the outdoor electronic control P.C. board.	○
10-time flash	Discharge temperature	Lighting	Lighting	The frequency of the compressor is kept 68 Hz (MXZ-2C30VA, MXZ-2C40VA)/80Hz (MXZ-2C52VA) or more and the discharge temperature is kept under 50°C (COOL mode)/40°C (HEAT mode) for more than 40 minutes.	• Check refrigerant circuit and refrigerant amount. • Refer to 11-6. ⑩ "Check of LEV".	—

NOTE: Blinking patterns of this mode differ from the ones of Troubleshooting check table (11-4).



Upper or left lamp of OPERATION INDICATOR lamp (Indoor unit)	Abnormal point (Failure mode / protection)	LED indication (Outdoor P.C. board)		Condition	Remedy	Indoor/outdoor unit failure mode recall function
		LED 1	LED 2			
11-time flash	Current sensor	8 times	Goes out	A short or open circuit is detected in the current sensor during compressor operating.	• Replace the power board.	_____
	Bus-bar voltage	6 times	Goes out	The bus-bar voltage exceeds 430 V or falls to 50 V or below during compressor operating.	• Replace the power board.	_____
14-time flash	Power module	7 times	Goes out	There is a high possibility that the power module is out of order.	• Refer to 11-6. ⑤ "How to check inverter/ compressor".	_____
	Stop valve (Closed valve)	Lighting	12 times	Closed valve is detected by compressor current. (MXZ-2C30VA, MXZ-2C40VA)	• Check the stop valve.	_____
15-time flash	LEV for drain	Lighting	Lighting	The indoor unit detects any abnormalities in the LEV for drain.	• Refer to 11-6. ⑥ "Check of LEV". • Check the drain pump of the indoor unit.	_____

NOTE: Blinking patterns of this mode differ from the ones of Troubleshooting check table (11-4).

MXZ-3C/4C/5C

Upper or left lamp of OPERATION INDICATOR lamp (Indoor unit)	Abnormal point (Failure mode/protection)	LED indication (Outdoor P.C. board)		Condition	Remedy	Indoor/outdoor unit failure mode recall function
		LED 1	LED 2			
OFF	None (Normal)	Lighting	Lighting	—	—	—
2-time flash	Outdoor power system	Lighting	Lighting	Overcurrent protection cut-out operates 3 consecutive times within 1 minute after the compressor gets started, or converter protection or bus-bar voltage protection cut-out operates 3 consecutive times within 3 minutes after start-up.	<ul style="list-style-type: none"> • Check the connection of the compressor connecting wire. • Refer to 11-6. ⑤ "How to check inverter/compressor". • Check the stop valve. 	○
3-time flash	Discharge temperature thermistor	Lighting	Once	Thermistor shorts or opens during compressor running.	<ul style="list-style-type: none"> • Refer to 11-6. ⑥ "Check of outdoor thermistors". • Replace the outdoor electronic control P.C. board. • Refer to 11-6. ⑥ "Check of outdoor thermistors". 	○
	Defrost thermistor	Lighting	Once			
	Ambient temperature thermistor	Lighting	Twice			
	Fin temperature thermistor	Lighting	3 times			
	P.C. board temperature thermistor	Lighting	4 times			
	Outdoor heat exchanger temperature thermistor	Lighting	9 times			
4-time flash	Overcurrent	Once	Goes out	28 A current flows into intelligent power module.	<ul style="list-style-type: none"> • Reconnect compressor connector. • Refer to 11-6. ⑤ "How to check inverter/compressor". • Check the stop valve. 	—
5-time flash	Discharge temperature	Lighting	Lighting	Discharge temperature exceeds 116°C during operation. Compressor can restart if discharge temperature thermistor reads 100°C or less 3 minutes later.	<ul style="list-style-type: none"> • Check refrigerant circuit and refrigerant amount. • Refer to 11-6. ⑩ "Check of LEV". 	—
6-time flash	High pressure	Lighting	Lighting	High-pressure is detected with the high-pressure switch (HPS) during operation. (MXZ-3C68/4C71/4C80/5C100VA)	<ul style="list-style-type: none"> • Check refrigerant circuit and refrigerant amount. • Check the stop valve. 	—
				The outdoor heat exchanger temperature exceeds 70°C during cooling or the indoor gas pipe temperature exceeds 70°C during heating.		
7-time flash	Fin temperature	3 times	Goes out	The fin temperature exceeds 89°C during operation.	<ul style="list-style-type: none"> • Check around outdoor unit. • Check outdoor unit air passage. • Refer to 11-6. ③ "Check of outdoor fan motor". 	—
	P.C. board temperature	4 times	Goes out	The P.C. board temperature exceeds 73°C (MXZ-3C54/3C68/4C71VA) / 87°C (MXZ-4C80/5C100VA) during operation.		
8-time flash	Outdoor fan motor	Lighting	Lighting	Failure occurs 3 consecutive times within 30 seconds after the fan gets started.	<ul style="list-style-type: none"> • Refer to 11-6. ③ "Check of outdoor fan motor". 	—
9-time flash	Nonvolatile memory data	Lighting	5 times	Nonvolatile memory data cannot be read properly.	<ul style="list-style-type: none"> • Replace the outdoor electronic control P.C. board. 	○
10-time flash	Discharge temperature	Lighting	Lighting	The frequency of the compressor is kept 80Hz or more and the discharge temperature is kept under 50°C (cooling)/40°C (heating) for more than 40 minutes.	<ul style="list-style-type: none"> • Check refrigerant circuit and refrigerant amount. • Refer to 11-6. ⑩ "Check of LEV". 	—

NOTE: Blinking patterns of this mode differ from the ones of Troubleshooting check table (11-4).

Upper or left lamp of OPERATION INDICATOR lamp (Indoor unit)	Abnormal point (Failure mode/protection)	LED indication (Outdoor P.C. board)		Condition	Remedy	Indoor/outdoor unit failure mode recall function
		LED 1	LED 2			
11-time flash	Communication error between P.C. boards	Lighting	6 times	Communication error occurs between the electronic control P.C. board and power board for more than 10 seconds.	• Check the connecting wire between outdoor electronic control P.C. board and power board.	—
				The communication between boards protection cut-out operates 2 consecutive times.		○
	Current sensor	Lighting	7 times	A short or open circuit is detected in the current sensor during compressor operating.	• Replace the power board.	—
				Current sensor protection cut-out operates 2 consecutive times.		○
	Zero cross detecting circuit	5 times	Goes out	Zero cross signal cannot be detected while the compressor is operating.	• Check the connecting wire between electronic control P.C. board, noise filter P.C. board and power board.	—
				The protection cut-out of the zero cross detecting circuit operates 10 consecutive times.		○
	Converter	5 times	Goes out	A failure is detected in the operation of the converter during operation.	• Check the voltage of power supply. • Replace the power board.	—
	Bus-bar voltage (1)	5 times	Goes out	The bus-bar voltage exceeds 400 V or falls to 200 V or below during compressor operating.		
	Bus-bar voltage (2) * Even if this protection stop is performed continuously three times, it does not mean the abnormality in outdoor power system.	6 times	Goes out	The bus-bar voltage exceeds 400 V (MXZ-3C54/3C68/4C71VA) 430 V (MXZ-4C80/5C100VA) or falls to 50V or below during compressor operating.	• Check the voltage of power supply. • Replace the outdoor electronic control P.C. board.	
15-time flash	LEV and drain pump	Lighting	Lighting	The indoor unit detects any abnormalities in the LEV and drain pump.	• Refer to 11-6. ② "Check of LEV". • Check the drain pump of the indoor unit.	—

NOTE: Blinking patterns of this mode differ from the ones of "Troubleshooting check table" (11-4).

MXZ-6C

Upper or left lamp of OPERATION INDICATOR lamp (Indoor unit)	Abnormal point (Failure mode/protection)	LED indication (Outdoor P.C. board)		Condition	Remedy	Indoor/outdoor unit failure mode recall function
		LED 1	LED 2			
OFF	None (Normal)	Lighting	Lighting			
2-time flash	Outdoor power system	Lighting	Lighting	Overcurrent protection cut-out operates 3 consecutive times, bus-bar voltage protection cut-out operates 3 consecutive times, or primary current protection cut-out operates 3 consecutive times within 1 minute after the compressor gets started.	<ul style="list-style-type: none"> Check the connection of the compressor connecting wire. Refer to 11-6. ⑤ How to check inverter/compressor. Check the stop valve. 	○
3-time flash	Discharge temperature thermistor	Lighting	Once	Thermistor shorts or opens during compressor running.	Refer to 11-6. ⑤ "Check of outdoor thermistors".	○
	Defrost thermistor	Lighting	Once			
	Ambient temperature thermistor	Lighting	Twice		Replace the power board.	
	Fin temperature thermistor	Lighting	3 times		Replace the power board.	
	P.C. board temperature thermistor	Lighting	4 times			
	Outdoor heat exchanger temperature thermistor	Lighting	9 times		Refer to 11-6. ⑤ "Check of outdoor thermistors".	
4-time flash	Overcurrent	Once	Goes out	40 A current flows into intelligent power module.	<ul style="list-style-type: none"> Reconnect compressor connector. Refer to 11-6. ⑤ "How to check inverter/compressor". Check the stop valve. 	—
	Out-of-step protection	9 times	Goes out	Waveform of compressor current is distorted.	Refer to 11-6. ⑤ "How to check inverter/compressor".	
5-time flash	Discharge temperature	Lighting	Lighting	Discharge temperature exceeds 114 °C during operation. Compressor can restart if discharge temperature thermistor reads 100 °C or less 3 minutes later.	<ul style="list-style-type: none"> Check refrigerant circuit and refrigerant amount. Refer to 11-6. ⑤ "Check of LEV". 	—
6-time flash	High pressure	Lighting	Lighting	High-pressure is detected with the high-pressure switch (HPS) during operation.	<ul style="list-style-type: none"> Check refrigerant circuit and refrigerant amount. Check the stop valve. 	—
				The outdoor heat exchanger temperature exceeds 70 °C during cooling or the indoor gas pipe temperature exceeds 70 °C during heating.		
7-time flash	Fin temperature	3 times	Goes out	The fin temperature exceeds 110 °C during operation.	<ul style="list-style-type: none"> Check around outdoor unit. Check outdoor unit air passage. Refer to 11-6. ⑤ "Check of outdoor fan motor". 	—
	P.C. board temperature	4 times	Goes out	The P.C. board temperature exceeds 95 °C during operation.		
8-time flash	Outdoor fan motor	Lighting	Lighting	The fan motor speed is 50 rpm or less or 1500 rpm or more for 1 minute, or the fan motor speed is 100 rpm or less for 15 seconds when the outside temperature is 20 °C or more.	Refer to 11-6. ⑤ "Check of outdoor fan motor".	—
9-time flash	Nonvolatile memory data	Lighting	5 times	Nonvolatile memory data cannot be read properly.	<ul style="list-style-type: none"> Replace the outdoor control P.C. board. Replace the power board. 	○
10-time flash	Discharge temperature	Lighting	Lighting	The frequency of the compressor is kept 80Hz or more and the discharge temperature is kept under 50 °C (cooling)/40 °C (heating) for more than 40 minutes.	<ul style="list-style-type: none"> Check refrigerant circuit and refrigerant amount. Refer to 11-6. ⑤ "Check of LEV". 	—


MXZ-6C

Upper or left lamp of OPERATION INDICATOR lamp (Indoor unit)	Abnormal point (Failure mode/protection)	LED indication (Outdoor P.C. board)		Condition	Remedy	Indoor/outdoor unit failure mode recall function
11-time flash	Communication error between P.C. boards	Lighting	6 times	Communication error occurs between the control P.C. board and power board for more than 10 seconds.	• Check the connecting wire between the outdoor control P.C. board and power board.	—
				The communication between boards protection cut-out operates 2 consecutive times.		○
	Current sensor	Lighting	7 times	After the operation starts, a short or open circuit is detected in the current sensor when the compressor is not operating.	• Replace the power board.	—
				Current sensor has been short or open circuited for 120 seconds.		○
	Zero cross detecting circuit	5 times	Goes out	Zero cross signal cannot be detected while the compressor is operating.	• Check the connecting wire between outdoor control P.C. board and power board.	—
				The protection cut-out of the zero cross detecting circuit operates 3 consecutive times.		○
	Bus-bar voltage	6 times	Goes out	The bus-bar voltage exceeds 400 V or falls to 300 V or below during compressor operating.	• Check the voltage of power supply. • Replace the outdoor control P.C. board.	—
12-time flash	Compressor (open phase)	10 times	Goes out	Waveform of compressor current is distorted.	• Check the connection of the compressor connecting wire. • Refer to 11-6. ⑤ "How to check inverter/compressor."	—
14-time flash	Power module	7 times	Goes out	The overcurrent is detected when the frequency of the compressor is 1 Hz or less.	• Refer to 11-6. ⑤ "How to check inverter/compressor."	—
15-time flash	LEV and drain pump	Lighting	Lighting	The indoor unit detects any abnormalities in the LEV and drain pump.	• Refer to 11-6. ⑥ "Check of LEV". • Check the drain pump of the indoor unit.	—

11-3. INSTRUCTION OF TROUBLESHOOTING

- Check the indoor unit by referring to the indoor unit service manual, and confirm whether there is any problem in the indoor unit.

Then, check the outdoor unit by referring to this page.

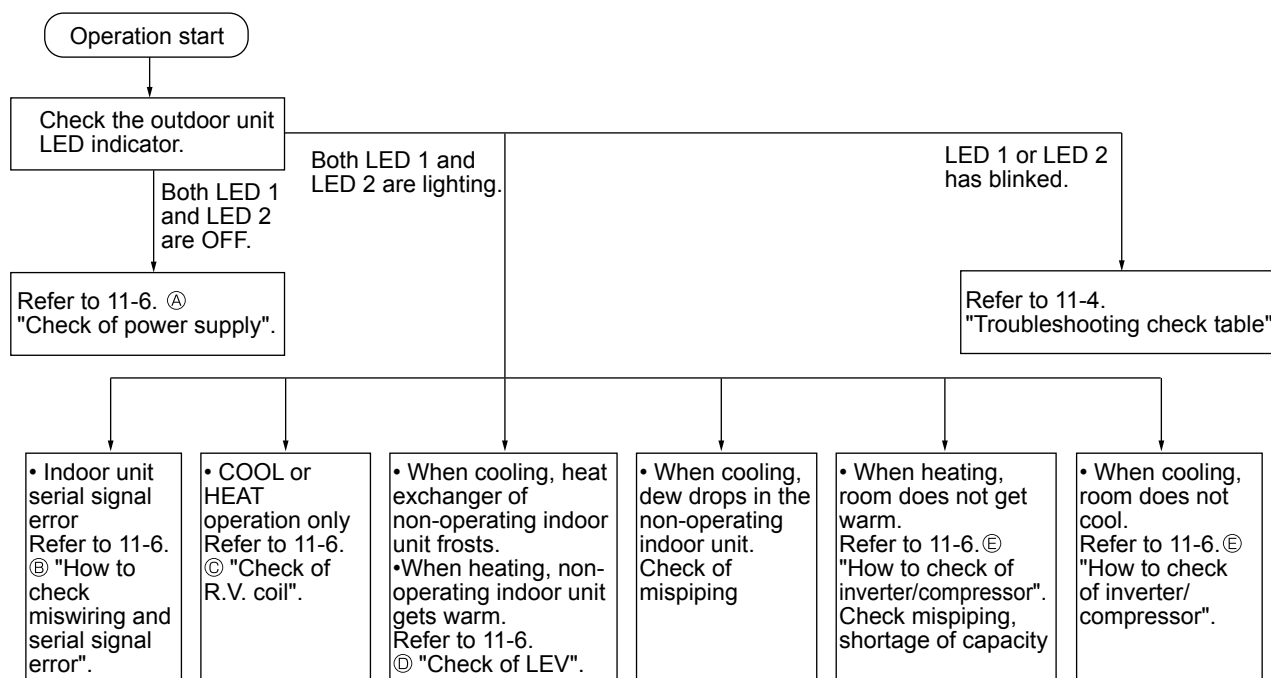

11-4. TROUBLESHOOTING CHECK TABLE

MXZ-2C



No.	Symptom	Indication		Abnormal point / Condition	Condition	Remedy
		LED1(Red)	LED2(Yellow)			
1	Outdoor unit does not operate.	Lighting	Once	LEV for drain	The indoor unit detects any abnormality in the LEV for drain.	<ul style="list-style-type: none"> Refer to 11-6. ㉔ "Check of LEV". Check the drain pump of the indoor unit.
2		Lighting	Twice	Outdoor power system	Overcurrent protection cut-out operates 3 consecutive times within 1 minute after the compressor gets started.	<ul style="list-style-type: none"> Check the connection of the compressor connecting wire. Refer to 11-6. ㉔ "How to check inverter/compressor". Check the stop valve.
3		Lighting	3 times	Discharge temperature thermistor	A short circuit is detected in the thermistor during operation, or when an open circuit is detected in the thermistor after 10 minutes of compressor start-up.	Refer to 11-6. ㉔ "Check of outdoor thermistors".
4		Lighting	4 times	Fin temperature thermistor	A short or open circuit is detected in the thermistor during operation.	Refer to 11-6. ㉔ "Check of outdoor thermistors".
				P.C. board temperature thermistor		Replace the outdoor electronic control P.C. board.
5		Lighting	5 times	Ambient temperature thermistor	A short or open circuit is detected in the thermistor during operation.	Refer to 11-6. ㉔ "Check of outdoor thermistors".
				Outdoor heat exchanger temperature thermistor	A short circuit is detected in the thermistor during operation, or when an open circuit is detected in the thermistor after 5 minutes (in cooling) and 10 minutes (in heating) of compressor start-up.	
				Defrost thermistor	A short circuit is detected in the thermistor during operation, or when an open circuit is detected in the thermistor after 5 minutes of compressor start-up.	
6		Lighting	7 times	Nonvolatile memory data	The nonvolatile memory data cannot be read properly.	Replace the outdoor electronic control P.C. board.
7		Lighting	11 times	Stop valve Closed valve	Closed valve is detected by compressor current. (MXZ-2C30VA, MXZ-2C40VA)	Check the stop valve.
8	'Outdoor unit stops and restarts 3 minutes later' is repeated.	Twice	Goes out	Overcurrent	14 A (MXZ-2C30VA)/18 A (MXZ-2C40VA, MXZ-2C52VA) current flows into intelligent power module.	<ul style="list-style-type: none"> Reconnect compressor connector. Refer to 11-6. ㉔ "How to check inverter/compressor". Check the stop valve.
9		3 times	Goes out	Discharge temperature protection	Discharge temperature exceeds 116°C during operation. Compressor can restart if discharge temperature thermistor reads 100°C or less 3 minutes later.	<ul style="list-style-type: none"> Check the amount of gas and refrigerant circuit. Refer to 11-6. ㉔ "Check of LEV".
10		4 times	Goes out	Fin temperature protection	The fin temperature exceeds 90°C during operation.	Check refrigerant circuit and refrigerant amount.
				P.C. board temperature protection	The P.C. board temperature exceeds 78°C during operation.	Refer to 11-6. ㉔ "Check of outdoor fan motor".
11		5 times	Goes out	High-pressure protection	The outdoor heat exchanger temperature exceeds 70°C during cooling or indoor gas pipe temperature exceeds 70°C during heating.	<ul style="list-style-type: none"> Check the amount of gas and the refrigerant circuit. Check the stop valve.
12		9 times	Goes out	Bus-bar voltage protection	The bus-bar voltage exceeds 430 V or falls to 50 V or below during compressor operating.	Replace the power board.
13		13 times	Goes out	Outdoor fan motor	Failure occurs 3 consecutive times within 30 seconds after the fan gets started.	Refer to 11-6. ㉔ "Check of outdoor fan motor".
14		8 times	Goes out	Current sensor protection	A short or open circuit is detected in the current sensor during compressor operating.	Replace the power board.
15		10 times	Goes out	Compressor	The compressor doesn't synchronize with the operating power.	<ul style="list-style-type: none"> Reconnect compressor connector. Refer to 11-6. ㉔ "How to check inverter/compressor". Check the stop valve.
16	Outdoor unit operates.	Once	Lighting	Primary current protection	The input current exceeds 8 A (MXZ-2C30VA)/ 10 A (MXZ-2C40VA, MXZ-2C52VA).	These symptoms do not mean any abnormality of the product, but check the following points. <ul style="list-style-type: none"> Check if indoor filters are clogged. Check if refrigerant is short. Check if indoor/outdoor unit air circulation is short cycled.
				Secondary current protection	The current of the compressor exceeds 17 A.	
17		Twice	Lighting	High-pressure protection	The indoor gas pipe temperature exceeds 45°C during heating.	
				Defrosting in cooling	The indoor gas pipe temperature falls 3°C or below during cooling.	
18		3 times	Lighting	Discharge temperature protection	The discharge temperature exceeds 100°C during operation.	<ul style="list-style-type: none"> Check refrigerant circuit and refrigerant amount. Refer to 11-6. ㉔ "Check of LEV". Refer to 11-6. ㉔ "Check of outdoor thermistors".
19		4 times	Lighting	Low discharge temperature protection	The frequency of the compressor is kept 68 Hz (MXZ-2C30VA, MXZ-2C40VA)/80 Hz (MXZ-2C52VA) or more and the discharge temperature is kept under 50°C (COOL mode)/40°C (HEAT mode) for more than 40 minutes.	<ul style="list-style-type: none"> Refer to 11-6. ㉔ "Check of LEV". Check refrigerant circuit and refrigerant amount.



No.	Symptom	Indication		Abnormal point / Condition	Condition	Remedy
		LED1(Red)	LED2(Yellow)			
20	Outdoor unit operates.	5 times	Lighting	Cooling high-pressure protection	The outdoor heat exchanger temperature exceeds 58°C during operation.	This symptom does not mean any abnormality of the product, but check the following points. • Check if indoor filters are clogged. • Check if refrigerant is short. • Check if indoor/outdoor unit air circulation is short cycled.
21	Outdoor unit operates normally.	9 times	Lighting	Inverter check mode	The connector of compressor is disconnected. Inverter check mode starts.	—
22		Lighting	Lighting	Normal	—	—

Display P.C. board(Parts side)

NOTE 1. The location of LED is illustrated at the right figure. Refer to 11-7.6.
2. LED is lighted during normal operation.
The flashing frequency shows the number of times the LED blinks after every 2.5-second OFF.
(Example) When the flashing frequency is “2”.



MXZ-3C/4C/5C

No.	Symptom	Indication		Abnormal point / Condition	Condition	Remedy
		LED1(Red)	LED2(Yellow)			
1	Outdoor unit does not operate.	Lighting	Once	LEV and drain pump	The indoor unit detects any abnormality in the LEV and drain pump.	• Refer to 11-6. ㉑ "Check of LEV". • Check the drain pump of the indoor unit.
2		Lighting	Twice	Outdoor power system	Overcurrent protection cut-out operates 3 consecutive times within 1 minute after the compressor gets started, or converter protection or bus-bar voltage protection cut-out operates 3 consecutive times within 3 minutes after start-up.	• Check the connection of the compressor connecting wire. • Refer to 11-6. ㉒ "How to check inverter/compressor". • Check the stop valve.
3		Lighting	3 times	Discharge temperature thermistor	A short circuit is detected in the thermistor during operation, or an open circuit is detected in the thermistor 10 minutes after compressor start-up.	• Refer to 11-6. ㉓ "Check of outdoor thermistors".
4		Lighting	4 times	Fin temperature thermistor	A short or open circuit is detected in the thermistor during operation.	• Refer to 11-6. ㉓ "Check of outdoor thermistors".
				P.C board temperature thermistor		• Replace the outdoor electronic control P.C. board.
5		Lighting	5 times	Ambient temperature thermistor	A short or open circuit is detected in the thermistor during operation.	• Refer to 11-6. ㉓ "Check of outdoor thermistors".
				Outdoor heat exchanger temperature thermistor	A short circuit is detected in the thermistor during operation, or an open circuit is detected in the thermistor 5 minutes (in cooling) and 10 minutes (in heating) after compressor start-up.	
				Defrost thermistor	A short circuit is detected in the thermistor during operation, or an open circuit is detected in the thermistor 5 minutes after compressor start-up.	
6		Lighting	7 times	Nonvolatile memory data	The nonvolatile memory data cannot be read properly.	• Replace the outdoor electronic control P.C. board.
7		Lighting	8 times	Current sensor	Current sensor protection cut-out operates 2 consecutive times.	• Replace the power board.
8	Lighting	11 times	Communication error between P.C. boards	Communication error occurs twice between the outdoor electronic control P.C. board and power board for more than 10 seconds.	• Check the connecting wire between outdoor electronic control P.C. board and power board.	
9	Lighting	12 times	Zero cross detecting circuit	The protection cut-out of the zero cross detecting circuit operates 10 consecutive times.	• Check the connecting wire between outdoor electronic control P.C. board, noise filter P.C. board and power board.	
10	'Outdoor unit stops and restarts 3 minutes later' is repeated.	Twice	Goes out	IPM protection	Overcurrent is detected 30 seconds after compressor start-up.	• Reconnect compressor connector. • Refer to 11-6. ㉔ "How to check inverter/compressor". • Check the stop valve. • Check the power module (PAM module).
				Lock protection	Overcurrent is detected within 30 seconds after compressor start-up.	
11		3 times	Goes out	Discharge temperature protection	Discharge temperature exceeds 116°C during operation. Compressor can restart if discharge temperature thermistor reads 100°C or less 3 minutes later.	• Check the amount of gas and refrigerant circuit. • Refer to 11-6. ㉕ "Check of LEV".
12		4 times	Goes out	Fin temperature protection	The fin temperature exceeds 89°C during operation.	• Check refrigerant circuit and refrigerant amount. • Refer to 11-6. ㉖ "Check of outdoor fan motor".
				P.C. board temperature protection	The P.C. board temperature exceeds 73°C (MXZ-3C54/3C68/4C71VA)/87°C (MXZ-4C80/5C100VA) during operation.	
13		5 times	Goes out	High-pressure protection	High-pressure is detected with the high-pressure switch (HPS) during operation. (MXZ-3C68/4C71/4C80/5C100VA)	• Check the amount of gas and the refrigerant circuit. • Check the stop valve.
					The outdoor heat exchanger temperature exceeds 70°C during cooling or indoor gas pipe temperature exceeds 70°C during heating.	
14		8 times	Goes out	Converter protection	A failure is detected in the operation of the converter during operation.	• Replace the power board.
15		9 times	Goes out	Bus-bar voltage protection (1)	The bus-bar voltage exceeds 400 V or falls to 200 V or below during compressor operating.	• Check the voltage of power supply. • Replace the power board or the outdoor electronic control P.C. board. • Refer to 11-6. ㉗ "Check of bus-bar voltage".
				Bus-bar voltage protection (2)	The bus-bar voltage exceeds 400 V (MXZ-3C54/3C68/4C71VA)/430 V (MXZ-4C80/5C100VA) or falls to 50 V or below while the compressor is operating.	
16		13 times	Goes out	Outdoor fan motor	Failure occurs 3 consecutive times within 30 seconds after the fan gets started.	• Refer to 11-6. ㉘ "Check of outdoor fan motor".
17		Lighting	8 times	Current sensor protection	A short or open circuit is detected in the current sensor while the compressor is operating.	• Replace the power board.
18		Lighting	11 times	Communication protection between P.C. boards	Communication error occurs between the outdoor electronic control P.C. board and power board for more than 10 seconds.	• Check the connecting wire between outdoor electronic control P.C. board and power board.
19		Lighting	12 times	Zero cross detecting circuit protection	Zero cross signal cannot be detected while the compressor is operating.	• Check the connecting wire between outdoor electronic control P.C. board, noise filter P.C. board and power board.




No.	Symptom	Indication		Abnormal point / Condition	Condition	Remedy
		LED1(Red)	LED2(Yellow)			
20	Outdoor unit operates.	Once	Lighting	Primary current protection	The primary current exceeds 15 A (MXZ-3C54/3C68/4C71VA)/17 A (MXZ-4C80VA)/18 A (MXZ-5C100VA).	These symptoms do not mean any abnormality of the product, but check the following points. • Check indoor filters are not clogged. • Check there is sufficient refrigerant. • Check indoor/outdoor unit air circulation is not short cycling.
				Secondary current protection	The current of the compressor exceeds 12 A (MXZ-3C54VA) /12.5A (MXZ-3C68/4C71VA) /10 A (MXZ-4C80/5C100VA).	
21		Twice	Lighting	High-pressure protection	The indoor gas pipe temperature exceeds 45°C during heating.	
				Defrosting in cooling	The indoor gas pipe temperature falls 3°C or below during cooling.	
22		3 times	Lighting	Discharge temperature protection	The discharge temperature exceeds 100°C during operation.	• Check refrigerant circuit and refrigerant amount. • Refer to 11-6. Ⓓ*Check of LEV". • Refer to 11-6. Ⓔ*Check of outdoor thermistors".
23		4 times	Lighting	Low discharge temperature protection	The frequency of the compressor is kept 80 Hz or more and the discharge temperature is kept under 50°C (cooling) /40°C (heating) for more than 40 minutes.	• Refer to 11-6. Ⓓ*Check of LEV". • Check refrigerant circuit and refrigerant amount.
24		5 times	Lighting	Cooling high-pressure protection	The outdoor heat exchanger temperature exceeds 58°C during operation.	This symptom does not mean any abnormality of the product, but check the following points. • Check indoor filters are not clogged. • Check there is sufficient refrigerant. • Check indoor/outdoor unit air circulation is not short cycling.
25	Outdoor unit operates normally.	9 times	Lighting	Inverter check mode	The unit is operated with emergency operation switch.	—
26		Lighting	Lighting	Normal	—	—


NOTE 1. The location of LED is illustrated at the right figure. Refer to 11-7.1.
 2. LED is lighted during normal operation.

Outdoor electronic control P.C. board(Parts side)


The flashing frequency shows the number of times the LED blinks after every 2.5-second OFF.
 (Example) When the flashing frequency is "2".



MXZ-3C54/3C68/4C71VA



MXZ-4C80/5C100VA



MXZ-6C

No.	Symptom	Indication		Abnormal point / Condition	Condition	Remedy
		LED1(Red)	LED2(Yellow)			
1	Outdoor unit does not operate.	Lighting	Once	LEV and drain pump	The indoor unit detects any abnormality in the LEV and drain pump.	<ul style="list-style-type: none"> Refer to 11-6. ⑥ "Check of LEV". Check the drain pump of the indoor unit.
2		Lighting	Twice	Outdoor power system	Overcurrent protection cut-out operates 3 consecutive times, bus-bar voltage protection cut-out operates 3 consecutive times, or primary current protection cut-out operates 3 consecutive times within 1 minute after the compressor gets started.	<ul style="list-style-type: none"> Check the connection of the compressor connecting wire. Refer to 11-6. ⑥ "How to check inverter/compressor". Check the stop valve.
3		Lighting	3 times	Discharge temperature thermistor	A short circuit is detected in the thermistor during operation, or an open circuit is detected in the thermistor 10 minutes after compressor start-up.	<ul style="list-style-type: none"> Refer to 11-6. ⑥ "Check of outdoor thermistors".
4		Lighting	4 times	Fin temperature thermistor	A short or open circuit is detected in the thermistor during operation.	<ul style="list-style-type: none"> Replace the power board.
				P.C. board temperature thermistor		<ul style="list-style-type: none"> Replace the power board.
5		Lighting	5 times	Ambient temperature thermistor	A short or open circuit is detected in the thermistor during operation.	<ul style="list-style-type: none"> Refer to 11-6. ⑥ "Check of outdoor thermistors".
				Outdoor heat exchanger temperature thermistor		
				Defrost thermistor		
6		Lighting	7 times	Nonvolatile memory data (Outdoor control P.C. board)	The nonvolatile memory data cannot be read properly.	<ul style="list-style-type: none"> Replace the outdoor control P.C. board.
7		Lighting	8 times	Current sensor	Current sensor has been short or open circuited for 120 seconds.	<ul style="list-style-type: none"> Replace the power board.
8		Lighting	11 times	Communication error between P.C. boards	Communication error occurs twice between the outdoor control P.C. board and power board for more than 10 seconds.	<ul style="list-style-type: none"> Check the connecting wire between outdoor control P.C. board and power board.
9		Lighting	12 times	Zero cross detecting circuit	The protection cut-out of the zero cross detecting circuit operates 3 consecutive times.	<ul style="list-style-type: none"> Check the connecting wire between outdoor control P.C. board and power board.
		Lighting	14 times	Nonvolatile memory data (Outdoor power board)	The nonvolatile memory data cannot be read properly.	<ul style="list-style-type: none"> Replace the power board.
10	'Outdoor unit stops and restarts 3 minutes later' is repeated.	Twice	Goes out	IPM protection	Overcurrent is detected when the frequency of the compressor is 1 Hz or less.	<ul style="list-style-type: none"> Reconnect compressor connector. Refer to 11-6. ⑥ "How to check inverter/compressor". Check the stop valve. Check the power module (PAM module).
				Overcurrent	Overcurrent is detected when the frequency of the compressor is more than 1 Hz.	
11		3 times	Goes out	Discharge temperature protection	Discharge temperature exceeds 114°C during operation. Compressor can restart if discharge temperature thermistor reads 100°C or less 3 minutes later.	<ul style="list-style-type: none"> Check the amount of gas and refrigerant circuit. Refer to 11-6. ⑥ "Check of LEV".
12		4 times	Goes out	Fin temperature protection	The fin temperature exceeds 110°C during operation.	<ul style="list-style-type: none"> Check refrigerant circuit and refrigerant amount.
				P.C. board temperature protection	The P.C. board temperature exceeds 95°C during operation.	
13		5 times	Goes out	High-pressure protection	High-pressure is detected with the high-pressure switch (HPS) during operation.	<ul style="list-style-type: none"> Check the amount of gas and the refrigerant circuit. Check the stop valve.
					The outdoor heat exchanger temperature exceeds 70°C during cooling or indoor gas pipe temperature exceeds 70°C during heating.	
		7 times	Goes out	Out-of-step protection	The waveform of compressor current is distorted.	<ul style="list-style-type: none"> Reconnect connector of compressor. Refer to 11-6. ⑥ "How to check inverter/compressor".
15		9 times	Goes out	Bus-bar voltage protection	The bus-bar voltage exceeds 400 V or falls to 300 V or below while the compressor is operating.	<ul style="list-style-type: none"> Check the voltage of power supply. Replace the power board or the outdoor control P.C. board. Refer to 11-6. ⑥ "Check of bus-bar voltage".
		10 times	Goes out	Zero cross loss	Zero cross signal cannot be detected while the compressor is operating.	
		11 times	Goes out	Low out side temperature protection (cooling)	The ambient temperature became -12°C or less.	
		12 times	Goes out	Primary current protection	The primary current exceeds 37 A for 10 seconds.	
16		13 times	Goes out	Outdoor fan motor	The fan motor speed is 50 rpm or less or 1500 rpm or more for 1 minute, or the fan motor speed is 100 rpm or less for 15 seconds when the outside temperature is 20 °C or more.	<ul style="list-style-type: none"> Refer to 11-6. ⑥ "Check of outdoor fan motor".




No.	Symptom	Indication		Abnormal point / Condition	Condition	Remedy
		LED1(Red)	LED2(Yellow)			
17	'Outdoor unit stops and restarts 3 minutes later' is repeated.	Lighting	8 times	Current sensor protection	After the operation starts, a short or open circuit is detected in the current sensor when the compressor is not operating.	• Replace the power board.
18		Lighting	11 times	Communication protection between P.C. boards	Communication error occurs between the outdoor control P.C. board and power board for more than 10 seconds.	• Check the connecting wire between outdoor control P.C. board and power board.
19		Lighting	12 times	Zero cross detecting circuit protection	Zero cross signal cannot be detected when the compressor begins operating.	• Check the connecting wire between outdoor control P.C. board and power board.
20	Outdoor unit operates	Once	Lighting	Primary current protection	The primary current exceeds 27A.	These symptoms do not mean any abnormality of the product, but check the following points. • Check indoor filters are not clogged. • Check there is sufficient refrigerant. • Check indoor/outdoor unit air circulation is not short cycling.
21		Twice	Lighting	High-pressure protection	The indoor heat exchanger exceeds 38°C during heating.	
				Defrosting in cooling	The indoor heat exchanger falls 3°C or below during cooling.	
22		3 times	Lighting	Discharge temperature protection	The discharge temperature exceeds 100°C during operation.	• Check refrigerant circuit and refrigerant amount. • Refer to 11-6. ③ "Check of LEV".
23		4 times	Lighting	Low discharge temperature protection	The frequency of the compressor is kept 58 Hz or more and the discharge temperature is kept under 50°C (cooling) /40°C (heating) for more than 20 minutes	• Refer to 11-6. ③ "Check of LEV". • Check refrigerant circuit and refrigerant amount.
24		5 times	Lighting	Cooling high-pressure protection	The outdoor heat exchanger temperature exceeds 54°C during operation.	This symptom does not mean any abnormality of the product, but check the following points. • Check indoor filters are not clogged. • Check there is sufficient refrigerant. • Check indoor/outdoor unit air circulation is short cycling.
	7 times	Lighting	High → Low Pressure bypass valve Cooling evaporating temperature drop prevention control	During cooling operation, the temperature of indoor heat exchanger becomes 3°C or less within 1 hour after the compressor starts running, or it becomes less than 12°C - 16°C later than that. * It depends on the difference between the set temperature and the room temperature.	This symptom does not mean any abnormality of the product, but check the following points. • Check indoor filters are not clogged. • Check there is sufficient refrigerant. • Check indoor/outdoor unit air circulation is not short cycling.	
	8 times	Lighting	Cooling evaporating temperature protection	During cooling operation, the temperature of indoor heat exchanger becomes 7°C - 11°C or less within 1 hour after the compressor starts running, or it becomes 13°C - 17°C or less later than that. * It depends on the difference between the set temperature and the room temperature.		
25	Outdoor unit operates normally.	7 times	Lighting	High → Low pressure bypass valve High pressure protection control at start-up of heating operation	The room temperature is 24°C or more when 1 or 2 unit(s) start(s) the heating operation.	This symptom does not mean any abnormality of the product.
				High → Low pressure bypass valve Compressor oil tempering control at start-up of heating operation	Both the following are true: • The outside temperature is -2°C or less when the heating operation is started. • [(Discharge temperature) - (Indoor heat exchanger temperature)] < 5°C	
		9 times	Lighting	Inverter check mode	The connector of compressor is disconnected. Inverter check mode starts.	• Check the connector of the compressor is correctly connected. • Refer to 11-6. ③ "How to check inverter/compressor".
26		Lighting	Lighting	Normal		


NOTE 1. The location of LED is illustrated at the right figure. Refer to 11-7.2.

2. LED is lighted during normal operation.

The flashing frequency shows the number of times the LED blinks after every 2.5-second OFF.
(Example) When the flashing frequency is "2".






Outdoor control P.C. board (Parts side)



11-5. TROUBLE CRITERION OF MAIN PARTS

MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA MXZ-3C54VA MXZ-3C68VA MXZ-4C71VA MXZ-4C80VA MXZ-5C100VA MXZ-6C120VA


Part name	Check method and criterion															
Defrost thermistor (RT61)	Measure the resistance with a tester.															
Fin temperature thermistor (RT64) MXZ-2C/3C/4C/5C	Refer to 11-7. "TEST POINT DIAGRAM AND VOLTAGE" 1. "Outdoor electronic control P.C. board", 2. "Outdoor control P.C. board" or 4. "Outdoor Power board" for the chart of thermistor.															
Ambient temperature thermistor (RT65)																
Outdoor heat exchanger temperature thermistor (RT68)																
Discharge temperature thermistor (RT62)	Measure the resistance with a tester. Before measurement, hold the thermistor with your hands to warm it up. Refer to 11-7. "TEST POINT DIAGRAM AND VOLTAGE" 1. "Outdoor electronic control P.C. board" or 2. "Outdoor control P.C. board" for the chart of thermistor.															
Compressor	Measure the resistance between terminals using a tester. (Winding temperature : -10°C ~ 40°C) <div></div> <table><tr><th colspan="5">Normal (Each phase)</th></tr><tr><th>MXZ-2C30VA MXZ-2C40VA</th><th>MXZ-2C52VA MXZ-3C54VA</th><th>MXZ-3C68VA MXZ-4C71VA</th><th>MXZ-4C80VA MXZ-5C100VA</th><th>MXZ-6C120VA</th></tr><tr><td>1.49 Ω ~ 1.84 Ω</td><td>0.86 Ω ~ 1.06 Ω</td><td>0.63 Ω ~ 0.78 Ω</td><td>1.29 Ω ~ 1.49 Ω</td><td>0.47 Ω ~ 0.57 Ω</td></tr></table>	Normal (Each phase)					MXZ-2C30VA MXZ-2C40VA	MXZ-2C52VA MXZ-3C54VA	MXZ-3C68VA MXZ-4C71VA	MXZ-4C80VA MXZ-5C100VA	MXZ-6C120VA	1.49 Ω ~ 1.84 Ω	0.86 Ω ~ 1.06 Ω	0.63 Ω ~ 0.78 Ω	1.29 Ω ~ 1.49 Ω	0.47 Ω ~ 0.57 Ω
Normal (Each phase)																
MXZ-2C30VA MXZ-2C40VA	MXZ-2C52VA MXZ-3C54VA	MXZ-3C68VA MXZ-4C71VA	MXZ-4C80VA MXZ-5C100VA	MXZ-6C120VA												
1.49 Ω ~ 1.84 Ω	0.86 Ω ~ 1.06 Ω	0.63 Ω ~ 0.78 Ω	1.29 Ω ~ 1.49 Ω	0.47 Ω ~ 0.57 Ω												
Outdoor fan motor	Measure the resistance between lead wires using a tester. (Part temperature : -10°C ~ 40°C) <div><div>MXZ-2CMXZ-3C/4C/5C</div></div> <table><tr><th colspan="2">Normal (Each phase)</th></tr><tr><th>MXZ-2C</th><th>MXZ-3C/4C/5C</th></tr><tr><td>12 Ω ~ 16 Ω</td><td>13.4 Ω ~ 16.4 Ω</td></tr></table>	Normal (Each phase)		MXZ-2C	MXZ-3C/4C/5C	12 Ω ~ 16 Ω	13.4 Ω ~ 16.4 Ω									
Normal (Each phase)																
MXZ-2C	MXZ-3C/4C/5C															
12 Ω ~ 16 Ω	13.4 Ω ~ 16.4 Ω															
Outdoor fan motor MXZ-6C	Refer to 11-6. ㉔ .															
R.V. coil	Measure the resistance using a tester. (Part temperature : -10°C ~ 40°C) <table><tr><th colspan="4">Normal (Each phase)</th></tr><tr><th>MXZ-3C54VA MXZ-3C68VA MXZ-4C71VA</th><th>MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA</th><th>MXZ-4C80VA MXZ-5C100VA</th><th>MXZ-6C120VA</th></tr><tr><td>1.26 kΩ ~ 1.62 kΩ</td><td colspan="2">1.2 kΩ ~ 1.56 kΩ</td><td>1.26 kΩ ~ 1.62 kΩ</td></tr></table>	Normal (Each phase)				MXZ-3C54VA MXZ-3C68VA MXZ-4C71VA	MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA	MXZ-4C80VA MXZ-5C100VA	MXZ-6C120VA	1.26 kΩ ~ 1.62 kΩ	1.2 kΩ ~ 1.56 kΩ		1.26 kΩ ~ 1.62 kΩ			
Normal (Each phase)																
MXZ-3C54VA MXZ-3C68VA MXZ-4C71VA	MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA	MXZ-4C80VA MXZ-5C100VA	MXZ-6C120VA													
1.26 kΩ ~ 1.62 kΩ	1.2 kΩ ~ 1.56 kΩ		1.26 kΩ ~ 1.62 kΩ													
Solenoid coil MXZ-6C	Measure the resistance using a tester. (Part temperature : -10°C ~ 40°C) <table><tr><th colspan="2">Normal (Each phase)</th></tr><tr><th colspan="2">MXZ-6C120VA</th></tr><tr><td colspan="2">1.17 kΩ ~ 1.43 kΩ</td></tr></table>	Normal (Each phase)		MXZ-6C120VA		1.17 kΩ ~ 1.43 kΩ										
Normal (Each phase)																
MXZ-6C120VA																
1.17 kΩ ~ 1.43 kΩ																
Linear expansion valve	Measure the resistance using a tester. (Part temperature : -10°C ~ 40°C) <div></div> <table><tr><th>Color of lead wire</th><th>Normal</th></tr><tr><td>WHT - RED</td><td rowspan="4">37.4 Ω ~ 53.9 Ω</td></tr><tr><td>RED - ORN</td></tr><tr><td>YLW - RED</td></tr><tr><td>RED - BLU</td></tr></table>	Color of lead wire	Normal	WHT - RED	37.4 Ω ~ 53.9 Ω	RED - ORN	YLW - RED	RED - BLU								
Color of lead wire	Normal															
WHT - RED	37.4 Ω ~ 53.9 Ω															
RED - ORN																
YLW - RED																
RED - BLU																
High pressure switch (HPS) MXZ-3C68/4C/5C/6C	<table><tr><th colspan="2">Pressure</th><th>Normal</th></tr><tr><td rowspan="2">HPS</td><td>3.7 ± 0.3 MPa</td><td>Close</td></tr><tr><td>4.8 ± 0.2 MPa</td><td>Open</td></tr></table>	Pressure		Normal	HPS	3.7 ± 0.3 MPa	Close	4.8 ± 0.2 MPa	Open							
Pressure		Normal														
HPS	3.7 ± 0.3 MPa	Close														
	4.8 ± 0.2 MPa	Open														

11-6. TROUBLESHOOTING FLOW


Outdoor unit does not operate.

Ⓐ Check of power supply


MXZ-2C30/2C40/2C52VA

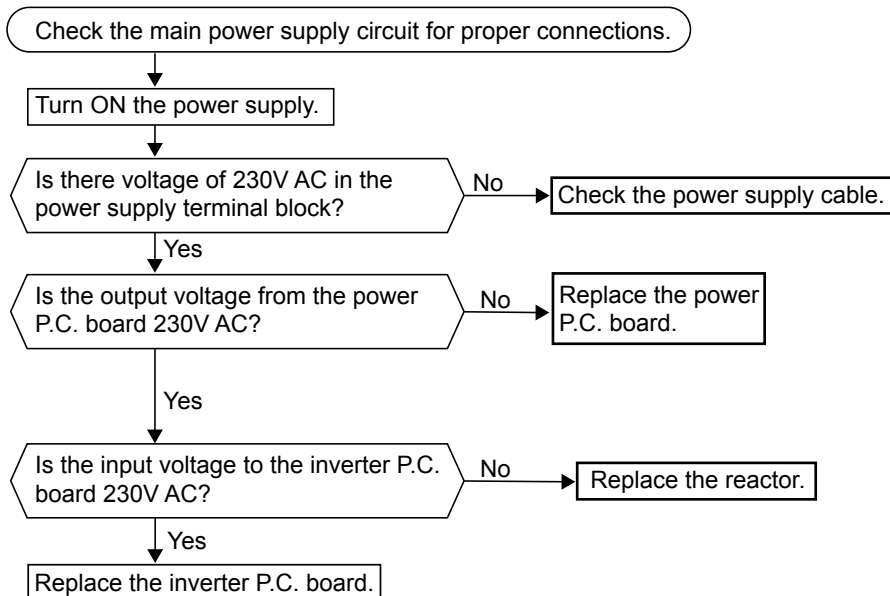

MXZ-3C54/3C68/4C71/4C80/5C100VA

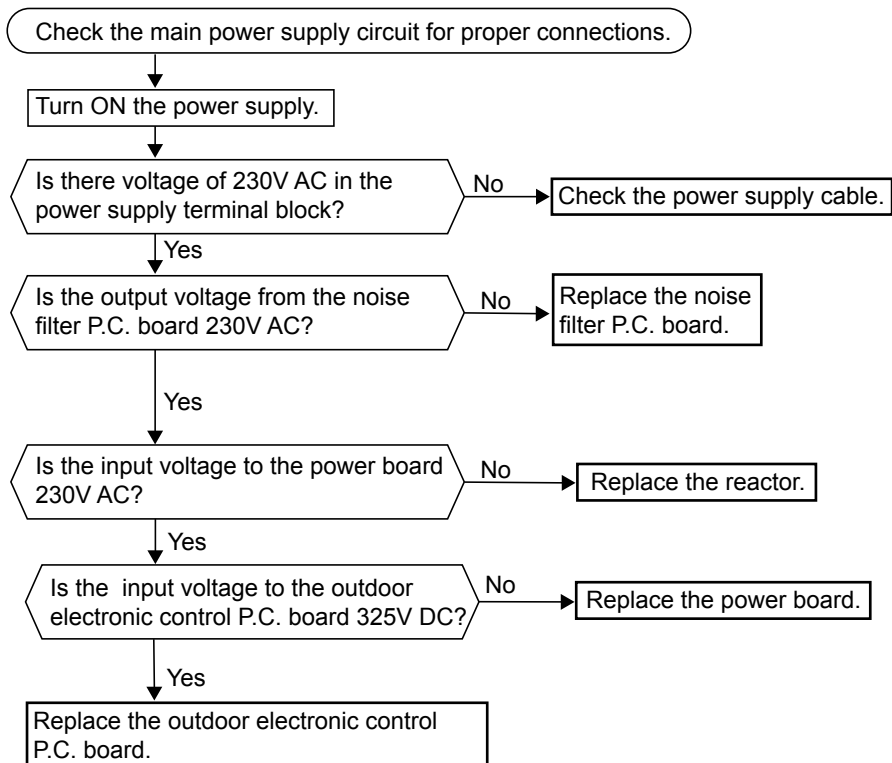

MXZ-6C120VA

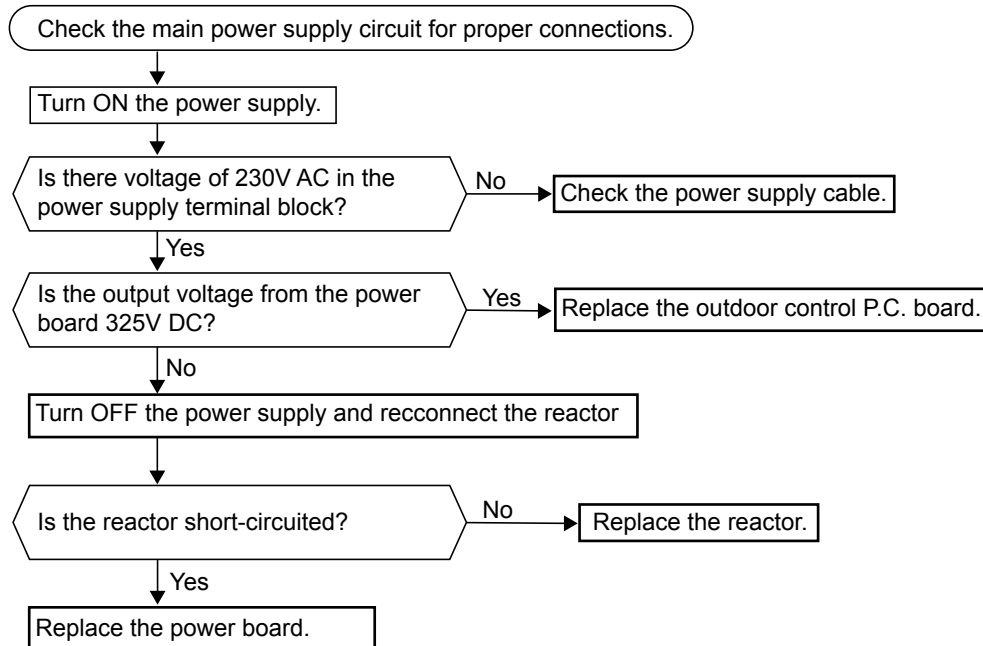

- When unit cannot operate neither by the remote controller nor by EMERGENCY OPERATION switch.
Indoor unit does not operate.
- When OPERATION INDICATOR lamp flashes ON and OFF every 0.5-second.
Outdoor unit does not operate.

② How to check mis-wiring and serial signal error (when outdoor unit does not work)

LED indication for communication status

Communication status is indicated by the LED.

Unit status

Blinking: normal communication


Lighting: abnormal communication or not connected

Pattern 1 and 2 is repeatedly displayed alternately. Each pattern is displayed for 15 seconds.

NOTE: "Lighting" in the table below does not indicate abnormal communication.

MXZ-2C30/2C40/2C52VA

Outdoor display P.C. board




Blinking

LED 1	LED 2
Unit A status	Unit B status

MXZ-3C54/3C68/4C71VA

Outdoor electronic control P.C. board (Parts side)




Blinking

Pattern	LED 3	LED 2	LED 1
1	Lighting	Unit B status	Unit A status
2	Goes out	Unit D status	Unit C status

MXZ-4C80/5C100VA

Outdoor electronic control P.C. board (Parts side)




Blinking



Pattern	LED 1	LED 2	LED 3
1	Unit A status	Unit B status	Unit C status
2	Unit D status	Unit E status	Goes out

MXZ-6C120VA

Outdoor control P.C. board



Pattern	LED 1	LED 2	LED 3
1	Unit A status	Unit B status	Lighting
2	Unit C status	Unit D status	Goes out
3	Unit E status	Unit F status	Blinking

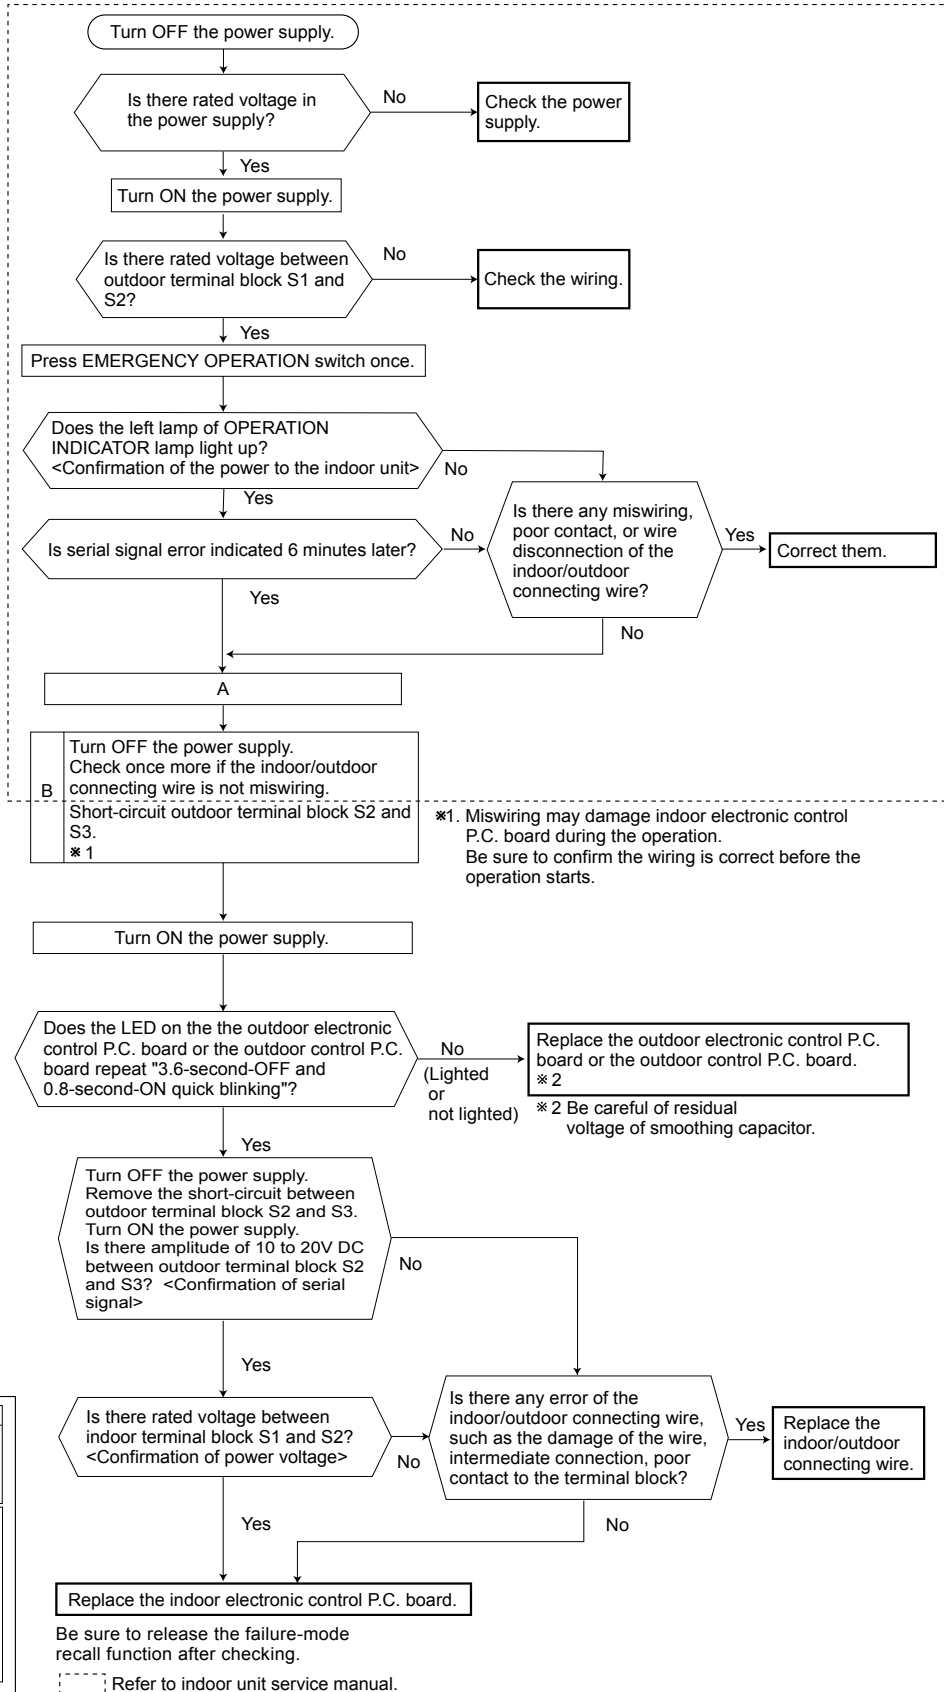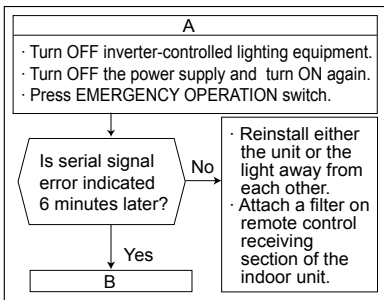

The cooling operation or heating operation does not operate.

© Check of R.V. coil

MXZ-2C30/2C40/2C52/3C54/3C68/4C71/4C80/5C100VA

	MXZ-2C	MXZ-3C/4C/5C
CN912	Power P.C. board	Noise filter P.C. board
CN781	—	Outdoor electronic control P.C. board
CN933	Inverter P.C. board	—

• When heating operation does not work.

1. Disconnect the lead wire leading to the compressor.
2. 3 minutes after turning ON the power supply, start EMERGENCY OPERATION in HEAT mode.

Is there voltage of 230V AC between pin1 and pin 2 at connector CN912?

Yes

Turn OFF the power supply of indoor and outdoor unit.

Disconnect the connector CN912. Is there normal resistance to R.V. coil? (Refer to 11-5.)

No

Replace the R.V. coil.

Yes

Replace the 4-way valve.

1. Turn OFF the power supply of indoor and outdoor unit, and disconnect the connector CN781.
2. 3 minutes after turning ON the power supply, start EMERGENCY OPERATION in HEAT mode.

Is there voltage 12V DC between the connector CN781 pin 5 (+) and pin 3 (-) ?

No

Replace the electronic control P.C. board.

Yes

Replace the noise filter P.C. board.

• When cooling operation does not work.

1. Disconnect the lead wire leading to the compressor.
2. 3 minutes after turning ON the power supply, start EMERGENCY OPERATION in COOL mode.

Is there voltage of 230V AC between pin1 and pin 2 at connector CN912? *

No

Replace the 4-way valve.

Yes

* If the connector CN912 is not connected or R.V. coil is open, voltage occurs between terminals even when the control is OFF.

1. Turn OFF the power supply of the indoor and the outdoor unit, and disconnect the connector CN781.
2. 3 minutes after turning ON the power supply, start EMERGENCY OPERATION in COOL mode.

Is there voltage 12V DC between the connector CN781 pin 5 (+) and pin 3 (-) ?

No

Replace the noise filter P.C. board.

Yes


Replace the outdoor electronic control P.C. board.

MXZ-6C120VA

• When heating operation does not work.


1. Disconnect the lead wire leading to the compressor.
2. 3 minutes after turning ON the power supply, start EMERGENCY OPERATION in HEAT mode.

MXZ-6C120VA	
CN711	Outdoor control P.C. board
CN712	

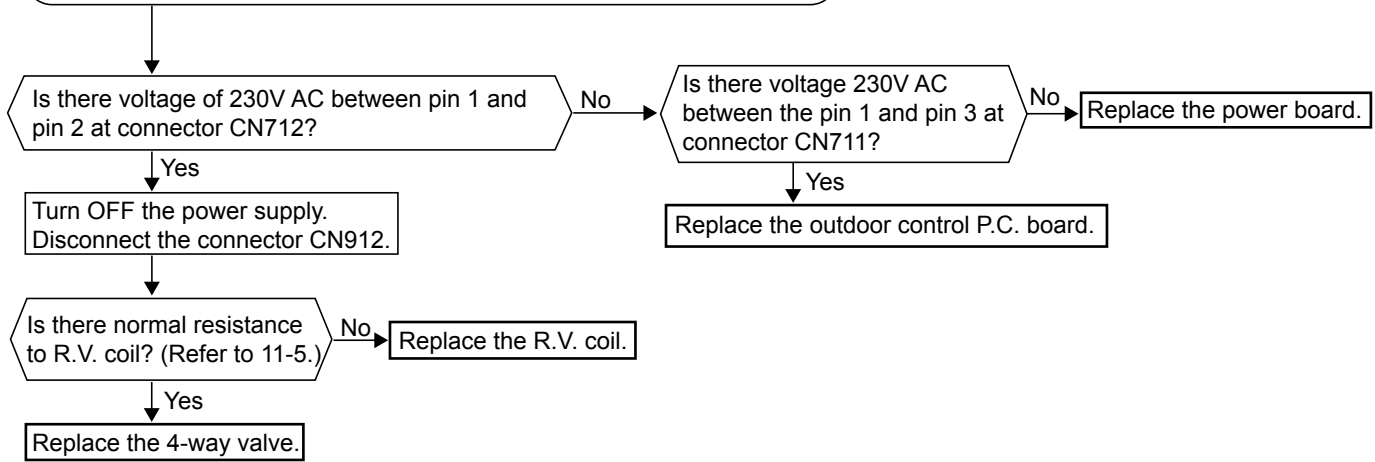

• When cooling operation does not work.


1. Disconnect the lead wire leading to the compressor.
2. 3 minutes after turning ON the power supply, start EMERGENCY OPERATION in COOL mode.

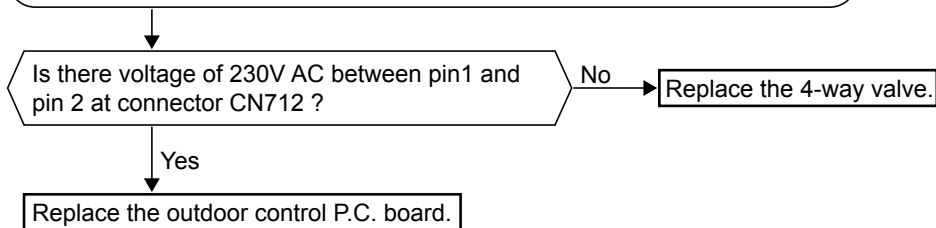

- When cooling, heat exchanger of non-operating indoor unit frosts.
- When heating, non-operating indoor unit gets warm.


④ Check of LEV

	MXZ-2C	MXZ-3C/ 4C/5C	MXZ-6C
CN791	Inverter P.C. board	Outdoor electronic control P.C. board	Outdoor control P.C. board
CN792			
CN793			
CN794			
CN795			
CN796			
CN797			

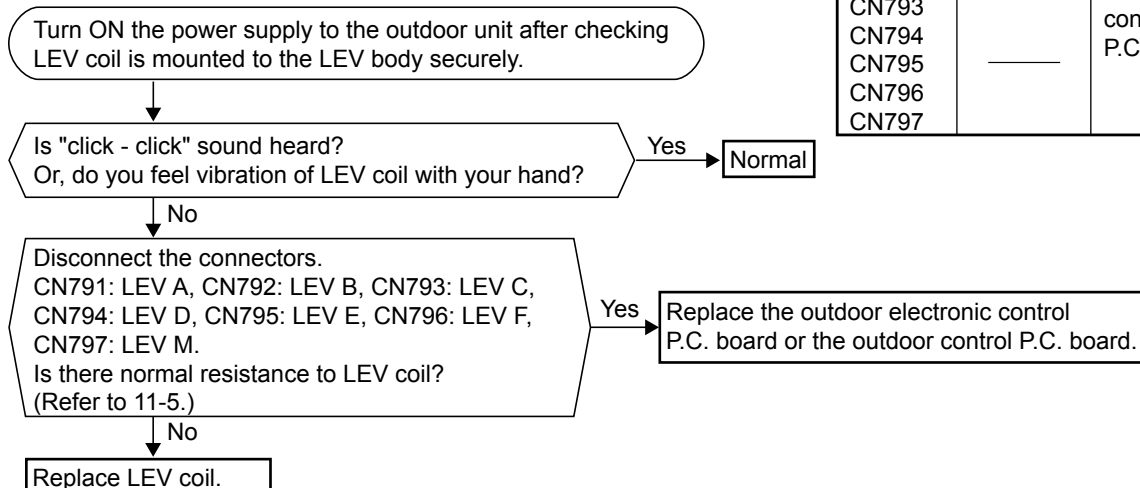


- When heating, room does not get warm.
- When cooling, room does not get cool.

⑤ How to check inverter/compressor

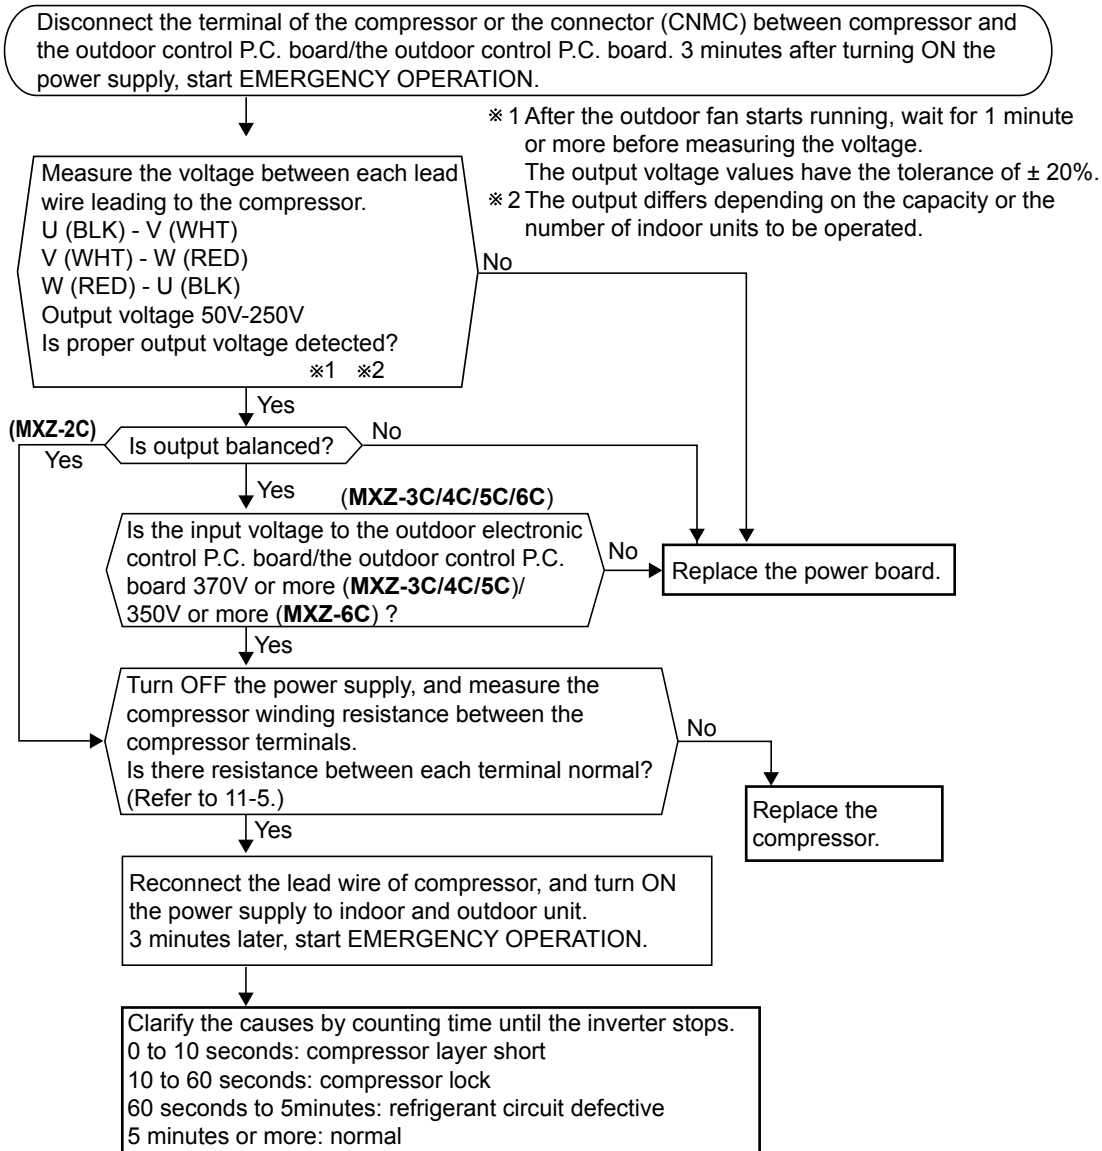

• When thermistor is abnormal.

⑤ Check of outdoor thermistors

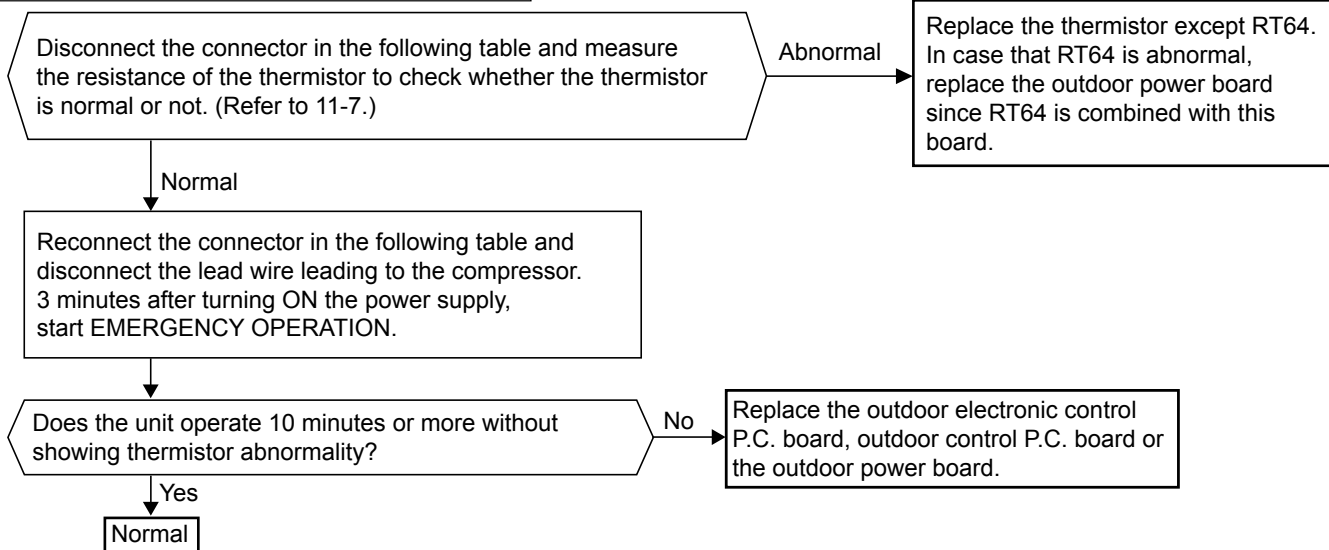

MXZ-2C30/2C40/2C52VA

Thermistor	Symbol	Connector, Pin No.	Board
Defrost	RT61	Between CN661 pin1 and pin2	Inverter P.C. board
Discharge temperature	RT62	Between CN661 pin3 and pin4	
Outdoor heat exchanger temperature	RT68	Between CN661 pin5 and pin6	
Fin temperature	RT64	Between CN662 pin1 and pin2	
Ambient temperature	RT65	Between CN663 pin1 and pin2	

MXZ-3C54/3C68/4C71/4C80/5C100VA

Thermistor	Symbol	Connector, Pin No.	Board
Defrost	RT61	Between CN661 pin1 and pin2	Outdoor electronic control P.C. board
Discharge temperature	RT62	Between CN661 pin3 and pin4	
Outdoor heat exchanger temperature	RT68	Between CN661 pin7 and pin8	
Ambient temperature	RT65	Between CN663 pin1 and pin2	
Fin temperature	RT64	Between CN3 pin1 and pin2	Outdoor power board

MXZ-6C120VA

Thermistor	Symbol	Connector, Pin No.	Board
Defrost	RT61	Between CN661 pin1 and pin2	Outdoor control P.C. board
Discharge temperature	RT62	Between CN661 pin3 and pin4	
Outdoor heat exchanger temperature	RT68	Between CN661 pin5 and pin6	
Ambient temperature	RT65	Between CN663 pin1 and pin2	

- Fan motor does not operate or stops operating shortly after starting the operation.

⑥ Check of outdoor fan motor

MXZ-2C30/2C40/2C52/3C54/3C68/4C71/4C80/5C100VA

Disconnect CN932 and measure the resistance of the outdoor fan motor.

Is the resistance of outdoor fan motor normal? (Refer to 11-5.)

Yes

No

Turn ON the power supply.
Rotate the outdoor fan motor manually and measure the voltage of CN931.
Between ① (+) and ⑤ (-)
Between ② (+) and ⑤ (-)
Between ③ (+) and ⑤ (-)

(Fixed to either 5V or 0V DC) No

Does the voltage between each terminal become 5V DC and 0V DC repeatedly?

Yes

No

Does the outdoor fan motor rotate smoothly?


Yes

Replace the outdoor fan motor.

Replace the outdoor electronic control P.C. board.

	MXZ-2C	MXZ-3C/4C/5C
CN931	Inverter P.C. board	Outdoor electronic control P.C. board
CN932		

MXZ-6C120VA

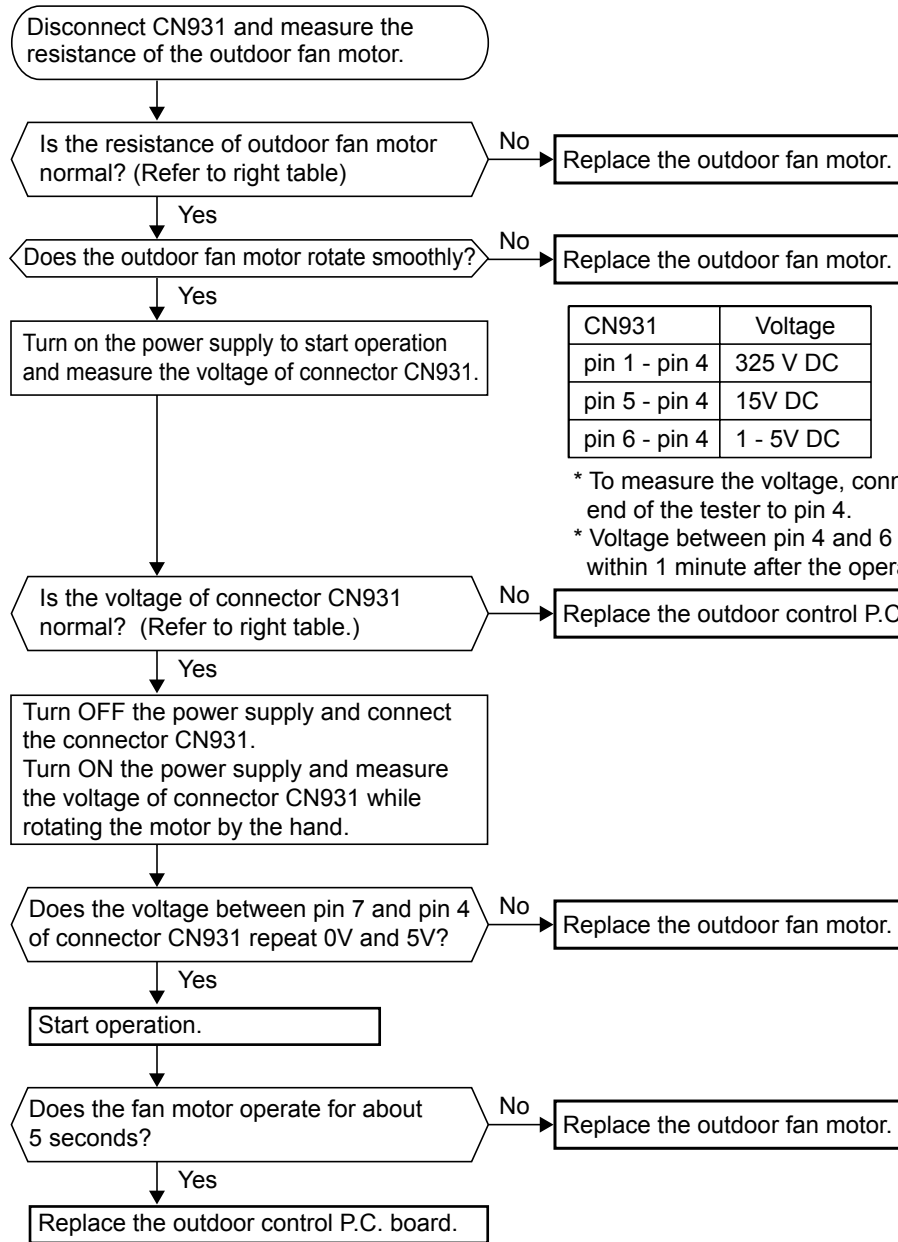

	MXZ-6C
CN931	Outdoor control P.C. board

Measuring points	Resistance
pin 1 - pin 4	∞
pin 5 - pin 4	60 k Ω
pin 6 - pin 4	160 k Ω
pin 7 - pin 4	∞

* To measure the resistance, connect the negative (-) end of the tester to pin 4.

CN931	Voltage
pin 1 - pin 4	325 V DC
pin 5 - pin 4	15V DC
pin 6 - pin 4	1 - 5V DC

* To measure the voltage, connect the negative (-) end of the tester to pin 4.


* Voltage between pin 4 and 6 should be measured within 1 minute after the operation starts.

- When the operation frequency does not go up from lowest frequency.

Ⓜ Check of HPS

MXZ-3C68/4C71/4C80/5C100/6C120VA


1. Disconnect the connector CN681.
2. Check the resistance of HPS 1 minute after the outdoor unit power supply was turned OFF.



	MXZ-3C/4C/5C	MXZ-6C
CN681	Outdoor electronic control P.C. board	Outdoor control P.C. board

0Ω

Reconnect CN681.
Turn ON the power supply to the indoor and outdoor units.
3 minutes later, start EMERGENCY OPERATION.

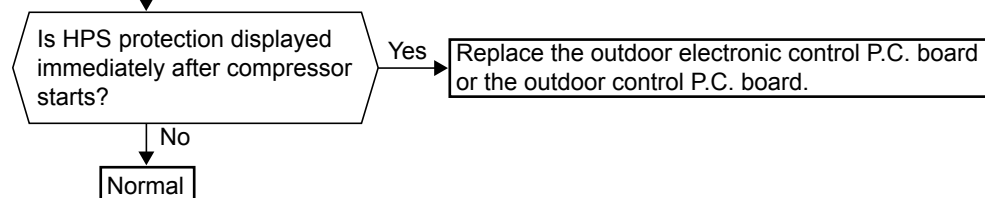


① The other cases

Indoor unit does not operate. (different operating models in multi system)

- When you try to run two indoor units simultaneously, one for cooling and the other for heating, the unit which transmits signal to the outdoor unit first decides the operation mode.
- When the above situation occurs, set all the indoor units to the same mode, turn OFF the indoor units, then turn them back ON.
- Though the top of the indoor unit sometimes gets warm, this does not mean malfunction. The reason is that the refrigerant gas continuously flows into the indoor unit even while it is not operating.

🕒 Check of bus-bar voltage

MXZ-3C/4C/5C




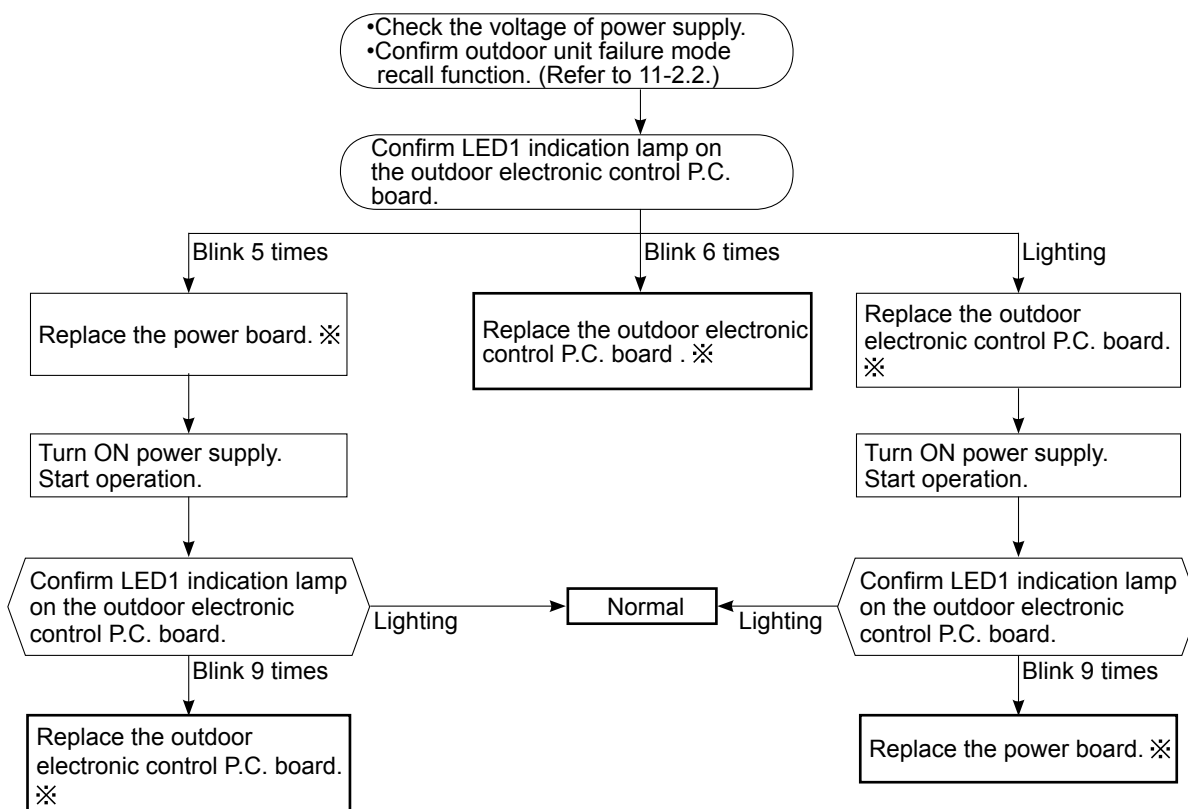


※ Turn OFF power supply before removing P.C. board.

11-7. TEST POINT DIAGRAM AND VOLTAGE

1. Inverter P.C. board




MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA

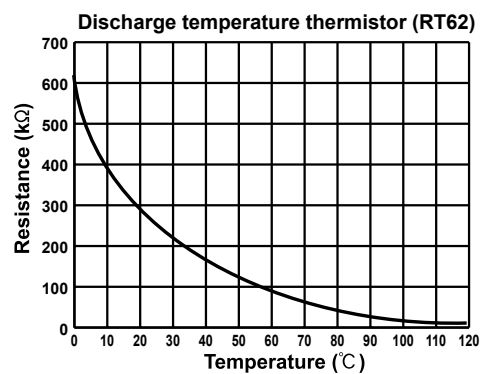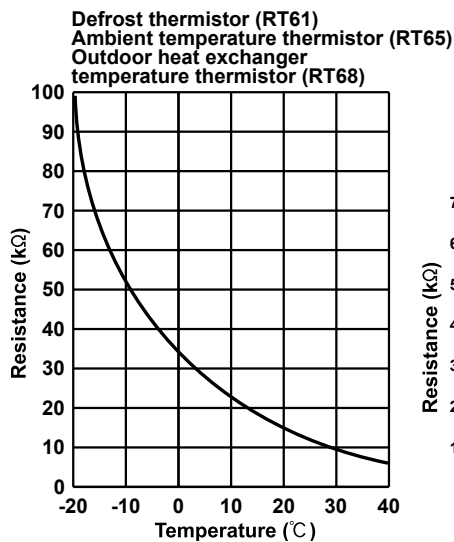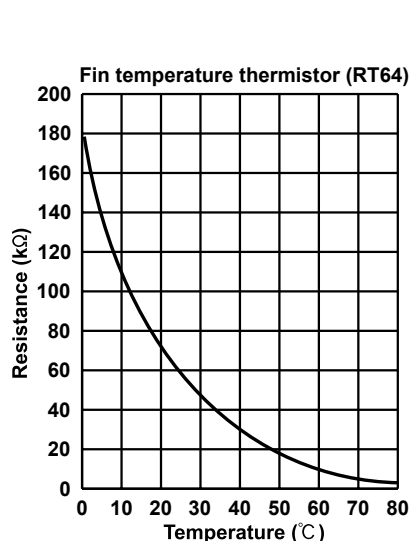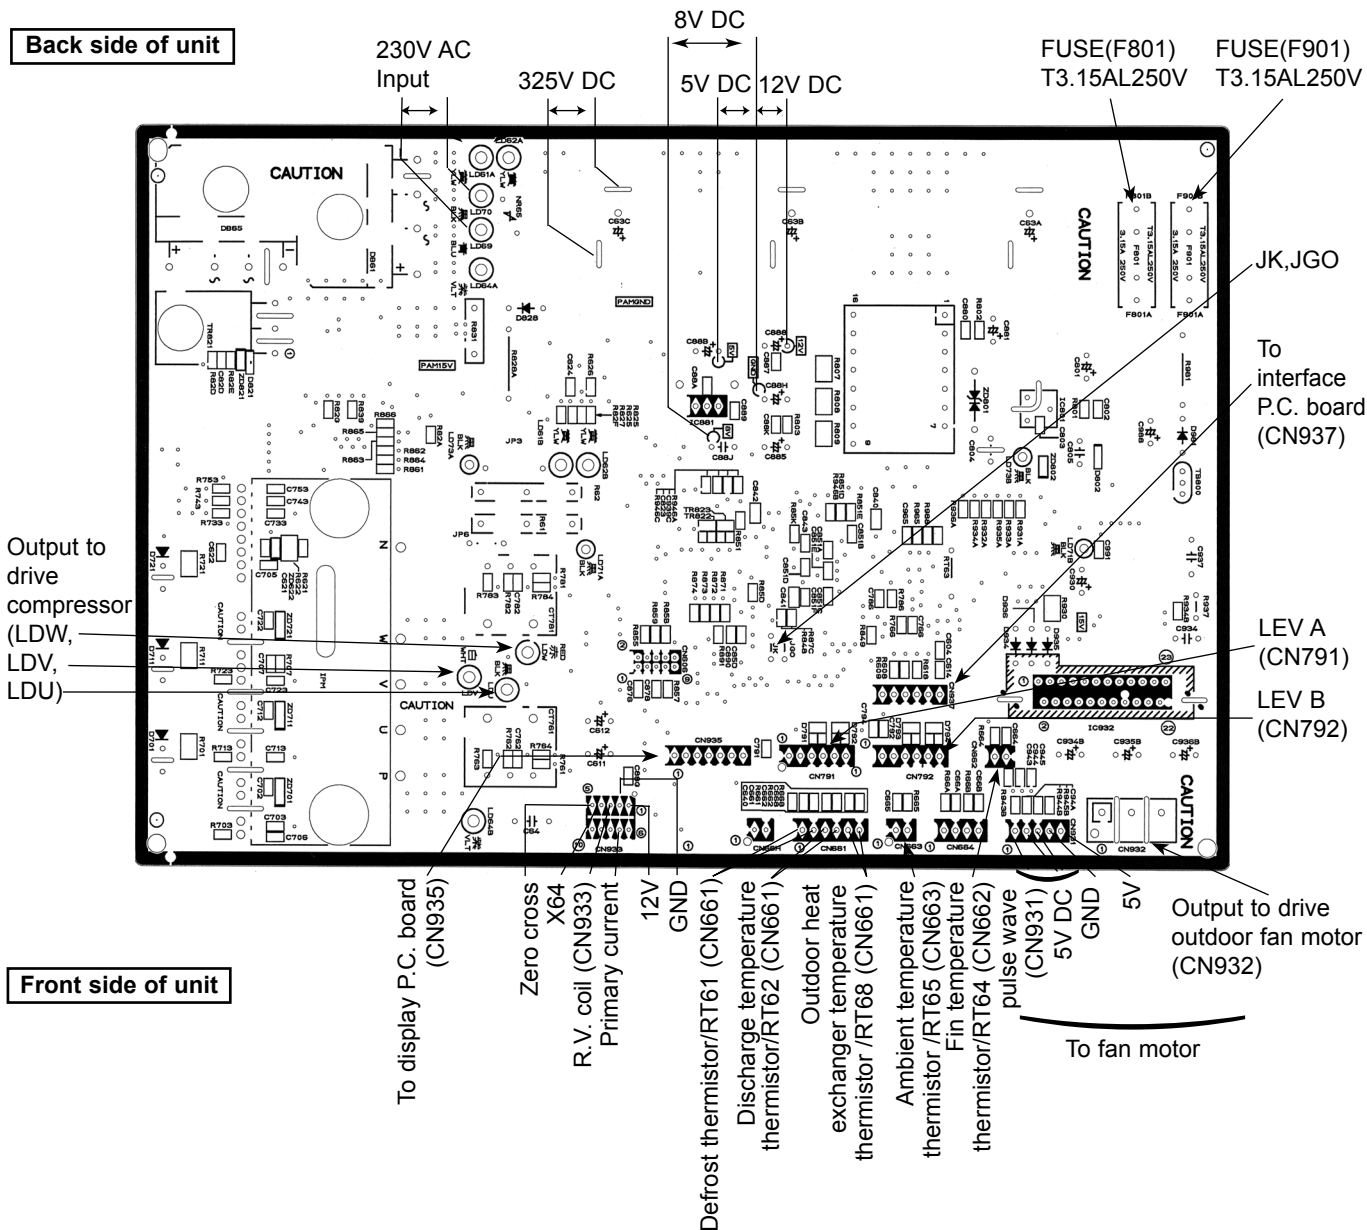

2. Outdoor electronic control P.C. board


MXZ-3C54VA MXZ-3C68VA MXZ-4C71VA

Defrost thermistor (RT61)
Ambient temperature thermistor (RT65)
Outdoor heat exchanger thermistor (RT68)

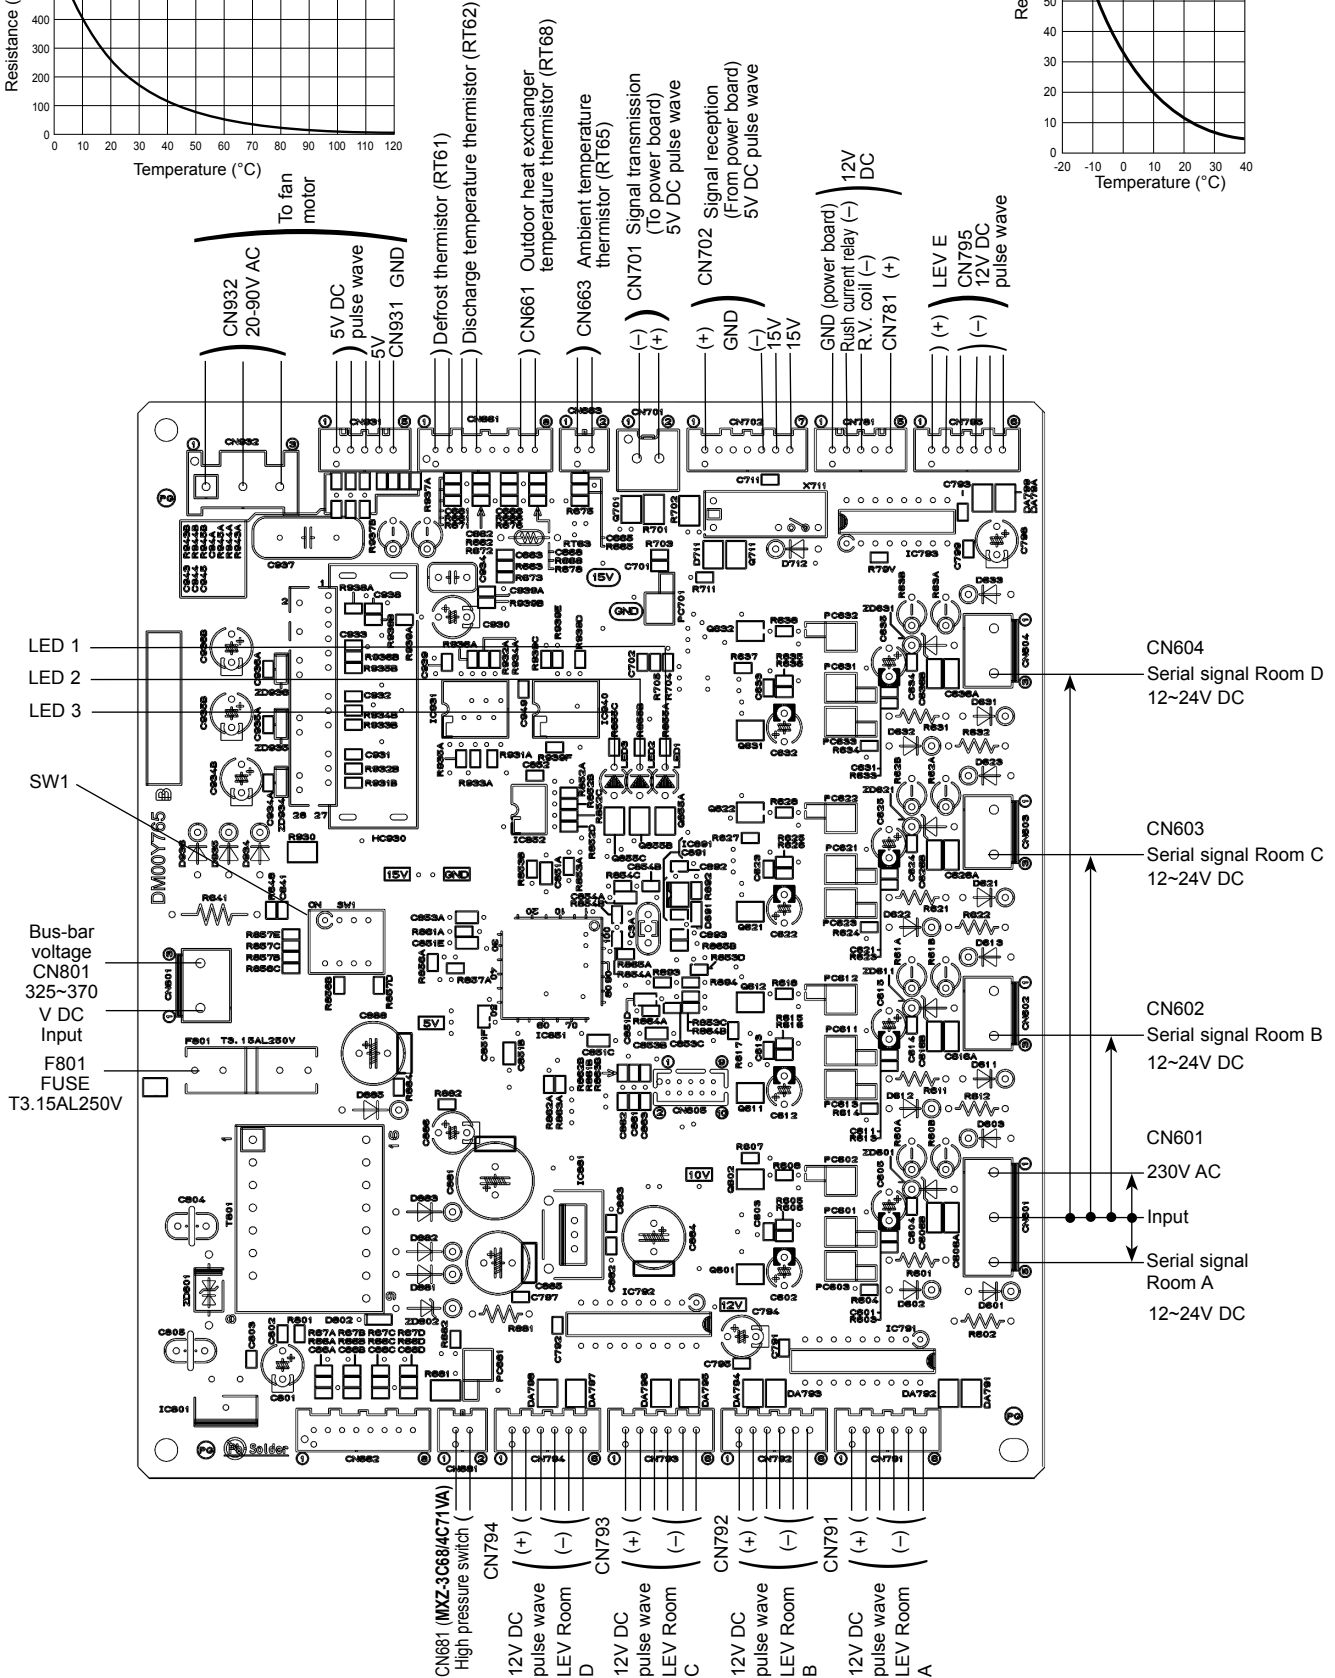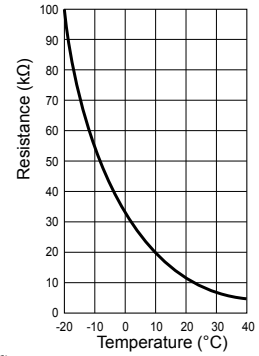
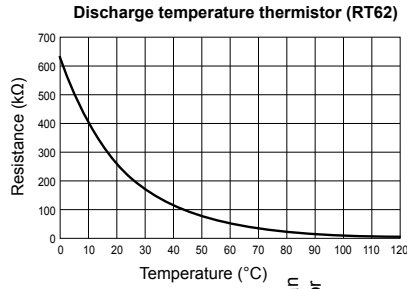


MXZ-4C80VA

MXZ-5C100VA

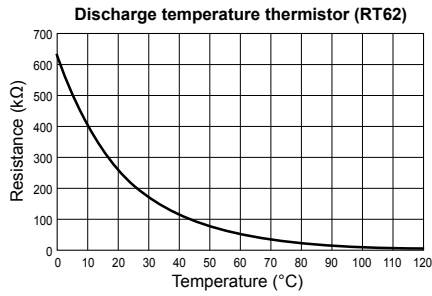


Defrost thermistor (RT61)
Ambient temperature thermistor (RT65)
Outdoor heat exchanger temperature thermistor (RT68)

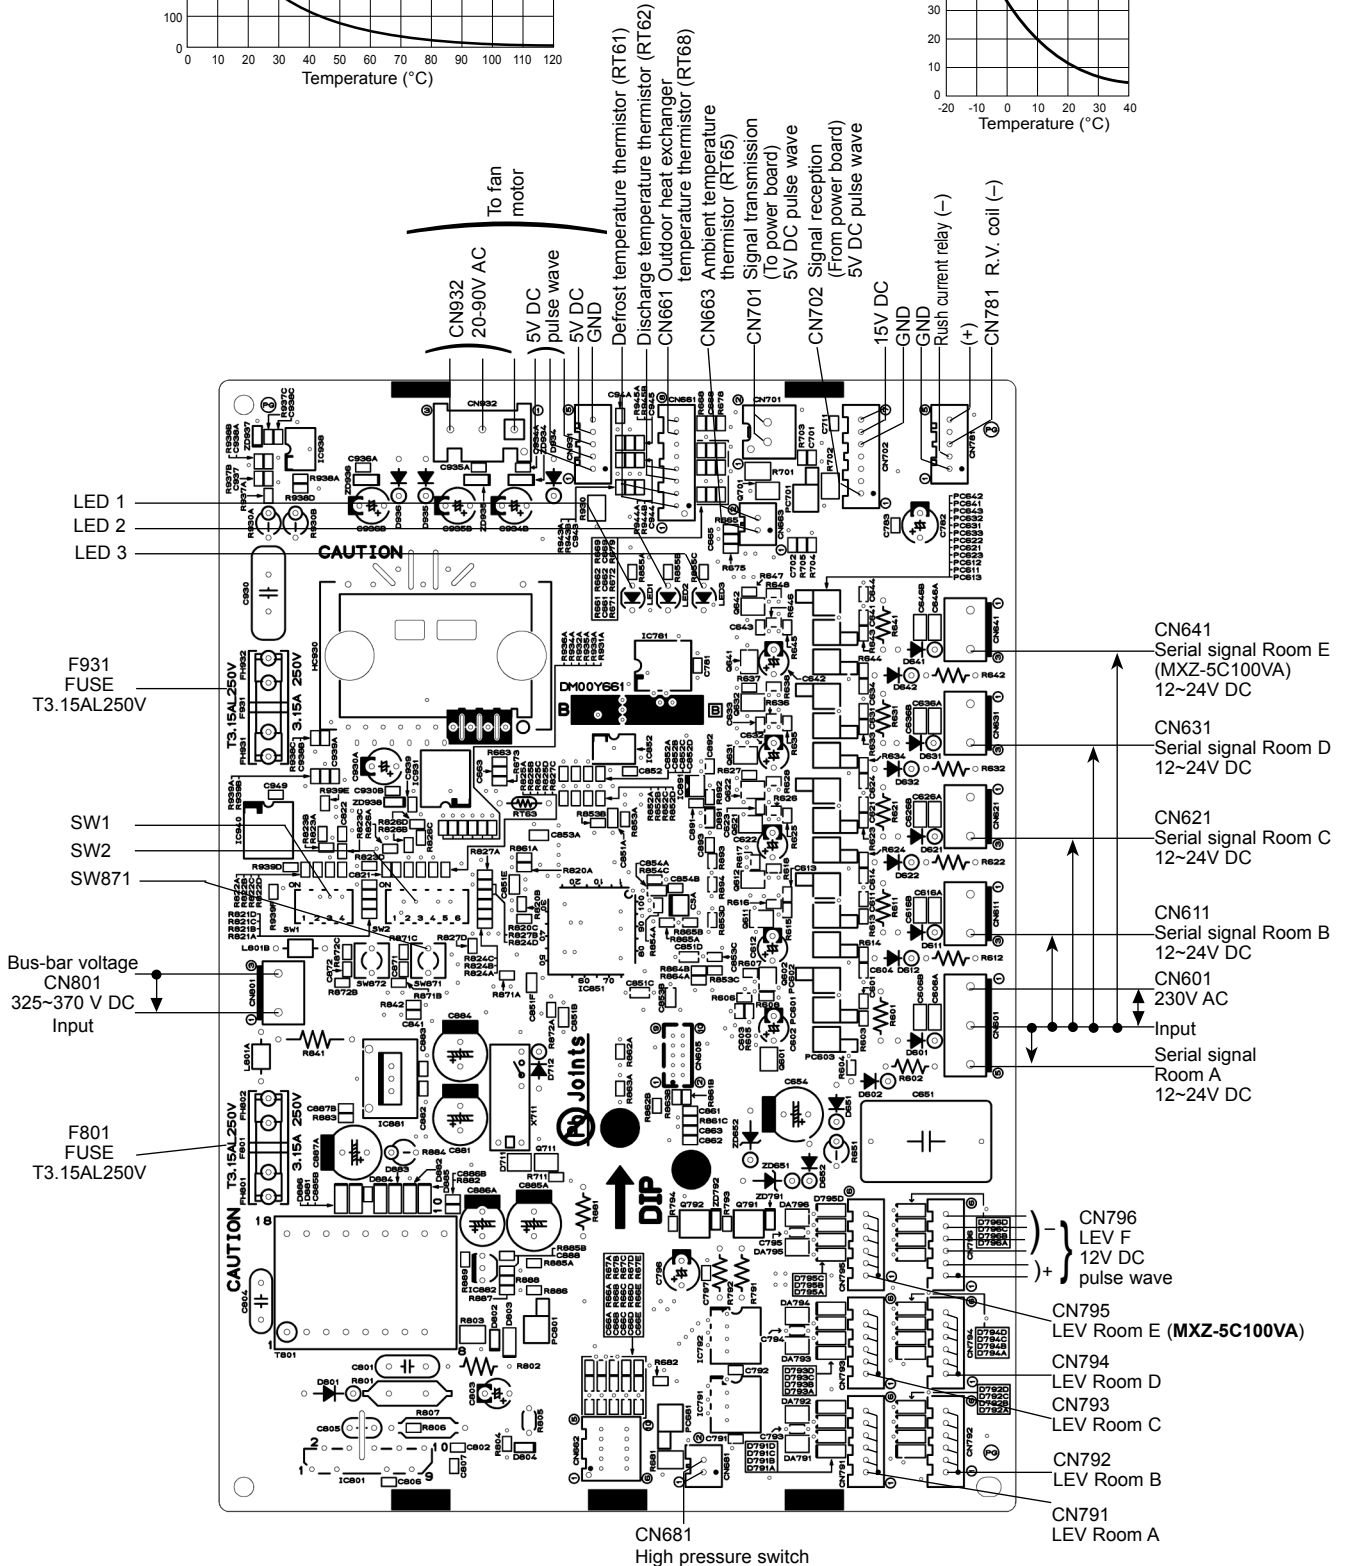



MXZ-6C120VA

3. Outdoor control P.C. board

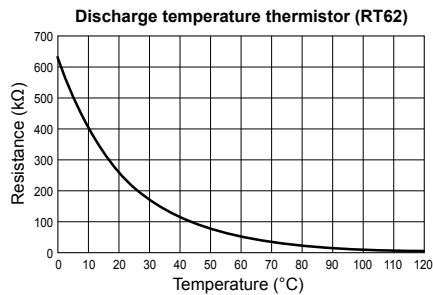


Defrost thermistor (RT61)
Ambient temperature thermistor (RT65)
Outdoor heat exchanger temperature thermistor (RT68)

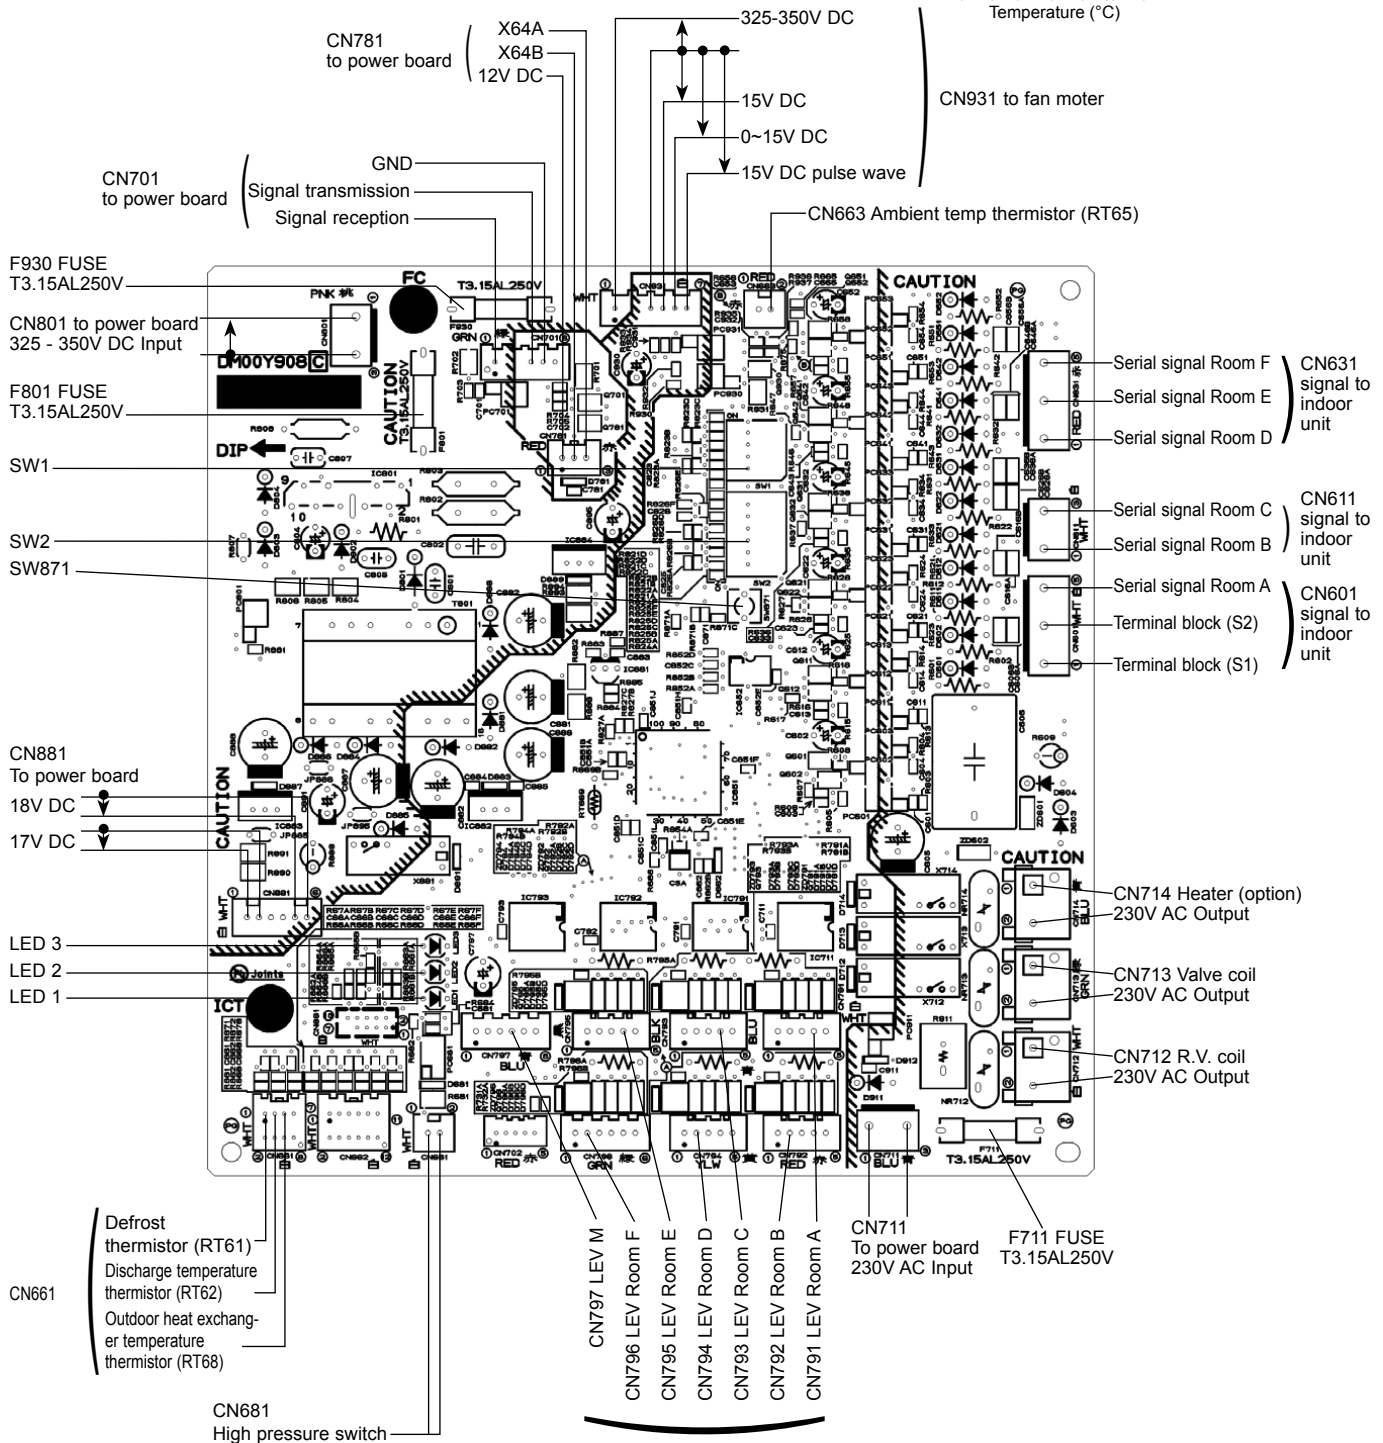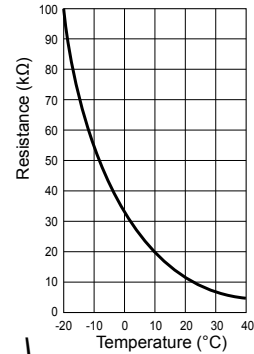


LEV: 12V DC pulse wave

4. Noise filter P.C. board MXZ-3C54VA MXZ-3C68VA MXZ-4C71VA

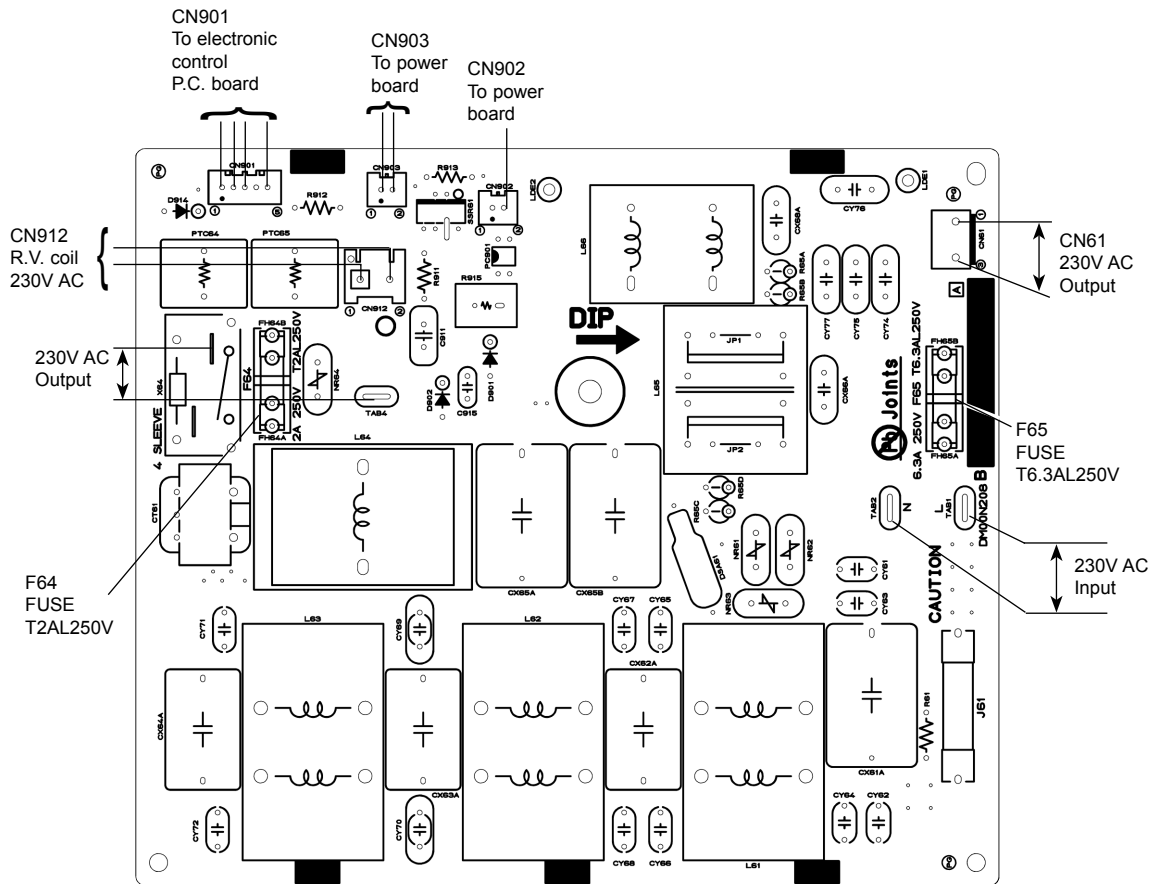

MXZ-4C80VA MXZ-5C100VA


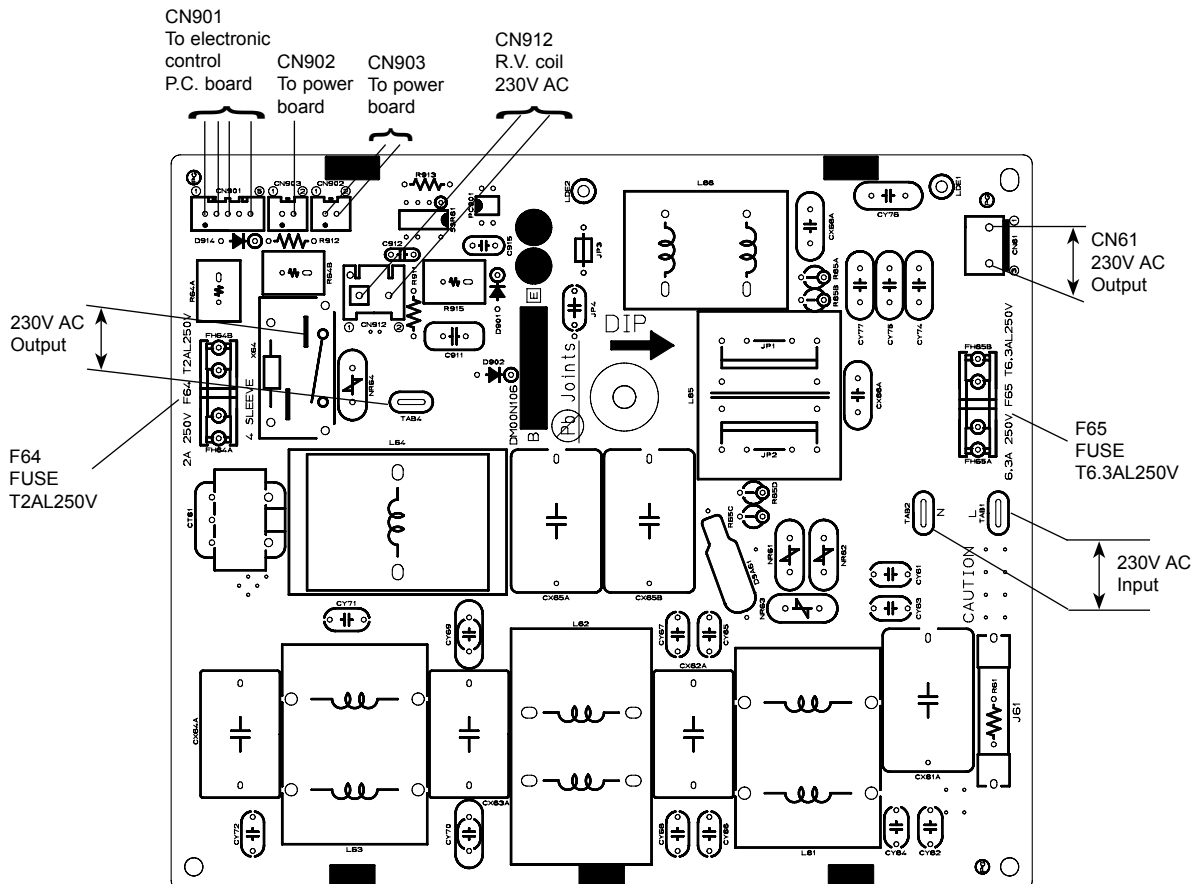


MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA

Front side of unit



MXZ-3C54VA MXZ-3C68VA MXZ-4C71VA
MXZ-4C80VA MXZ-5C100VA

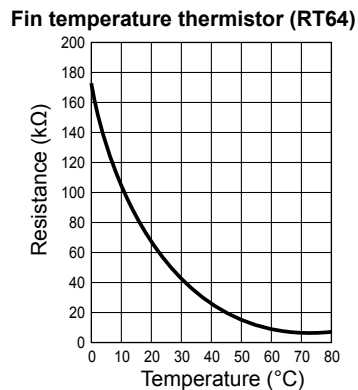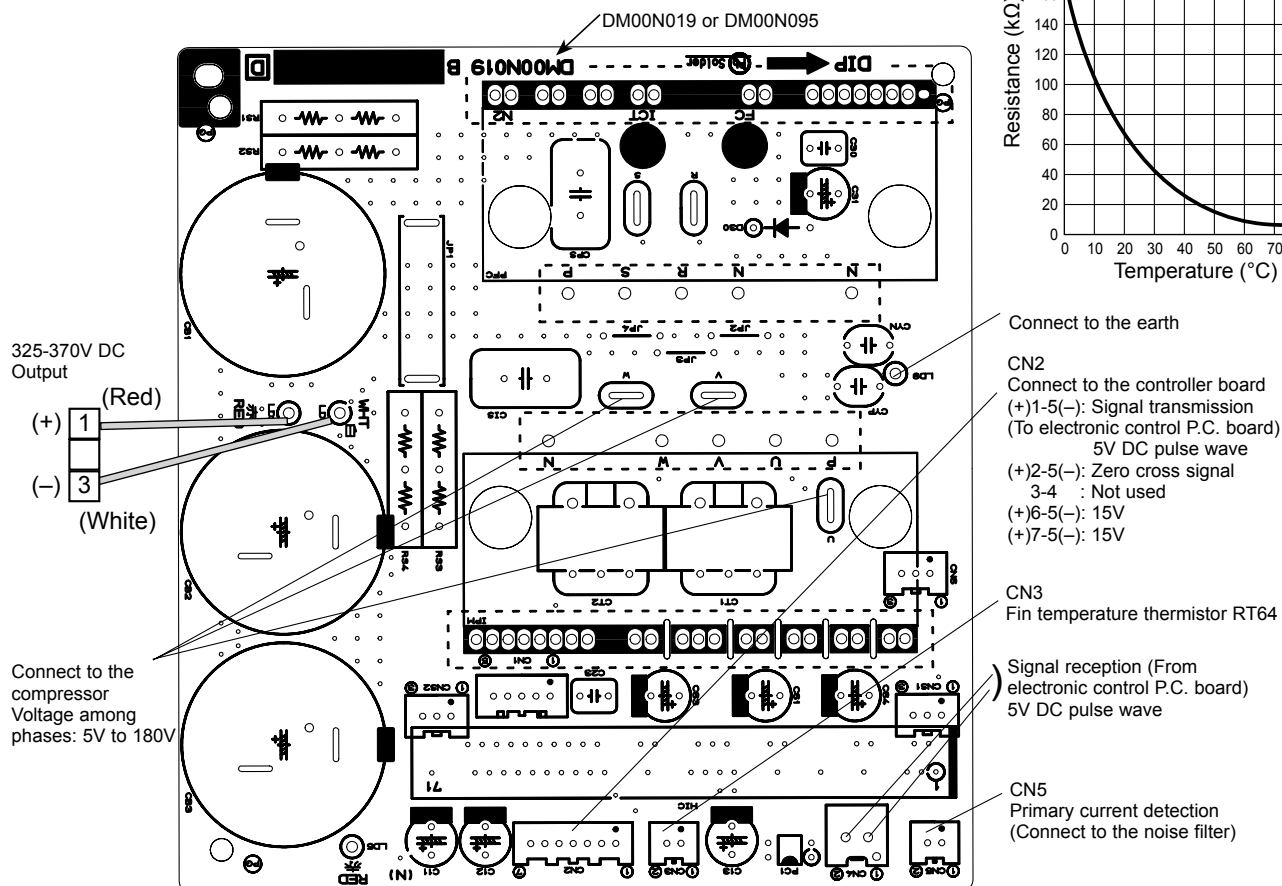




7. Display P.C. board

MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA


To inverter P.C. board (CN936)

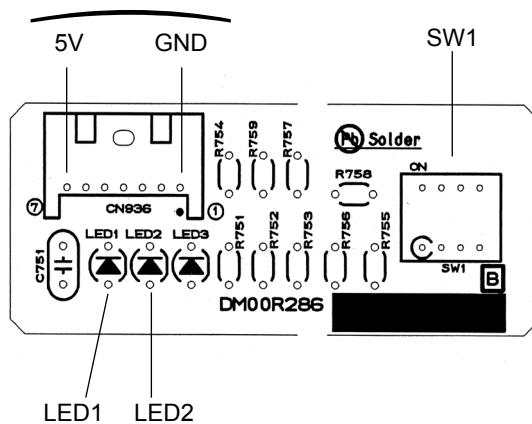

8. Interface P.C. board

MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA


To inverter P.C. board (CN938)

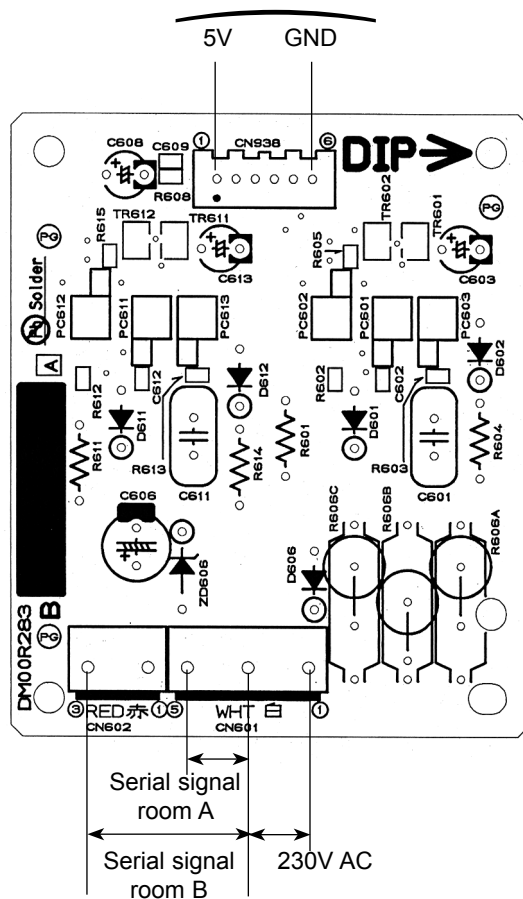


<"Terminal with locking mechanism" Detaching points>

The terminal which has the locking mechanism can be detached as shown below.
There are two types (Refer to (1) and (2)) of the terminal with locking mechanism.
The terminal without locking mechanism can be detached by pulling it out.
Check the shape of the terminal before detaching.

(1) Slide the sleeve and check if there is a locking lever or not.

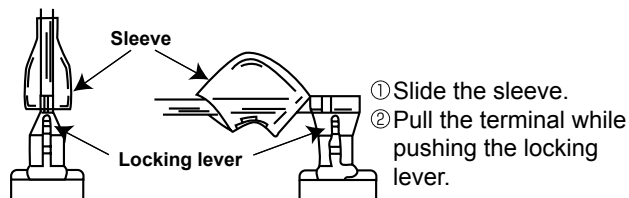

(2) The terminal with this connector has the locking mechanism.

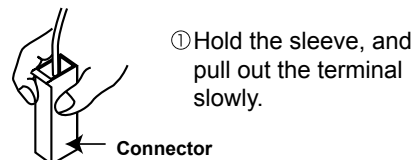

12-1. MXZ-2C30VA MXZ-2C40VA MXZ-2C52VA


NOTE: Turn OFF power supply before disassembly.

OPERATING PROCEDURE

1. Removing the cabinet


- (1) Remove the screw fixing the service panel.
- (2) Pull down the service panel and remove it.
- (3) Disconnect the power supply and indoor/outdoor connecting wire.
- (4) Remove the screws fixing the top panel.
- (5) Remove the top panel.
- (6) Remove the screws fixing the cabinet.
- (7) Remove the cabinet.
- (8) Remove the screws fixing the back panel.
- (9) Remove the back panel.

Photo 2

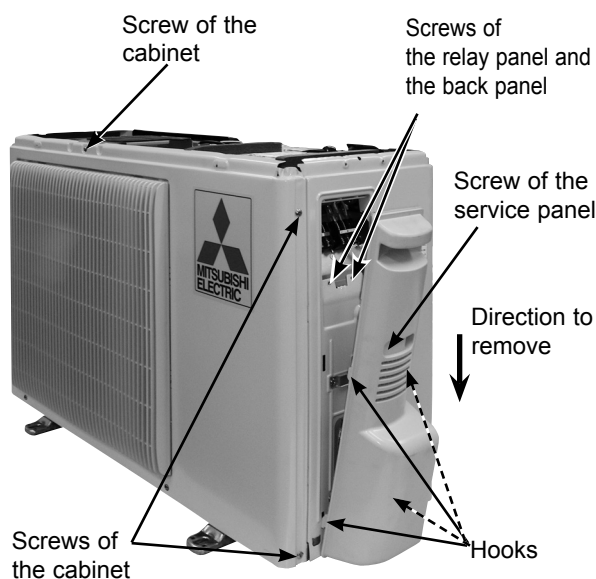

PHOTOS

Photo 1

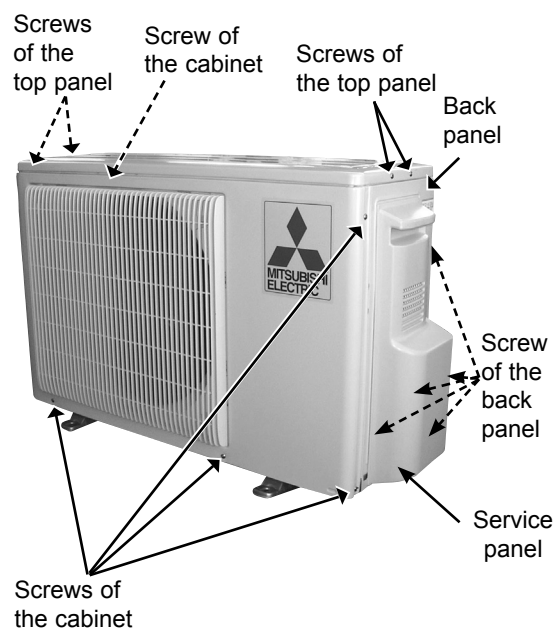

OPERATING PROCEDURE

2. Removing the inverter assembly, inverter P.C. board and power P.C. board

- (1) Remove the top panel, cabinet and service panel (Refer to 1).
- (2) Disconnect the power supply and indoor/outdoor connecting wire and remove the back panel (Refer to 1).
- (3) Disconnect the earth wires, the lead wire to the reactor and the following connectors;
 - <Power P.C. board>
 - CN912 (R.V. coil)
 - <Inverter P.C. board>
 - CN931, CN932 (Fan motor)
 - CN661 (Defrost thermistor, discharge temperature thermistor and outdoor heat exchanger temperature thermistor)
 - CN663 (Ambient temperature thermistor)
 - CN791, CN792 (LEV A, LEV B)
- (4) Remove the compressor connector (CN61).
- (5) Remove the screws fixing the relay panel.
- (6) Remove the inverter assembly.
- (7) Disconnect all connectors and lead wires on the inverter P.C. board.
- (8) Remove the inverter P.C. board from the inverter assembly.
- (9) Remove the screw fixing the power P.C. board.
- (10) Disconnect all connectors and lead wires on the power P.C. board.
- (11) Remove the power P.C. board from the inverter assembly.

3. Removing R.V. coil

- (1) Remove the top panel, cabinet and service panel (Refer to 1).
- (2) Disconnect the power supply and indoor/outdoor connecting wire and remove the back panel (Refer to 1).
- (3) Remove the inverter assembly (Refer to 2).
- (4) Remove the R.V. coil.

4. Removing the discharge temperature thermistor, defrost thermistor and outdoor heat exchanger temperature thermistor

- (1) Remove the top panel, cabinet and service panel (Refer to 1).
- (2) Disconnect the power supply and indoor/outdoor connecting wire and remove the back panel (Refer to 1).
- (3) Remove the inverter assembly (Refer to 2).
- (4) Pull out the discharge temperature thermistor from its holder.
- (5) Pull out the defrost thermistor from its holder (Photo 6).
- (6) Pull out the outdoor heat exchanger temperature thermistor from its holder (Photo 6).

PHOTOS

Photo 3

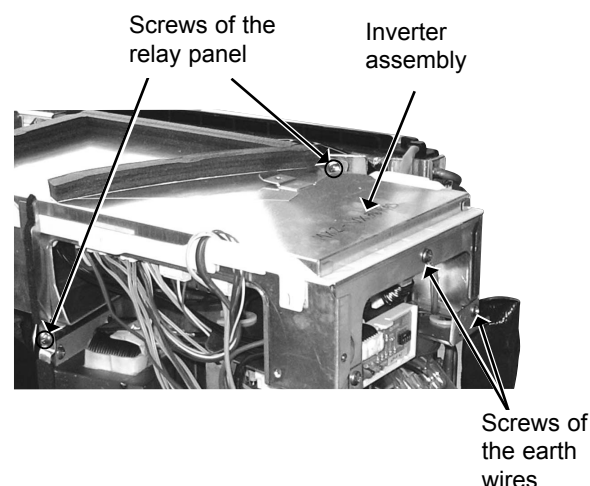


Photo 4





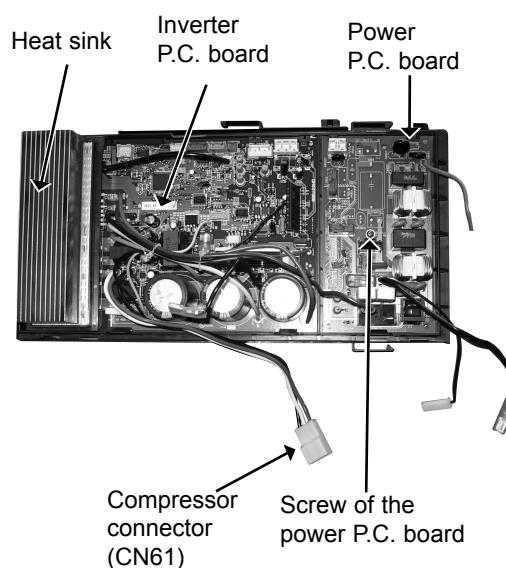




Photo 5

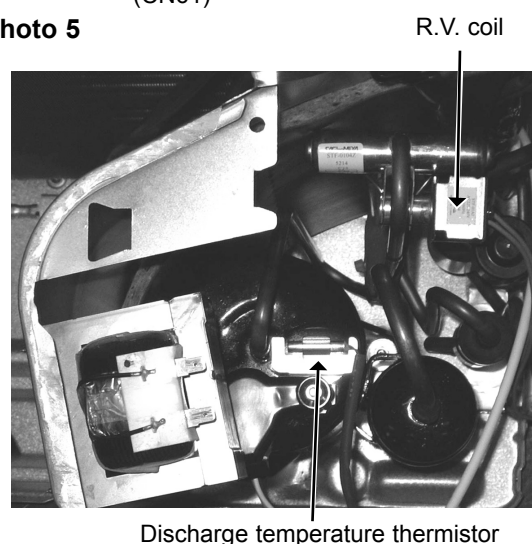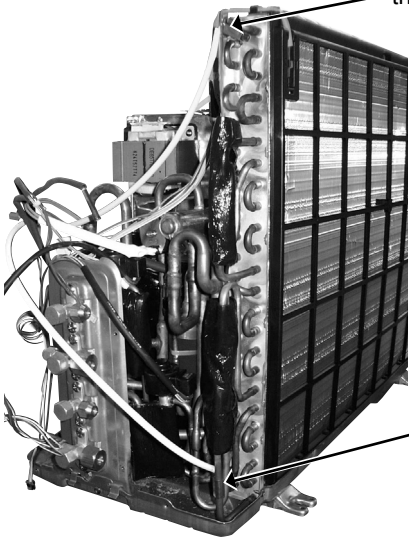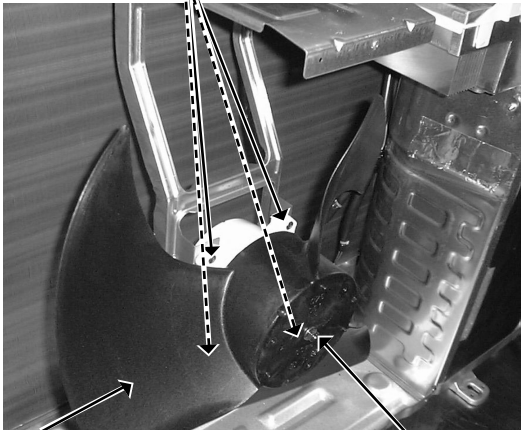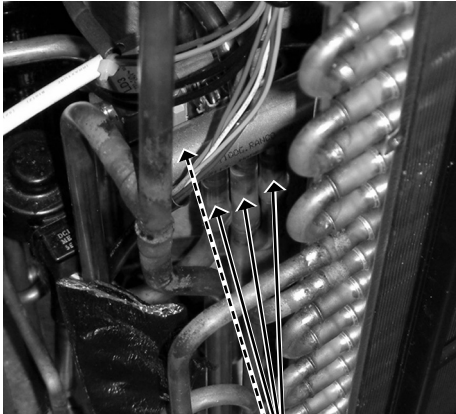

OPERATING PROCEDURE	PHOTOS
<p>5. Removing outdoor fan motor</p> <p>(1) Remove the top panel, cabinet and service panel (Refer to 1).</p> <p>(2) Disconnect the power supply and indoor/outdoor connecting wire.</p> <p>(3) Disconnect the connectors for outdoor fan motor.</p> <p>(4) Remove the propeller nut.</p> <p>(5) Remove the propeller.</p> <p>(6) Remove the screws fixing the fan motor (Photo 7).</p> <p>(7) Remove the fan motor.</p>	<p>Photo 6</p> <p>Outdoor heat exchanger temperature thermistor</p>  <p>Defrost thermistor</p> <p>Photo 7</p> <p>Screws of the outdoor fan motor</p>  <p>Propeller</p> <p>Propeller nut</p> <p>Photo 8</p>  <p>Brazed parts of 4-way valve</p>


12-2. MXZ-3C54VA MXZ-3C68VA MXZ-4C71VA

NOTE: Turn OFF power supply before disassembly.

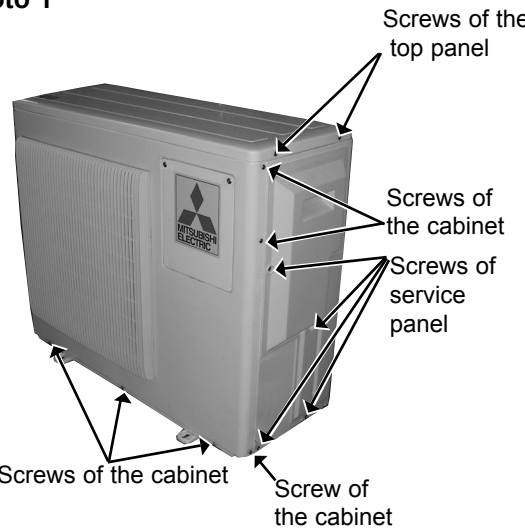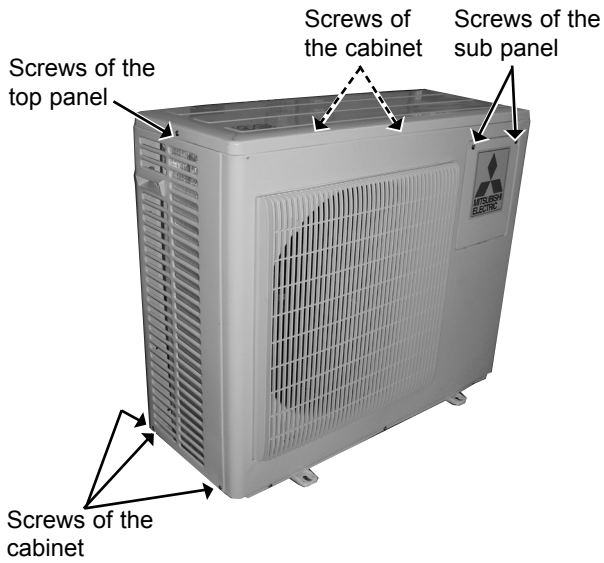OPERATING PROCEDURE	PHOTOS
<p>1. Removing the compressor</p> <p>(1) Remove the screws of the top panel, and remove the top panel.</p> <p>(2) Remove the screws of the service panel, and remove the service panel.</p> <p>(3) Recover gas from the refrigerant circuit.</p> <p>NOTE: Recover gas from the pipes until the pressure gauge shows 0 kg/cm² (0 MPa).</p> <p>(4) Remove the screws of the cabinet, and remove the cabinet.</p> <p>(5) Remove the screws of the back panel, and remove the back panel (Photo 3).</p> <p>(6) Disconnect the compressor lead wire from terminal of the compressor (U, V, W).</p> <p>(7) Disconnect the outdoor electronic control P.C. board connectors: CN661, CN663, CN681 (MXZ-3C68VA, MXZ-4C71VA), CN791, CN792, CN793, CN794 (MXZ-4C71VA), CN795, CN931, CN932 Disconnect the noise filter P.C. board connector: CN912</p> <p>(8) Remove the screws of the electrical parts, and remove the electrical parts (Photo 4).</p> <p>(9) Remove the propeller.</p> <p>(10) Remove the screws of the separator, and remove the separator (Photo 6).</p> <p>(11) Remove the sound proof felt (Photo 6).</p> <p>(12) Detach the brazed parts of the compressor suction and discharge pipes (Photo 5).</p> <p>(13) Remove the compressor nuts and remove the compressor.</p>	<p>Photo 1</p>  <p>Screws of the top panel</p> <p>Screws of the cabinet</p> <p>Screws of service panel</p> <p>Screws of the cabinet</p> <p>Screw of the cabinet</p> <p>Photo 2</p>  <p>Screws of the top panel</p> <p>Screws of the cabinet</p> <p>Screws of the sub panel</p> <p>Screws of the cabinet</p>
<p>2. Removing the electronic control P.C. board</p> <p>(1) Remove the screws of the sub panel.</p> <p>(2) Remove the sub panel.</p> <p>(3) Disconnect all connectors and lead wires on the electronic control P.C. board.</p> <p>(4) Remove the electronic control P.C. board.</p>	

OPERATING PROCEDURE

Photo 5

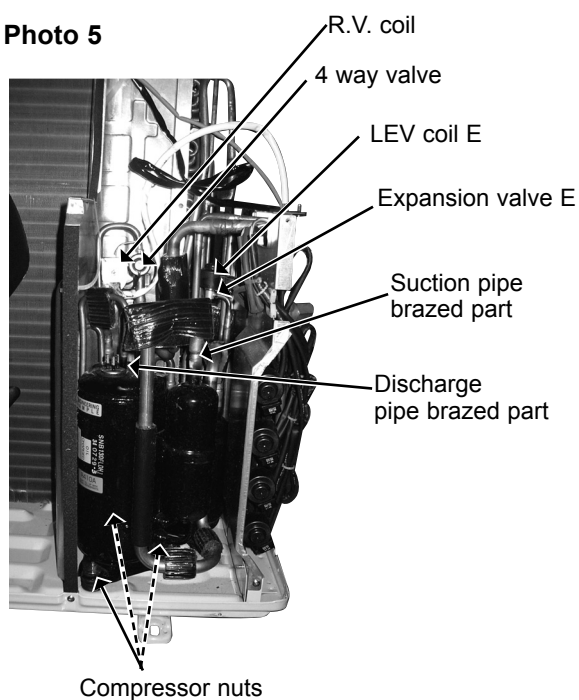

3. Removing the fan motor

- (1) Remove the top panel, the service panel, and the cabinet (Photo 1, 2).
- (2) Disconnect the connector CN931 and CN932 on the outdoor electronic control P.C. board.
- (3) Remove the propeller.
- (4) Remove the fan motor.

PHOTOS

Photo 3

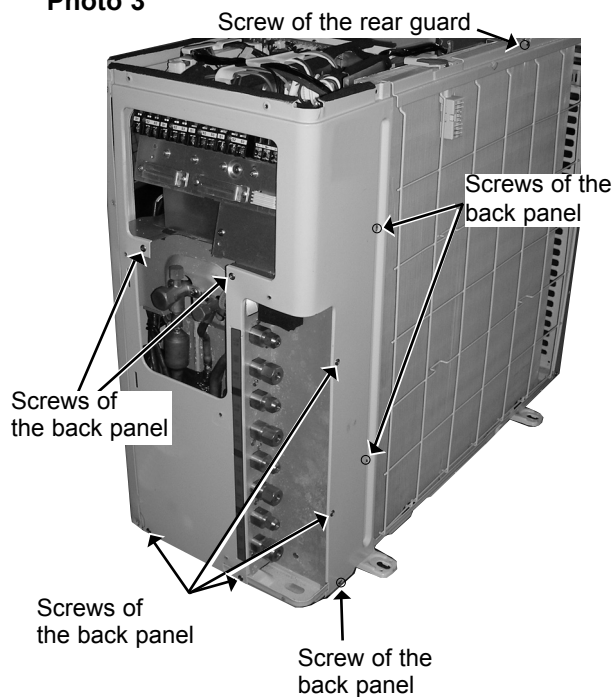


Photo 4





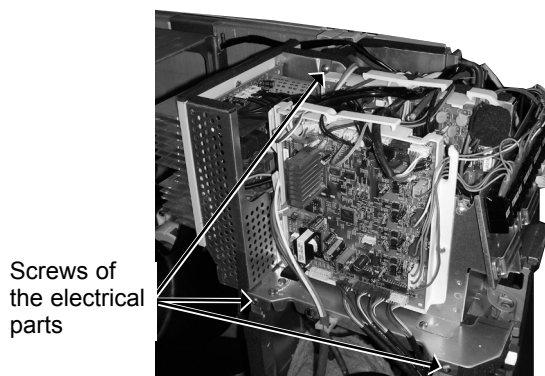


Photo 6

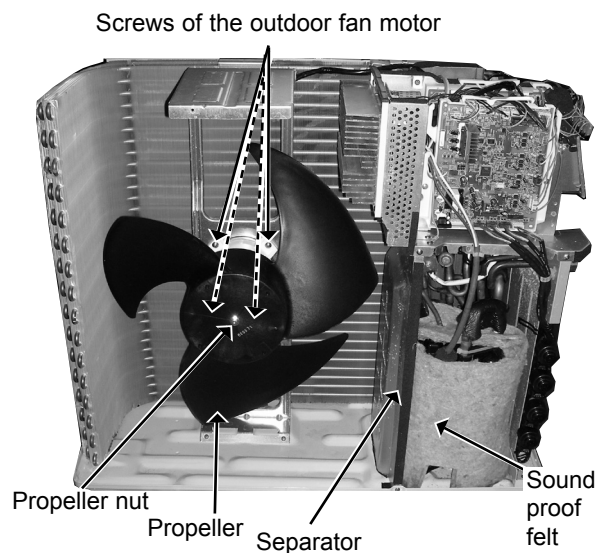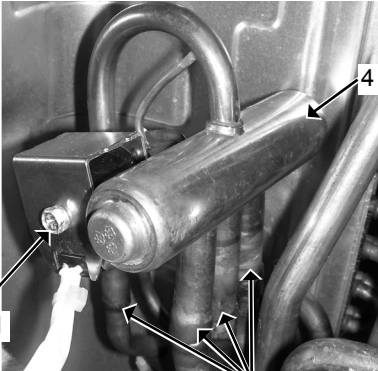
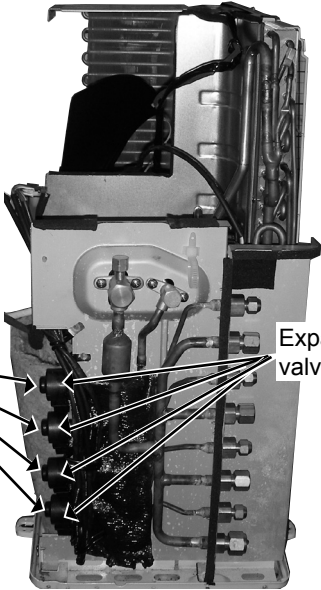


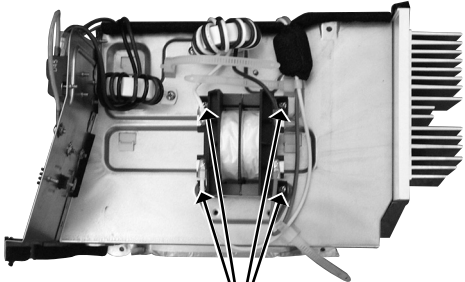

OPERATING PROCEDURE	PHOTOS
<p>4. Removing the 4-way valve</p> <p>(1) Remove the top panel (Photo 1).</p> <p>(2) Remove the service panel, the cabinet, and the back panel (Photo 1, 2, 3).</p> <p>(3) Recover gas from the refrigerant circuit.</p> <p>NOTE: Recover gas from the pipes until the pressure gauge shows 0 kg/cm² (0 MPa).</p> <p>(4) Remove the electrical parts (Photo 4).</p> <p>(5) Detach the brazed parts of 4-way valve and pipe (Photo 7).</p>	<p>Photo 7</p>  <p>4 way valve</p> <p>R.V. coil</p> <p>Brazed parts</p>
<p>5. Removing the expansion valve</p> <p>(1) Remove the top panel (Photo 1).</p> <p>(2) Remove the service panel, the cabinet, and the back panel (Photo 1, 2, 3).</p> <p>(Gas recovery is not required if the unit is pumped down.)</p> <p>(3) Remove the electrical parts for removing LEV E (Photo 4, 5).</p> <p>(4) Remove the LEV coils.</p> <p>(5) Detach the brazed parts of expansion valves and pipes.</p>	<p>Photo 8</p>  <p>LEV coils</p> <p>Expansion valves</p>
<p>6. Removing the reactor</p> <p>(1) Remove the top panel (Photo 1).</p> <p>(2) Remove the service panel, cabinet, back panel, and the electrical parts (Photo 1, 2, 3, 4).</p> <p>(3) Disconnect the reactor lead wire from the terminal of the reactor.</p> <p>(4) Remove the screws of the reactor, and remove the reactor (Photo 9).</p>	<p>Photo 9</p>  <p>Screws of the reactor</p>


12-3. MXZ-4C80VA MXZ-5C100VA

NOTE: Turn OFF power supply before disassembly.

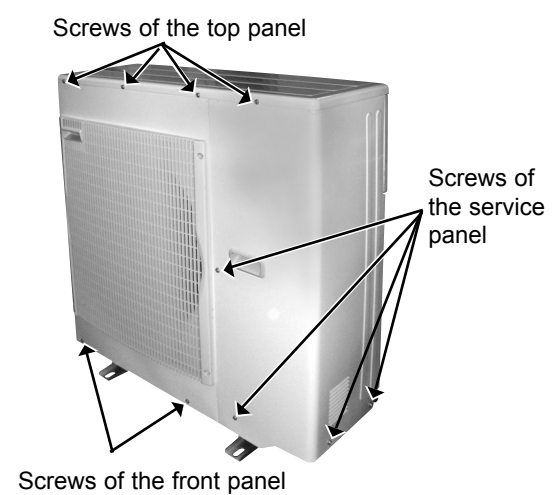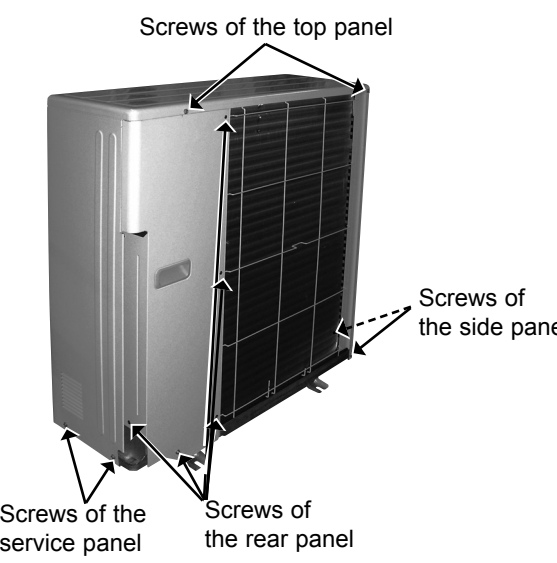OPERATING PROCEDURE	PHOTOS
<p>1. Removing the compressor</p> <p>(1) Remove the screws of the top panel, and remove the top panel.</p> <p>(2) Remove the screws of the service panel, and remove the service panel.</p> <p>(3) Recover gas from the refrigerant circuit.</p> <p>NOTE: Recover gas from the pipes until the pressure gauge shows 0 kg/cm² (0 MPa).</p> <p>(4) Remove the screws of the front panel, and remove the front panel.</p> <p>(5) Remove the screws of the rear panel, and remove the rear panel.</p> <p>(6) Disconnect the compressor lead wire from terminal of compressor (U, V, W).</p> <p>(7) Disconnect the outdoor electronic control P.C. board connectors: CN661, CN663, CN681, CN791, CN792, CN793, CN794, CN795 (MXZ-5C100VA), CN796, CN931, CN932 Disconnect the noise filter P.C. board connector: CN912</p> <p>(8) Remove the screws of the electrical parts, and remove the electrical parts.</p> <p>(9) Remove the propeller.</p> <p>(10) Remove the screws of the separator, and remove the separator.</p> <p>(11) Remove the sound proof felt.</p> <p>(12) Detach the brazed parts of the compressor suction and discharge pipes (Photo 4).</p> <p>(13) Remove the compressor nuts and remove the compressor.</p>	<p>Photo 1</p>  <p>Screws of the top panel</p> <p>Screws of the service panel</p> <p>Screws of the front panel</p> <p>Photo 2</p>  <p>Screws of the top panel</p> <p>Screws of the side panel</p> <p>Screws of the service panel</p> <p>Screws of the rear panel</p>

OPERATING PROCEDURE

Photo 3

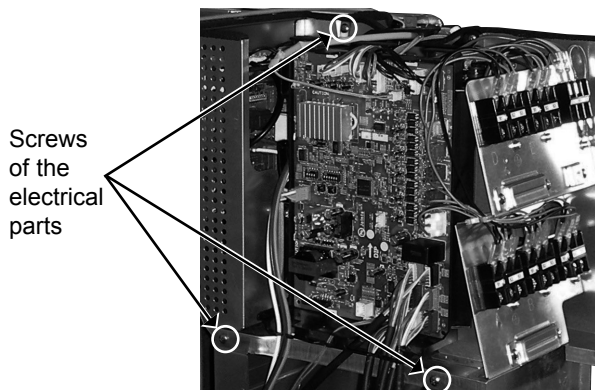

2. Removing the fan motor

- (1) Remove the top panel, the service panel, and the front panel (Photo 1).
- (2) Disconnect the connector CN931 and CN932 on the outdoor electronic control P.C. board.
- (3) Remove the propeller.
- (4) Remove the fan motor.

3. Removing the 4-way valve

- (1) Remove the top panel (Photo 1).
- (2) Remove the service panel, rear panel, and pipe cover.
- (3) Recover gas from the refrigerant circuit.
NOTE: Recover gas from the pipes until the pressure gauge shows 0 kg/cm² (0 MPa).
- (4) Remove the electrical parts (Photo 3).
- (5) Detach the brazed parts of 4-way valve and pipe.

PHOTOS

Photo 4

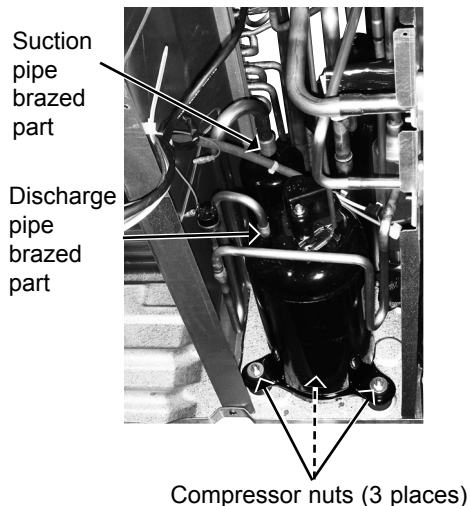


Photo 5 Screws of the outdoor fan motor




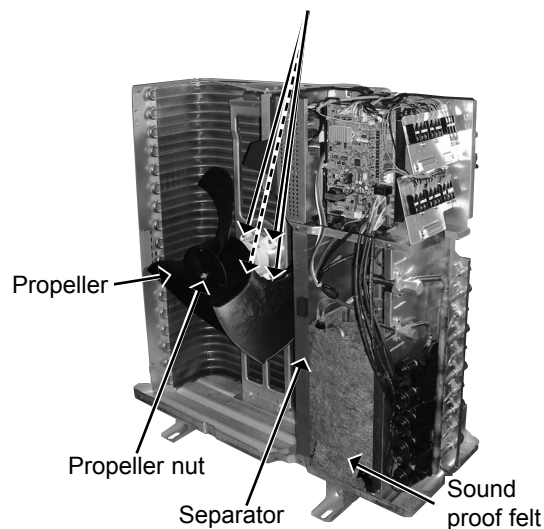




Photo 6

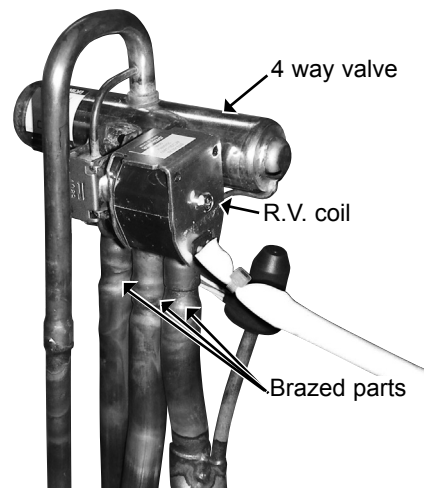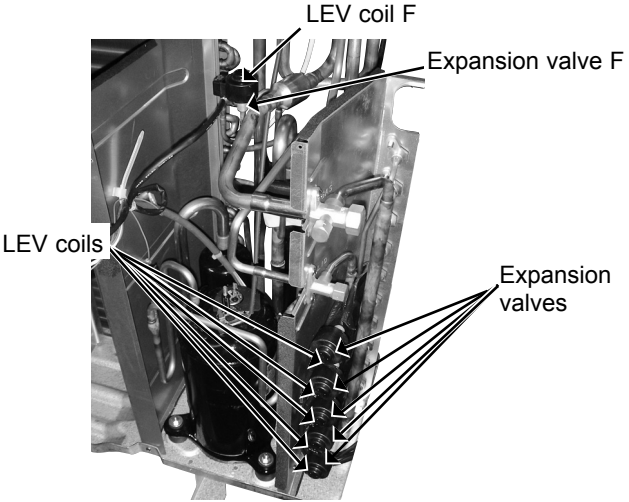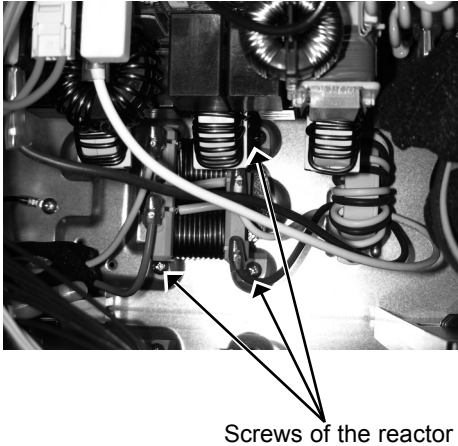

OPERATING PROCEDURE	PHOTOS
<p>4. Removing the expansion valve</p> <p>(1) Remove the top panel (Photo 1,2).</p> <p>(2) Remove the service panel (Photo 1).</p> <p>(Gas recovery is not required if the unit is pumped down.)</p> <p>(3) Remove the font panel for removing LEV F (Photo 1).</p> <p>(4) Remove the electrical parts for removing LEV F (Photo 3).</p> <p>(5) Remove the LEV coils.</p> <p>(6) Detach the brazed parts of expansion valves and pipes.</p>	<p>Photo 7</p> 
<p>5. Removing the reactor</p> <p>(1) Remove the top panel (Photo 1).</p> <p>(2) Disconnect the reactor lead wire.</p> <p>(3) Remove the screws of the reactor, and remove the reactor.</p>	<p>Photo 8</p> 


12-4. MXZ-6C120VA

NOTE: Turn OFF power supply before disassembly.

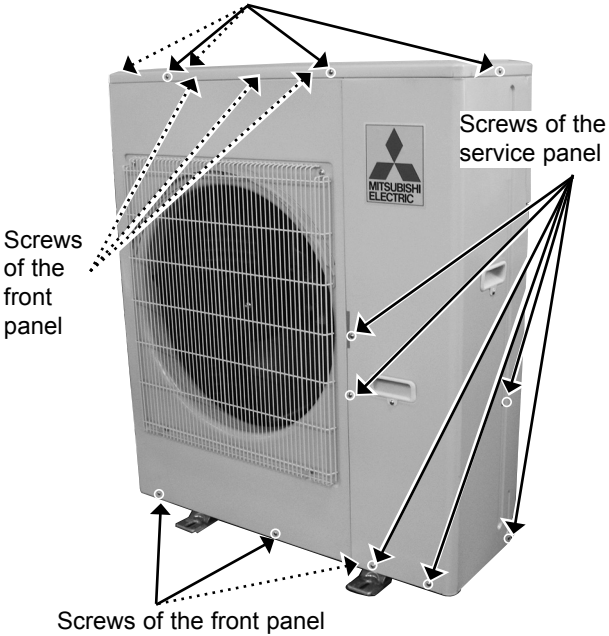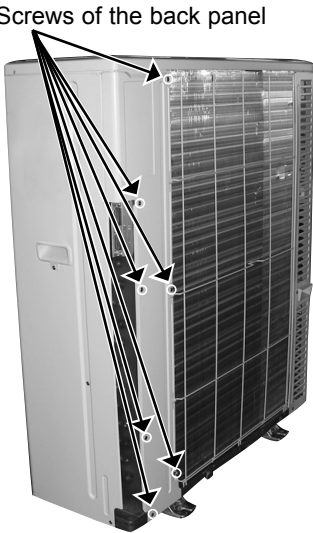OPERATING PROCEDURE	PHOTOS
<p>1. Removing the compressor</p> <p>(1) Remove the screws of the top panel, and remove the top panel.</p> <p>(2) Remove the screws of the service panel, and remove the service panel.</p> <p>(3) Recover gas from the refrigerant circuit.</p> <p>NOTE: Recover gas from the pipes until the pressure gauge shows 0 kg/cm² (0 MPa).</p> <p>(4) Remove the screws of the front panel, and remove the front panel.</p> <p>(5) Remove the screws of the back panel, and remove the back panel.</p> <p>(6) Disconnect the compressor lead wire from terminal of compressor (U, V, W).</p> <p>(7) Disconnect the outdoor control P.C. board connectors: CN661, CN663, CN681, CN712, CN713, CN791, CN792, CN793, CN794, CN795, CN796, CN931</p> <p>(8) Remove the screws of the electrical parts, and remove the electrical parts (Photo 3, 4).</p> <p>(9) Remove the propeller (Photo 5).</p> <p>(10) Remove the VB_fixture (Photo 5).</p> <p>(11) Remove the screws of the separator, and remove the separator (Photo 5).</p> <p>(12) Remove the sound proof felt (Photo 5).</p> <p>(13) Detach the brazed parts of the compressor suction and discharge pipes (Photo 7).</p> <p>(14) Remove the compressor nuts and remove the compressor (Photo 7).</p>	<p>Photo 1</p>  <p>Screws of the top panel</p> <p>Screws of the service panel</p> <p>Screws of the front panel</p> <p>Photo 2</p>  <p>Screws of the back panel</p>

OPERATING PROCEDURE

Photo 3

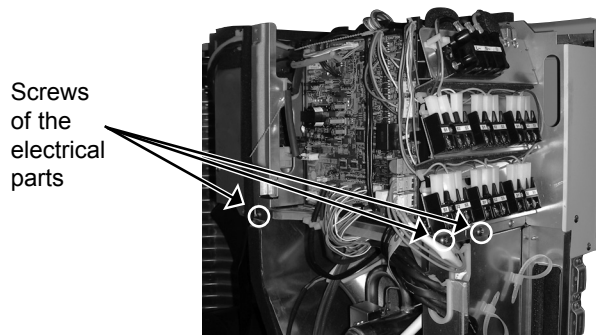

2. Removing the fan motor

- (1) Remove the top panel, the service panel, and the front panel (Photo 1).
- (2) Disconnect the connector CN931 on the outdoor control P.C. board.
- (3) Remove the propeller.
- (4) Remove the fan motor.

3. Removing the 4-way valve

- (1) Remove the top panel (Photo 1).
- (2) Remove the service panel, back panel, and pipe cover (Photo 1, 2).
- (3) Recover gas from the refrigerant circuit.
NOTE: Recover gas from the pipes until the pressure gauge shows 0 kg/cm² (0 MPa).
- (4) Remove the electrical parts (Photo 3, 4).
- (5) Detach the brazed parts of 4-way valve and pipe.

PHOTOS

Photo 4

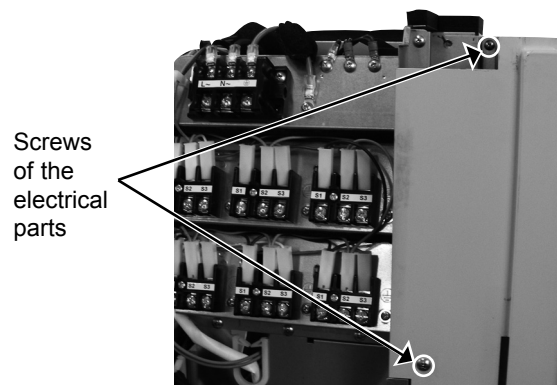


Photo 5


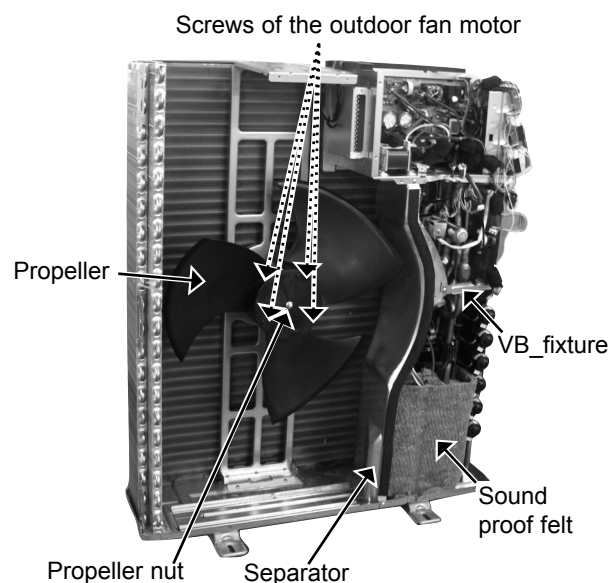


Photo 6

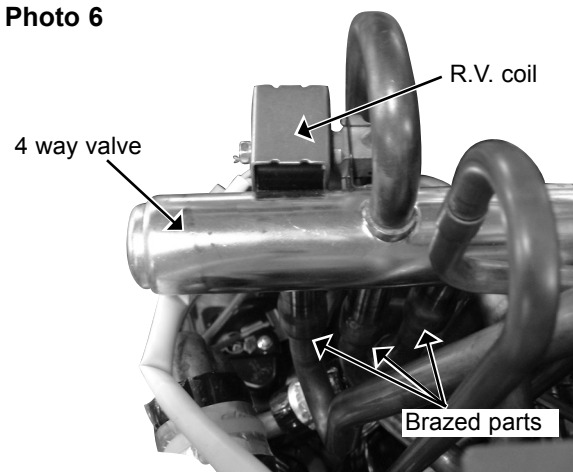

OPERATING PROCEDURE

4. Removing the expansion valve

- (1) Remove the top panel (Photo 1).
- (2) Remove the service panel (Photo 1).
(Gas recovery is not required if the unit is pumped down.)
- (3) Remove the front panel for removing LEV G (Photo 1).
- (4) Remove the electrical parts for removing LEV G (Photo 3, 4).
- (5) Remove the LEV coils.
- (6) Detach the brazed parts of expansion valves and pipes.

PHOTOS

Photo 7


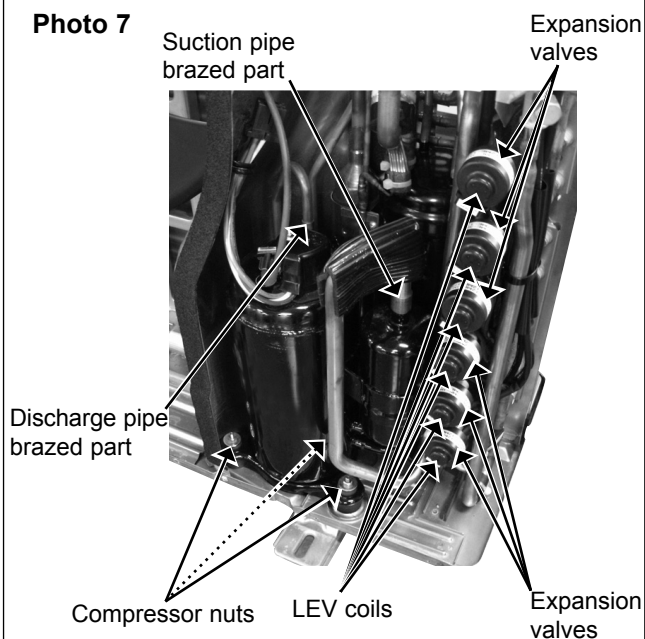


Photo 8

2 way valve solenoid coil

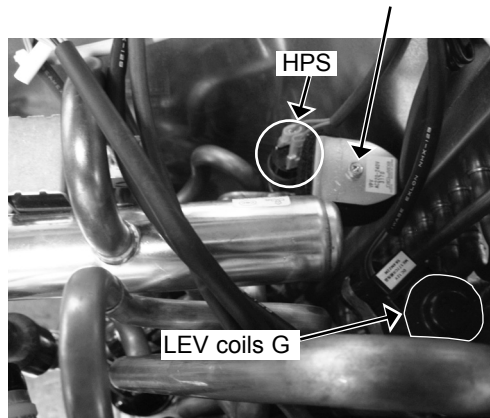


OPERATING PROCEDURE

5. Removing the control P.C. board, the reactor and the power board

- (1) Remove the top panel and the service panel (Photo 1).
- (2) Disconnect the connectors on the control P.C. board. Remove the screws of the control P.C. board, and remove the control P.C. board.
- (3) Remove the screws of the reactor cover, and remove the reactor cover.
- (4) Remove the screws of the reactor, and remove the reactor.
- (5) Remove the screws of the power board, and remove the power board.

Photo 11

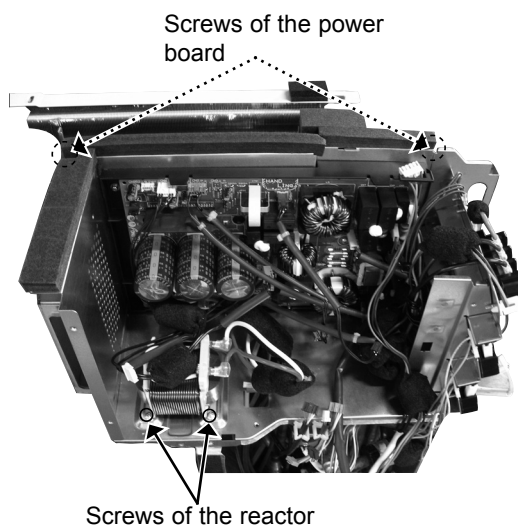

PHOTOS

Photo 9

Screws of the control P.C. board


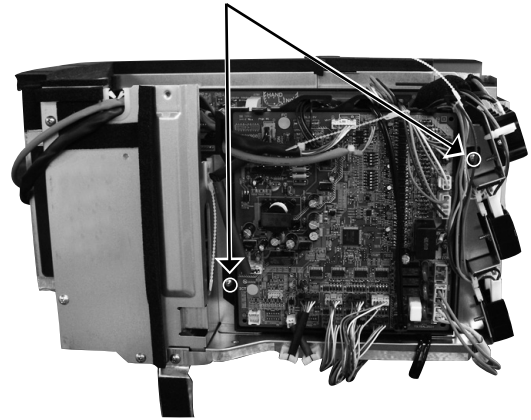


Photo 10



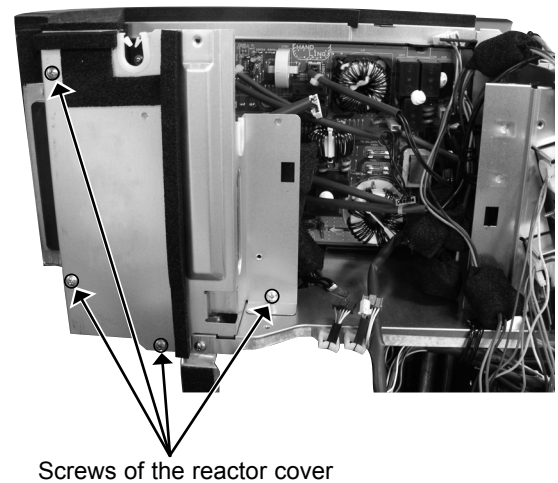

HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

© Copyright 2010 MITSUBISHI ELECTRIC ENGINEERING CO.,LTD
Distributed in Apr. 2011. No.OBH584 REVISED EDITION-A
Distributed in Oct. 2010. No.OBH584
Made in Japan

New publication, effective Apr. 2011
Specifications subject to change without notice.

MXZ-2C30VA COOLING

Indoor units combination	Cooling capacity (kW)			Outdoor unit power consumption(kW)	Current (A)	Power factor(%)
	Unit A	Unit B	Total			
15	1.50	-	1.50 (0.90 - 2.40)	0.330 (0.140 - 0.670)	1.59	90
20	2.00	-	2.00 (0.90 - 2.60)	0.440 (0.140 - 0.720)	2.13	90
22	2.20	-	2.20 (0.90 - 3.00)	0.410 (0.120 - 0.620)	1.98	90
25	2.50	-	2.50 (0.90 - 3.30)	0.490 (0.120 - 0.690)	2.37	90
15+15	1.20	1.20	2.40 (1.10 - 3.80)	0.540 (0.300 - 1.100)	2.61	90
15+20	1.07	1.43	2.50 (1.10 - 3.80)	0.610 (0.300 - 1.100)	2.95	90
15+22	1.01	1.49	2.50 (1.10 - 3.80)	0.520 (0.280 - 1.040)	2.51	90
15+25	0.98	1.63	2.60 (1.10 - 3.80)	0.670 (0.300 - 1.100)	3.24	90
20+20	1.30	1.30	2.60 (1.10 - 3.80)	0.670 (0.300 - 1.100)	3.24	90
20+22	1.29	1.41	2.70 (1.10 - 3.80)	0.590 (0.280 - 1.040)	2.85	90
20+25	1.24	1.56	2.80 (1.10 - 3.80)	0.620 (0.280 - 1.040)	3.00	90
22+22	1.40	1.40	2.80 (1.10 - 3.80)	0.500 (0.250 - 0.970)	2.42	90
22+25	1.36	1.54	2.90 (1.10 - 3.90)	0.530 (0.250 - 1.010)	2.56	90
25+25	1.50	1.50	3.00 (1.10 - 4.00)	0.560 (0.250 - 1.040)	2.71	90

MXZ-2C30VA HEATING

Indoor units combination	Heating capacity (kW)			Outdoor unit power consumption(kW)	Current (A)	Power factor(%)
	Unit A	Unit B	Total			
15	1.70	-	1.70 (0.90 - 3.10)	0.350 (0.140 - 0.820)	1.69	90
20	2.20	-	2.20 (0.90 - 3.10)	0.470 (0.140 - 0.850)	2.27	90
22	3.30	-	3.30 (0.90 - 4.00)	0.670 (0.110 - 1.100)	3.24	90
25	3.60	-	3.60 (0.90 - 4.40)	0.730 (0.110 - 1.250)	3.53	90
15+15	1.50	1.50	3.00 (1.00 - 3.90)	0.640 (0.250 - 0.990)	3.09	90
15+20	1.41	1.89	3.30 (1.00 - 3.90)	0.770 (0.250 - 1.010)	3.72	90
15+22	1.38	2.02	3.40 (1.00 - 4.10)	0.710 (0.230 - 0.980)	3.43	90
15+25	1.35	2.25	3.60 (1.00 - 3.90)	0.890 (0.250 - 1.020)	4.30	90
20+20	1.80	1.80	3.60 (1.00 - 3.90)	0.890 (0.250 - 1.020)	4.30	90
20+22	1.76	1.94	3.70 (1.00 - 4.10)	0.830 (0.230 - 1.000)	4.01	90
20+25	1.73	2.17	3.90 (1.00 - 4.10)	0.860 (0.230 - 1.020)	4.15	90
22+22	1.90	1.90	3.80 (1.00 - 4.30)	0.770 (0.200 - 0.970)	3.72	90
22+25	1.83	2.07	3.90 (1.00 - 4.30)	0.800 (0.200 - 0.990)	3.86	90
25+25	2.00	2.00	4.00 (1.00 - 4.40)	0.815 (0.200 - 1.010)	3.94	90

MXZ-2C40VA COOLING

Indoor units combination	Cooling capacity (kW)			Outdoor unit power consumption(kW)	Current (A)	Power factor(%)
	Unit A	Unit B	Total			
15	1.50	-	1.50 (0.90 - 2.70)	0.330 (0.260 - 0.890)	1.59	90
20	2.00	-	2.00 (0.90 - 2.70)	0.500 (0.260 - 0.890)	2.42	90
22	2.20	-	2.20 (0.90 - 3.00)	0.430 (0.120 - 0.620)	2.08	90
25	2.50	-	2.50 (0.90 - 3.30)	0.490 (0.120 - 0.690)	2.37	90
35	3.50	-	3.50 (0.90 - 4.00)	0.730 (0.120 - 0.900)	3.53	90
15+15	1.40	1.40	2.80 (1.10 - 4.30)	0.630 (0.450 - 1.350)	2.88	95
15+20	1.33	1.77	3.10 (1.10 - 4.30)	0.750 (0.450 - 1.350)	3.43	95
15+22	1.34	1.96	3.30 (1.10 - 4.30)	0.770 (0.350 - 1.230)	3.52	95
15+25	1.28	2.13	3.40 (1.10 - 4.30)	0.950 (0.550 - 1.470)	4.35	95
15+35	1.17	2.73	3.90 (1.10 - 4.40)	0.930 (0.350 - 1.250)	4.26	95
20+20	1.70	1.70	3.40 (1.10 - 4.30)	0.880 (0.450 - 1.350)	4.03	95
20+22	1.71	1.89	3.60 (1.10 - 4.30)	0.850 (0.350 - 1.230)	3.89	95
20+25	1.69	2.11	3.80 (1.10 - 4.30)	0.890 (0.350 - 1.230)	4.07	95
20+35	1.42	2.48	3.90 (1.10 - 4.40)	0.930 (0.350 - 1.250)	4.26	95
22+22	1.90	1.90	3.80 (1.10 - 4.30)	0.820 (0.250 - 1.110)	3.75	95
22+25	1.83	2.07	3.90 (1.10 - 4.40)	0.860 (0.250 - 1.130)	3.94	95
22+35	1.51	2.39	3.90 (1.10 - 4.40)	0.860 (0.250 - 1.130)	3.94	95
25+25	1.95	1.95	3.90 (1.10 - 4.40)	0.860 (0.250 - 1.130)	3.94	95
25+35	1.67	2.33	4.00 (1.10 - 4.50)	0.875 (0.250 - 1.170)	4.00	95

MXZ-2C40VA HEATING

Indoor units combination	Heating capacity (kW)			Outdoor unit power consumption(kW)	Current (A)	Power factor(%)
	Unit A	Unit B	Total			
15	1.70	-	1.70 (0.90 - 3.10)	0.380 (0.230 - 1.080)	1.84	90
20	2.20	-	2.20 (0.90 - 3.10)	0.550 (0.230 - 1.080)	2.66	90
22	3.30	-	3.30 (0.90 - 4.00)	0.670 (0.110 - 0.910)	3.24	90
25	3.60	-	3.60 (0.90 - 4.50)	0.730 (0.110 - 1.050)	3.53	90
35	4.00	-	4.00 (0.90 - 4.80)	0.870 (0.110 - 1.150)	4.20	90
15+15	1.60	1.60	3.20 (1.00 - 4.80)	0.670 (0.360 - 1.300)	3.07	95
15+20	1.54	2.06	3.60 (1.00 - 4.80)	0.830 (0.360 - 1.270)	3.80	95
15+22	1.54	2.26	3.80 (1.00 - 4.80)	0.810 (0.280 - 1.150)	3.71	95
15+25	1.50	2.50	4.00 (1.00 - 4.80)	0.970 (0.440 - 1.400)	4.44	95
15+35	1.32	3.08	4.40 (1.00 - 4.90)	0.920 (0.280 - 1.170)	4.21	95
20+20	2.00	2.00	4.00 (1.00 - 4.80)	0.910 (0.360 - 1.260)	4.16	95
20+22	2.00	2.20	4.20 (1.00 - 4.80)	0.890 (0.280 - 1.130)	4.07	95
20+25	1.96	2.44	4.40 (1.00 - 4.80)	0.920 (0.280 - 1.130)	4.21	95
20+35	1.60	2.80	4.40 (1.00 - 4.90)	0.920 (0.280 - 1.150)	4.21	95
22+22	2.20	2.20	4.40 (1.00 - 4.80)	0.860 (0.200 - 1.010)	3.94	95
22+25	2.06	2.34	4.40 (1.00 - 4.80)	0.860 (0.200 - 1.010)	3.94	95
22+35	1.70	2.70	4.40 (1.00 - 4.90)	0.860 (0.200 - 1.030)	3.94	95
25+25	2.20	2.20	4.40 (1.00 - 4.90)	0.860 (0.200 - 1.030)	3.94	95
25+35	1.88	2.63	4.50 (1.00 - 5.00)	0.870 (0.200 - 1.050)	3.98	95

MXZ-2C52VA COOLING

Indoor units combination	Cooling capacity (kW)			Outdoor unit power consumption(kW)	Current (A)	Power factor(%)
	Unit A	Unit B	Total			
15	1.50	-	1.50 (0.90 - 2.80)	0.310 (0.280 - 0.820)	1.42	95
20	2.00	-	2.00 (0.90 - 2.90)	0.470 (0.280 - 0.870)	2.15	95
22	2.20	-	2.20 (0.90 - 3.00)	0.430 (0.120 - 0.620)	1.97	95
25	2.50	-	2.50 (0.90 - 3.30)	0.490 (0.120 - 0.690)	2.24	95
35	3.50	-	3.50 (0.90 - 4.00)	0.730 (0.120 - 0.900)	3.34	95
42	4.20	-	4.20 (1.00 - 4.90)	1.100 (0.160 - 1.500)	5.03	95
50	4.50	-	4.50 (1.00 - 5.00)	1.220 (0.160 - 1.550)	5.58	95
15+15	1.50	1.50	3.00 (1.10 - 4.80)	0.740 (0.330 - 1.620)	3.32	97
15+20	1.50	2.00	3.50 (1.10 - 4.80)	0.950 (0.330 - 1.620)	4.26	97
15+22	1.50	2.20	3.70 (1.10 - 5.00)	0.850 (0.290 - 1.480)	3.81	97
15+25	1.50	2.50	4.00 (1.10 - 4.80)	1.370 (0.370 - 1.950)	6.14	97
15+35	1.50	3.50	5.00 (1.10 - 5.60)	1.410 (0.290 - 1.780)	6.32	97
15+42	1.32	3.68	5.00 (1.10 - 5.60)	1.410 (0.290 - 1.780)	6.32	97
15+50	1.18	3.92	5.10 (1.10 - 5.80)	1.470 (0.290 - 1.880)	6.59	97
20+20	2.00	2.00	4.00 (1.10 - 4.80)	1.150 (0.330 - 1.620)	5.15	97
20+22	2.00	2.20	4.20 (1.10 - 5.00)	1.050 (0.290 - 1.480)	4.71	97
20+25	2.00	2.50	4.50 (1.10 - 5.20)	1.110 (0.290 - 1.540)	4.98	97
20+35	1.82	3.18	5.00 (1.10 - 5.60)	1.410 (0.290 - 1.780)	6.32	97
20+42	1.65	3.45	5.10 (1.10 - 5.80)	1.470 (0.290 - 1.880)	6.59	97
20+50	1.49	3.71	5.20 (1.10 - 6.00)	1.520 (0.290 - 1.980)	6.81	97
22+22	2.20	2.20	4.40 (1.10 - 5.30)	0.950 (0.250 - 1.330)	4.26	97
22+25	2.20	2.50	4.70 (1.10 - 5.40)	1.070 (0.250 - 1.390)	4.80	97
22+35	1.93	3.07	5.00 (1.10 - 5.60)	1.190 (0.250 - 1.450)	5.33	97
22+42	1.75	3.35	5.10 (1.10 - 5.80)	1.250 (0.250 - 1.550)	5.60	97
22+50	1.59	3.61	5.20 (1.10 - 6.00)	1.300 (0.250 - 1.650)	5.83	97
25+25	2.50	2.50	5.00 (1.10 - 5.60)	1.190 (0.250 - 1.450)	5.33	97
25+35	2.13	2.98	5.10 (1.10 - 5.80)	1.250 (0.250 - 1.450)	5.60	97
25+42	1.90	3.20	5.10 (1.10 - 5.80)	1.250 (0.250 - 1.550)	5.60	97
25+50	1.73	3.47	5.20 (1.10 - 6.00)	1.300 (0.250 - 1.650)	5.83	97
35+35	2.60	2.60	5.20 (1.10 - 6.00)	1.300 (0.250 - 1.650)	5.83	97

MXZ-2C52VA HEATING

Indoor units combination	Heating capacity (kW)			Outdoor unit power consumption(kW)	Current (A)	Power factor(%)
	Unit A	Unit B	Total			
15	1.70	-	1.70 (0.90 - 3.10)	0.470 (0.200 - 1.140)	2.15	95
20	2.20	-	2.20 (0.90 - 3.30)	0.700 (0.200 - 1.170)	3.20	95
22	3.30	-	3.30 (0.90 - 4.00)	0.670 (0.110 - 0.910)	3.07	95
25	3.60	-	3.60 (0.90 - 4.50)	0.730 (0.110 - 1.050)	3.34	95
35	4.00	-	4.00 (0.90 - 4.80)	0.870 (0.110 - 1.150)	3.98	95
42	4.80	-	4.80 (0.90 - 5.30)	1.580 (0.100 - 2.000)	7.23	95
50	5.00	-	5.00 (0.90 - 5.50)	1.780 (0.100 - 2.080)	8.15	95
15+15	1.70	1.70	3.40 (1.00 - 5.00)	0.740 (0.360 - 1.490)	3.32	97
15+20	1.67	2.23	3.90 (1.00 - 5.20)	0.910 (0.360 - 1.550)	4.08	97
15+22	1.74	2.56	4.30 (1.00 - 5.30)	0.910 (0.360 - 1.580)	4.08	97
15+25	1.65	2.75	4.40 (1.00 - 5.40)	1.270 (0.440 - 1.910)	5.69	97
15+35	1.89	4.41	6.30 (1.00 - 7.00)	1.740 (0.280 - 2.060)	7.80	97
15+42	1.66	4.64	6.30 (1.00 - 7.00)	1.740 (0.280 - 2.060)	7.80	97
15+50	1.45	4.85	6.30 (1.00 - 7.00)	1.740 (0.280 - 2.060)	7.80	97
20+20	2.20	2.20	4.40 (1.00 - 5.40)	1.070 (0.360 - 1.610)	4.80	97
20+22	2.48	2.72	5.20 (1.00 - 6.10)	1.250 (0.360 - 1.660)	5.60	97
20+25	2.40	3.00	5.40 (1.00 - 6.20)	1.310 (0.360 - 1.690)	5.87	97
20+35	2.29	4.01	6.30 (1.00 - 7.00)	1.740 (0.280 - 2.060)	7.80	97
20+42	2.03	4.27	6.30 (1.00 - 7.00)	1.740 (0.280 - 2.060)	7.80	97
20+50	1.83	4.57	6.40 (1.00 - 7.00)	1.810 (0.280 - 2.060)	8.11	97
22+22	3.05	3.05	6.10 (1.00 - 6.70)	1.420 (0.200 - 1.710)	6.36	97
22+25	2.90	3.30	6.20 (1.00 - 6.80)	1.460 (0.200 - 1.740)	6.54	97
22+35	2.43	3.87	6.30 (1.00 - 7.00)	1.540 (0.200 - 1.760)	6.90	97
22+42	2.17	4.13	6.30 (1.00 - 7.00)	1.540 (0.200 - 1.760)	6.90	97
22+50	1.96	4.44	6.40 (1.00 - 7.00)	1.610 (0.200 - 1.760)	7.22	97
25+25	3.15	3.15	6.30 (1.00 - 7.00)	1.540 (0.200 - 1.760)	6.90	97
25+35	2.63	3.68	6.30 (1.00 - 7.00)	1.540 (0.200 - 1.760)	6.90	97
25+42	2.35	3.95	6.30 (1.00 - 7.00)	1.540 (0.200 - 1.760)	6.90	97
25+50	2.13	4.27	6.40 (1.00 - 7.00)	1.610 (0.200 - 1.760)	7.22	97
35+35	3.20	3.20	6.40 (1.00 - 7.00)	1.610 (0.200 - 1.760)	7.22	97

MXZ-3C54VA COOLING

Indoor units combination	Cooling capacity (kW)				Outdoor unit power consumption(kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Total			
15	1.50			1.50 (1.4 - 3.0)	0.450 (0.410 - 1.020)	1.98	99
20	2.00			2.00 (1.4 - 3.0)	0.540 (0.410 - 1.020)	2.37	99
22	2.20			2.20 (1.4 - 3.0)	0.510 (0.420 - 0.740)	2.24	99
25	2.50			2.50 (1.4 - 3.3)	0.580 (0.420 - 0.830)	2.55	99
35	3.50			3.50 (1.5 - 4.3)	0.820 (0.430 - 1.180)	3.60	99
42	4.20			4.20 (1.6 - 5.0)	1.080 (0.450 - 1.420)	4.74	99
50	5.00			5.00 (1.6 - 5.6)	1.430 (0.480 - 1.660)	6.28	99
15+15	1.50	1.50		3.00 (2.0 - 5.4)	0.700 (0.630 - 1.800)	3.07	99
15+20	1.50	2.00		3.50 (2.0 - 5.4)	0.970 (0.700 - 1.790)	4.26	99
15+22	1.50	2.20		3.70 (2.0 - 5.4)	1.020 (0.620 - 1.620)	4.48	99
15+25	1.50	2.50		4.00 (2.0 - 5.4)	1.140 (0.710 - 1.970)	5.01	99
15+35	1.50	3.50		5.00 (2.0 - 6.0)	1.120 (0.620 - 1.920)	4.92	99
15+42	1.42	3.98		5.40 (2.0 - 6.8)	1.220 (0.620 - 2.490)	5.36	99
15+50	1.25	4.15		5.40 (2.0 - 6.8)	1.200 (0.620 - 2.480)	5.27	99
20+20	2.00	2.00		4.00 (2.0 - 5.4)	1.110 (0.630 - 1.800)	4.87	99
20+22	2.00	2.20		4.20 (2.0 - 5.4)	1.040 (0.620 - 1.620)	4.57	99
20+25	2.00	2.50		4.50 (2.0 - 5.5)	0.960 (0.620 - 1.670)	4.22	99
20+35	1.96	3.44		5.40 (2.0 - 6.8)	1.220 (0.620 - 2.490)	5.36	99
20+42	1.74	3.66		5.40 (2.0 - 6.8)	1.220 (0.620 - 2.490)	5.36	99
20+50	1.54	3.86		5.40 (2.0 - 6.8)	1.200 (0.620 - 2.480)	5.27	99
22+22	2.20	2.20		4.40 (2.0 - 5.4)	0.900 (0.540 - 1.450)	3.95	99
22+25	2.20	2.50		4.70 (2.0 - 5.7)	1.000 (0.540 - 1.600)	4.39	99
22+35	2.08	3.32		5.40 (2.0 - 6.8)	1.190 (0.540 - 2.320)	5.23	99
22+42	1.86	3.54		5.40 (2.0 - 6.8)	1.190 (0.540 - 2.320)	5.23	99
22+50	1.65	3.75		5.40 (2.0 - 6.8)	1.170 (0.540 - 2.310)	5.14	99
25+25	2.50	2.50		5.00 (2.0 - 6.0)	1.090 (0.540 - 1.750)	4.79	99
25+35	2.25	3.15		5.40 (2.0 - 6.8)	1.190 (0.540 - 2.320)	5.23	99
25+42	2.01	3.39		5.40 (2.0 - 6.8)	1.190 (0.540 - 2.320)	5.23	99
25+50	1.80	3.60		5.40 (2.0 - 6.8)	1.170 (0.540 - 2.310)	5.14	99
35+35	2.70	2.70		5.40 (2.0 - 6.8)	1.190 (0.540 - 2.320)	5.23	99
35+42	2.45	2.95		5.40 (2.0 - 6.8)	1.190 (0.540 - 2.320)	5.23	99
35+50	2.22	3.18		5.40 (2.0 - 6.8)	1.170 (0.550 - 2.310)	5.14	99
42+42	2.70	2.70		5.40 (2.0 - 6.8)	1.190 (0.550 - 2.320)	5.23	99
42+50	2.47	2.93		5.40 (2.0 - 6.8)	1.170 (0.550 - 2.310)	5.14	99
50+50	2.70	2.70		5.40 (2.1 - 6.8)	1.150 (0.560 - 2.340)	5.05	99
15+15+15	1.50	1.50	1.50	4.50 (2.9 - 6.8)	0.960 (0.730 - 2.290)	4.22	99
15+15+20	1.50	1.50	2.00	5.00 (2.9 - 6.8)	1.170 (0.760 - 2.550)	5.14	99

MXZ-3C54VA COOLING

Indoor units combination	Cooling capacity (kW)				Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Total			
15+15+22	1.50	1.50	2.20	5.20 (2.9 - 6.8)	1.190 (0.730 - 2.290)	5.23	99
15+15+25	1.47	1.47	2.45	5.40 (2.9 - 6.8)	1.260 (0.730 - 2.290)	5.53	99
15+15+35	1.25	1.25	2.91	5.40 (2.9 - 6.8)	1.270 (0.730 - 2.290)	5.58	99
15+15+42	1.13	1.13	3.15	5.40 (2.9 - 6.8)	1.250 (0.730 - 2.280)	5.49	99
15+15+50	1.01	1.01	3.38	5.40 (2.9 - 6.8)	1.240 (0.730 - 2.270)	5.45	99
15+20+20	1.47	1.96	1.96	5.40 (2.9 - 6.8)	1.300 (0.760 - 2.550)	5.71	99
15+20+22	1.42	1.89	2.08	5.40 (2.9 - 6.8)	1.260 (0.730 - 2.290)	5.53	99
15+20+25	1.35	1.80	2.25	5.40 (2.9 - 6.8)	1.340 (0.790 - 2.810)	5.88	99
15+20+35	1.16	1.54	2.70	5.40 (2.9 - 6.8)	1.270 (0.730 - 2.290)	5.58	99
15+20+42	1.05	1.40	2.95	5.40 (2.9 - 6.8)	1.250 (0.730 - 2.280)	5.49	99
15+20+50	0.95	1.27	3.18	5.40 (2.9 - 6.8)	1.240 (0.730 - 2.270)	5.45	99
15+22+22	1.37	2.01	2.01	5.40 (2.9 - 6.8)	1.220 (0.700 - 2.030)	5.36	99
15+22+25	1.31	1.92	2.18	5.40 (2.9 - 6.8)	1.230 (0.700 - 2.030)	5.40	99
15+22+35	1.13	1.65	2.63	5.40 (2.9 - 6.8)	1.230 (0.700 - 2.030)	5.40	99
15+22+42	1.03	1.50	2.87	5.40 (2.9 - 6.8)	1.210 (0.700 - 2.020)	5.31	99
15+22+50	0.93	1.37	3.10	5.40 (2.9 - 6.8)	1.200 (0.700 - 2.010)	5.27	99
15+25+25	1.25	2.08	2.08	5.40 (2.9 - 6.8)	1.230 (0.700 - 2.030)	5.40	99
15+25+35	1.08	1.80	2.52	5.40 (2.9 - 6.8)	1.230 (0.700 - 2.030)	5.40	99
15+25+42	0.99	1.65	2.77	5.40 (2.9 - 6.8)	1.210 (0.700 - 2.020)	5.31	99
15+25+50	0.90	1.50	3.00	5.40 (2.9 - 6.8)	1.200 (0.700 - 2.010)	5.27	99
15+35+35	0.95	2.22	2.22	5.40 (2.9 - 6.8)	1.230 (0.700 - 2.030)	5.40	99
15+35+42	0.88	2.05	2.47	5.40 (2.9 - 6.8)	1.210 (0.700 - 2.020)	5.31	99
15+35+50	0.81	1.89	2.70	5.40 (2.9 - 6.8)	1.200 (0.700 - 2.010)	5.27	99
15+42+42	0.82	2.29	2.29	5.40 (2.9 - 6.8)	1.190 (0.700 - 2.010)	5.23	99
20+20+20	1.80	1.80	1.80	5.40 (2.9 - 6.8)	1.260 (0.730 - 2.290)	5.53	99
20+20+22	1.74	1.74	1.92	5.40 (2.9 - 6.8)	1.270 (0.730 - 2.290)	5.58	99
20+20+25	1.66	1.66	2.08	5.40 (2.9 - 6.8)	1.270 (0.730 - 2.290)	5.58	99
20+20+35	1.44	1.44	2.52	5.40 (2.9 - 6.8)	1.270 (0.730 - 2.290)	5.58	99
20+20+42	1.32	1.32	2.77	5.40 (2.9 - 6.8)	1.250 (0.730 - 2.280)	5.49	99
20+20+50	1.20	1.20	3.00	5.40 (2.9 - 6.8)	1.240 (0.730 - 2.270)	5.45	99
20+22+22	1.69	1.86	1.86	5.40 (2.9 - 6.8)	1.230 (0.700 - 2.030)	5.40	99
20+22+25	1.61	1.77	2.01	5.40 (2.9 - 6.8)	1.230 (0.700 - 2.030)	5.40	99
20+22+35	1.40	1.54	2.45	5.40 (2.9 - 6.8)	1.230 (0.700 - 2.030)	5.40	99
20+22+42	1.29	1.41	2.70	5.40 (2.9 - 6.8)	1.210 (0.700 - 2.020)	5.31	99
20+22+50	1.17	1.29	2.93	5.40 (2.9 - 6.8)	1.200 (0.700 - 2.010)	5.27	99
20+25+25	1.54	1.93	1.93	5.40 (2.9 - 6.8)	1.230 (0.700 - 2.030)	5.40	99
20+25+35	1.35	1.69	2.36	5.40 (2.9 - 6.8)	1.230 (0.700 - 2.030)	5.40	99

MXZ-3C54VA COOLING

Indoor units combination	Cooling capacity (kW)				Outdoor unit power consumption(kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Total			
20+25+42	1.24	1.55	2.61	5.40 (2.9 - 6.8)	1.210 (0.700 - 2.020)	5.31	99
20+25+50	1.14	1.42	2.84	5.40 (2.9 - 6.8)	1.200 (0.700 - 2.010)	5.27	99
20+35+35	1.20	2.10	2.10	5.40 (2.9 - 6.8)	1.230 (0.700 - 2.030)	5.40	99
20+35+42	1.11	1.95	2.34	5.40 (2.9 - 6.8)	1.210 (0.700 - 2.020)	5.31	99
22+22+22	1.80	1.80	1.80	5.40 (2.9 - 6.8)	1.190 (0.670 - 1.770)	5.23	99
22+22+25	1.72	1.72	1.96	5.40 (2.9 - 6.8)	1.190 (0.670 - 1.770)	5.23	99
22+22+35	1.50	1.50	2.39	5.40 (2.9 - 6.8)	1.190 (0.670 - 1.770)	5.23	99
22+22+42	1.38	1.38	2.64	5.40 (2.9 - 6.8)	1.170 (0.670 - 1.760)	5.14	99
22+22+50	1.26	1.26	2.87	5.40 (2.9 - 6.8)	1.160 (0.670 - 1.750)	5.09	99
22+25+25	1.65	1.88	1.88	5.40 (2.9 - 6.8)	1.190 (0.670 - 1.770)	5.23	99
22+25+35	1.45	1.65	2.30	5.40 (2.9 - 6.8)	1.190 (0.670 - 1.770)	5.23	99
22+25+42	1.33	1.52	2.55	5.40 (2.9 - 6.8)	1.170 (0.670 - 1.760)	5.14	99
22+25+50	1.22	1.39	2.78	5.40 (2.9 - 6.8)	1.160 (0.670 - 1.750)	5.09	99
22+35+35	1.29	2.05	2.05	5.40 (2.9 - 6.8)	1.190 (0.670 - 1.770)	5.23	99
22+35+42	1.20	1.91	2.29	5.40 (2.9 - 6.8)	1.170 (0.670 - 1.760)	5.14	99
25+25+25	1.80	1.80	1.80	5.40 (2.9 - 6.8)	1.190 (0.670 - 1.770)	5.23	99
25+25+35	1.59	1.59	2.22	5.40 (2.9 - 6.8)	1.190 (0.670 - 1.770)	5.23	99
25+25+42	1.47	1.47	2.47	5.40 (2.9 - 6.8)	1.170 (0.670 - 1.760)	5.14	99
25+25+50	1.35	1.35	2.70	5.40 (2.9 - 6.8)	1.160 (0.670 - 1.750)	5.09	99
25+35+35	1.42	1.99	1.99	5.40 (2.9 - 6.8)	1.190 (0.670 - 1.770)	5.23	99

MXZ-3C54VA HEATING

Indoor units combination	Heating capacity (kW)				Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Total			
15	1.70			1.70 (1.2 - 3.0)	0.460 (0.400 - 1.020)	2.02	99
20	2.20			2.20 (1.2 - 3.9)	0.610 (0.390 - 1.440)	2.68	99
22	3.30			3.30 (1.2 - 4.2)	0.780 (0.380 - 1.090)	3.43	99
25	3.60			3.60 (1.2 - 4.5)	0.880 (0.380 - 1.190)	3.86	99
35	4.00			4.00 (1.2 - 4.8)	1.020 (0.380 - 1.300)	4.48	99
42	5.40			5.40 (1.3 - 6.5)	1.400 (0.370 - 1.800)	6.15	99
50	6.80			6.80 (1.4 - 8.2)	1.770 (0.370 - 2.300)	7.77	99
15+15	1.70	1.70		3.40 (1.8 - 5.0)	0.850 (0.720 - 1.390)	3.73	99
15+20	1.67	2.23		3.90 (1.8 - 5.8)	1.000 (0.710 - 2.790)	4.39	99
15+22	1.66	2.44		4.10 (1.8 - 6.1)	1.050 (0.560 - 2.430)	4.61	99
15+25	1.65	2.75		4.40 (1.8 - 6.6)	1.140 (0.860 - 2.650)	5.01	99
15+35	2.04	4.76		6.80 (1.8 - 9.0)	1.580 (0.560 - 2.790)	6.94	99
15+42	1.79	5.01		6.80 (1.8 - 9.0)	1.560 (0.560 - 2.790)	6.85	99
15+50	1.57	5.23		6.80 (1.8 - 9.0)	1.550 (0.530 - 2.790)	6.81	99
20+20	2.20	2.20		4.40 (1.8 - 6.6)	1.140 (0.710 - 2.110)	5.01	99
20+22	2.62	2.88		5.50 (1.8 - 7.2)	1.320 (0.560 - 2.410)	5.80	99
20+25	2.93	3.67		6.60 (1.8 - 7.5)	1.510 (0.560 - 2.300)	6.63	99
20+35	2.47	4.33		6.80 (1.8 - 9.0)	1.580 (0.560 - 2.500)	6.94	99
20+42	2.19	4.61		6.80 (1.8 - 9.0)	1.560 (0.560 - 2.750)	6.85	99
20+50	1.94	4.86		6.80 (1.8 - 9.0)	1.550 (0.530 - 2.750)	6.81	99
22+22	3.30	3.30		6.60 (1.8 - 7.2)	1.500 (0.410 - 1.710)	6.59	99
22+25	3.14	3.56		6.70 (1.8 - 8.1)	1.540 (0.410 - 1.980)	6.76	99
22+35	2.62	4.18		6.80 (1.8 - 9.0)	1.580 (0.410 - 2.250)	6.94	99
22+42	2.34	4.46		6.80 (1.8 - 9.0)	1.560 (0.410 - 2.250)	6.85	99
22+50	2.08	4.72		6.80 (1.8 - 9.0)	1.530 (0.380 - 2.240)	6.72	99
25+25	3.40	3.40		6.80 (1.8 - 9.0)	1.580 (0.410 - 2.250)	6.94	99
25+35	2.83	3.97		6.80 (1.8 - 9.0)	1.580 (0.410 - 2.250)	6.94	99
25+42	2.54	4.26		6.80 (1.8 - 9.0)	1.560 (0.410 - 2.250)	6.85	99
25+50	2.27	4.53		6.80 (1.8 - 9.0)	1.500 (0.380 - 2.230)	6.59	99
35+35	3.40	3.40		6.80 (1.8 - 9.0)	1.580 (0.410 - 2.250)	6.94	99
35+42	3.09	3.71		6.80 (1.8 - 9.0)	1.490 (0.410 - 2.220)	6.54	99
35+50	2.80	4.00		6.80 (1.8 - 9.0)	1.410 (0.380 - 2.180)	6.19	99
42+42	3.40	3.40		6.80 (1.8 - 9.0)	1.440 (0.410 - 2.190)	6.32	99
42+50	3.10	3.70		6.80 (1.8 - 9.0)	1.370 (0.380 - 2.120)	6.02	99
50+50	3.40	3.40		6.80 (1.9 - 9.0)	1.390 (0.360 - 2.040)	6.10	99
15+15+15	1.70	1.70	1.70	5.10 (2.6 - 7.9)	1.150 (0.890 - 2.390)	5.05	99
15+15+20	1.68	1.68	2.24	5.60 (2.6 - 7.9)	1.760 (1.060 - 2.710)	7.73	99

MXZ-3C54VA HEATING

Indoor units combination	Heating capacity (kW)				Outdoor unit power consumption(kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Total			
15+15+22	1.67	1.67	2.45	5.80 (2.6 - 7.9)	1.690 (0.880 - 2.610)	7.42	99
15+15+25	1.66	1.66	2.77	6.10 (2.6 - 8.0)	1.790 (0.880 - 2.540)	7.86	99
15+15+35	1.57	1.57	3.66	6.80 (2.6 - 8.8)	1.790 (0.880 - 2.300)	7.86	99
15+15+42	1.44	1.44	4.03	6.90 (2.6 - 9.0)	1.740 (0.880 - 2.200)	7.64	99
15+15+50	1.31	1.31	4.38	7.00 (2.6 - 9.0)	1.735 (0.880 - 2.170)	7.62	99
15+20+20	1.66	2.22	2.22	6.10 (2.6 - 8.0)	1.920 (1.050 - 2.630)	8.43	99
15+20+22	1.66	2.21	2.43	6.30 (2.6 - 8.0)	1.850 (0.870 - 2.530)	8.12	99
15+20+25	1.65	2.20	2.75	6.60 (2.6 - 8.0)	1.950 (1.250 - 2.530)	8.56	99
15+20+35	1.48	1.97	3.45	6.90 (2.6 - 9.0)	1.750 (0.870 - 2.230)	7.69	99
15+20+42	1.36	1.82	3.82	7.00 (2.6 - 9.0)	1.735 (0.870 - 2.190)	7.62	99
15+20+50	1.24	1.65	4.12	7.00 (2.6 - 9.0)	1.725 (0.870 - 2.160)	7.58	99
15+22+22	1.65	2.42	2.42	6.50 (2.6 - 8.0)	1.780 (0.690 - 2.430)	7.82	99
15+22+25	1.62	2.38	2.70	6.70 (2.6 - 8.3)	1.740 (0.690 - 2.340)	7.64	99
15+22+35	1.44	2.11	3.35	6.90 (2.6 - 9.0)	1.610 (0.690 - 2.130)	7.07	99
15+22+42	1.33	1.95	3.72	7.00 (2.6 - 9.0)	1.595 (0.690 - 2.090)	7.00	99
15+22+50	1.21	1.77	4.02	7.00 (2.6 - 9.0)	1.585 (0.690 - 2.060)	6.96	99
15+25+25	1.57	2.62	2.62	6.80 (2.6 - 8.8)	1.640 (0.690 - 2.190)	7.20	99
15+25+35	1.40	2.33	3.27	7.00 (2.6 - 9.0)	1.615 (0.690 - 2.130)	7.09	99
15+25+42	1.28	2.13	3.59	7.00 (2.6 - 9.0)	1.595 (0.690 - 2.090)	7.00	99
15+25+50	1.17	1.94	3.89	7.00 (2.6 - 9.0)	1.585 (0.690 - 2.060)	6.96	99
15+35+35	1.24	2.88	2.88	7.00 (2.6 - 9.0)	1.615 (0.690 - 2.130)	7.09	99
15+35+42	1.14	2.66	3.20	7.00 (2.6 - 9.0)	1.595 (0.690 - 2.090)	7.00	99
15+35+50	1.05	2.45	3.50	7.00 (2.6 - 9.0)	1.585 (0.690 - 2.060)	6.96	99
15+42+42	1.06	2.97	2.97	7.00 (2.6 - 9.0)	1.575 (0.690 - 2.050)	6.92	99
20+20+20	2.20	2.20	2.20	6.60 (2.6 - 8.0)	1.660 (0.880 - 2.320)	7.29	99
20+20+22	2.16	2.16	2.38	6.70 (2.6 - 8.3)	1.870 (0.860 - 2.430)	8.21	99
20+20+25	2.09	2.09	2.62	6.80 (2.6 - 8.8)	1.770 (0.860 - 2.280)	7.77	99
20+20+35	1.87	1.87	3.27	7.00 (2.6 - 9.0)	1.745 (0.860 - 2.220)	7.66	99
20+20+42	1.71	1.71	3.59	7.00 (2.6 - 9.0)	1.725 (0.860 - 2.180)	7.58	99
20+20+50	1.56	1.56	3.89	7.00 (2.6 - 9.0)	1.715 (0.860 - 2.150)	7.53	99
20+22+22	2.09	2.30	2.30	6.70 (2.6 - 8.7)	1.660 (0.680 - 2.210)	7.29	99
20+22+25	2.03	2.23	2.54	6.80 (2.6 - 9.0)	1.590 (0.680 - 2.120)	6.98	99
20+22+35	1.82	2.00	3.18	7.00 (2.6 - 9.0)	1.605 (0.680 - 2.120)	7.05	99
20+22+42	1.67	1.83	3.50	7.00 (2.6 - 9.0)	1.585 (0.680 - 2.080)	6.96	99
20+22+50	1.52	1.67	3.80	7.00 (2.6 - 9.0)	1.575 (0.680 - 2.050)	6.92	99
20+25+25	1.97	2.46	2.46	6.90 (2.6 - 9.0)	1.600 (0.680 - 2.120)	7.03	99
20+25+35	1.75	2.19	3.06	7.00 (2.6 - 9.0)	1.605 (0.680 - 2.120)	7.05	99

MXZ-3C54VA HEATING

Indoor units combination	Heating capacity (kW)				Outdoor unit power consumption(kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Total			
20+25+42	1.61	2.01	3.38	7.00 (2.6 - 9.0)	1.585 (0.680 - 2.080)	6.96	99
20+25+50	1.47	1.84	3.68	7.00 (2.6 - 9.0)	1.575 (0.680 - 2.050)	6.92	99
20+35+35	1.56	2.72	2.72	7.00 (2.6 - 9.0)	1.605 (0.680 - 2.120)	7.05	99
20+35+42	1.44	2.53	3.03	7.00 (2.6 - 9.0)	1.585 (0.680 - 2.080)	6.96	99
22+22+22	2.27	2.27	2.27	6.80 (2.6 - 9.0)	1.450 (0.500 - 2.020)	6.37	99
22+22+25	2.20	2.20	2.50	6.90 (2.6 - 9.0)	1.460 (0.500 - 2.020)	6.41	99
22+22+35	1.95	1.95	3.10	7.00 (2.6 - 9.0)	1.465 (0.500 - 2.020)	6.43	99
22+22+42	1.79	1.79	3.42	7.00 (2.6 - 9.0)	1.445 (0.500 - 1.980)	6.35	99
22+22+50	1.64	1.64	3.72	7.00 (2.6 - 9.0)	1.435 (0.500 - 1.950)	6.30	99
22+25+25	2.11	2.40	2.40	6.90 (2.6 - 9.0)	1.460 (0.500 - 2.020)	6.41	99
22+25+35	1.88	2.13	2.99	7.00 (2.6 - 9.0)	1.465 (0.500 - 2.020)	6.43	99
22+25+42	1.73	1.97	3.30	7.00 (2.6 - 9.0)	1.445 (0.500 - 1.980)	6.35	99
22+25+50	1.59	1.80	3.61	7.00 (2.6 - 9.0)	1.435 (0.500 - 1.950)	6.30	99
22+35+35	1.67	2.66	2.66	7.00 (2.6 - 9.0)	1.465 (0.500 - 2.020)	6.43	99
22+35+42	1.56	2.47	2.97	7.00 (2.6 - 9.0)	1.445 (0.500 - 1.980)	6.35	99
25+25+25	2.33	2.33	2.33	7.00 (2.6 - 9.0)	1.465 (0.500 - 2.020)	6.43	99
25+25+35	2.06	2.06	2.88	7.00 (2.6 - 9.0)	1.465 (0.500 - 2.020)	6.43	99
25+25+42	1.90	1.90	3.20	7.00 (2.6 - 9.0)	1.445 (0.500 - 1.980)	6.35	99
25+25+50	1.75	1.75	3.50	7.00 (2.6 - 9.0)	1.435 (0.500 - 1.950)	6.30	99
25+35+35	1.84	2.58	2.58	7.00 (2.6 - 9.0)	1.465 (0.500 - 2.020)	6.43	99

MXZ-3C68VA COOLING

Indoor units combination	Cooling capacity (kW)				Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Total			
15	1.50			1.50 (1.4 - 3.0)	0.490 (0.450 - 1.020)	2.15	99
20	2.00			2.00 (1.4 - 3.0)	0.520 (0.450 - 1.020)	2.28	99
22	2.20			2.20 (1.4 - 3.0)	0.510 (0.420 - 0.740)	2.24	99
25	2.50			2.50 (1.4 - 3.3)	0.580 (0.420 - 0.830)	2.55	99
35	3.50			3.50 (1.5 - 4.3)	0.800 (0.430 - 1.180)	3.51	99
42	4.20			4.20 (1.6 - 5.0)	1.060 (0.450 - 1.420)	4.66	99
50	5.00			5.00 (1.6 - 5.6)	1.400 (0.480 - 1.660)	6.15	99
60	6.00			6.00 (1.6 - 6.6)	1.700 (0.480 - 2.250)	7.47	99
15+15	1.50	1.50		3.00 (2.0 - 5.4)	0.790 (0.700 - 1.800)	3.47	99
15+20	1.50	2.00		3.50 (2.0 - 5.4)	0.850 (0.700 - 1.790)	3.73	99
15+22	1.50	2.20		3.70 (2.0 - 5.4)	0.980 (0.620 - 1.620)	4.30	99
15+25	1.50	2.50		4.00 (2.0 - 5.4)	1.130 (0.780 - 1.970)	4.96	99
15+35	1.50	3.50		5.00 (2.0 - 6.0)	1.110 (0.620 - 1.920)	4.87	99
15+42	1.50	4.20		5.70 (2.0 - 6.4)	1.370 (0.620 - 2.130)	6.02	99
15+50	1.50	5.00		6.50 (2.0 - 6.8)	1.670 (0.630 - 2.350)	7.33	99
15+60	1.36	5.44		6.80 (2.0 - 7.1)	1.850 (0.640 - 2.490)	8.12	99
20+20	2.00	2.00		4.00 (2.0 - 5.4)	1.100 (0.700 - 1.800)	4.83	99
20+22	2.00	2.20		4.20 (2.0 - 5.4)	1.030 (0.620 - 1.620)	4.52	99
20+25	2.00	2.50		4.50 (2.0 - 5.4)	0.960 (0.620 - 1.620)	4.22	99
20+35	2.00	3.50		5.50 (2.0 - 6.3)	1.300 (0.620 - 2.070)	5.71	99
20+42	2.00	4.20		6.20 (2.0 - 6.7)	1.550 (0.620 - 2.270)	6.81	99
20+50	1.94	4.86		6.80 (2.0 - 7.1)	1.850 (0.630 - 2.500)	8.12	99
20+60	1.70	5.10		6.80 (2.0 - 7.1)	1.850 (0.640 - 2.490)	8.12	99
22+22	2.20	2.20		4.40 (2.0 - 5.4)	0.900 (0.540 - 1.450)	3.95	99
22+25	2.20	2.50		4.70 (2.0 - 5.7)	0.990 (0.540 - 1.600)	4.35	99
22+35	2.20	3.50		5.70 (2.0 - 6.4)	1.340 (0.540 - 1.960)	5.88	99
22+42	2.20	4.20		6.40 (2.0 - 6.8)	1.600 (0.540 - 2.160)	7.03	99
22+50	2.08	4.72		6.80 (2.0 - 7.1)	1.820 (0.550 - 2.330)	7.99	99
22+60	1.82	4.98		6.80 (2.0 - 7.1)	1.820 (0.560 - 2.320)	7.99	99
25+25	2.50	2.50		5.00 (2.0 - 6.0)	1.080 (0.540 - 1.750)	4.74	99
25+35	2.50	3.50		6.00 (2.0 - 6.6)	1.450 (0.540 - 2.050)	6.37	99
25+42	2.50	4.20		6.70 (2.0 - 6.9)	1.710 (0.540 - 2.250)	7.51	99
25+50	2.27	4.53		6.80 (2.0 - 7.1)	1.820 (0.550 - 2.330)	7.99	99
25+60	2.00	4.80		6.80 (2.0 - 7.1)	1.810 (0.560 - 2.320)	7.95	99
35+35	3.40	3.40		6.80 (2.0 - 7.1)	1.820 (0.540 - 2.340)	7.99	99
35+42	3.09	3.71		6.80 (2.0 - 7.1)	1.820 (0.540 - 2.340)	7.99	99
35+50	2.80	4.00		6.80 (2.0 - 7.1)	1.810 (0.550 - 2.330)	7.95	99

MXZ-3C68VA COOLING

Indoor units combination	Cooling capacity (kW)				Outdoor unit power consumption(kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Total			
35+60	2.51	4.29		6.80 (2.0 - 7.1)	1.750 (0.560 - 2.330)	7.69	99
42+42	3.40	3.40		6.80 (2.0 - 7.1)	1.820 (0.540 - 2.340)	7.99	99
42+50	3.10	3.70		6.80 (2.0 - 7.1)	1.770 (0.550 - 2.340)	7.77	99
42+60	2.80	4.00		6.80 (2.1 - 7.1)	1.710 (0.560 - 2.350)	7.51	99
50+50	3.40	3.40		6.80 (2.1 - 7.1)	1.720 (0.560 - 2.360)	7.55	99
50+60	3.09	3.71		6.80 (2.1 - 7.1)	1.650 (0.570 - 2.360)	7.25	99
60+60	3.40	3.40		6.80 (2.1 - 7.1)	1.580 (0.580 - 2.410)	6.94	99
15+15+15	1.50	1.50	1.50	4.50 (2.9 - 7.3)	0.970 (0.780 - 2.310)	4.26	99
15+15+20	1.50	1.50	2.00	5.00 (2.9 - 7.3)	1.270 (0.760 - 2.430)	5.58	99
15+15+22	1.50	1.50	2.20	5.20 (2.9 - 7.3)	1.310 (0.730 - 2.390)	5.75	99
15+15+25	1.50	1.50	2.50	5.50 (2.9 - 7.4)	1.420 (0.730 - 2.400)	6.24	99
15+15+35	1.50	1.50	3.50	6.50 (2.9 - 8.0)	1.620 (0.730 - 2.460)	7.11	99
15+15+42	1.40	1.40	3.91	6.70 (2.9 - 8.3)	1.720 (0.730 - 2.480)	7.55	99
15+15+50	1.28	1.28	4.25	6.80 (2.9 - 8.4)	1.770 (0.730 - 2.480)	7.77	99
15+15+60	1.13	1.13	4.53	6.80 (2.9 - 8.4)	1.640 (0.730 - 2.470)	7.20	99
15+20+20	1.50	2.00	2.00	5.50 (2.9 - 7.4)	1.460 (0.760 - 2.440)	6.41	99
15+20+22	1.50	2.00	2.20	5.70 (2.9 - 7.4)	1.490 (0.730 - 2.400)	6.54	99
15+20+25	1.50	2.00	2.50	6.00 (2.9 - 7.4)	1.600 (0.840 - 2.400)	7.03	99
15+20+35	1.44	1.91	3.35	6.70 (2.9 - 8.2)	1.740 (0.730 - 2.480)	7.64	99
15+20+42	1.32	1.77	3.71	6.80 (2.9 - 8.4)	1.810 (0.730 - 2.490)	7.95	99
15+20+50	1.20	1.60	4.00	6.80 (2.9 - 8.4)	1.720 (0.730 - 2.480)	7.55	99
15+20+60	1.07	1.43	4.29	6.80 (2.9 - 8.4)	1.590 (0.730 - 2.460)	6.98	99
15+22+22	1.50	2.20	2.20	5.90 (2.9 - 7.4)	1.520 (0.700 - 2.360)	6.68	99
15+22+25	1.50	2.20	2.50	6.20 (2.9 - 7.6)	1.570 (0.700 - 2.380)	6.90	99
15+22+35	1.40	2.05	3.26	6.70 (2.9 - 8.3)	1.700 (0.700 - 2.450)	7.47	99
15+22+42	1.29	1.89	3.62	6.80 (2.9 - 8.4)	1.750 (0.700 - 2.450)	7.69	99
15+22+50	1.17	1.72	3.91	6.80 (2.9 - 8.4)	1.660 (0.700 - 2.440)	7.29	99
15+22+60	1.05	1.54	4.21	6.80 (2.9 - 8.4)	1.530 (0.700 - 2.420)	6.72	99
15+25+25	1.50	2.50	2.50	6.50 (2.9 - 8.0)	1.580 (0.700 - 2.420)	6.94	99
15+25+35	1.36	2.27	3.17	6.80 (2.9 - 8.4)	1.815 (0.700 - 2.460)	7.97	99
15+25+42	1.24	2.07	3.48	6.80 (2.9 - 8.4)	1.720 (0.700 - 2.450)	7.55	99
15+25+50	1.13	1.89	3.78	6.80 (2.9 - 8.4)	1.630 (0.700 - 2.440)	7.16	99
15+25+60	1.02	1.70	4.08	6.80 (2.9 - 8.4)	1.500 (0.700 - 2.420)	6.59	99
15+35+35	1.20	2.80	2.80	6.80 (2.9 - 8.4)	1.710 (0.700 - 2.460)	7.51	99
15+35+42	1.11	2.59	3.10	6.80 (2.9 - 8.4)	1.620 (0.700 - 2.440)	7.11	99
15+35+50	1.02	2.38	3.40	6.80 (2.9 - 8.4)	1.530 (0.700 - 2.430)	6.72	99
15+35+60	0.93	2.16	3.71	6.80 (2.9 - 8.4)	1.450 (0.700 - 2.420)	6.37	99

MXZ-3C68VA COOLING

Indoor units combination	Cooling capacity (kW)				Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Total			
15+42+42	1.03	2.88	2.88	6.80 (2.9 - 8.4)	1.530 (0.700 - 2.430)	6.72	99
15+42+50	0.95	2.67	3.18	6.80 (2.9 - 8.4)	1.460 (0.700 - 2.420)	6.41	99
15+42+60	0.87	2.44	3.49	6.80 (2.9 - 8.4)	1.430 (0.700 - 2.410)	6.28	99
15+50+50	0.89	2.96	2.96	6.80 (2.9 - 8.4)	1.450 (0.700 - 2.410)	6.37	99
20+20+20	2.00	2.00	2.00	6.00 (2.9 - 7.4)	1.520 (0.780 - 2.320)	6.68	99
20+20+22	2.00	2.00	2.20	6.20 (2.9 - 7.6)	1.610 (0.730 - 2.420)	7.07	99
20+20+25	2.00	2.00	2.50	6.50 (2.9 - 8.0)	1.620 (0.730 - 2.460)	7.11	99
20+20+35	1.81	1.81	3.17	6.80 (2.9 - 8.4)	1.855 (0.730 - 2.500)	8.15	99
20+20+42	1.66	1.66	3.48	6.80 (2.9 - 8.4)	1.760 (0.730 - 2.490)	7.73	99
20+20+50	1.51	1.51	3.78	6.80 (2.9 - 8.4)	1.670 (0.730 - 2.480)	7.33	99
20+20+60	1.36	1.36	4.08	6.80 (2.9 - 8.4)	1.540 (0.730 - 2.460)	6.76	99
20+22+22	2.00	2.20	2.20	6.40 (2.9 - 7.9)	1.570 (0.700 - 2.410)	6.90	99
20+22+25	1.97	2.17	2.46	6.60 (2.9 - 8.1)	1.580 (0.700 - 2.430)	6.94	99
20+22+35	1.77	1.94	3.09	6.80 (2.9 - 8.4)	1.790 (0.700 - 2.460)	7.86	99
20+22+42	1.62	1.78	3.40	6.80 (2.9 - 8.4)	1.700 (0.700 - 2.450)	7.47	99
20+22+50	1.48	1.63	3.70	6.80 (2.9 - 8.4)	1.610 (0.700 - 2.430)	7.07	99
20+22+60	1.33	1.47	4.00	6.80 (2.9 - 8.4)	1.480 (0.700 - 2.420)	6.50	99
20+25+25	1.91	2.39	2.39	6.70 (2.9 - 8.2)	1.700 (0.700 - 2.440)	7.47	99
20+25+35	1.70	2.13	2.98	6.80 (2.9 - 8.4)	1.760 (0.700 - 2.460)	7.73	99
20+25+42	1.56	1.95	3.28	6.80 (2.9 - 8.4)	1.670 (0.700 - 2.450)	7.33	99
20+25+50	1.43	1.79	3.58	6.80 (2.9 - 8.4)	1.580 (0.700 - 2.430)	6.94	99
20+25+60	1.30	1.62	3.89	6.80 (2.9 - 8.4)	1.450 (0.700 - 2.420)	6.37	99
20+35+35	1.51	2.64	2.64	6.80 (2.9 - 8.4)	1.660 (0.700 - 2.460)	7.29	99
20+35+42	1.40	2.45	2.94	6.80 (2.9 - 8.4)	1.570 (0.700 - 2.440)	6.90	99
20+35+50	1.30	2.27	3.24	6.80 (2.9 - 8.4)	1.480 (0.700 - 2.430)	6.50	99
20+35+60	1.18	2.07	3.55	6.80 (2.9 - 8.4)	1.450 (0.700 - 2.420)	6.37	99
20+42+42	1.31	2.75	2.75	6.80 (2.9 - 8.4)	1.480 (0.700 - 2.430)	6.50	99
20+42+50	1.21	2.55	3.04	6.80 (2.9 - 8.4)	1.460 (0.700 - 2.420)	6.41	99
20+50+50	1.13	2.83	2.83	6.80 (2.9 - 8.4)	1.450 (0.700 - 2.410)	6.37	99
22+22+22	2.20	2.20	2.20	6.60 (2.9 - 8.1)	1.540 (0.670 - 2.390)	6.76	99
22+22+25	2.14	2.14	2.43	6.70 (2.9 - 8.2)	1.660 (0.670 - 2.400)	7.29	99
22+22+35	1.89	1.89	3.01	6.80 (2.9 - 8.4)	1.730 (0.670 - 2.420)	7.60	99
22+22+42	1.74	1.74	3.32	6.80 (2.9 - 8.4)	1.640 (0.670 - 2.410)	7.20	99
22+22+50	1.59	1.59	3.62	6.80 (2.9 - 8.4)	1.550 (0.670 - 2.390)	6.81	99
22+22+60	1.44	1.44	3.92	6.80 (2.9 - 8.4)	1.420 (0.670 - 2.380)	6.24	99
22+25+25	2.05	2.33	2.33	6.70 (2.9 - 8.3)	1.660 (0.670 - 2.410)	7.29	99
22+25+35	1.82	2.07	2.90	6.80 (2.9 - 8.4)	1.700 (0.670 - 2.420)	7.47	99

MXZ-3C68VA COOLING

Indoor units combination	Cooling capacity (kW)				Outdoor unit power consumption(kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Total			
22+25+42	1.68	1.91	3.21	6.80 (2.9 - 8.4)	1.610 (0.670 - 2.410)	7.07	99
22+25+50	1.54	1.75	3.51	6.80 (2.9 - 8.4)	1.520 (0.670 - 2.390)	6.68	99
22+25+60	1.40	1.59	3.81	6.80 (2.9 - 8.4)	1.410 (0.670 - 2.380)	6.19	99
22+35+35	1.63	2.59	2.59	6.80 (2.9 - 8.4)	1.600 (0.670 - 2.410)	7.03	99
22+35+42	1.51	2.40	2.88	6.80 (2.9 - 8.4)	1.510 (0.670 - 2.400)	6.63	99
22+35+50	1.40	2.22	3.18	6.80 (2.9 - 8.4)	1.440 (0.670 - 2.390)	6.32	99
22+35+60	1.28	2.03	3.49	6.80 (2.9 - 8.4)	1.410 (0.670 - 2.380)	6.19	99
22+42+42	1.41	2.69	2.69	6.80 (2.9 - 8.4)	1.430 (0.670 - 2.390)	6.28	99
22+42+50	1.31	2.51	2.98	6.80 (2.9 - 8.4)	1.420 (0.670 - 2.380)	6.24	99
25+25+25	2.27	2.27	2.27	6.80 (2.9 - 8.4)	1.775 (0.670 - 2.420)	7.80	99
25+25+35	2.00	2.00	2.80	6.80 (2.9 - 8.4)	1.670 (0.670 - 2.420)	7.33	99
25+25+42	1.85	1.85	3.10	6.80 (2.9 - 8.4)	1.580 (0.670 - 2.400)	6.94	99
25+25+50	1.70	1.70	3.40	6.80 (2.9 - 8.4)	1.490 (0.670 - 2.390)	6.54	99
25+25+60	1.55	1.55	3.71	6.80 (2.9 - 8.4)	1.410 (0.670 - 2.380)	6.19	99
25+35+35	1.79	2.51	2.51	6.80 (2.9 - 8.4)	1.570 (0.670 - 2.410)	6.90	99
25+35+42	1.67	2.33	2.80	6.80 (2.9 - 8.4)	1.480 (0.670 - 2.400)	6.50	99
25+35+50	1.55	2.16	3.09	6.80 (2.9 - 8.4)	1.440 (0.670 - 2.390)	6.32	99
25+35+60	1.42	1.98	3.40	6.80 (2.9 - 8.4)	1.410 (0.670 - 2.380)	6.19	99
25+42+42	1.56	2.62	2.62	6.80 (2.9 - 8.4)	1.430 (0.670 - 2.390)	6.28	99
25+42+50	1.45	2.44	2.91	6.80 (2.9 - 8.4)	1.420 (0.670 - 2.380)	6.24	99
35+35+35	2.27	2.27	2.27	6.80 (2.9 - 8.4)	1.470 (0.670 - 2.410)	6.46	99
35+35+42	2.13	2.13	2.55	6.80 (2.9 - 8.4)	1.450 (0.670 - 2.400)	6.37	99
35+35+50	1.98	1.98	2.83	6.80 (2.9 - 8.4)	1.440 (0.670 - 2.390)	6.32	99
35+42+42	2.00	2.40	2.40	6.80 (2.9 - 8.4)	1.430 (0.670 - 2.390)	6.28	99

MXZ-3C68VA HEATING

Indoor units combination	Heating capacity (kW)				Outdoor unit power consumption(kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Total			
15	1.70			1.70 (1.2 - 3.0)	0.500 (0.400 - 0.950)	2.20	99
20	2.20			2.20 (1.2 - 3.9)	0.610 (0.390 - 1.330)	2.68	99
22	3.30			3.30 (1.2 - 4.2)	0.760 (0.380 - 1.090)	3.34	99
25	3.60			3.60 (1.2 - 4.5)	0.860 (0.380 - 1.190)	3.78	99
35	4.00			4.00 (1.2 - 4.8)	1.000 (0.380 - 1.300)	4.39	99
42	5.40			5.40 (1.3 - 6.5)	1.460 (0.370 - 1.800)	6.41	99
50	7.20			7.20 (1.4 - 8.2)	1.880 (0.370 - 2.300)	8.26	99
60	7.90			7.90 (1.4 - 8.6)	2.120 (0.360 - 2.410)	9.31	99
15+15	1.70	1.70		3.40 (1.8 - 5.0)	0.850 (0.670 - 1.310)	3.73	99
15+20	1.67	2.23		3.90 (1.8 - 5.8)	1.020 (0.680 - 1.630)	4.48	99
15+22	1.66	2.44		4.10 (1.8 - 6.1)	1.080 (0.550 - 1.760)	4.74	99
15+25	1.65	2.75		4.40 (1.8 - 6.6)	1.180 (0.800 - 1.950)	5.18	99
15+35	2.16	5.04		7.20 (1.8 - 9.0)	1.680 (0.550 - 2.170)	7.38	99
15+42	2.03	5.67		7.70 (1.8 - 9.0)	1.780 (0.550 - 2.170)	7.82	99
15+50	1.92	6.38		8.30 (1.8 - 9.0)	1.910 (0.550 - 2.170)	8.39	99
15+60	1.72	6.88		8.60 (1.8 - 9.0)	2.050 (0.550 - 2.150)	9.00	99
20+20	2.20	2.20		4.40 (1.8 - 6.6)	1.180 (0.660 - 1.950)	5.18	99
20+22	2.62	2.88		5.50 (1.8 - 6.9)	1.330 (0.540 - 1.830)	5.84	99
20+25	2.98	3.72		6.70 (1.8 - 7.5)	1.510 (0.540 - 1.790)	6.63	99
20+35	2.76	4.84		7.60 (1.8 - 9.0)	1.770 (0.540 - 2.170)	7.77	99
20+42	2.58	5.42		8.00 (1.8 - 9.0)	1.870 (0.540 - 2.170)	8.21	99
20+50	2.46	6.14		8.60 (1.8 - 9.0)	2.000 (0.540 - 2.170)	8.78	99
20+60	2.15	6.45		8.60 (1.8 - 9.0)	2.070 (0.540 - 2.130)	9.09	99
22+22	3.30	3.30		6.60 (1.8 - 7.2)	1.470 (0.410 - 1.710)	6.46	99
22+25	3.23	3.67		6.90 (1.8 - 8.1)	1.580 (0.410 - 1.940)	6.94	99
22+35	2.97	4.73		7.70 (1.8 - 9.0)	1.800 (0.410 - 2.170)	7.91	99
22+42	2.82	5.38		8.20 (1.8 - 9.0)	1.910 (0.410 - 2.170)	8.39	99
22+50	2.63	5.97		8.60 (1.8 - 9.0)	2.010 (0.410 - 2.160)	8.83	99
22+60	2.31	6.29		8.60 (1.8 - 9.0)	2.080 (0.410 - 2.120)	9.13	99
25+25	3.60	3.60		7.20 (1.8 - 9.0)	1.680 (0.410 - 2.170)	7.38	99
25+35	3.29	4.61		7.90 (1.8 - 9.0)	1.860 (0.410 - 2.170)	8.17	99
25+42	3.13	5.27		8.40 (1.8 - 9.0)	1.960 (0.410 - 2.170)	8.61	99
25+50	2.87	5.73		8.60 (1.8 - 9.0)	2.020 (0.410 - 2.150)	8.87	99
25+60	2.53	6.07		8.60 (1.8 - 9.0)	2.070 (0.400 - 2.110)	9.09	99
35+35	4.30	4.30		8.60 (1.8 - 9.0)	2.030 (0.410 - 2.170)	8.92	99
35+42	3.91	4.69		8.60 (1.8 - 9.0)	2.040 (0.410 - 2.140)	8.96	99
35+50	3.54	5.06		8.60 (1.8 - 9.0)	2.040 (0.400 - 2.110)	8.96	99

MXZ-3C68VA HEATING

Indoor units combination	Heating capacity (kW)				Outdoor unit power consumption(kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Total			
35+60	3.17	5.43		8.60 (1.8 - 9.0)	1.900 (0.370 - 2.060)	8.34	99
42+42	4.30	4.30		8.60 (1.8 - 9.0)	2.090 (0.400 - 2.110)	9.18	99
42+50	3.93	4.67		8.60 (1.8 - 9.0)	1.910 (0.380 - 2.080)	8.39	99
42+60	3.54	5.06		8.60 (1.9 - 9.0)	1.780 (0.360 - 2.030)	7.82	99
50+50	4.30	4.30		8.60 (1.9 - 9.0)	1.820 (0.360 - 2.040)	7.99	99
50+60	3.91	4.69		8.60 (1.9 - 9.0)	1.780 (0.360 - 1.970)	7.82	99
60+60	4.30	4.30		8.60 (1.9 - 9.0)	1.800 (0.360 - 1.900)	7.91	99
15+15+15	1.70	1.70	1.70	5.10 (2.6 - 8.4)	1.110 (0.900 - 2.410)	4.87	99
15+15+20	1.68	1.68	2.24	5.60 (2.6 - 8.9)	1.250 (1.060 - 2.950)	5.49	99
15+15+22	1.67	1.67	2.45	5.80 (2.6 - 9.1)	1.310 (0.880 - 2.940)	5.75	99
15+15+25	1.66	1.66	2.77	6.10 (2.6 - 9.4)	1.400 (0.880 - 3.080)	6.15	99
15+15+35	1.92	1.92	4.47	8.30 (2.6 - 10.5)	1.970 (0.880 - 3.320)	8.65	99
15+15+42	1.79	1.79	5.02	8.60 (2.6 - 10.6)	2.030 (0.880 - 3.280)	8.92	99
15+15+50	1.61	1.61	5.38	8.60 (2.6 - 10.6)	2.020 (0.880 - 3.250)	8.87	99
15+15+60	1.43	1.43	5.73	8.60 (2.6 - 10.6)	2.050 (0.880 - 3.250)	9.00	99
15+20+20	1.66	2.22	2.22	6.10 (2.6 - 9.4)	1.400 (1.050 - 3.170)	6.15	99
15+20+22	1.66	2.21	2.43	6.30 (2.6 - 9.6)	1.450 (0.870 - 3.160)	6.37	99
15+20+25	1.65	2.20	2.75	6.60 (2.6 - 9.9)	1.540 (1.260 - 3.290)	6.76	99
15+20+35	1.84	2.46	4.30	8.60 (2.6 - 10.6)	2.050 (0.870 - 3.310)	9.00	99
15+20+42	1.68	2.23	4.69	8.60 (2.6 - 10.6)	2.030 (0.870 - 3.270)	8.92	99
15+20+50	1.52	2.02	5.06	8.60 (2.6 - 10.6)	2.020 (0.870 - 3.240)	8.87	99
15+20+60	1.36	1.81	5.43	8.60 (2.6 - 10.6)	2.050 (0.870 - 3.240)	9.00	99
15+22+22	1.65	2.42	2.42	6.50 (2.6 - 9.8)	1.510 (0.690 - 3.150)	6.63	99
15+22+25	1.77	2.59	2.94	7.30 (2.6 - 10.1)	1.710 (0.690 - 3.200)	7.51	99
15+22+35	1.79	2.63	4.18	8.60 (2.6 - 10.6)	2.050 (0.690 - 3.210)	9.00	99
15+22+42	1.63	2.39	4.57	8.60 (2.6 - 10.6)	2.030 (0.690 - 3.170)	8.92	99
15+22+50	1.48	2.17	4.94	8.60 (2.6 - 10.6)	2.020 (0.690 - 3.140)	8.87	99
15+22+60	1.33	1.95	5.32	8.60 (2.6 - 10.6)	2.050 (0.690 - 3.140)	9.00	99
15+25+25	1.92	3.19	3.19	8.30 (2.6 - 10.5)	1.970 (0.690 - 3.210)	8.65	99
15+25+35	1.72	2.87	4.01	8.60 (2.6 - 10.6)	2.050 (0.690 - 3.210)	9.00	99
15+25+42	1.57	2.62	4.40	8.60 (2.6 - 10.6)	2.030 (0.690 - 3.170)	8.92	99
15+25+50	1.43	2.39	4.78	8.60 (2.6 - 10.6)	2.020 (0.690 - 3.140)	8.87	99
15+25+60	1.29	2.15	5.16	8.60 (2.6 - 10.6)	2.050 (0.690 - 3.140)	9.00	99
15+35+35	1.52	3.54	3.54	8.60 (2.6 - 10.6)	2.050 (0.690 - 3.210)	9.00	99
15+35+42	1.40	3.27	3.93	8.60 (2.6 - 10.6)	2.030 (0.690 - 3.170)	8.92	99
15+35+50	1.29	3.01	4.30	8.60 (2.6 - 10.6)	2.020 (0.690 - 3.140)	8.87	99
15+35+60	1.17	2.74	4.69	8.60 (2.6 - 10.6)	2.050 (0.690 - 3.140)	9.00	99

MXZ-3C68VA HEATING

Indoor units combination	Heating capacity (kW)				Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Total			
15+42+42	1.30	3.65	3.65	8.60 (2.6 - 10.6)	2.010 (0.690 - 3.130)	8.83	99
15+42+50	1.21	3.38	4.02	8.60 (2.6 - 10.6)	2.000 (0.690 - 3.100)	8.78	99
15+42+60	1.10	3.09	4.41	8.60 (2.6 - 10.6)	2.030 (0.690 - 3.100)	8.92	99
15+50+50	1.12	3.74	3.74	8.60 (2.6 - 10.6)	1.990 (0.690 - 3.070)	8.74	99
20+20+20	2.20	2.20	2.20	6.60 (2.6 - 9.9)	1.540 (0.890 - 3.080)	6.76	99
20+20+22	2.35	2.35	2.59	7.30 (2.6 - 10.1)	1.710 (0.860 - 3.290)	7.51	99
20+20+25	2.55	2.55	3.19	8.30 (2.6 - 10.5)	1.970 (0.860 - 3.300)	8.65	99
20+20+35	2.29	2.29	4.01	8.60 (2.6 - 10.6)	2.050 (0.860 - 3.300)	9.00	99
20+20+42	2.10	2.10	4.40	8.60 (2.6 - 10.6)	2.030 (0.860 - 3.260)	8.92	99
20+20+50	1.91	1.91	4.78	8.60 (2.6 - 10.6)	2.020 (0.860 - 3.230)	8.87	99
20+20+60	1.72	1.72	5.16	8.60 (2.6 - 10.6)	2.050 (0.860 - 3.230)	9.00	99
20+22+22	2.47	2.72	2.72	7.90 (2.6 - 10.4)	1.880 (0.680 - 3.190)	8.26	99
20+22+25	2.57	2.82	3.21	8.60 (2.6 - 10.6)	2.050 (0.680 - 3.200)	9.00	99
20+22+35	2.23	2.46	3.91	8.60 (2.6 - 10.6)	2.050 (0.680 - 3.200)	9.00	99
20+22+42	2.05	2.25	4.30	8.60 (2.6 - 10.6)	2.030 (0.680 - 3.160)	8.92	99
20+22+50	1.87	2.06	4.67	8.60 (2.6 - 10.6)	2.020 (0.680 - 3.130)	8.87	99
20+22+60	1.69	1.85	5.06	8.60 (2.6 - 10.6)	2.050 (0.680 - 3.130)	9.00	99
20+25+25	2.46	3.07	3.07	8.60 (2.6 - 10.6)	2.050 (0.680 - 3.200)	9.00	99
20+25+35	2.15	2.69	3.76	8.60 (2.6 - 10.6)	2.050 (0.680 - 3.200)	9.00	99
20+25+42	1.98	2.47	4.15	8.60 (2.6 - 10.6)	2.030 (0.680 - 3.160)	8.92	99
20+25+50	1.81	2.26	4.53	8.60 (2.6 - 10.6)	2.020 (0.680 - 3.130)	8.87	99
20+25+60	1.64	2.05	4.91	8.60 (2.6 - 10.6)	2.050 (0.680 - 3.130)	9.00	99
20+35+35	1.91	3.34	3.34	8.60 (2.6 - 10.6)	2.050 (0.680 - 3.200)	9.00	99
20+35+42	1.77	3.10	3.72	8.60 (2.6 - 10.6)	2.030 (0.680 - 3.160)	8.92	99
20+35+50	1.64	2.87	4.10	8.60 (2.6 - 10.6)	2.020 (0.680 - 3.130)	8.87	99
20+35+60	1.50	2.62	4.49	8.60 (2.6 - 10.6)	2.050 (0.680 - 3.130)	9.00	99
20+42+42	1.65	3.47	3.47	8.60 (2.6 - 10.6)	2.010 (0.680 - 3.120)	8.83	99
20+42+50	1.54	3.23	3.84	8.60 (2.6 - 10.6)	2.000 (0.680 - 3.090)	8.78	99
20+50+50	1.43	3.58	3.58	8.60 (2.6 - 10.6)	1.990 (0.680 - 3.060)	8.74	99
22+22+22	2.87	2.87	2.87	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
22+22+25	2.74	2.74	3.12	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
22+22+35	2.39	2.39	3.81	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
22+22+42	2.20	2.20	4.20	8.60 (2.6 - 10.6)	2.030 (0.500 - 3.060)	8.92	99
22+22+50	2.01	2.01	4.57	8.60 (2.6 - 10.6)	2.020 (0.500 - 3.030)	8.87	99
22+22+60	1.82	1.82	4.96	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.030)	9.00	99
22+25+25	2.63	2.99	2.99	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
22+25+35	2.31	2.62	3.67	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99

MXZ-3C68VA HEATING

Indoor units combination	Heating capacity (kW)				Outdoor unit power consumption(kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Total			
22+25+42	2.13	2.42	4.06	8.60 (2.6 - 10.6)	2.030 (0.500 - 3.060)	8.92	99
22+25+50	1.95	2.22	4.43	8.60 (2.6 - 10.6)	2.020 (0.500 - 3.030)	8.87	99
22+25+60	1.77	2.01	4.82	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.030)	9.00	99
22+35+35	2.06	3.27	3.27	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
22+35+42	1.91	3.04	3.65	8.60 (2.6 - 10.6)	2.030 (0.500 - 3.060)	8.92	99
22+35+50	1.77	2.81	4.02	8.60 (2.6 - 10.6)	2.020 (0.500 - 3.030)	8.87	99
22+35+60	1.62	2.57	4.41	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.030)	9.00	99
22+42+42	1.78	3.41	3.41	8.60 (2.6 - 10.6)	2.010 (0.500 - 3.020)	8.83	99
22+42+50	1.66	3.17	3.77	8.60 (2.6 - 10.6)	2.000 (0.500 - 2.990)	8.78	99
25+25+25	2.87	2.87	2.87	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
25+25+35	2.53	2.53	3.54	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
25+25+42	2.34	2.34	3.93	8.60 (2.6 - 10.6)	2.030 (0.500 - 3.060)	8.92	99
25+25+50	2.15	2.15	4.30	8.60 (2.6 - 10.6)	2.020 (0.500 - 3.030)	8.87	99
25+25+60	1.95	1.95	4.69	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.030)	9.00	99
25+35+35	2.26	3.17	3.17	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
25+35+42	2.11	2.95	3.54	8.60 (2.6 - 10.6)	2.030 (0.500 - 3.060)	8.92	99
25+35+50	1.95	2.74	3.91	8.60 (2.6 - 10.6)	2.020 (0.500 - 3.030)	8.87	99
25+35+60	1.79	2.51	4.30	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.030)	9.00	99
25+42+42	1.97	3.31	3.31	8.60 (2.6 - 10.6)	2.010 (0.500 - 3.020)	8.83	99
25+42+50	1.84	3.09	3.68	8.60 (2.6 - 10.6)	2.000 (0.500 - 2.990)	8.78	99
35+35+35	2.87	2.87	2.87	8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
35+35+42	2.69	2.69	3.23	8.60 (2.6 - 10.6)	2.030 (0.500 - 3.060)	8.92	99
35+35+50	2.51	2.51	3.58	8.60 (2.6 - 10.6)	2.020 (0.500 - 3.030)	8.87	99
35+42+42	2.53	3.04	3.04	8.60 (2.6 - 10.6)	2.010 (0.500 - 3.020)	8.83	99

MXZ-4C71VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15	1.50				1.50 (1.4 - 3.0)	0.490 (0.450 - 1.020)	2.15	99
20	2.00				2.00 (1.4 - 3.0)	0.520 (0.450 - 1.020)	2.28	99
22	2.20				2.20 (1.4 - 3.0)	0.510 (0.420 - 0.740)	2.24	99
25	2.50				2.50 (1.4 - 3.3)	0.580 (0.420 - 0.830)	2.55	99
35	3.50				3.50 (1.5 - 4.3)	0.800 (0.430 - 1.180)	3.51	99
42	4.20				4.20 (1.6 - 5.0)	1.060 (0.450 - 1.420)	4.66	99
50	5.00				5.00 (1.6 - 5.6)	1.400 (0.480 - 1.660)	6.15	99
60	6.00				6.00 (1.6 - 6.6)	1.700 (0.480 - 2.250)	7.47	99
15+15	1.50	1.50			3.00 (2.0 - 5.4)	0.790 (0.700 - 1.800)	3.47	99
15+20	1.50	2.00			3.50 (2.0 - 5.4)	0.850 (0.700 - 1.790)	3.73	99
15+22	1.50	2.20			3.70 (2.0 - 5.4)	0.980 (0.620 - 1.620)	4.30	99
15+25	1.50	2.50			4.00 (2.0 - 5.4)	1.130 (0.780 - 1.970)	4.96	99
15+35	1.50	3.50			5.00 (2.0 - 6.0)	1.110 (0.620 - 1.920)	4.87	99
15+42	1.50	4.20			5.70 (2.0 - 6.4)	1.370 (0.620 - 2.130)	6.02	99
15+50	1.50	5.00			6.50 (2.0 - 6.8)	1.670 (0.630 - 2.350)	7.33	99
15+60	1.36	5.44			6.80 (2.0 - 7.1)	1.850 (0.640 - 2.490)	8.12	99
20+20	2.00	2.00			4.00 (2.0 - 5.4)	1.100 (0.700 - 1.800)	4.83	99
20+22	2.00	2.20			4.20 (2.0 - 5.4)	1.030 (0.620 - 1.620)	4.52	99
20+25	2.00	2.50			4.50 (2.0 - 5.4)	0.960 (0.620 - 1.620)	4.22	99
20+35	2.00	3.50			5.50 (2.0 - 6.3)	1.300 (0.620 - 2.070)	5.71	99
20+42	2.00	4.20			6.20 (2.0 - 6.7)	1.550 (0.620 - 2.270)	6.81	99
20+50	1.94	4.86			6.80 (2.0 - 7.1)	1.850 (0.630 - 2.500)	8.12	99
20+60	1.70	5.10			6.80 (2.0 - 7.1)	1.850 (0.640 - 2.490)	8.12	99
22+22	2.20	2.20			4.40 (2.0 - 5.4)	0.900 (0.540 - 1.450)	3.95	99
22+25	2.20	2.50			4.70 (2.0 - 5.7)	0.990 (0.540 - 1.600)	4.35	99
22+35	2.20	3.50			5.70 (2.0 - 6.4)	1.340 (0.540 - 1.960)	5.88	99
22+42	2.20	4.20			6.40 (2.0 - 6.8)	1.600 (0.540 - 2.160)	7.03	99
22+50	2.08	4.72			6.80 (2.0 - 7.1)	1.820 (0.550 - 2.330)	7.99	99
22+60	1.82	4.98			6.80 (2.0 - 7.1)	1.820 (0.560 - 2.320)	7.99	99
25+25	2.50	2.50			5.00 (2.0 - 6.0)	1.080 (0.540 - 1.750)	4.74	99
25+35	2.50	3.50			6.00 (2.0 - 6.6)	1.450 (0.540 - 2.050)	6.37	99
25+42	2.50	4.20			6.70 (2.0 - 6.9)	1.710 (0.540 - 2.250)	7.51	99
25+50	2.27	4.53			6.80 (2.0 - 7.1)	1.820 (0.550 - 2.330)	7.99	99
25+60	2.00	4.80			6.80 (2.0 - 7.1)	1.810 (0.560 - 2.320)	7.95	99
35+35	3.40	3.40			6.80 (2.0 - 7.1)	1.820 (0.540 - 2.340)	7.99	99
35+42	3.09	3.71			6.80 (2.0 - 7.1)	1.820 (0.540 - 2.340)	7.99	99
35+50	2.80	4.00			6.80 (2.0 - 7.1)	1.810 (0.550 - 2.330)	7.95	99
35+60	2.51	4.29			6.80 (2.0 - 7.1)	1.750 (0.560 - 2.330)	7.69	99
42+42	3.40	3.40			6.80 (2.0 - 7.1)	1.820 (0.540 - 2.340)	7.99	99
42+50	3.10	3.70			6.80 (2.0 - 7.1)	1.770 (0.550 - 2.340)	7.77	99

MXZ-4C71VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
42+60	2.80	4.00			6.80 (2.1 - 7.1)	1.710 (0.560 - 2.350)	7.51	99
50+50	3.40	3.40			6.80 (2.1 - 7.1)	1.720 (0.560 - 2.360)	7.55	99
50+60	3.09	3.71			6.80 (2.1 - 7.1)	1.650 (0.570 - 2.360)	7.25	99
60+60	3.40	3.40			6.80 (2.1 - 7.1)	1.580 (0.580 - 2.410)	6.94	99
15+15+15	1.50	1.50	1.50		4.50 (2.9 - 7.3)	0.970 (0.780 - 2.310)	4.26	99
15+15+20	1.50	1.50	2.00		5.00 (2.9 - 7.3)	1.270 (0.760 - 2.430)	5.58	99
15+15+22	1.50	1.50	2.20		5.20 (2.9 - 7.3)	1.310 (0.730 - 2.390)	5.75	99
15+15+25	1.50	1.50	2.50		5.50 (2.9 - 7.4)	1.420 (0.730 - 2.400)	6.24	99
15+15+35	1.50	1.50	3.50		6.50 (2.9 - 8.0)	1.620 (0.730 - 2.460)	7.11	99
15+15+42	1.48	1.48	4.14		7.10 (2.9 - 8.4)	1.950 (0.730 - 2.540)	8.56	99
15+15+50	1.33	1.33	4.44		7.10 (2.9 - 8.5)	1.910 (0.730 - 2.560)	8.39	99
15+15+60	1.18	1.18	4.73		7.10 (2.9 - 8.5)	1.810 (0.730 - 2.540)	7.95	99
15+20+20	1.50	2.00	2.00		5.50 (2.9 - 7.4)	1.460 (0.760 - 2.440)	6.41	99
15+20+22	1.50	2.00	2.20		5.70 (2.9 - 7.4)	1.490 (0.730 - 2.400)	6.54	99
15+20+25	1.50	2.00	2.50		6.00 (2.9 - 7.4)	1.600 (0.840 - 2.400)	7.03	99
15+20+35	1.50	2.00	3.50		7.00 (2.9 - 8.3)	1.900 (0.730 - 2.530)	8.34	99
15+20+42	1.38	1.84	3.87		7.10 (2.9 - 8.5)	1.940 (0.730 - 2.570)	8.52	99
15+20+50	1.25	1.67	4.18		7.10 (2.9 - 8.5)	1.870 (0.730 - 2.550)	8.21	99
15+20+60	1.12	1.49	4.48		7.10 (2.9 - 8.5)	1.780 (0.730 - 2.530)	7.82	99
15+22+22	1.50	2.20	2.20		5.90 (2.9 - 7.4)	1.520 (0.700 - 2.360)	6.68	99
15+22+25	1.50	2.20	2.50		6.20 (2.9 - 7.6)	1.570 (0.700 - 2.380)	6.90	99
15+22+35	1.48	2.17	3.45		7.10 (2.9 - 8.4)	1.930 (0.700 - 2.510)	8.48	99
15+22+42	1.35	1.98	3.77		7.10 (2.9 - 8.5)	1.880 (0.700 - 2.530)	8.26	99
15+22+50	1.22	1.80	4.08		7.10 (2.9 - 8.5)	1.820 (0.700 - 2.510)	7.99	99
15+22+60	1.10	1.61	4.39		7.10 (2.9 - 8.5)	1.720 (0.700 - 2.490)	7.55	99
15+25+25	1.50	2.50	2.50		6.50 (2.9 - 8.0)	1.580 (0.700 - 2.420)	6.94	99
15+25+35	1.42	2.37	3.31		7.10 (2.9 - 8.5)	1.930 (0.700 - 2.540)	8.48	99
15+25+42	1.30	2.16	3.64		7.10 (2.9 - 8.5)	1.860 (0.700 - 2.520)	8.17	99
15+25+50	1.18	1.97	3.94		7.10 (2.9 - 8.5)	1.800 (0.700 - 2.510)	7.91	99
15+25+60	1.07	1.78	4.26		7.10 (2.9 - 8.5)	1.700 (0.700 - 2.490)	7.47	99
15+35+35	1.25	2.92	2.92		7.10 (2.9 - 8.5)	1.860 (0.700 - 2.530)	8.17	99
15+35+42	1.16	2.70	3.24		7.10 (2.9 - 8.5)	1.800 (0.700 - 2.510)	7.91	99
15+35+50	1.07	2.49	3.55		7.10 (2.9 - 8.5)	1.730 (0.700 - 2.500)	7.60	99
15+35+60	0.97	2.26	3.87		7.10 (2.9 - 8.5)	1.670 (0.700 - 2.480)	7.33	99
15+42+42	1.08	3.01	3.01		7.10 (2.9 - 8.5)	1.730 (0.700 - 2.500)	7.60	99
15+42+50	1.00	2.79	3.32		7.10 (2.9 - 8.5)	1.680 (0.700 - 2.480)	7.38	99
15+42+60	0.91	2.55	3.64		7.10 (2.9 - 8.5)	1.650 (0.700 - 2.470)	7.25	99
15+50+50	0.93	3.09	3.09		7.10 (2.9 - 8.5)	1.670 (0.700 - 2.470)	7.33	99
15+50+60	0.85	2.84	3.41		7.10 (2.9 - 8.5)	1.640 (0.700 - 2.460)	7.20	99
20+20+20	2.00	2.00	2.00		6.00 (2.9 - 7.4)	1.520 (0.780 - 2.320)	6.68	99

MXZ-4C71VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
20+20+22	2.00	2.00	2.20		6.20 (2.9 - 7.6)	1.610 (0.730 - 2.420)	7.07	99
20+20+25	2.00	2.00	2.50		6.50 (2.9 - 8.0)	1.620 (0.730 - 2.460)	7.11	99
20+20+35	1.89	1.89	3.31		7.10 (2.9 - 8.5)	1.970 (0.730 - 2.580)	8.65	99
20+20+42	1.73	1.73	3.64		7.10 (2.9 - 8.5)	1.900 (0.730 - 2.560)	8.34	99
20+20+50	1.58	1.58	3.94		7.10 (2.9 - 8.5)	1.840 (0.730 - 2.550)	8.08	99
20+20+60	1.42	1.42	4.26		7.10 (2.9 - 8.5)	1.740 (0.730 - 2.530)	7.64	99
20+22+22	2.00	2.20	2.20		6.40 (2.9 - 7.9)	1.570 (0.700 - 2.410)	6.90	99
20+22+25	2.00	2.20	2.50		6.70 (2.9 - 8.1)	1.650 (0.700 - 2.430)	7.25	99
20+22+35	1.84	2.03	3.23		7.10 (2.9 - 8.5)	1.920 (0.700 - 2.540)	8.43	99
20+22+42	1.69	1.86	3.55		7.10 (2.9 - 8.5)	1.850 (0.700 - 2.520)	8.12	99
20+22+50	1.54	1.70	3.86		7.10 (2.9 - 8.5)	1.790 (0.700 - 2.500)	7.86	99
20+22+60	1.39	1.53	4.18		7.10 (2.9 - 8.5)	1.690 (0.700 - 2.480)	7.42	99
20+25+25	2.00	2.50	2.50		7.00 (2.9 - 8.3)	1.860 (0.700 - 2.490)	8.17	99
20+25+35	1.78	2.22	3.11		7.10 (2.9 - 8.5)	1.900 (0.700 - 2.540)	8.34	99
20+25+42	1.63	2.04	3.43		7.10 (2.9 - 8.5)	1.830 (0.700 - 2.520)	8.04	99
20+25+50	1.49	1.87	3.74		7.10 (2.9 - 8.5)	1.770 (0.700 - 2.500)	7.77	99
20+25+60	1.35	1.69	4.06		7.10 (2.9 - 8.5)	1.670 (0.700 - 2.480)	7.33	99
20+35+35	1.58	2.76	2.76		7.10 (2.9 - 8.5)	1.830 (0.700 - 2.530)	8.04	99
20+35+42	1.46	2.56	3.07		7.10 (2.9 - 8.5)	1.760 (0.700 - 2.510)	7.73	99
20+35+50	1.35	2.37	3.38		7.10 (2.9 - 8.5)	1.700 (0.700 - 2.490)	7.47	99
20+35+60	1.23	2.16	3.70		7.10 (2.9 - 8.5)	1.670 (0.700 - 2.480)	7.33	99
20+42+42	1.37	2.87	2.87		7.10 (2.9 - 8.5)	1.700 (0.700 - 2.490)	7.47	99
20+42+50	1.27	2.66	3.17		7.10 (2.9 - 8.5)	1.680 (0.700 - 2.480)	7.38	99
20+42+60	1.16	2.44	3.49		7.10 (2.9 - 8.5)	1.650 (0.700 - 2.470)	7.25	99
20+50+50	1.18	2.96	2.96		7.10 (2.9 - 8.5)	1.670 (0.700 - 2.470)	7.33	99
22+22+22	2.20	2.20	2.20		6.60 (2.9 - 8.1)	1.540 (0.670 - 2.390)	6.76	99
22+22+25	2.20	2.20	2.50		6.90 (2.9 - 8.2)	1.750 (0.670 - 2.420)	7.69	99
22+22+35	1.98	1.98	3.15		7.10 (2.9 - 8.5)	1.860 (0.670 - 2.500)	8.17	99
22+22+42	1.82	1.82	3.47		7.10 (2.9 - 8.5)	1.800 (0.670 - 2.480)	7.91	99
22+22+50	1.66	1.66	3.78		7.10 (2.9 - 8.5)	1.730 (0.670 - 2.460)	7.60	99
22+22+60	1.50	1.50	4.10		7.10 (2.9 - 8.5)	1.640 (0.670 - 2.440)	7.20	99
22+25+25	2.17	2.47	2.47		7.10 (2.9 - 8.4)	1.890 (0.670 - 2.470)	8.30	99
22+25+35	1.90	2.16	3.03		7.10 (2.9 - 8.5)	1.840 (0.670 - 2.490)	8.08	99
22+25+42	1.76	1.99	3.35		7.10 (2.9 - 8.5)	1.780 (0.670 - 2.480)	7.82	99
22+25+50	1.61	1.83	3.66		7.10 (2.9 - 8.5)	1.710 (0.670 - 2.460)	7.51	99
22+25+60	1.46	1.66	3.98		7.10 (2.9 - 8.5)	1.630 (0.670 - 2.440)	7.16	99
22+35+35	1.70	2.70	2.70		7.10 (2.9 - 8.5)	1.780 (0.670 - 2.480)	7.82	99
22+35+42	1.58	2.51	3.01		7.10 (2.9 - 8.5)	1.710 (0.670 - 2.470)	7.51	99
22+35+50	1.46	2.32	3.32		7.10 (2.9 - 8.5)	1.660 (0.670 - 2.450)	7.29	99
22+35+60	1.34	2.12	3.64		7.10 (2.9 - 8.5)	1.630 (0.670 - 2.440)	7.16	99

MXZ-4C71VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
22+42+42	1.47	2.81	2.81		7.10 (2.9 - 8.5)	1.650 (0.670 - 2.450)	7.25	99
22+42+50	1.37	2.62	3.11		7.10 (2.9 - 8.5)	1.640 (0.670 - 2.440)	7.20	99
22+42+60	1.26	2.40	3.44		7.10 (2.9 - 8.5)	1.610 (0.670 - 2.430)	7.07	99
22+50+50	1.28	2.91	2.91		7.10 (2.9 - 8.5)	1.630 (0.670 - 2.430)	7.16	99
25+25+25	2.37	2.37	2.37		7.10 (2.9 - 8.5)	1.890 (0.670 - 2.500)	8.30	99
25+25+35	2.09	2.09	2.92		7.10 (2.9 - 8.5)	1.820 (0.670 - 2.490)	7.99	99
25+25+42	1.93	1.93	3.24		7.10 (2.9 - 8.5)	1.760 (0.670 - 2.470)	7.73	99
25+25+50	1.78	1.78	3.55		7.10 (2.9 - 8.5)	1.690 (0.670 - 2.460)	7.42	99
25+25+60	1.61	1.61	3.87		7.10 (2.9 - 8.5)	1.630 (0.670 - 2.440)	7.16	99
25+35+35	1.87	2.62	2.62		7.10 (2.9 - 8.5)	1.760 (0.670 - 2.480)	7.73	99
25+35+42	1.74	2.44	2.92		7.10 (2.9 - 8.5)	1.690 (0.670 - 2.460)	7.42	99
25+35+50	1.61	2.26	3.23		7.10 (2.9 - 8.5)	1.660 (0.670 - 2.450)	7.29	99
25+35+60	1.48	2.07	3.55		7.10 (2.9 - 8.5)	1.630 (0.670 - 2.440)	7.16	99
25+42+42	1.63	2.74	2.74		7.10 (2.9 - 8.5)	1.650 (0.670 - 2.450)	7.25	99
25+42+50	1.52	2.55	3.03		7.10 (2.9 - 8.5)	1.640 (0.670 - 2.440)	7.20	99
25+50+50	1.42	2.84	2.84		7.10 (2.9 - 8.5)	1.630 (0.670 - 2.430)	7.16	99
35+35+35	2.37	2.37	2.37		7.10 (2.9 - 8.5)	1.690 (0.670 - 2.470)	7.42	99
35+35+42	2.22	2.22	2.66		7.10 (2.9 - 8.5)	1.670 (0.670 - 2.460)	7.33	99
35+35+50	2.07	2.07	2.96		7.10 (2.9 - 8.5)	1.660 (0.670 - 2.450)	7.29	99
35+42+42	2.09	2.51	2.51		7.10 (2.9 - 8.5)	1.650 (0.670 - 2.450)	7.25	99
15+15+15+15	1.50	1.50	1.50	1.50	6.00 (3.7 - 7.9)	1.390 (1.000 - 2.370)	6.10	99
15+15+15+20	1.50	1.50	1.50	2.00	6.50 (3.7 - 7.9)	1.660 (0.920 - 2.570)	7.29	99
15+15+15+22	1.50	1.50	1.50	2.20	6.70 (3.7 - 7.9)	1.670 (0.890 - 2.520)	7.33	99
15+15+15+25	1.50	1.50	1.50	2.50	7.00 (3.7 - 8.0)	1.740 (0.890 - 2.530)	7.64	99
15+15+15+35	1.33	1.33	1.33	3.11	7.10 (3.7 - 8.0)	1.960 (1.090 - 2.530)	8.61	99
15+15+15+42	1.22	1.22	1.22	3.43	7.10 (3.7 - 8.7)	1.800 (0.890 - 2.600)	7.91	99
15+15+15+50	1.12	1.12	1.12	3.74	7.10 (3.7 - 8.8)	1.770 (0.890 - 2.610)	7.77	99
15+15+15+60	1.01	1.01	1.01	4.06	7.10 (3.7 - 8.8)	1.740 (0.890 - 2.600)	7.64	99
15+15+20+20	1.50	1.50	2.00	2.00	7.00 (3.7 - 8.0)	1.780 (0.920 - 2.580)	7.82	99
15+15+20+22	1.48	1.48	1.97	2.17	7.10 (3.7 - 8.0)	1.780 (0.890 - 2.530)	7.82	99
15+15+20+25	1.42	1.42	1.89	2.37	7.10 (3.7 - 8.0)	1.850 (0.890 - 2.530)	8.12	99
15+15+20+35	1.25	1.25	1.67	2.92	7.10 (3.7 - 8.5)	1.860 (0.890 - 2.580)	8.17	99
15+15+20+42	1.16	1.16	1.54	3.24	7.10 (3.7 - 8.8)	1.780 (0.890 - 2.620)	7.82	99
15+15+20+50	1.07	1.07	1.42	3.55	7.10 (3.7 - 8.8)	1.770 (0.890 - 2.610)	7.77	99
15+15+20+60	0.97	0.97	1.29	3.87	7.10 (3.7 - 8.8)	1.740 (0.890 - 2.600)	7.64	99
15+15+22+22	1.44	1.44	2.11	2.11	7.10 (3.7 - 8.0)	1.790 (0.860 - 2.480)	7.86	99
15+15+22+25	1.38	1.38	2.03	2.31	7.10 (3.7 - 8.0)	1.850 (0.860 - 2.480)	8.12	99
15+15+22+35	1.22	1.22	1.80	2.86	7.10 (3.7 - 8.7)	1.780 (0.860 - 2.560)	7.82	99
15+15+22+42	1.13	1.13	1.66	3.17	7.10 (3.7 - 8.8)	1.740 (0.860 - 2.570)	7.64	99
15+15+22+50	1.04	1.04	1.53	3.48	7.10 (3.7 - 8.8)	1.730 (0.860 - 2.560)	7.60	99

MXZ-4C71VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15+15+22+60	0.95	0.95	1.39	3.80	7.10 (3.7 - 8.8)	1.700 (0.860 - 2.550)	7.47	99
15+15+25+25	1.33	1.33	2.22	2.22	7.10 (3.7 - 8.0)	1.920 (1.060 - 2.480)	8.43	99
15+15+25+35	1.18	1.18	1.97	2.76	7.10 (3.7 - 8.8)	1.760 (0.860 - 2.580)	7.73	99
15+15+25+42	1.10	1.10	1.83	3.07	7.10 (3.7 - 8.8)	1.740 (0.860 - 2.570)	7.64	99
15+15+25+50	1.01	1.01	1.69	3.38	7.10 (3.7 - 8.8)	1.730 (0.860 - 2.560)	7.60	99
15+15+25+60	0.93	0.93	1.54	3.70	7.10 (3.7 - 8.8)	1.700 (0.860 - 2.550)	7.47	99
15+15+35+35	1.07	1.07	2.49	2.49	7.10 (3.7 - 8.8)	1.760 (0.860 - 2.580)	7.73	99
15+15+35+42	1.00	1.00	2.32	2.79	7.10 (3.7 - 8.8)	1.740 (0.860 - 2.570)	7.64	99
15+15+35+50	0.93	0.93	2.16	3.09	7.10 (3.7 - 8.8)	1.730 (0.860 - 2.560)	7.60	99
15+15+35+60	0.85	0.85	1.99	3.41	7.10 (3.7 - 8.8)	1.700 (0.860 - 2.550)	7.47	99
15+15+42+42	0.93	0.93	2.62	2.62	7.10 (3.7 - 8.8)	1.720 (0.860 - 2.560)	7.55	99
15+15+42+50	0.87	0.87	2.44	2.91	7.10 (3.7 - 8.8)	1.710 (0.860 - 2.550)	7.51	99
15+20+20+20	1.42	1.89	1.89	1.89	7.10 (3.7 - 8.0)	1.890 (0.920 - 2.580)	8.30	99
15+20+20+22	1.38	1.84	1.84	2.03	7.10 (3.7 - 8.0)	1.890 (0.890 - 2.530)	8.30	99
15+20+20+25	1.33	1.78	1.78	2.22	7.10 (3.7 - 8.0)	1.960 (1.090 - 2.530)	8.61	99
15+20+20+35	1.18	1.58	1.58	2.76	7.10 (3.7 - 8.8)	1.800 (0.890 - 2.630)	7.91	99
15+20+20+42	1.10	1.46	1.46	3.07	7.10 (3.7 - 8.8)	1.780 (0.890 - 2.620)	7.82	99
15+20+20+50	1.01	1.35	1.35	3.38	7.10 (3.7 - 8.8)	1.770 (0.890 - 2.610)	7.77	99
15+20+20+60	0.93	1.23	1.23	3.70	7.10 (3.7 - 8.8)	1.740 (0.890 - 2.600)	7.64	99
15+20+22+22	1.35	1.80	1.98	1.98	7.10 (3.7 - 8.0)	1.900 (0.860 - 2.480)	8.34	99
15+20+22+25	1.30	1.73	1.90	2.16	7.10 (3.7 - 8.2)	1.880 (0.860 - 2.500)	8.26	99
15+20+22+35	1.16	1.54	1.70	2.70	7.10 (3.7 - 8.8)	1.760 (0.860 - 2.580)	7.73	99
15+20+22+42	1.08	1.43	1.58	3.01	7.10 (3.7 - 8.8)	1.740 (0.860 - 2.570)	7.64	99
15+20+22+50	1.00	1.33	1.46	3.32	7.10 (3.7 - 8.8)	1.730 (0.860 - 2.560)	7.60	99
15+20+22+60	0.91	1.21	1.34	3.64	7.10 (3.7 - 8.8)	1.700 (0.860 - 2.550)	7.47	99
15+20+25+25	1.25	1.67	2.09	2.09	7.10 (3.7 - 8.5)	1.820 (0.860 - 2.530)	7.99	99
15+20+25+35	1.12	1.49	1.87	2.62	7.10 (3.7 - 8.8)	1.760 (0.860 - 2.580)	7.73	99
15+20+25+42	1.04	1.39	1.74	2.92	7.10 (3.7 - 8.8)	1.740 (0.860 - 2.570)	7.64	99
15+20+25+50	0.97	1.29	1.61	3.23	7.10 (3.7 - 8.8)	1.730 (0.860 - 2.560)	7.60	99
15+20+25+60	0.89	1.18	1.48	3.55	7.10 (3.7 - 8.8)	1.700 (0.860 - 2.550)	7.47	99
15+20+35+35	1.01	1.35	2.37	2.37	7.10 (3.7 - 8.8)	1.760 (0.860 - 2.580)	7.73	99
15+20+35+42	0.95	1.27	2.22	2.66	7.10 (3.7 - 8.8)	1.740 (0.860 - 2.570)	7.64	99
15+20+35+50	0.89	1.18	2.07	2.96	7.10 (3.7 - 8.8)	1.730 (0.860 - 2.560)	7.60	99
15+20+42+42	0.89	1.19	2.51	2.51	7.10 (3.7 - 8.8)	1.720 (0.860 - 2.560)	7.55	99
15+22+22+22	1.31	1.93	1.93	1.93	7.10 (3.7 - 8.1)	1.860 (0.830 - 2.430)	8.17	99
15+22+22+25	1.27	1.86	1.86	2.11	7.10 (3.7 - 8.4)	1.800 (0.830 - 2.470)	7.91	99
15+22+22+35	1.13	1.66	1.66	2.64	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
15+22+22+42	1.05	1.55	1.55	2.95	7.10 (3.7 - 8.8)	1.700 (0.830 - 2.520)	7.47	99
15+22+22+50	0.98	1.43	1.43	3.26	7.10 (3.7 - 8.8)	1.690 (0.830 - 2.510)	7.42	99
15+22+22+60	0.89	1.31	1.31	3.58	7.10 (3.7 - 8.8)	1.660 (0.830 - 2.500)	7.29	99

MXZ-4C71VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15+22+25+25	1.22	1.80	2.04	2.04	7.10 (3.7 - 8.7)	1.740 (0.830 - 2.510)	7.64	99
15+22+25+35	1.10	1.61	1.83	2.56	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
15+22+25+42	1.02	1.50	1.71	2.87	7.10 (3.7 - 8.8)	1.700 (0.830 - 2.520)	7.47	99
15+22+25+50	0.95	1.39	1.58	3.17	7.10 (3.7 - 8.8)	1.690 (0.830 - 2.510)	7.42	99
15+22+25+60	0.87	1.28	1.45	3.49	7.10 (3.7 - 8.8)	1.660 (0.830 - 2.500)	7.29	99
15+22+35+35	1.00	1.46	2.32	2.32	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
15+22+35+42	0.93	1.37	2.18	2.62	7.10 (3.7 - 8.8)	1.700 (0.830 - 2.520)	7.47	99
15+22+35+50	0.87	1.28	2.04	2.91	7.10 (3.7 - 8.8)	1.690 (0.830 - 2.510)	7.42	99
15+22+42+42	0.88	1.29	2.46	2.46	7.10 (3.7 - 8.8)	1.680 (0.830 - 2.510)	7.38	99
15+25+25+25	1.18	1.97	1.97	1.97	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
15+25+25+35	1.07	1.78	1.78	2.49	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
15+25+25+42	1.00	1.66	1.66	2.79	7.10 (3.7 - 8.8)	1.700 (0.830 - 2.520)	7.47	99
15+25+25+50	0.93	1.54	1.54	3.09	7.10 (3.7 - 8.8)	1.690 (0.830 - 2.510)	7.42	99
15+25+25+60	0.85	1.42	1.42	3.41	7.10 (3.7 - 8.8)	1.660 (0.830 - 2.500)	7.29	99
15+25+35+35	0.97	1.61	2.26	2.26	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
15+25+35+42	0.91	1.52	2.12	2.55	7.10 (3.7 - 8.8)	1.700 (0.830 - 2.520)	7.47	99
15+25+35+50	0.85	1.42	1.99	2.84	7.10 (3.7 - 8.8)	1.690 (0.830 - 2.510)	7.42	99
15+25+42+42	0.86	1.43	2.40	2.40	7.10 (3.7 - 8.8)	1.680 (0.830 - 2.510)	7.38	99
15+35+35+35	0.89	2.07	2.07	2.07	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
20+20+20+20	1.78	1.78	1.78	1.78	7.10 (3.7 - 8.0)	1.840 (1.000 - 2.380)	8.08	99
20+20+20+22	1.73	1.73	1.73	1.90	7.10 (3.7 - 8.2)	1.920 (0.890 - 2.550)	8.43	99
20+20+20+25	1.67	1.67	1.67	2.09	7.10 (3.7 - 8.5)	1.860 (0.890 - 2.580)	8.17	99
20+20+20+35	1.49	1.49	1.49	2.62	7.10 (3.7 - 8.8)	1.800 (0.890 - 2.630)	7.91	99
20+20+20+42	1.39	1.39	1.39	2.92	7.10 (3.7 - 8.8)	1.780 (0.890 - 2.620)	7.82	99
20+20+20+50	1.29	1.29	1.29	3.23	7.10 (3.7 - 8.8)	1.770 (0.890 - 2.610)	7.77	99
20+20+20+60	1.18	1.18	1.18	3.55	7.10 (3.7 - 8.8)	1.740 (0.890 - 2.600)	7.64	99
20+20+22+22	1.69	1.69	1.86	1.86	7.10 (3.7 - 8.4)	1.840 (0.860 - 2.520)	8.08	99
20+20+22+25	1.63	1.63	1.80	2.04	7.10 (3.7 - 8.7)	1.780 (0.860 - 2.560)	7.82	99
20+20+22+35	1.46	1.46	1.61	2.56	7.10 (3.7 - 8.8)	1.760 (0.860 - 2.580)	7.73	99
20+20+22+42	1.37	1.37	1.50	2.87	7.10 (3.7 - 8.8)	1.740 (0.860 - 2.570)	7.64	99
20+20+22+50	1.27	1.27	1.39	3.17	7.10 (3.7 - 8.8)	1.730 (0.860 - 2.560)	7.60	99
20+20+22+60	1.16	1.16	1.28	3.49	7.10 (3.7 - 8.8)	1.700 (0.860 - 2.550)	7.47	99
20+20+25+25	1.58	1.58	1.97	1.97	7.10 (3.7 - 8.8)	1.760 (0.860 - 2.580)	7.73	99
20+20+25+35	1.42	1.42	1.78	2.49	7.10 (3.7 - 8.8)	1.760 (0.860 - 2.580)	7.73	99
20+20+25+42	1.33	1.33	1.66	2.79	7.10 (3.7 - 8.8)	1.740 (0.860 - 2.570)	7.64	99
20+20+25+50	1.23	1.23	1.54	3.09	7.10 (3.7 - 8.8)	1.730 (0.860 - 2.560)	7.60	99
20+20+25+60	1.14	1.14	1.42	3.41	7.10 (3.7 - 8.8)	1.700 (0.860 - 2.550)	7.47	99
20+20+35+35	1.29	1.29	2.26	2.26	7.10 (3.7 - 8.8)	1.760 (0.860 - 2.580)	7.73	99
20+20+35+42	1.21	1.21	2.12	2.55	7.10 (3.7 - 8.8)	1.740 (0.860 - 2.570)	7.64	99
20+20+35+50	1.14	1.14	1.99	2.84	7.10 (3.7 - 8.8)	1.730 (0.860 - 2.560)	7.60	99

MXZ-4C71VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
20+20+42+42	1.15	1.15	2.40	2.40	7.10 (3.7 - 8.8)	1.720 (0.860 - 2.560)	7.55	99
20+22+22+22	1.65	1.82	1.82	1.82	7.10 (3.7 - 8.6)	1.760 (0.830 - 2.500)	7.73	99
20+22+22+25	1.60	1.76	1.76	1.99	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
20+22+22+35	1.43	1.58	1.58	2.51	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
20+22+22+42	1.34	1.47	1.47	2.81	7.10 (3.7 - 8.8)	1.700 (0.830 - 2.520)	7.47	99
20+22+22+50	1.25	1.37	1.37	3.11	7.10 (3.7 - 8.8)	1.690 (0.830 - 2.510)	7.42	99
20+22+22+60	1.15	1.26	1.26	3.44	7.10 (3.7 - 8.8)	1.660 (0.830 - 2.500)	7.29	99
20+22+25+25	1.54	1.70	1.93	1.93	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
20+22+25+35	1.39	1.53	1.74	2.44	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
20+22+25+42	1.30	1.43	1.63	2.74	7.10 (3.7 - 8.8)	1.700 (0.830 - 2.520)	7.47	99
20+22+25+50	1.21	1.34	1.52	3.03	7.10 (3.7 - 8.8)	1.690 (0.830 - 2.510)	7.42	99
20+22+35+35	1.27	1.39	2.22	2.22	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
20+22+35+42	1.19	1.31	2.09	2.51	7.10 (3.7 - 8.8)	1.700 (0.830 - 2.520)	7.47	99
20+25+25+25	1.49	1.87	1.87	1.87	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
20+25+25+35	1.35	1.69	1.69	2.37	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
20+25+25+42	1.27	1.58	1.58	2.66	7.10 (3.7 - 8.8)	1.700 (0.830 - 2.520)	7.47	99
20+25+25+50	1.18	1.48	1.48	2.96	7.10 (3.7 - 8.8)	1.690 (0.830 - 2.510)	7.42	99
20+25+35+35	1.23	1.54	2.16	2.16	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
20+25+35+42	1.16	1.45	2.04	2.44	7.10 (3.7 - 8.8)	1.700 (0.830 - 2.520)	7.47	99
20+35+35+35	1.14	1.99	1.99	1.99	7.10 (3.7 - 8.8)	1.720 (0.830 - 2.530)	7.55	99
22+22+22+22	1.78	1.78	1.78	1.78	7.10 (3.7 - 8.8)	1.680 (0.800 - 2.480)	7.38	99
22+22+22+25	1.72	1.72	1.72	1.95	7.10 (3.7 - 8.8)	1.680 (0.800 - 2.480)	7.38	99
22+22+22+35	1.55	1.55	1.55	2.46	7.10 (3.7 - 8.8)	1.680 (0.800 - 2.480)	7.38	99
22+22+22+42	1.45	1.45	1.45	2.76	7.10 (3.7 - 8.8)	1.660 (0.800 - 2.470)	7.29	99
22+22+22+50	1.35	1.35	1.35	3.06	7.10 (3.7 - 8.8)	1.650 (0.800 - 2.460)	7.25	99
22+22+25+25	1.66	1.66	1.89	1.89	7.10 (3.7 - 8.8)	1.680 (0.800 - 2.480)	7.38	99
22+22+25+35	1.50	1.50	1.71	2.39	7.10 (3.7 - 8.8)	1.680 (0.800 - 2.480)	7.38	99
22+22+25+42	1.41	1.41	1.60	2.69	7.10 (3.7 - 8.8)	1.660 (0.800 - 2.470)	7.29	99
22+22+25+50	1.31	1.31	1.49	2.98	7.10 (3.7 - 8.8)	1.650 (0.800 - 2.460)	7.25	99
22+22+35+35	1.37	1.37	2.18	2.18	7.10 (3.7 - 8.8)	1.680 (0.800 - 2.480)	7.38	99
22+22+35+42	1.29	1.29	2.05	2.46	7.10 (3.7 - 8.8)	1.660 (0.800 - 2.470)	7.29	99
22+25+25+25	1.61	1.83	1.83	1.83	7.10 (3.7 - 8.8)	1.680 (0.800 - 2.480)	7.38	99
22+25+25+35	1.46	1.66	1.66	2.32	7.10 (3.7 - 8.8)	1.680 (0.800 - 2.480)	7.38	99
22+25+25+42	1.37	1.56	1.56	2.62	7.10 (3.7 - 8.8)	1.660 (0.800 - 2.470)	7.29	99
22+25+25+50	1.28	1.45	1.45	2.91	7.10 (3.7 - 8.8)	1.650 (0.800 - 2.460)	7.25	99
22+25+35+35	1.34	1.52	2.12	2.12	7.10 (3.7 - 8.8)	1.680 (0.800 - 2.480)	7.38	99
22+25+35+42	1.26	1.43	2.00	2.40	7.10 (3.7 - 8.8)	1.660 (0.800 - 2.470)	7.29	99
25+25+25+25	1.78	1.78	1.78	1.78	7.10 (3.7 - 8.8)	1.680 (0.800 - 2.480)	7.38	99
25+25+25+35	1.61	1.61	1.61	2.26	7.10 (3.7 - 8.8)	1.680 (0.800 - 2.480)	7.38	99
25+25+25+42	1.52	1.52	1.52	2.55	7.10 (3.7 - 8.8)	1.660 (0.800 - 2.470)	7.29	99

MXZ-4C71VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
25+25+25+50	1.42	1.42	1.42	2.84	7.10 (3.7 - 8.8)	1.650 (0.800 - 2.460)	7.25	99
25+25+35+35	1.48	1.48	2.07	2.07	7.10 (3.7 - 8.8)	1.680 (0.800 - 2.480)	7.38	99

MXZ-4C71VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15	1.70				1.70 (1.2 - 3.0)	0.500 (0.400 - 0.950)	2.20	99
20	2.20				2.20 (1.2 - 3.9)	0.610 (0.390 - 1.330)	2.68	99
22	3.30				3.30 (1.2 - 4.2)	0.760 (0.380 - 1.090)	3.34	99
25	3.60				3.60 (1.2 - 4.5)	0.860 (0.380 - 1.190)	3.78	99
35	4.00				4.00 (1.2 - 4.8)	1.000 (0.380 - 1.300)	4.39	99
42	5.40				5.40 (1.3 - 6.5)	1.460 (0.370 - 1.800)	6.41	99
50	7.20				7.20 (1.4 - 8.2)	1.880 (0.370 - 2.300)	8.26	99
60	7.90				7.90 (1.4 - 8.6)	2.120 (0.360 - 2.410)	9.31	99
15+15	1.70	1.70			3.40 (1.8 - 5.0)	0.850 (0.670 - 1.310)	3.73	99
15+20	1.67	2.23			3.90 (1.8 - 5.8)	1.020 (0.680 - 1.630)	4.48	99
15+22	1.66	2.44			4.10 (1.8 - 6.1)	1.080 (0.550 - 1.760)	4.74	99
15+25	1.65	2.75			4.40 (1.8 - 6.6)	1.180 (0.800 - 1.950)	5.18	99
15+35	2.16	5.04			7.20 (1.8 - 9.0)	1.680 (0.550 - 2.170)	7.38	99
15+42	2.03	5.67			7.70 (1.8 - 9.0)	1.780 (0.550 - 2.170)	7.82	99
15+50	1.92	6.38			8.30 (1.8 - 9.0)	1.910 (0.550 - 2.170)	8.39	99
15+60	1.72	6.88			8.60 (1.8 - 9.0)	2.050 (0.550 - 2.150)	9.00	99
20+20	2.20	2.20			4.40 (1.8 - 6.6)	1.180 (0.660 - 1.950)	5.18	99
20+22	2.62	2.88			5.50 (1.8 - 6.9)	1.330 (0.540 - 1.830)	5.84	99
20+25	2.98	3.72			6.70 (1.8 - 7.5)	1.510 (0.540 - 1.790)	6.63	99
20+35	2.76	4.84			7.60 (1.8 - 9.0)	1.770 (0.540 - 2.170)	7.77	99
20+42	2.58	5.42			8.00 (1.8 - 9.0)	1.870 (0.540 - 2.170)	8.21	99
20+50	2.46	6.14			8.60 (1.8 - 9.0)	2.000 (0.540 - 2.170)	8.78	99
20+60	2.15	6.45			8.60 (1.8 - 9.0)	2.070 (0.540 - 2.130)	9.09	99
22+22	3.30	3.30			6.60 (1.8 - 7.2)	1.470 (0.410 - 1.710)	6.46	99
22+25	3.23	3.67			6.90 (1.8 - 8.1)	1.580 (0.410 - 1.940)	6.94	99
22+35	2.97	4.73			7.70 (1.8 - 9.0)	1.800 (0.410 - 2.170)	7.91	99
22+42	2.82	5.38			8.20 (1.8 - 9.0)	1.910 (0.410 - 2.170)	8.39	99
22+50	2.63	5.97			8.60 (1.8 - 9.0)	2.010 (0.410 - 2.160)	8.83	99
22+60	2.31	6.29			8.60 (1.8 - 9.0)	2.080 (0.410 - 2.120)	9.13	99
25+25	3.60	3.60			7.20 (1.8 - 9.0)	1.680 (0.410 - 2.170)	7.38	99
25+35	3.29	4.61			7.90 (1.8 - 9.0)	1.860 (0.410 - 2.170)	8.17	99
25+42	3.13	5.27			8.40 (1.8 - 9.0)	1.960 (0.410 - 2.170)	8.61	99
25+50	2.87	5.73			8.60 (1.8 - 9.0)	2.020 (0.410 - 2.150)	8.87	99
25+60	2.53	6.07			8.60 (1.8 - 9.0)	2.070 (0.400 - 2.110)	9.09	99
35+35	4.30	4.30			8.60 (1.8 - 9.0)	2.030 (0.410 - 2.170)	8.92	99
35+42	3.91	4.69			8.60 (1.8 - 9.0)	2.040 (0.410 - 2.140)	8.96	99
35+50	3.54	5.06			8.60 (1.8 - 9.0)	2.040 (0.400 - 2.110)	8.96	99
35+60	3.17	5.43			8.60 (1.8 - 9.0)	1.900 (0.370 - 2.060)	8.34	99
42+42	4.30	4.30			8.60 (1.8 - 9.0)	2.050 (0.400 - 2.110)	9.00	99
42+50	3.93	4.67			8.60 (1.8 - 9.0)	1.910 (0.380 - 2.080)	8.39	99

MXZ-4C71VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
42+60	3.54	5.06			8.60 (1.9 - 9.0)	1.780 (0.360 - 2.030)	7.82	99
50+50	4.30	4.30			8.60 (1.9 - 9.0)	1.760 (0.360 - 2.040)	7.73	99
50+60	3.91	4.69			8.60 (1.9 - 9.0)	1.780 (0.360 - 1.970)	7.82	99
60+60	4.30	4.30			8.60 (1.9 - 9.0)	1.800 (0.360 - 1.900)	7.91	99
15+15+15	1.70	1.70	1.70		5.10 (2.6 - 8.4)	1.110 (0.900 - 2.410)	4.87	99
15+15+20	1.68	1.68	2.24		5.60 (2.6 - 8.9)	1.690 (1.060 - 2.950)	7.42	99
15+15+22	1.67	1.67	2.45		5.80 (2.6 - 9.1)	1.610 (0.880 - 2.940)	7.07	99
15+15+25	1.66	1.66	2.77		6.10 (2.6 - 9.4)	1.700 (0.880 - 3.080)	7.47	99
15+15+35	1.92	1.92	4.47		8.30 (2.6 - 10.5)	2.270 (0.880 - 3.320)	9.97	99
15+15+42	1.79	1.79	5.02		8.60 (2.6 - 10.6)	2.330 (0.880 - 3.280)	10.23	99
15+15+50	1.61	1.61	5.38		8.60 (2.6 - 10.6)	2.320 (0.880 - 3.250)	10.19	99
15+15+60	1.43	1.43	5.73		8.60 (2.6 - 10.6)	2.350 (0.880 - 3.250)	10.32	99
15+20+20	1.66	2.22	2.22		6.10 (2.6 - 9.4)	1.830 (1.050 - 3.170)	8.04	99
15+20+22	1.66	2.21	2.43		6.30 (2.6 - 9.6)	1.740 (0.870 - 3.160)	7.64	99
15+20+25	1.65	2.20	2.75		6.60 (2.6 - 9.9)	1.830 (1.260 - 3.290)	8.04	99
15+20+35	1.84	2.46	4.30		8.60 (2.6 - 10.6)	2.340 (0.870 - 3.310)	10.28	99
15+20+42	1.68	2.23	4.69		8.60 (2.6 - 10.6)	2.320 (0.870 - 3.270)	10.19	99
15+20+50	1.52	2.02	5.06		8.60 (2.6 - 10.6)	2.310 (0.870 - 3.240)	10.14	99
15+20+60	1.36	1.81	5.43		8.60 (2.6 - 10.6)	2.340 (0.870 - 3.240)	10.28	99
15+22+22	1.65	2.42	2.42		6.50 (2.6 - 9.8)	1.660 (0.690 - 3.150)	7.29	99
15+22+25	1.77	2.59	2.94		7.30 (2.6 - 10.1)	1.860 (0.690 - 3.200)	8.17	99
15+22+35	1.79	2.63	4.18		8.60 (2.6 - 10.6)	2.200 (0.690 - 3.210)	9.66	99
15+22+42	1.63	2.39	4.57		8.60 (2.6 - 10.6)	2.180 (0.690 - 3.170)	9.57	99
15+22+50	1.48	2.17	4.94		8.60 (2.6 - 10.6)	2.170 (0.690 - 3.140)	9.53	99
15+22+60	1.33	1.95	5.32		8.60 (2.6 - 10.6)	2.200 (0.690 - 3.140)	9.66	99
15+25+25	1.92	3.19	3.19		8.30 (2.6 - 10.5)	2.120 (0.690 - 3.210)	9.31	99
15+25+35	1.72	2.87	4.01		8.60 (2.6 - 10.6)	2.200 (0.690 - 3.210)	9.66	99
15+25+42	1.57	2.62	4.40		8.60 (2.6 - 10.6)	2.180 (0.690 - 3.170)	9.57	99
15+25+50	1.43	2.39	4.78		8.60 (2.6 - 10.6)	2.170 (0.690 - 3.140)	9.53	99
15+25+60	1.29	2.15	5.16		8.60 (2.6 - 10.6)	2.200 (0.690 - 3.140)	9.66	99
15+35+35	1.52	3.54	3.54		8.60 (2.6 - 10.6)	2.200 (0.690 - 3.210)	9.66	99
15+35+42	1.40	3.27	3.93		8.60 (2.6 - 10.6)	2.180 (0.690 - 3.170)	9.57	99
15+35+50	1.29	3.01	4.30		8.60 (2.6 - 10.6)	2.170 (0.690 - 3.140)	9.53	99
15+35+60	1.17	2.74	4.69		8.60 (2.6 - 10.6)	2.200 (0.690 - 3.140)	9.66	99
15+42+42	1.30	3.65	3.65		8.60 (2.6 - 10.6)	2.160 (0.690 - 3.130)	9.49	99
15+42+50	1.21	3.38	4.02		8.60 (2.6 - 10.6)	2.150 (0.690 - 3.100)	9.44	99
15+42+60	1.10	3.09	4.41		8.60 (2.6 - 10.6)	2.180 (0.690 - 3.100)	9.57	99
15+50+50	1.12	3.74	3.74		8.60 (2.6 - 10.6)	2.140 (0.690 - 3.070)	9.40	99
15+50+60	1.03	3.44	4.13		8.60 (2.6 - 10.6)	2.170 (0.690 - 3.070)	9.53	99
20+20+20	2.20	2.20	2.20		6.60 (2.6 - 9.9)	1.540 (0.890 - 3.080)	6.76	99

MXZ-4C71VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
20+20+22	2.35	2.35	2.59		7.30 (2.6 - 10.1)	1.990 (0.860 - 3.290)	8.74	99
20+20+25	2.55	2.55	3.19		8.30 (2.6 - 10.5)	2.250 (0.860 - 3.300)	9.88	99
20+20+35	2.29	2.29	4.01		8.60 (2.6 - 10.6)	2.330 (0.860 - 3.300)	10.23	99
20+20+42	2.10	2.10	4.40		8.60 (2.6 - 10.6)	2.310 (0.860 - 3.260)	10.14	99
20+20+50	1.91	1.91	4.78		8.60 (2.6 - 10.6)	2.300 (0.860 - 3.230)	10.10	99
20+20+60	1.72	1.72	5.16		8.60 (2.6 - 10.6)	2.330 (0.860 - 3.230)	10.23	99
20+22+22	2.47	2.72	2.72		7.90 (2.6 - 10.4)	2.020 (0.680 - 3.190)	8.87	99
20+22+25	2.57	2.82	3.21		8.60 (2.6 - 10.6)	2.190 (0.680 - 3.200)	9.62	99
20+22+35	2.23	2.46	3.91		8.60 (2.6 - 10.6)	2.190 (0.680 - 3.200)	9.62	99
20+22+42	2.05	2.25	4.30		8.60 (2.6 - 10.6)	2.170 (0.680 - 3.160)	9.53	99
20+22+50	1.87	2.06	4.67		8.60 (2.6 - 10.6)	2.160 (0.680 - 3.130)	9.49	99
20+22+60	1.69	1.85	5.06		8.60 (2.6 - 10.6)	2.190 (0.680 - 3.130)	9.62	99
20+25+25	2.46	3.07	3.07		8.60 (2.6 - 10.6)	2.190 (0.680 - 3.200)	9.62	99
20+25+35	2.15	2.69	3.76		8.60 (2.6 - 10.6)	2.190 (0.680 - 3.200)	9.62	99
20+25+42	1.98	2.47	4.15		8.60 (2.6 - 10.6)	2.170 (0.680 - 3.160)	9.53	99
20+25+50	1.81	2.26	4.53		8.60 (2.6 - 10.6)	2.160 (0.680 - 3.130)	9.49	99
20+25+60	1.64	2.05	4.91		8.60 (2.6 - 10.6)	2.190 (0.680 - 3.130)	9.62	99
20+35+35	1.91	3.34	3.34		8.60 (2.6 - 10.6)	2.190 (0.680 - 3.200)	9.62	99
20+35+42	1.77	3.10	3.72		8.60 (2.6 - 10.6)	2.170 (0.680 - 3.160)	9.53	99
20+35+50	1.64	2.87	4.10		8.60 (2.6 - 10.6)	2.160 (0.680 - 3.130)	9.49	99
20+35+60	1.50	2.62	4.49		8.60 (2.6 - 10.6)	2.190 (0.680 - 3.130)	9.62	99
20+42+42	1.65	3.47	3.47		8.60 (2.6 - 10.6)	2.150 (0.680 - 3.120)	9.44	99
20+42+50	1.54	3.23	3.84		8.60 (2.6 - 10.6)	2.140 (0.680 - 3.090)	9.40	99
20+42+60	1.41	2.96	4.23		8.60 (2.6 - 10.6)	2.170 (0.680 - 3.090)	9.53	99
20+50+50	1.43	3.58	3.58		8.60 (2.6 - 10.6)	2.130 (0.680 - 3.060)	9.35	99
22+22+22	2.87	2.87	2.87		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
22+22+25	2.74	2.74	3.12		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
22+22+35	2.39	2.39	3.81		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
22+22+42	2.20	2.20	4.20		8.60 (2.6 - 10.6)	2.030 (0.500 - 3.060)	8.92	99
22+22+50	2.01	2.01	4.57		8.60 (2.6 - 10.6)	2.020 (0.500 - 3.030)	8.87	99
22+22+60	1.82	1.82	4.96		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.030)	9.00	99
22+25+25	2.63	2.99	2.99		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
22+25+35	2.31	2.62	3.67		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
22+25+42	2.13	2.42	4.06		8.60 (2.6 - 10.6)	2.030 (0.500 - 3.060)	8.92	99
22+25+50	1.95	2.22	4.43		8.60 (2.6 - 10.6)	2.020 (0.500 - 3.030)	8.87	99
22+25+60	1.77	2.01	4.82		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.030)	9.00	99
22+35+35	2.06	3.27	3.27		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
22+35+42	1.91	3.04	3.65		8.60 (2.6 - 10.6)	2.030 (0.500 - 3.060)	8.92	99
22+35+50	1.77	2.81	4.02		8.60 (2.6 - 10.6)	2.020 (0.500 - 3.030)	8.87	99
22+35+60	1.62	2.57	4.41		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.030)	9.00	99

MXZ-4C71VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
22+42+42	1.78	3.41	3.41		8.60 (2.6 - 10.6)	2.010 (0.500 - 3.020)	8.83	99
22+42+50	1.66	3.17	3.77		8.60 (2.6 - 10.6)	2.000 (0.500 - 2.990)	8.78	99
22+42+60	1.53	2.91	4.16		8.60 (2.6 - 10.6)	2.030 (0.500 - 2.990)	8.92	99
22+50+50	1.55	3.52	3.52		8.60 (2.6 - 10.6)	1.990 (0.500 - 2.960)	8.74	99
25+25+25	2.87	2.87	2.87		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
25+25+35	2.53	2.53	3.54		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
25+25+42	2.34	2.34	3.93		8.60 (2.6 - 10.6)	2.030 (0.500 - 3.060)	8.92	99
25+25+50	2.15	2.15	4.30		8.60 (2.6 - 10.6)	2.020 (0.500 - 3.030)	8.87	99
25+25+60	1.95	1.95	4.69		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.030)	9.00	99
25+35+35	2.26	3.17	3.17		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
25+35+42	2.11	2.95	3.54		8.60 (2.6 - 10.6)	2.030 (0.500 - 3.060)	8.92	99
25+35+50	1.95	2.74	3.91		8.60 (2.6 - 10.6)	2.020 (0.500 - 3.030)	8.87	99
25+35+60	1.79	2.51	4.30		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.030)	9.00	99
25+42+42	1.97	3.31	3.31		8.60 (2.6 - 10.6)	2.010 (0.500 - 3.020)	8.83	99
25+42+50	1.84	3.09	3.68		8.60 (2.6 - 10.6)	2.000 (0.500 - 2.990)	8.78	99
25+50+50	1.72	3.44	3.44		8.60 (2.6 - 10.6)	1.990 (0.500 - 2.960)	8.74	99
35+35+35	2.87	2.87	2.87		8.60 (2.6 - 10.6)	2.050 (0.500 - 3.100)	9.00	99
35+35+42	2.69	2.69	3.23		8.60 (2.6 - 10.6)	2.030 (0.500 - 3.060)	8.92	99
35+35+50	2.51	2.51	3.58		8.60 (2.6 - 10.6)	2.020 (0.500 - 3.030)	8.87	99
35+42+42	2.53	3.04	3.04		8.60 (2.6 - 10.6)	2.010 (0.500 - 3.020)	8.83	99
15+15+15+15	1.70	1.70	1.70	1.70	6.80 (3.4 - 9.3)	1.460 (1.370 - 2.450)	6.41	99
15+15+15+20	1.68	1.68	1.68	2.25	7.30 (3.4 - 9.7)	1.630 (0.760 - 2.680)	7.16	99
15+15+15+22	1.66	1.66	1.66	2.43	7.40 (3.4 - 9.8)	1.690 (0.720 - 2.670)	7.42	99
15+15+15+25	1.65	1.65	1.65	2.75	7.70 (3.4 - 10.0)	1.800 (0.720 - 2.810)	7.91	99
15+15+15+35	1.61	1.61	1.61	3.76	8.60 (3.4 - 10.7)	2.130 (1.460 - 3.670)	9.35	99
15+15+15+42	1.48	1.48	1.48	4.15	8.60 (3.4 - 10.7)	1.740 (0.690 - 3.230)	7.64	99
15+15+15+50	1.36	1.36	1.36	4.53	8.60 (3.4 - 10.7)	1.675 (0.680 - 3.240)	7.36	99
15+15+15+60	1.23	1.23	1.23	4.91	8.60 (3.4 - 10.7)	1.645 (0.720 - 3.240)	7.22	99
15+15+20+20	1.65	1.65	2.20	2.20	7.70 (3.4 - 10.0)	1.800 (0.760 - 2.910)	7.91	99
15+15+20+22	1.65	1.65	2.19	2.41	7.90 (3.4 - 10.1)	1.860 (0.720 - 2.900)	8.17	99
15+15+20+25	1.64	1.64	2.19	2.73	8.20 (3.4 - 10.4)	1.960 (0.720 - 3.040)	8.61	99
15+15+20+35	1.52	1.52	2.02	3.54	8.60 (3.4 - 10.7)	1.860 (0.720 - 3.270)	8.17	99
15+15+20+42	1.40	1.40	1.87	3.93	8.60 (3.4 - 10.7)	1.685 (0.690 - 3.230)	7.40	99
15+15+20+50	1.29	1.29	1.72	4.30	8.60 (3.4 - 10.7)	1.675 (0.680 - 3.240)	7.36	99
15+15+20+60	1.17	1.17	1.56	4.69	8.60 (3.4 - 10.7)	1.645 (0.720 - 3.240)	7.22	99
15+15+22+22	1.64	1.64	2.41	2.41	8.10 (3.4 - 10.3)	1.930 (0.680 - 2.890)	8.48	99
15+15+22+25	1.62	1.62	2.37	2.69	8.30 (3.4 - 10.5)	2.030 (0.680 - 3.030)	8.92	99
15+15+22+35	1.48	1.48	2.17	3.46	8.60 (3.4 - 10.7)	1.760 (0.680 - 3.170)	7.73	99
15+15+22+42	1.37	1.37	2.01	3.84	8.60 (3.4 - 10.7)	1.685 (0.650 - 3.130)	7.40	99
15+15+22+50	1.26	1.26	1.85	4.22	8.60 (3.4 - 10.7)	1.675 (0.640 - 3.140)	7.36	99

MXZ-4C71VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15+15+22+60	1.15	1.15	1.69	4.61	8.60 (3.4 - 10.7)	1.645 (0.680 - 3.140)	7.22	99
15+15+25+25	1.61	1.61	2.69	2.69	8.60 (3.4 - 10.7)	2.130 (1.420 - 3.570)	9.35	99
15+15+25+35	1.43	1.43	2.39	3.34	8.60 (3.4 - 10.7)	1.705 (0.680 - 3.170)	7.49	99
15+15+25+42	1.33	1.33	2.22	3.72	8.60 (3.4 - 10.7)	1.685 (0.650 - 3.130)	7.40	99
15+15+25+50	1.23	1.23	2.05	4.10	8.60 (3.4 - 10.7)	1.675 (0.640 - 3.140)	7.36	99
15+15+25+60	1.12	1.12	1.87	4.49	8.60 (3.4 - 10.7)	1.645 (0.680 - 3.140)	7.22	99
15+15+35+35	1.29	1.29	3.01	3.01	8.60 (3.4 - 10.7)	1.705 (0.680 - 3.170)	7.49	99
15+15+35+42	1.21	1.21	2.81	3.38	8.60 (3.4 - 10.7)	1.685 (0.650 - 3.130)	7.40	99
15+15+35+50	1.12	1.12	2.62	3.74	8.60 (3.4 - 10.7)	1.675 (0.640 - 3.140)	7.36	99
15+15+35+60	1.03	1.03	2.41	4.13	8.60 (3.4 - 10.7)	1.645 (0.680 - 3.140)	7.22	99
15+15+42+42	1.13	1.13	3.17	3.17	8.60 (3.4 - 10.7)	1.665 (0.620 - 3.090)	7.31	99
15+15+42+50	1.06	1.06	2.96	3.52	8.60 (3.4 - 10.7)	1.655 (0.610 - 3.100)	7.27	99
15+20+20+20	1.64	2.19	2.19	2.19	8.20 (3.4 - 10.4)	1.960 (0.760 - 3.140)	8.61	99
15+20+20+22	1.62	2.16	2.16	2.37	8.30 (3.4 - 10.5)	2.030 (0.720 - 3.130)	8.92	99
15+20+20+25	1.61	2.15	2.15	2.69	8.60 (3.4 - 10.7)	2.130 (1.460 - 3.670)	9.35	99
15+20+20+35	1.43	1.91	1.91	3.34	8.60 (3.4 - 10.7)	1.705 (0.720 - 3.270)	7.49	99
15+20+20+42	1.33	1.77	1.77	3.72	8.60 (3.4 - 10.7)	1.685 (0.690 - 3.230)	7.40	99
15+20+20+50	1.23	1.64	1.64	4.10	8.60 (3.4 - 10.7)	1.675 (0.680 - 3.240)	7.36	99
15+20+20+60	1.12	1.50	1.50	4.49	8.60 (3.4 - 10.7)	1.645 (0.720 - 3.240)	7.22	99
15+20+22+22	1.61	2.15	2.37	2.37	8.50 (3.4 - 10.6)	2.100 (0.680 - 3.120)	9.22	99
15+20+22+25	1.57	2.10	2.31	2.62	8.60 (3.4 - 10.7)	2.020 (0.680 - 3.170)	8.87	99
15+20+22+35	1.40	1.87	2.06	3.27	8.60 (3.4 - 10.7)	1.705 (0.680 - 3.170)	7.49	99
15+20+22+42	1.30	1.74	1.91	3.65	8.60 (3.4 - 10.7)	1.685 (0.650 - 3.130)	7.40	99
15+20+22+50	1.21	1.61	1.77	4.02	8.60 (3.4 - 10.7)	1.675 (0.640 - 3.140)	7.36	99
15+20+22+60	1.10	1.47	1.62	4.41	8.60 (3.4 - 10.7)	1.645 (0.680 - 3.140)	7.22	99
15+20+25+25	1.52	2.02	2.53	2.53	8.60 (3.4 - 10.7)	1.860 (0.680 - 3.170)	8.17	99
15+20+25+35	1.36	1.81	2.26	3.17	8.60 (3.4 - 10.7)	1.705 (0.680 - 3.170)	7.49	99
15+20+25+42	1.26	1.69	2.11	3.54	8.60 (3.4 - 10.7)	1.685 (0.650 - 3.130)	7.40	99
15+20+25+50	1.17	1.56	1.95	3.91	8.60 (3.4 - 10.7)	1.675 (0.640 - 3.140)	7.36	99
15+20+25+60	1.08	1.43	1.79	4.30	8.60 (3.4 - 10.7)	1.645 (0.680 - 3.140)	7.22	99
15+20+35+35	1.23	1.64	2.87	2.87	8.60 (3.4 - 10.7)	1.705 (0.680 - 3.170)	7.49	99
15+20+35+42	1.15	1.54	2.69	3.23	8.60 (3.4 - 10.7)	1.685 (0.650 - 3.130)	7.40	99
15+20+35+50	1.08	1.43	2.51	3.58	8.60 (3.4 - 10.7)	1.675 (0.640 - 3.140)	7.36	99
15+20+42+42	1.08	1.45	3.04	3.04	8.60 (3.4 - 10.7)	1.665 (0.620 - 3.090)	7.31	99
15+22+22+22	1.59	2.34	2.34	2.34	8.60 (3.4 - 10.7)	2.080 (0.640 - 3.070)	9.13	99
15+22+22+25	1.54	2.25	2.25	2.56	8.60 (3.4 - 10.7)	1.920 (0.640 - 3.070)	8.43	99
15+22+22+35	1.37	2.01	2.01	3.20	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
15+22+22+42	1.28	1.87	1.87	3.58	8.60 (3.4 - 10.7)	1.685 (0.610 - 3.030)	7.40	99
15+22+22+50	1.18	1.74	1.74	3.94	8.60 (3.4 - 10.7)	1.675 (0.600 - 3.040)	7.36	99
15+22+22+60	1.08	1.59	1.59	4.34	8.60 (3.4 - 10.7)	1.645 (0.640 - 3.040)	7.22	99

MXZ-4C71VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15+22+25+25	1.48	2.17	2.47	2.47	8.60 (3.4 - 10.7)	1.760 (0.640 - 3.070)	7.73	99
15+22+25+35	1.33	1.95	2.22	3.10	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
15+22+25+42	1.24	1.82	2.07	3.47	8.60 (3.4 - 10.7)	1.685 (0.610 - 3.030)	7.40	99
15+22+25+50	1.15	1.69	1.92	3.84	8.60 (3.4 - 10.7)	1.675 (0.600 - 3.040)	7.36	99
15+22+25+60	1.06	1.55	1.76	4.23	8.60 (3.4 - 10.7)	1.645 (0.640 - 3.040)	7.22	99
15+22+35+35	1.21	1.77	2.81	2.81	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
15+22+35+42	1.13	1.66	2.64	3.17	8.60 (3.4 - 10.7)	1.685 (0.610 - 3.030)	7.40	99
15+22+35+50	1.06	1.55	2.47	3.52	8.60 (3.4 - 10.7)	1.675 (0.600 - 3.040)	7.36	99
15+22+42+42	1.07	1.56	2.99	2.99	8.60 (3.4 - 10.7)	1.665 (0.580 - 2.990)	7.31	99
15+25+25+25	1.43	2.39	2.39	2.39	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
15+25+25+35	1.29	2.15	2.15	3.01	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
15+25+25+42	1.21	2.01	2.01	3.38	8.60 (3.4 - 10.7)	1.685 (0.610 - 3.030)	7.40	99
15+25+25+50	1.12	1.87	1.87	3.74	8.60 (3.4 - 10.7)	1.675 (0.600 - 3.040)	7.36	99
15+25+25+60	1.03	1.72	1.72	4.13	8.60 (3.4 - 10.7)	1.645 (0.640 - 3.040)	7.22	99
15+25+35+35	1.17	1.95	2.74	2.74	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
15+25+35+42	1.10	1.84	2.57	3.09	8.60 (3.4 - 10.7)	1.685 (0.610 - 3.030)	7.40	99
15+25+35+50	1.03	1.72	2.41	3.44	8.60 (3.4 - 10.7)	1.675 (0.600 - 3.040)	7.36	99
15+25+42+42	1.04	1.73	2.91	2.91	8.60 (3.4 - 10.7)	1.665 (0.580 - 2.990)	7.31	99
15+35+35+35	1.08	2.51	2.51	2.51	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
20+20+20+20	2.15	2.15	2.15	2.15	8.60 (3.4 - 10.7)	2.130 (1.340 - 3.370)	9.35	99
20+20+20+22	2.10	2.10	2.10	2.31	8.60 (3.4 - 10.7)	2.020 (0.720 - 3.270)	8.87	99
20+20+20+25	2.02	2.02	2.02	2.53	8.60 (3.4 - 10.7)	1.860 (0.720 - 3.270)	8.17	99
20+20+20+35	1.81	1.81	1.81	3.17	8.60 (3.4 - 10.7)	1.705 (0.720 - 3.270)	7.49	99
20+20+20+42	1.69	1.69	1.69	3.54	8.60 (3.4 - 10.7)	1.685 (0.690 - 3.230)	7.40	99
20+20+20+50	1.56	1.56	1.56	3.91	8.60 (3.4 - 10.7)	1.675 (0.680 - 3.240)	7.36	99
20+20+20+60	1.43	1.43	1.43	4.30	8.60 (3.4 - 10.7)	1.645 (0.720 - 3.240)	7.22	99
20+20+22+22	2.05	2.05	2.25	2.25	8.60 (3.4 - 10.7)	1.920 (0.680 - 3.170)	8.43	99
20+20+22+25	1.98	1.98	2.17	2.47	8.60 (3.4 - 10.7)	1.760 (0.680 - 3.170)	7.73	99
20+20+22+35	1.77	1.77	1.95	3.10	8.60 (3.4 - 10.7)	1.705 (0.680 - 3.170)	7.49	99
20+20+22+42	1.65	1.65	1.82	3.47	8.60 (3.4 - 10.7)	1.685 (0.650 - 3.130)	7.40	99
20+20+22+50	1.54	1.54	1.69	3.84	8.60 (3.4 - 10.7)	1.675 (0.640 - 3.140)	7.36	99
20+20+22+60	1.41	1.41	1.55	4.23	8.60 (3.4 - 10.7)	1.645 (0.680 - 3.140)	7.22	99
20+20+25+25	1.91	1.91	2.39	2.39	8.60 (3.4 - 10.7)	1.705 (0.680 - 3.170)	7.49	99
20+20+25+35	1.72	1.72	2.15	3.01	8.60 (3.4 - 10.7)	1.705 (0.680 - 3.170)	7.49	99
20+20+25+42	1.61	1.61	2.01	3.38	8.60 (3.4 - 10.7)	1.685 (0.650 - 3.130)	7.40	99
20+20+25+50	1.50	1.50	1.87	3.74	8.60 (3.4 - 10.7)	1.675 (0.640 - 3.140)	7.36	99
20+20+25+60	1.38	1.38	1.72	4.13	8.60 (3.4 - 10.7)	1.645 (0.680 - 3.140)	7.22	99
20+20+35+35	1.56	1.56	2.74	2.74	8.60 (3.4 - 10.7)	1.705 (0.680 - 3.170)	7.49	99
20+20+35+42	1.47	1.47	2.57	3.09	8.60 (3.4 - 10.7)	1.685 (0.650 - 3.130)	7.40	99
20+20+35+50	1.38	1.38	2.41	3.44	8.60 (3.4 - 10.7)	1.675 (0.640 - 3.140)	7.36	99

MXZ-4C71VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
20+20+42+42	1.39	1.39	2.91	2.91	8.60 (3.4 - 10.7)	1.665 (0.620 - 3.090)	7.31	99
20+22+22+22	2.00	2.20	2.20	2.20	8.60 (3.4 - 10.7)	1.810 (0.640 - 3.070)	7.95	99
20+22+22+25	1.93	2.13	2.13	2.42	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
20+22+22+35	1.74	1.91	1.91	3.04	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
20+22+22+42	1.62	1.78	1.78	3.41	8.60 (3.4 - 10.7)	1.685 (0.610 - 3.030)	7.40	99
20+22+22+50	1.51	1.66	1.66	3.77	8.60 (3.4 - 10.7)	1.675 (0.600 - 3.040)	7.36	99
20+22+22+60	1.39	1.53	1.53	4.16	8.60 (3.4 - 10.7)	1.645 (0.640 - 3.040)	7.22	99
20+22+25+25	1.87	2.06	2.34	2.34	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
20+22+25+35	1.69	1.85	2.11	2.95	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
20+22+25+42	1.58	1.74	1.97	3.31	8.60 (3.4 - 10.7)	1.685 (0.610 - 3.030)	7.40	99
20+22+25+50	1.47	1.62	1.84	3.68	8.60 (3.4 - 10.7)	1.675 (0.600 - 3.040)	7.36	99
20+22+35+35	1.54	1.69	2.69	2.69	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
20+22+35+42	1.45	1.59	2.53	3.04	8.60 (3.4 - 10.7)	1.685 (0.610 - 3.030)	7.40	99
20+25+25+25	1.81	2.26	2.26	2.26	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
20+25+25+35	1.64	2.05	2.05	2.87	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
20+25+25+42	1.54	1.92	1.92	3.23	8.60 (3.4 - 10.7)	1.685 (0.610 - 3.030)	7.40	99
20+25+25+50	1.43	1.79	1.79	3.58	8.60 (3.4 - 10.7)	1.675 (0.600 - 3.040)	7.36	99
20+25+35+35	1.50	1.87	2.62	2.62	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
20+25+35+42	1.41	1.76	2.47	2.96	8.60 (3.4 - 10.7)	1.685 (0.610 - 3.030)	7.40	99
20+35+35+35	1.38	2.41	2.41	2.41	8.60 (3.4 - 10.7)	1.705 (0.640 - 3.070)	7.49	99
22+22+22+22	2.15	2.15	2.15	2.15	8.60 (3.4 - 10.7)	1.705 (0.600 - 2.970)	7.49	99
22+22+22+25	2.08	2.08	2.08	2.36	8.60 (3.4 - 10.7)	1.705 (0.600 - 2.970)	7.49	99
22+22+22+35	1.87	1.87	1.87	2.98	8.60 (3.4 - 10.7)	1.705 (0.600 - 2.970)	7.49	99
22+22+22+42	1.75	1.75	1.75	3.34	8.60 (3.4 - 10.7)	1.685 (0.570 - 2.930)	7.40	99
22+22+22+50	1.63	1.63	1.63	3.71	8.60 (3.4 - 10.7)	1.675 (0.560 - 2.940)	7.36	99
22+22+25+25	2.01	2.01	2.29	2.29	8.60 (3.4 - 10.7)	1.705 (0.600 - 2.970)	7.49	99
22+22+25+35	1.82	1.82	2.07	2.89	8.60 (3.4 - 10.7)	1.705 (0.600 - 2.970)	7.49	99
22+22+25+42	1.70	1.70	1.94	3.25	8.60 (3.4 - 10.7)	1.685 (0.570 - 2.930)	7.40	99
22+22+25+50	1.59	1.59	1.81	3.61	8.60 (3.4 - 10.7)	1.675 (0.560 - 2.940)	7.36	99
22+22+35+35	1.66	1.66	2.64	2.64	8.60 (3.4 - 10.7)	1.705 (0.600 - 2.970)	7.49	99
22+22+35+42	1.56	1.56	2.49	2.99	8.60 (3.4 - 10.7)	1.685 (0.570 - 2.930)	7.40	99
22+25+25+25	1.95	2.22	2.22	2.22	8.60 (3.4 - 10.7)	1.705 (0.600 - 2.970)	7.49	99
22+25+25+35	1.77	2.01	2.01	2.81	8.60 (3.4 - 10.7)	1.705 (0.600 - 2.970)	7.49	99
22+25+25+42	1.66	1.89	1.89	3.17	8.60 (3.4 - 10.7)	1.685 (0.570 - 2.930)	7.40	99
22+25+25+50	1.55	1.76	1.76	3.52	8.60 (3.4 - 10.7)	1.675 (0.560 - 2.940)	7.36	99
22+25+35+35	1.62	1.84	2.57	2.57	8.60 (3.4 - 10.7)	1.705 (0.600 - 2.970)	7.49	99
22+25+35+42	1.53	1.73	2.43	2.91	8.60 (3.4 - 10.7)	1.685 (0.570 - 2.930)	7.40	99
25+25+25+25	2.15	2.15	2.15	2.15	8.60 (3.4 - 10.7)	1.705 (0.600 - 2.970)	7.49	99
25+25+25+35	1.95	1.95	1.95	2.74	8.60 (3.4 - 10.7)	1.705 (0.600 - 2.970)	7.49	99
25+25+25+42	1.84	1.84	1.84	3.09	8.60 (3.4 - 10.7)	1.685 (0.570 - 2.930)	7.40	99

MXZ-4C71VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
25+25+25+50	1.72	1.72	1.72	3.44	8.60 (3.4 - 10.7)	1.675 (0.560 - 2.940)	7.36	99
25+25+35+35	1.79	1.79	2.51	2.51	8.60 (3.4 - 10.7)	1.705 (0.600 - 2.970)	7.49	99

MXZ-4C80VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption(kW)	Current (A)	Power factor(%)
	Unit A	Unit B	Unit C	Unit D	Total			
15	1.50				1.50 (1.4 - 2.1)	0.510 (0.470 - 1.000)	2.24	99
20	2.00				2.00 (1.4 - 2.8)	0.680 (0.470 - 1.330)	2.99	99
22	2.20				2.20 (1.4 - 3.0)	0.670 (0.400 - 0.920)	2.94	99
25	2.50				2.50 (1.4 - 3.3)	0.760 (0.400 - 1.010)	3.34	99
35	3.50				3.50 (1.5 - 4.3)	1.030 (0.400 - 1.290)	4.52	99
42	4.20				4.20 (1.6 - 5.0)	1.230 (0.410 - 1.460)	5.40	99
50	5.00				5.00 (1.6 - 5.6)	1.440 (0.420 - 1.630)	6.32	99
60	6.00				6.00 (1.6 - 6.6)	1.930 (0.400 - 2.130)	8.48	99
71	7.10				7.10 (1.7 - 7.4)	2.550 (0.410 - 2.710)	11.20	99
15+15	1.50	1.50			3.00 (2.0 - 4.0)	0.860 (0.660 - 2.130)	3.78	99
15+20	1.50	2.00			3.50 (2.0 - 4.6)	1.110 (0.660 - 2.530)	4.87	99
15+22	1.50	2.20			3.70 (2.0 - 4.8)	1.130 (0.630 - 2.590)	4.96	99
15+25	1.50	2.50			4.00 (2.0 - 5.2)	1.190 (0.660 - 2.760)	5.23	99
15+35	1.50	3.50			5.00 (2.0 - 6.2)	1.400 (0.610 - 1.990)	6.15	99
15+42	1.50	4.20			5.70 (2.0 - 6.8)	1.670 (0.610 - 2.370)	7.33	99
15+50	1.50	5.00			6.50 (2.0 - 7.1)	2.040 (0.610 - 2.570)	8.96	99
15+60	1.50	6.00			7.50 (2.0 - 7.8)	2.610 (0.610 - 2.780)	11.46	99
15+71	1.36	6.44			7.80 (2.0 - 8.2)	2.810 (0.620 - 2.890)	12.34	99
20+20	2.00	2.00			4.00 (2.0 - 5.2)	1.190 (0.660 - 2.760)	5.23	99
20+22	2.00	2.20			4.20 (2.0 - 5.4)	1.200 (0.630 - 2.220)	5.27	99
20+25	2.00	2.50			4.50 (2.0 - 5.7)	1.210 (0.630 - 1.700)	5.31	99
20+35	2.00	3.50			5.50 (2.0 - 6.7)	1.630 (0.610 - 2.320)	7.16	99
20+42	2.00	4.20			6.20 (2.0 - 7.1)	1.900 (0.610 - 2.570)	8.34	99
20+50	2.00	5.00			7.00 (2.0 - 7.1)	2.280 (0.610 - 2.570)	10.01	99
20+60	1.93	5.78			7.70 (2.0 - 8.1)	2.740 (0.610 - 2.870)	12.03	99
20+71	1.71	6.09			7.80 (2.0 - 8.2)	2.810 (0.620 - 2.890)	12.34	99
22+22	2.20	2.20			4.40 (2.0 - 5.6)	1.130 (0.600 - 1.600)	4.96	99
22+25	2.20	2.50			4.70 (2.0 - 5.9)	1.250 (0.600 - 1.780)	5.49	99
22+35	2.20	3.50			5.70 (2.0 - 6.8)	1.680 (0.580 - 2.340)	7.38	99
22+42	2.20	4.20			6.40 (2.0 - 7.1)	1.950 (0.580 - 2.530)	8.56	99
22+50	2.20	5.00			7.20 (2.0 - 7.4)	2.370 (0.580 - 2.620)	10.41	99
22+60	2.09	5.71			7.80 (2.0 - 8.2)	2.770 (0.580 - 2.860)	12.17	99
22+71	1.87	6.03			7.90 (2.0 - 8.8)	2.730 (0.590 - 3.150)	11.99	99
25+25	2.50	2.50			5.00 (2.0 - 6.2)	1.360 (0.580 - 1.950)	5.97	99
25+35	2.50	3.50			6.00 (2.0 - 7.1)	1.810 (0.580 - 2.540)	7.95	99
25+42	2.50	4.20			6.70 (2.0 - 7.1)	2.100 (0.580 - 2.540)	9.22	99
25+50	2.50	5.00			7.50 (2.0 - 7.8)	2.570 (0.580 - 2.750)	11.29	99
25+60	2.29	5.51			7.80 (2.0 - 8.2)	2.770 (0.590 - 2.860)	12.17	99
25+71	2.06	5.84			7.90 (2.0 - 8.8)	2.730 (0.590 - 3.150)	11.99	99
35+35	3.50	3.50			7.00 (2.0 - 7.1)	2.290 (0.580 - 2.550)	10.06	99

MXZ-4C80VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
35+42	3.50	4.20			7.70 (2.0 - 8.1)	2.700 (0.580 - 2.850)	11.86	99
35+50	3.21	4.59			7.80 (2.0 - 8.2)	2.770 (0.590 - 2.870)	12.17	99
35+60	2.91	4.99			7.90 (2.0 - 8.8)	2.730 (0.590 - 3.160)	11.99	99
35+71	2.61	5.29			7.90 (2.1 - 8.8)	2.730 (0.580 - 3.120)	11.99	99
42+42	3.90	3.90			7.80 (2.0 - 8.2)	2.820 (0.590 - 2.890)	12.38	99
42+50	3.61	4.29			7.90 (2.0 - 8.8)	2.680 (0.590 - 3.160)	11.77	99
42+60	3.25	4.65			7.90 (2.1 - 8.8)	2.680 (0.590 - 3.140)	11.77	99
42+71	2.97	5.03			8.00 (2.1 - 8.8)	2.470 (0.560 - 3.070)	10.85	99
50+50	3.95	3.95			7.90 (2.1 - 8.8)	2.780 (0.590 - 3.190)	12.21	99
50+60	3.64	4.36			8.00 (2.1 - 8.8)	2.470 (0.570 - 3.090)	10.85	99
50+71	3.31	4.69			8.00 (2.1 - 8.8)	2.470 (0.550 - 3.020)	10.85	99
60+60	4.00	4.00			8.00 (2.1 - 8.8)	2.470 (0.550 - 3.020)	10.85	99
60+71	3.66	4.34			8.00 (2.1 - 8.8)	2.470 (0.550 - 3.010)	10.85	99
15+15+15	1.50	1.50	1.50		4.50 (2.9 - 5.7)	1.120 (0.770 - 3.020)	4.92	99
15+15+20	1.50	1.50	2.00		5.00 (2.9 - 6.3)	1.430 (0.780 - 3.340)	6.28	99
15+15+22	1.50	1.50	2.20		5.20 (2.9 - 6.5)	1.470 (0.750 - 3.380)	6.46	99
15+15+25	1.50	1.50	2.50		5.50 (2.9 - 6.9)	1.590 (0.750 - 3.530)	6.98	99
15+15+35	1.50	1.50	3.50		6.50 (2.9 - 8.0)	1.810 (0.750 - 2.690)	7.95	99
15+15+42	1.50	1.50	4.20		7.20 (2.9 - 8.7)	2.070 (0.750 - 2.870)	9.09	99
15+15+50	1.44	1.44	4.81		7.70 (2.9 - 9.0)	2.250 (0.760 - 3.050)	9.88	99
15+15+60	1.30	1.30	5.20		7.80 (2.9 - 9.0)	2.250 (0.770 - 3.020)	9.88	99
15+15+71	1.17	1.17	5.55		7.90 (2.9 - 9.0)	2.260 (0.780 - 2.980)	9.93	99
15+20+20	1.50	2.00	2.00		5.50 (2.9 - 6.9)	1.630 (0.780 - 3.560)	7.16	99
15+20+22	1.50	2.00	2.20		5.70 (2.9 - 7.1)	1.660 (0.750 - 3.610)	7.29	99
15+20+25	1.50	2.00	2.50		6.00 (2.9 - 7.5)	1.780 (0.830 - 3.760)	7.82	99
15+20+35	1.50	2.00	3.50		7.00 (2.9 - 8.5)	2.000 (0.750 - 2.740)	8.78	99
15+20+42	1.48	1.97	4.15		7.60 (2.9 - 9.0)	2.230 (0.750 - 3.060)	9.79	99
15+20+50	1.38	1.84	4.59		7.80 (2.9 - 9.0)	2.280 (0.760 - 3.040)	10.01	99
15+20+60	1.25	1.66	4.99		7.90 (2.9 - 9.0)	2.280 (0.770 - 3.000)	10.01	99
15+20+71	1.13	1.51	5.36		8.00 (2.9 - 9.0)	2.280 (0.780 - 3.090)	10.01	99
15+22+22	1.50	2.20	2.20		5.90 (2.9 - 7.4)	1.700 (0.720 - 3.690)	7.47	99
15+22+25	1.50	2.20	2.50		6.20 (2.9 - 7.7)	1.750 (0.720 - 3.300)	7.69	99
15+22+35	1.50	2.20	3.50		7.20 (2.9 - 8.7)	2.050 (0.720 - 2.840)	9.00	99
15+22+42	1.46	2.14	4.09		7.70 (2.9 - 9.0)	2.220 (0.720 - 3.030)	9.75	99
15+22+50	1.34	1.97	4.48		7.80 (2.9 - 9.0)	2.240 (0.730 - 3.000)	9.84	99
15+22+60	1.22	1.79	4.89		7.90 (2.9 - 9.0)	2.240 (0.740 - 2.970)	9.84	99
15+22+71	1.11	1.63	5.26		8.00 (2.9 - 9.0)	2.240 (0.750 - 3.060)	9.84	99
15+25+25	1.50	2.50	2.50		6.50 (2.9 - 8.0)	1.770 (0.720 - 2.660)	7.77	99
15+25+35	1.50	2.50	3.50		7.50 (2.9 - 9.0)	2.180 (0.720 - 3.040)	9.57	99
15+25+42	1.41	2.35	3.94		7.70 (2.9 - 9.0)	2.220 (0.730 - 3.020)	9.75	99

MXZ-4C80VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15+25+50	1.30	2.17	4.33		7.80 (2.9 - 9.0)	2.240 (0.740 - 2.990)	9.84	99
15+25+60	1.19	1.98	4.74		7.90 (2.9 - 9.0)	2.240 (0.750 - 2.960)	9.84	99
15+25+71	1.08	1.80	5.12		8.00 (2.9 - 9.0)	2.240 (0.750 - 3.060)	9.84	99
15+35+35	1.38	3.21	3.21		7.80 (2.9 - 9.0)	2.270 (0.730 - 3.010)	9.97	99
15+35+42	1.27	2.97	3.56		7.80 (2.9 - 9.0)	2.250 (0.740 - 2.980)	9.88	99
15+35+50	1.19	2.77	3.95		7.90 (2.9 - 9.0)	2.270 (0.750 - 2.960)	9.97	99
15+35+60	1.09	2.55	4.36		8.00 (2.9 - 9.0)	2.260 (0.750 - 3.060)	9.93	99
15+35+71	0.99	2.31	4.69		8.00 (2.9 - 9.0)	2.240 (0.750 - 3.060)	9.84	99
15+42+42	1.20	3.35	3.35		7.90 (2.9 - 9.0)	2.260 (0.740 - 2.960)	9.93	99
15+42+50	1.12	3.14	3.74		8.00 (2.9 - 9.0)	2.270 (0.750 - 3.060)	9.97	99
15+42+60	1.03	2.87	4.10		8.00 (2.9 - 9.0)	2.240 (0.750 - 3.060)	9.84	99
15+42+71	0.94	2.63	4.44		8.00 (2.9 - 9.0)	2.220 (0.750 - 3.060)	9.75	99
15+50+50	1.04	3.48	3.48		8.00 (2.9 - 9.0)	2.260 (0.750 - 3.060)	9.93	99
15+50+60	0.96	3.20	3.84		8.00 (2.9 - 9.0)	2.230 (0.750 - 3.060)	9.79	99
15+50+71	0.88	2.94	4.18		8.00 (2.9 - 9.0)	2.210 (0.750 - 3.060)	9.71	99
20+20+20	2.00	2.00	2.00		6.00 (2.9 - 7.5)	1.700 (0.770 - 3.700)	7.47	99
20+20+22	2.00	2.00	2.20		6.20 (2.9 - 7.7)	1.790 (0.750 - 3.330)	7.86	99
20+20+25	2.00	2.00	2.50		6.50 (2.9 - 8.0)	1.810 (0.750 - 2.690)	7.95	99
20+20+35	2.00	2.00	3.50		7.50 (2.9 - 9.0)	2.220 (0.750 - 3.070)	9.75	99
20+20+42	1.88	1.88	3.94		7.70 (2.9 - 9.0)	2.260 (0.760 - 3.050)	9.93	99
20+20+50	1.73	1.73	4.33		7.80 (2.9 - 9.0)	2.280 (0.770 - 3.020)	10.01	99
20+20+60	1.58	1.58	4.74		7.90 (2.9 - 9.0)	2.280 (0.780 - 2.990)	10.01	99
20+20+71	1.44	1.44	5.12		8.00 (2.9 - 9.0)	2.280 (0.780 - 3.090)	10.01	99
20+22+22	2.00	2.20	2.20		6.40 (2.9 - 7.9)	1.770 (0.720 - 2.870)	7.77	99
20+22+25	2.00	2.20	2.50		6.70 (2.9 - 8.2)	1.820 (0.720 - 2.510)	7.99	99
20+22+35	1.97	2.17	3.45		7.60 (2.9 - 9.0)	2.210 (0.720 - 3.030)	9.71	99
20+22+42	1.83	2.02	3.85		7.70 (2.9 - 9.0)	2.220 (0.730 - 3.010)	9.75	99
20+22+50	1.70	1.87	4.24		7.80 (2.9 - 9.0)	2.240 (0.740 - 2.980)	9.84	99
20+22+60	1.55	1.70	4.65		7.90 (2.9 - 9.0)	2.240 (0.750 - 2.950)	9.84	99
20+22+71	1.42	1.56	5.03		8.00 (2.9 - 9.0)	2.240 (0.750 - 3.060)	9.84	99
20+25+25	2.00	2.50	2.50		7.00 (2.9 - 8.5)	1.960 (0.720 - 2.710)	8.61	99
20+25+35	1.93	2.41	3.37		7.70 (2.9 - 9.0)	2.240 (0.730 - 3.020)	9.84	99
20+25+42	1.79	2.24	3.77		7.80 (2.9 - 9.0)	2.250 (0.730 - 3.000)	9.88	99
20+25+50	1.66	2.08	4.16		7.90 (2.9 - 9.0)	2.270 (0.740 - 2.970)	9.97	99
20+25+60	1.51	1.89	4.54		7.95 (2.9 - 9.0)	2.260 (0.750 - 2.940)	9.93	99
20+25+71	1.38	1.72	4.90		8.00 (2.9 - 9.0)	2.240 (0.750 - 3.060)	9.84	99
20+35+35	1.73	3.03	3.03		7.80 (2.9 - 9.0)	2.270 (0.740 - 2.990)	9.97	99
20+35+42	1.63	2.85	3.42		7.90 (2.9 - 9.0)	2.280 (0.740 - 2.970)	10.01	99
20+35+50	1.51	2.65	3.79		7.95 (2.9 - 9.0)	2.290 (0.750 - 2.940)	10.06	99
20+35+60	1.39	2.43	4.17		8.00 (2.9 - 9.0)	2.260 (0.750 - 3.060)	9.93	99

MXZ-4C80VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
20+35+71	1.27	2.22	4.51		8.00 (2.9 - 9.0)	2.240 (0.750 - 3.060)	9.84	99
20+42+42	1.52	3.19	3.19		7.90 (2.9 - 9.0)	2.260 (0.750 - 2.940)	9.93	99
20+42+50	1.43	3.00	3.57		8.00 (2.9 - 9.0)	2.270 (0.750 - 3.060)	9.97	99
20+42+60	1.31	2.75	3.93		8.00 (2.9 - 9.0)	2.240 (0.750 - 3.060)	9.84	99
20+42+71	1.20	2.53	4.27		8.00 (2.9 - 9.0)	2.220 (0.750 - 3.060)	9.75	99
20+50+50	1.33	3.33	3.33		8.00 (2.9 - 9.0)	2.260 (0.750 - 3.060)	9.93	99
20+50+60	1.23	3.08	3.69		8.00 (2.9 - 9.0)	2.230 (0.750 - 3.060)	9.79	99
20+50+71	1.13	2.84	4.03		8.00 (2.9 - 9.0)	2.210 (0.750 - 3.060)	9.71	99
22+22+22	2.20	2.20	2.20		6.60 (2.9 - 8.1)	1.740 (0.690 - 2.410)	7.64	99
22+22+25	2.20	2.20	2.50		6.90 (2.9 - 8.4)	1.870 (0.690 - 2.610)	8.21	99
22+22+35	2.14	2.14	3.41		7.70 (2.9 - 9.0)	2.200 (0.690 - 3.000)	9.66	99
22+22+42	2.00	2.00	3.81		7.80 (2.9 - 9.0)	2.210 (0.700 - 2.970)	9.71	99
22+22+50	1.83	1.83	4.15		7.80 (2.9 - 9.0)	2.200 (0.710 - 2.950)	9.66	99
22+22+60	1.67	1.67	4.56		7.90 (2.9 - 9.0)	2.200 (0.720 - 2.910)	9.66	99
22+22+71	1.53	1.53	4.94		8.00 (2.9 - 9.0)	2.200 (0.720 - 3.030)	9.66	99
22+25+25	2.20	2.50	2.50		7.20 (2.9 - 8.7)	2.010 (0.690 - 2.810)	8.83	99
22+25+35	2.07	2.35	3.29		7.70 (2.9 - 9.0)	2.200 (0.700 - 2.990)	9.66	99
22+25+42	1.93	2.19	3.68		7.80 (2.9 - 9.0)	2.210 (0.700 - 2.960)	9.71	99
22+25+50	1.79	2.04	4.07		7.90 (2.9 - 9.0)	2.230 (0.710 - 2.940)	9.79	99
22+25+60	1.64	1.87	4.49		8.00 (2.9 - 9.0)	2.220 (0.720 - 3.030)	9.75	99
22+25+71	1.49	1.69	4.81		8.00 (2.9 - 9.0)	2.200 (0.720 - 3.030)	9.66	99
22+35+35	1.87	2.97	2.97		7.80 (2.9 - 9.0)	2.230 (0.710 - 2.950)	9.79	99
22+35+42	1.76	2.79	3.35		7.90 (2.9 - 9.0)	2.240 (0.710 - 2.930)	9.84	99
22+35+50	1.64	2.62	3.74		8.00 (2.9 - 9.0)	2.250 (0.720 - 3.030)	9.88	99
22+35+60	1.50	2.39	4.10		8.00 (2.9 - 9.0)	2.220 (0.720 - 3.030)	9.75	99
22+35+71	1.38	2.19	4.44		8.00 (2.9 - 9.0)	2.200 (0.720 - 3.030)	9.66	99
22+42+42	1.66	3.17	3.17		8.00 (2.9 - 9.0)	2.240 (0.720 - 3.030)	9.84	99
22+42+50	1.54	2.95	3.51		8.00 (2.9 - 9.0)	2.230 (0.720 - 3.030)	9.79	99
22+42+60	1.42	2.71	3.87		8.00 (2.9 - 9.0)	2.200 (0.720 - 3.030)	9.66	99
22+42+71	1.30	2.49	4.21		8.00 (2.9 - 9.0)	2.180 (0.720 - 3.030)	9.57	99
22+50+50	1.44	3.28	3.28		8.00 (2.9 - 9.0)	2.220 (0.720 - 3.030)	9.75	99
22+50+60	1.33	3.03	3.64		8.00 (2.9 - 9.0)	2.190 (0.720 - 3.030)	9.62	99
22+50+71	1.23	2.80	3.97		8.00 (2.9 - 9.0)	2.170 (0.720 - 3.030)	9.53	99
25+25+25	2.50	2.50	2.50		7.50 (2.9 - 9.0)	2.140 (0.690 - 3.010)	9.40	99
25+25+35	2.29	2.29	3.21		7.80 (2.9 - 9.0)	2.230 (0.700 - 2.980)	9.79	99
25+25+42	2.12	2.12	3.56		7.80 (2.9 - 9.0)	2.210 (0.710 - 2.950)	9.71	99
25+25+50	1.98	1.98	3.95		7.90 (2.9 - 9.0)	2.230 (0.720 - 2.930)	9.79	99
25+25+60	1.82	1.82	4.36		8.00 (2.9 - 9.0)	2.220 (0.720 - 3.030)	9.75	99
25+25+71	1.65	1.65	4.69		8.00 (2.9 - 9.0)	2.200 (0.720 - 3.030)	9.66	99
25+35+35	2.08	2.91	2.91		7.90 (2.9 - 9.0)	2.260 (0.710 - 2.940)	9.93	99

MXZ-4C80VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
25+35+42	1.94	2.71	3.25		7.90 (2.9 - 9.0)	2.240 (0.720 - 2.920)	9.84	99
25+35+50	1.82	2.55	3.64		8.00 (2.9 - 9.0)	2.250 (0.720 - 3.030)	9.88	99
25+35+60	1.67	2.33	4.00		8.00 (2.9 - 9.0)	2.220 (0.720 - 3.030)	9.75	99
25+35+71	1.53	2.14	4.34		8.00 (2.9 - 9.0)	2.200 (0.720 - 3.030)	9.66	99
25+42+42	1.83	3.08	3.08		8.00 (2.9 - 9.0)	2.240 (0.720 - 3.030)	9.84	99
25+42+50	1.71	2.87	3.42		8.00 (2.9 - 9.0)	2.230 (0.720 - 3.030)	9.79	99
25+42+60	1.57	2.65	3.78		8.00 (2.9 - 9.0)	2.200 (0.720 - 3.030)	9.66	99
25+42+71	1.45	2.43	4.12		8.00 (2.9 - 9.0)	2.180 (0.720 - 3.030)	9.57	99
25+50+50	1.60	3.20	3.20		8.00 (2.9 - 9.0)	2.220 (0.720 - 3.030)	9.75	99
25+50+60	1.48	2.96	3.56		8.00 (2.9 - 9.0)	2.190 (0.720 - 3.030)	9.62	99
35+35+35	2.65	2.65	2.65		7.95 (2.9 - 9.0)	2.280 (0.720 - 2.910)	10.01	99
35+35+42	2.50	2.50	3.00		8.00 (2.9 - 9.0)	2.260 (0.720 - 3.030)	9.93	99
35+35+50	2.33	2.33	3.33		8.00 (2.9 - 9.0)	2.250 (0.720 - 3.030)	9.88	99
35+35+60	2.15	2.15	3.69		8.00 (2.9 - 9.0)	2.220 (0.720 - 3.030)	9.75	99
35+35+71	1.99	1.99	4.03		8.00 (2.9 - 9.0)	2.200 (0.720 - 3.030)	9.66	99
35+42+42	2.35	2.82	2.82		8.00 (2.9 - 9.0)	2.240 (0.720 - 3.030)	9.84	99
35+42+50	2.20	2.65	3.15		8.00 (2.9 - 9.0)	2.230 (0.720 - 3.030)	9.79	99
35+42+60	2.04	2.45	3.50		8.00 (2.9 - 9.0)	2.200 (0.720 - 3.030)	9.66	99
35+50+50	2.07	2.96	2.96		8.00 (2.9 - 9.0)	2.220 (0.720 - 3.030)	9.75	99
35+50+60	1.93	2.76	3.31		8.00 (2.9 - 9.0)	2.190 (0.720 - 3.030)	9.62	99
15+15+15+15	1.50	1.50	1.50	1.50	6.00 (3.7 - 6.4)	1.580 (0.910 - 3.360)	6.94	99
15+15+15+20	1.48	1.48	1.48	1.97	6.40 (3.7 - 6.9)	1.930 (0.930 - 3.610)	8.48	99
15+15+15+22	1.48	1.48	1.48	2.17	6.60 (3.7 - 7.2)	1.980 (0.900 - 3.620)	8.70	99
15+15+15+25	1.46	1.46	1.46	2.43	6.80 (3.7 - 7.4)	2.080 (0.900 - 3.650)	9.13	99
15+15+15+35	1.43	1.43	1.43	3.33	7.60 (3.7 - 8.4)	2.450 (1.000 - 3.820)	10.76	99
15+15+15+42	1.33	1.33	1.33	3.72	7.70 (3.7 - 8.8)	2.250 (0.900 - 3.300)	9.88	99
15+15+15+50	1.24	1.24	1.24	4.13	7.85 (3.7 - 9.2)	2.240 (0.900 - 2.770)	9.84	99
15+15+15+60	1.14	1.14	1.14	4.54	7.95 (3.7 - 9.2)	2.220 (0.900 - 2.750)	9.75	99
15+15+15+71	1.03	1.03	1.03	4.90	8.00 (3.7 - 9.2)	2.210 (0.900 - 2.710)	9.71	99
15+15+20+20	1.46	1.46	1.94	1.94	6.80 (3.7 - 7.4)	2.120 (0.930 - 3.690)	9.31	99
15+15+20+22	1.46	1.46	1.94	2.14	7.00 (3.7 - 7.7)	2.170 (0.900 - 3.700)	9.53	99
15+15+20+25	1.44	1.44	1.92	2.40	7.20 (3.7 - 7.9)	2.260 (0.900 - 3.740)	9.93	99
15+15+20+35	1.36	1.36	1.81	3.17	7.70 (3.7 - 8.8)	2.270 (0.900 - 3.310)	9.97	99
15+15+20+42	1.28	1.28	1.71	3.58	7.85 (3.7 - 9.2)	2.250 (0.900 - 2.780)	9.88	99
15+15+20+50	1.19	1.19	1.58	3.96	7.92 (3.7 - 9.2)	2.240 (0.900 - 2.770)	9.84	99
15+15+20+60	1.09	1.09	1.45	4.36	8.00 (3.7 - 9.2)	2.230 (0.900 - 2.740)	9.79	99
15+15+20+71	0.99	0.99	1.32	4.69	8.00 (3.7 - 9.2)	2.210 (0.900 - 2.700)	9.71	99
15+15+22+22	1.44	1.44	2.11	2.11	7.10 (3.7 - 7.8)	2.180 (0.870 - 3.680)	9.57	99
15+15+22+25	1.44	1.44	2.11	2.40	7.40 (3.7 - 8.2)	2.320 (0.870 - 3.750)	10.19	99
15+15+22+35	1.33	1.33	1.95	3.10	7.70 (3.7 - 8.8)	2.230 (0.870 - 3.270)	9.79	99

MXZ-4C80VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15+15+22+42	1.25	1.25	1.84	3.51	7.85 (3.7 - 9.2)	2.210 (0.870 - 2.740)	9.71	99
15+15+22+50	1.17	1.17	1.71	3.90	7.95 (3.7 - 9.2)	2.210 (0.870 - 2.730)	9.71	99
15+15+22+60	1.07	1.07	1.57	4.29	8.00 (3.7 - 9.2)	2.190 (0.870 - 2.690)	9.62	99
15+15+22+71	0.98	0.98	1.43	4.62	8.00 (3.7 - 9.2)	2.170 (0.870 - 2.660)	9.53	99
15+15+25+25	1.43	1.43	2.38	2.38	7.60 (3.7 - 8.4)	2.410 (0.970 - 3.780)	10.58	99
15+15+25+35	1.30	1.30	2.17	3.03	7.80 (3.7 - 9.2)	2.230 (0.870 - 2.750)	9.79	99
15+15+25+42	1.22	1.22	2.04	3.42	7.90 (3.7 - 9.2)	2.210 (0.870 - 2.740)	9.71	99
15+15+25+50	1.14	1.14	1.89	3.79	7.95 (3.7 - 9.2)	2.210 (0.870 - 2.720)	9.71	99
15+15+25+60	1.04	1.04	1.74	4.17	8.00 (3.7 - 9.2)	2.190 (0.870 - 2.690)	9.62	99
15+15+25+71	0.95	0.95	1.59	4.51	8.00 (3.7 - 9.2)	2.170 (0.870 - 2.650)	9.53	99
15+15+35+35	1.19	1.19	2.77	2.77	7.92 (3.7 - 9.2)	2.230 (0.870 - 2.750)	9.79	99
15+15+35+42	1.11	1.11	2.60	3.12	7.95 (3.7 - 9.2)	2.220 (0.870 - 2.720)	9.75	99
15+15+35+50	1.04	1.04	2.43	3.48	8.00 (3.7 - 9.2)	2.220 (0.870 - 2.700)	9.75	99
15+15+35+60	0.96	0.96	2.24	3.84	8.00 (3.7 - 9.2)	2.190 (0.870 - 2.660)	9.62	99
15+15+35+71	0.88	0.88	2.06	4.18	8.00 (3.7 - 9.2)	2.170 (0.870 - 2.630)	9.53	99
15+15+42+42	1.05	1.05	2.95	2.95	8.00 (3.7 - 9.2)	2.210 (0.870 - 2.700)	9.71	99
15+15+42+50	0.98	0.98	2.75	3.28	8.00 (3.7 - 9.2)	2.200 (0.870 - 2.670)	9.66	99
15+15+42+60	0.91	0.91	2.55	3.64	8.00 (3.7 - 9.2)	2.170 (0.870 - 2.640)	9.53	99
15+15+42+71	0.84	0.84	2.35	3.97	8.00 (3.7 - 9.2)	2.150 (0.870 - 2.610)	9.44	99
15+15+50+50	0.92	0.92	3.08	3.08	8.00 (3.7 - 9.2)	2.190 (0.870 - 2.640)	9.62	99
15+15+50+60	0.86	0.86	2.86	3.43	8.00 (3.7 - 9.2)	2.160 (0.870 - 2.610)	9.49	99
15+20+20+20	1.44	1.92	1.92	1.92	7.20 (3.7 - 7.9)	2.300 (0.930 - 3.780)	10.10	99
15+20+20+22	1.44	1.92	1.92	2.11	7.40 (3.7 - 8.2)	2.360 (0.900 - 3.790)	10.36	99
15+20+20+25	1.43	1.90	1.90	2.38	7.60 (3.7 - 8.4)	2.450 (1.000 - 3.820)	10.76	99
15+20+20+35	1.30	1.73	1.73	3.03	7.80 (3.7 - 9.2)	2.270 (0.900 - 2.790)	9.97	99
15+20+20+42	1.22	1.63	1.63	3.42	7.90 (3.7 - 9.2)	2.250 (0.900 - 2.780)	9.88	99
15+20+20+50	1.14	1.51	1.51	3.79	7.95 (3.7 - 9.2)	2.250 (0.900 - 2.760)	9.88	99
15+20+20+60	1.04	1.39	1.39	4.17	8.00 (3.7 - 9.2)	2.230 (0.900 - 2.730)	9.79	99
15+20+20+71	0.95	1.27	1.27	4.51	8.00 (3.7 - 9.2)	2.210 (0.900 - 2.690)	9.71	99
15+20+22+22	1.42	1.90	2.09	2.09	7.50 (3.7 - 8.3)	2.360 (0.870 - 3.760)	10.36	99
15+20+22+25	1.39	1.85	2.04	2.32	7.60 (3.7 - 8.4)	2.230 (0.870 - 3.780)	9.79	99
15+20+22+35	1.28	1.71	1.88	2.99	7.85 (3.7 - 9.2)	2.230 (0.870 - 2.750)	9.79	99
15+20+22+42	1.20	1.60	1.76	3.35	7.90 (3.7 - 9.2)	2.210 (0.870 - 2.740)	9.71	99
15+20+22+50	1.11	1.49	1.63	3.71	7.95 (3.7 - 9.2)	2.210 (0.870 - 2.710)	9.71	99
15+20+22+60	1.03	1.37	1.50	4.10	8.00 (3.7 - 9.2)	2.190 (0.870 - 2.680)	9.62	99
15+20+22+71	0.94	1.25	1.38	4.44	8.00 (3.7 - 9.2)	2.170 (0.870 - 2.650)	9.53	99
15+20+25+25	1.36	1.81	2.26	2.26	7.70 (3.7 - 8.8)	2.230 (0.870 - 3.270)	9.79	99
15+20+25+35	1.24	1.65	2.07	2.89	7.85 (3.7 - 9.2)	2.230 (0.870 - 2.750)	9.79	99
15+20+25+42	1.17	1.56	1.95	3.27	7.95 (3.7 - 9.2)	2.220 (0.870 - 2.740)	9.75	99
15+20+25+50	1.09	1.45	1.82	3.64	8.00 (3.7 - 9.2)	2.220 (0.870 - 2.710)	9.75	99

MXZ-4C80VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15+20+25+60	1.00	1.33	1.67	4.00	8.00 (3.7 - 9.2)	2.190 (0.870 - 2.680)	9.62	99
15+20+25+71	0.92	1.22	1.53	4.34	8.00 (3.7 - 9.2)	2.170 (0.870 - 2.640)	9.53	99
15+20+35+35	1.14	1.51	2.65	2.65	7.95 (3.7 - 9.2)	2.240 (0.870 - 2.740)	9.84	99
15+20+35+42	1.07	1.43	2.50	3.00	8.00 (3.7 - 9.2)	2.230 (0.870 - 2.710)	9.79	99
15+20+35+50	1.00	1.33	2.33	3.33	8.00 (3.7 - 9.2)	2.220 (0.870 - 2.690)	9.75	99
15+20+35+60	0.92	1.23	2.15	3.69	8.00 (3.7 - 9.2)	2.190 (0.870 - 2.650)	9.62	99
15+20+35+71	0.85	1.13	1.99	4.03	8.00 (3.7 - 9.2)	2.170 (0.870 - 2.620)	9.53	99
15+20+42+42	1.01	1.34	2.82	2.82	8.00 (3.7 - 9.2)	2.210 (0.870 - 2.690)	9.71	99
15+20+42+50	0.94	1.26	2.65	3.15	8.00 (3.7 - 9.2)	2.200 (0.870 - 2.660)	9.66	99
15+20+42+60	0.88	1.17	2.45	3.50	8.00 (3.7 - 9.2)	2.170 (0.870 - 2.630)	9.53	99
15+20+50+50	0.89	1.19	2.96	2.96	8.00 (3.7 - 9.2)	2.190 (0.870 - 2.630)	9.62	99
15+20+50+60	0.83	1.10	2.76	3.31	8.00 (3.7 - 9.2)	2.160 (0.870 - 2.610)	9.49	99
15+22+22+22	1.41	2.06	2.06	2.06	7.60 (3.7 - 8.4)	2.190 (0.840 - 3.740)	9.62	99
15+22+22+25	1.38	2.02	2.02	2.29	7.70 (3.7 - 8.8)	2.190 (0.840 - 3.230)	9.62	99
15+22+22+35	1.25	1.84	1.84	2.92	7.85 (3.7 - 9.2)	2.190 (0.840 - 2.710)	9.62	99
15+22+22+42	1.18	1.73	1.73	3.31	7.95 (3.7 - 9.2)	2.180 (0.840 - 2.700)	9.57	99
15+22+22+50	1.10	1.61	1.61	3.67	8.00 (3.7 - 9.2)	2.180 (0.840 - 2.670)	9.57	99
15+22+22+60	1.01	1.48	1.48	4.03	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.640)	9.44	99
15+22+22+71	0.92	1.35	1.35	4.37	8.00 (3.7 - 9.2)	2.130 (0.840 - 2.600)	9.35	99
15+22+25+25	1.33	1.95	2.21	2.21	7.70 (3.7 - 8.8)	2.190 (0.840 - 3.230)	9.62	99
15+22+25+35	1.22	1.79	2.04	2.85	7.90 (3.7 - 9.2)	2.190 (0.840 - 2.710)	9.62	99
15+22+25+42	1.15	1.68	1.91	3.21	7.95 (3.7 - 9.2)	2.180 (0.840 - 2.690)	9.57	99
15+22+25+50	1.07	1.57	1.79	3.57	8.00 (3.7 - 9.2)	2.180 (0.840 - 2.660)	9.57	99
15+22+25+60	0.98	1.44	1.64	3.93	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.630)	9.44	99
15+22+25+71	0.90	1.32	1.50	4.27	8.00 (3.7 - 9.2)	2.130 (0.840 - 2.600)	9.35	99
15+22+35+35	1.11	1.63	2.60	2.60	7.95 (3.7 - 9.2)	2.200 (0.840 - 2.690)	9.66	99
15+22+35+42	1.05	1.54	2.46	2.95	8.00 (3.7 - 9.2)	2.190 (0.840 - 2.670)	9.62	99
15+22+35+50	0.98	1.44	2.30	3.28	8.00 (3.7 - 9.2)	2.180 (0.840 - 2.640)	9.57	99
15+22+35+60	0.91	1.33	2.12	3.64	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.610)	9.44	99
15+22+35+71	0.84	1.23	1.96	3.97	8.00 (3.7 - 9.2)	2.130 (0.840 - 2.580)	9.35	99
15+22+42+42	0.99	1.45	2.78	2.78	8.00 (3.7 - 9.2)	2.170 (0.840 - 2.640)	9.53	99
15+22+42+50	0.93	1.36	2.60	3.10	8.00 (3.7 - 9.2)	2.160 (0.840 - 2.610)	9.49	99
15+22+42+60	0.86	1.27	2.42	3.45	8.00 (3.7 - 9.2)	2.130 (0.840 - 2.580)	9.35	99
15+22+50+50	0.88	1.28	2.92	2.92	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.590)	9.44	99
15+25+25+25	1.30	2.17	2.17	2.17	7.80 (3.7 - 9.2)	2.190 (0.840 - 2.710)	9.62	99
15+25+25+35	1.19	1.98	1.98	2.77	7.92 (3.7 - 9.2)	2.190 (0.840 - 2.710)	9.62	99
15+25+25+42	1.11	1.86	1.86	3.12	7.95 (3.7 - 9.2)	2.180 (0.840 - 2.680)	9.57	99
15+25+25+50	1.04	1.74	1.74	3.48	8.00 (3.7 - 9.2)	2.180 (0.840 - 2.660)	9.57	99
15+25+25+60	0.96	1.60	1.60	3.84	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.620)	9.44	99
15+25+25+71	0.88	1.47	1.47	4.18	8.00 (3.7 - 9.2)	2.130 (0.840 - 2.590)	9.35	99

MXZ-4C80VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15+25+35+35	1.09	1.82	2.55	2.55	8.00 (3.7 - 9.2)	2.210 (0.840 - 2.690)	9.71	99
15+25+35+42	1.03	1.71	2.39	2.87	8.00 (3.7 - 9.2)	2.190 (0.840 - 2.660)	9.62	99
15+25+35+50	0.96	1.60	2.24	3.20	8.00 (3.7 - 9.2)	2.180 (0.840 - 2.630)	9.57	99
15+25+35+60	0.89	1.48	2.07	3.56	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.600)	9.44	99
15+25+42+42	0.97	1.61	2.71	2.71	8.00 (3.7 - 9.2)	2.170 (0.840 - 2.640)	9.53	99
15+25+42+50	0.91	1.52	2.55	3.03	8.00 (3.7 - 9.2)	2.160 (0.840 - 2.610)	9.49	99
15+25+42+60	0.85	1.41	2.37	3.38	8.00 (3.7 - 9.2)	2.130 (0.840 - 2.580)	9.35	99
15+25+50+50	0.86	1.43	2.86	2.86	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.580)	9.44	99
15+35+35+35	1.00	2.33	2.33	2.33	8.00 (3.7 - 9.2)	2.210 (0.840 - 2.670)	9.71	99
15+35+35+42	0.94	2.20	2.20	2.65	8.00 (3.7 - 9.2)	2.190 (0.840 - 2.640)	9.62	99
15+35+35+50	0.89	2.07	2.07	2.96	8.00 (3.7 - 9.2)	2.180 (0.840 - 2.610)	9.57	99
15+35+35+60	0.83	1.93	1.93	3.31	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.590)	9.44	99
15+35+42+42	0.90	2.09	2.51	2.51	8.00 (3.7 - 9.2)	2.170 (0.840 - 2.610)	9.53	99
15+35+42+50	0.85	1.97	2.37	2.82	8.00 (3.7 - 9.2)	2.160 (0.840 - 2.590)	9.49	99
15+42+42+42	0.85	2.38	2.38	2.38	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.590)	9.44	99
20+20+20+20	1.90	1.90	1.90	1.90	7.60 (3.7 - 8.4)	2.330 (0.910 - 3.700)	10.23	99
20+20+20+22	1.85	1.85	1.85	2.04	7.60 (3.7 - 8.4)	2.270 (0.900 - 3.820)	9.97	99
20+20+20+25	1.81	1.81	1.81	2.26	7.70 (3.7 - 8.8)	2.270 (0.900 - 3.310)	9.97	99
20+20+20+35	1.65	1.65	1.65	2.89	7.85 (3.7 - 9.2)	2.270 (0.900 - 2.790)	9.97	99
20+20+20+42	1.56	1.56	1.56	3.27	7.95 (3.7 - 9.2)	2.260 (0.900 - 2.780)	9.93	99
20+20+20+50	1.45	1.45	1.45	3.64	8.00 (3.7 - 9.2)	2.260 (0.900 - 2.750)	9.93	99
20+20+20+60	1.33	1.33	1.33	4.00	8.00 (3.7 - 9.2)	2.230 (0.900 - 2.720)	9.79	99
20+20+20+71	1.22	1.22	1.22	4.34	8.00 (3.7 - 9.2)	2.210 (0.900 - 2.680)	9.71	99
20+20+22+22	1.83	1.83	2.02	2.02	7.70 (3.7 - 8.8)	2.230 (0.870 - 3.270)	9.79	99
20+20+22+25	1.77	1.77	1.95	2.21	7.70 (3.7 - 8.8)	2.230 (0.870 - 3.270)	9.79	99
20+20+22+35	1.63	1.63	1.79	2.85	7.90 (3.7 - 9.2)	2.230 (0.870 - 2.750)	9.79	99
20+20+22+42	1.53	1.53	1.68	3.21	7.95 (3.7 - 9.2)	2.220 (0.870 - 2.730)	9.75	99
20+20+22+50	1.43	1.43	1.57	3.57	8.00 (3.7 - 9.2)	2.220 (0.870 - 2.700)	9.75	99
20+20+22+60	1.31	1.31	1.44	3.93	8.00 (3.7 - 9.2)	2.190 (0.870 - 2.670)	9.62	99
20+20+22+71	1.20	1.20	1.32	4.27	8.00 (3.7 - 9.2)	2.170 (0.870 - 2.640)	9.53	99
20+20+25+25	1.73	1.73	2.17	2.17	7.80 (3.7 - 9.2)	2.230 (0.870 - 2.750)	9.79	99
20+20+25+35	1.58	1.58	1.98	2.77	7.92 (3.7 - 9.2)	2.230 (0.870 - 2.750)	9.79	99
20+20+25+42	1.49	1.49	1.86	3.12	7.95 (3.7 - 9.2)	2.220 (0.870 - 2.720)	9.75	99
20+20+25+50	1.39	1.39	1.74	3.48	8.00 (3.7 - 9.2)	2.220 (0.870 - 2.700)	9.75	99
20+20+25+60	1.28	1.28	1.60	3.84	8.00 (3.7 - 9.2)	2.190 (0.870 - 2.660)	9.62	99
20+20+25+71	1.18	1.18	1.47	4.18	8.00 (3.7 - 9.2)	2.170 (0.870 - 2.630)	9.53	99
20+20+35+35	1.45	1.45	2.55	2.55	8.00 (3.7 - 9.2)	2.250 (0.870 - 2.730)	9.88	99
20+20+35+42	1.37	1.37	2.39	2.87	8.00 (3.7 - 9.2)	2.230 (0.870 - 2.700)	9.79	99
20+20+35+50	1.28	1.28	2.24	3.20	8.00 (3.7 - 9.2)	2.220 (0.870 - 2.670)	9.75	99
20+20+35+60	1.19	1.19	2.07	3.56	8.00 (3.7 - 9.2)	2.190 (0.870 - 2.640)	9.62	99

MXZ-4C80VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
20+20+42+42	1.29	1.29	2.71	2.71	8.00 (3.7 - 9.2)	2.210 (0.870 - 2.680)	9.71	99
20+20+42+50	1.21	1.21	2.55	3.03	8.00 (3.7 - 9.2)	2.200 (0.870 - 2.650)	9.66	99
20+20+42+60	1.13	1.13	2.37	3.38	8.00 (3.7 - 9.2)	2.170 (0.870 - 2.620)	9.53	99
20+20+50+50	1.14	1.14	2.86	2.86	8.00 (3.7 - 9.2)	2.190 (0.870 - 2.620)	9.62	99
20+22+22+22	1.79	1.97	1.97	1.97	7.70 (3.7 - 8.8)	2.190 (0.840 - 3.230)	9.62	99
20+22+22+25	1.75	1.93	1.93	2.19	7.80 (3.7 - 9.2)	2.190 (0.840 - 2.710)	9.62	99
20+22+22+35	1.60	1.76	1.76	2.79	7.90 (3.7 - 9.2)	2.190 (0.840 - 2.710)	9.62	99
20+22+22+42	1.50	1.65	1.65	3.15	7.95 (3.7 - 9.2)	2.180 (0.840 - 2.690)	9.57	99
20+22+22+50	1.40	1.54	1.54	3.51	8.00 (3.7 - 9.2)	2.180 (0.840 - 2.660)	9.57	99
20+22+22+60	1.29	1.42	1.42	3.87	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.630)	9.44	99
20+22+22+71	1.19	1.30	1.30	4.21	8.00 (3.7 - 9.2)	2.130 (0.840 - 2.590)	9.35	99
20+22+25+25	1.71	1.88	2.13	2.13	7.85 (3.7 - 9.2)	2.190 (0.840 - 2.710)	9.62	99
20+22+25+35	1.56	1.71	1.95	2.73	7.95 (3.7 - 9.2)	2.200 (0.840 - 2.710)	9.66	99
20+22+25+42	1.47	1.61	1.83	3.08	8.00 (3.7 - 9.2)	2.190 (0.840 - 2.680)	9.62	99
20+22+25+50	1.37	1.50	1.71	3.42	8.00 (3.7 - 9.2)	2.180 (0.840 - 2.650)	9.57	99
20+22+25+60	1.26	1.39	1.57	3.78	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.620)	9.44	99
20+22+25+71	1.16	1.28	1.45	4.12	8.00 (3.7 - 9.2)	2.130 (0.840 - 2.580)	9.35	99
20+22+35+35	1.43	1.57	2.50	2.50	8.00 (3.7 - 9.2)	2.210 (0.840 - 2.680)	9.71	99
20+22+35+42	1.34	1.48	2.35	2.82	8.00 (3.7 - 9.2)	2.190 (0.840 - 2.660)	9.62	99
20+22+35+50	1.26	1.39	2.20	3.15	8.00 (3.7 - 9.2)	2.180 (0.840 - 2.630)	9.57	99
20+22+35+60	1.17	1.28	2.04	3.50	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.600)	9.44	99
20+22+42+42	1.27	1.40	2.67	2.67	8.00 (3.7 - 9.2)	2.170 (0.840 - 2.630)	9.53	99
20+22+42+50	1.19	1.31	2.51	2.99	8.00 (3.7 - 9.2)	2.160 (0.840 - 2.600)	9.49	99
20+22+42+60	1.11	1.22	2.33	3.33	8.00 (3.7 - 9.2)	2.130 (0.840 - 2.580)	9.35	99
20+22+50+50	1.13	1.24	2.82	2.82	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.580)	9.44	99
20+25+25+25	1.65	2.07	2.07	2.07	7.85 (3.7 - 9.2)	2.190 (0.840 - 2.710)	9.62	99
20+25+25+35	1.51	1.89	1.89	2.65	7.95 (3.7 - 9.2)	2.200 (0.840 - 2.700)	9.66	99
20+25+25+42	1.43	1.79	1.79	3.00	8.00 (3.7 - 9.2)	2.190 (0.840 - 2.670)	9.62	99
20+25+25+50	1.33	1.67	1.67	3.33	8.00 (3.7 - 9.2)	2.180 (0.840 - 2.650)	9.57	99
20+25+25+60	1.23	1.54	1.54	3.69	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.610)	9.44	99
20+25+25+71	1.13	1.42	1.42	4.03	8.00 (3.7 - 9.2)	2.130 (0.840 - 2.580)	9.35	99
20+25+35+35	1.39	1.74	2.43	2.43	8.00 (3.7 - 9.2)	2.210 (0.840 - 2.680)	9.71	99
20+25+35+42	1.31	1.64	2.30	2.75	8.00 (3.7 - 9.2)	2.190 (0.840 - 2.650)	9.62	99
20+25+35+50	1.23	1.54	2.15	3.08	8.00 (3.7 - 9.2)	2.180 (0.840 - 2.620)	9.57	99
20+25+35+60	1.14	1.43	2.00	3.43	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.590)	9.44	99
20+25+42+42	1.24	1.55	2.60	2.60	8.00 (3.7 - 9.2)	2.170 (0.840 - 2.620)	9.53	99
20+25+42+50	1.17	1.46	2.45	2.92	8.00 (3.7 - 9.2)	2.160 (0.840 - 2.600)	9.49	99
20+25+50+50	1.10	1.38	2.76	2.76	8.00 (3.7 - 9.2)	2.150 (0.840 - 2.580)	9.44	99
20+35+35+35	1.28	2.24	2.24	2.24	8.00 (3.7 - 9.2)	2.210 (0.840 - 2.650)	9.71	99
20+35+35+42	1.21	2.12	2.12	2.55	8.00 (3.7 - 9.2)	2.190 (0.840 - 2.630)	9.62	99

MXZ-4C80VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
20+35+35+50	1.14	2.00	2.00	2.86	8.00 (3.7 - 9.2)	2.180 (0.840 - 2.600)	9.57	99
20+35+42+42	1.15	2.01	2.42	2.42	8.00 (3.7 - 9.2)	2.170 (0.840 - 2.600)	9.53	99
22+22+22+22	1.95	1.95	1.95	1.95	7.80 (3.7 - 9.2)	2.150 (0.810 - 2.670)	9.44	99
22+22+22+25	1.90	1.90	1.90	2.16	7.85 (3.7 - 9.2)	2.150 (0.810 - 2.670)	9.44	99
22+22+22+35	1.73	1.73	1.73	2.75	7.95 (3.7 - 9.2)	2.160 (0.810 - 2.670)	9.49	99
22+22+22+42	1.63	1.63	1.63	3.11	8.00 (3.7 - 9.2)	2.150 (0.810 - 2.640)	9.44	99
22+22+22+50	1.52	1.52	1.52	3.45	8.00 (3.7 - 9.2)	2.140 (0.810 - 2.610)	9.40	99
22+22+22+60	1.40	1.40	1.40	3.81	8.00 (3.7 - 9.2)	2.110 (0.810 - 2.580)	9.27	99
22+22+22+71	1.28	1.28	1.28	4.15	8.00 (3.7 - 9.2)	2.090 (0.810 - 2.550)	9.18	99
22+22+25+25	1.84	1.84	2.09	2.09	7.85 (3.7 - 9.2)	2.150 (0.810 - 2.670)	9.44	99
22+22+25+35	1.68	1.68	1.91	2.68	7.95 (3.7 - 9.2)	2.160 (0.810 - 2.660)	9.49	99
22+22+25+42	1.59	1.59	1.80	3.03	8.00 (3.7 - 9.2)	2.150 (0.810 - 2.640)	9.44	99
22+22+25+50	1.48	1.48	1.68	3.36	8.00 (3.7 - 9.2)	2.140 (0.810 - 2.610)	9.40	99
22+22+25+60	1.36	1.36	1.55	3.72	8.00 (3.7 - 9.2)	2.110 (0.810 - 2.570)	9.27	99
22+22+25+71	1.26	1.26	1.43	4.06	8.00 (3.7 - 9.2)	2.090 (0.810 - 2.540)	9.18	99
22+22+35+35	1.54	1.54	2.46	2.46	8.00 (3.7 - 9.2)	2.170 (0.810 - 2.640)	9.53	99
22+22+35+42	1.45	1.45	2.31	2.78	8.00 (3.7 - 9.2)	2.150 (0.810 - 2.610)	9.44	99
22+22+35+50	1.36	1.36	2.17	3.10	8.00 (3.7 - 9.2)	2.140 (0.810 - 2.580)	9.40	99
22+22+35+60	1.27	1.27	2.01	3.45	8.00 (3.7 - 9.2)	2.110 (0.810 - 2.550)	9.27	99
22+22+42+42	1.38	1.38	2.63	2.63	8.00 (3.7 - 9.2)	2.130 (0.810 - 2.590)	9.35	99
22+22+42+50	1.29	1.29	2.47	2.94	8.00 (3.7 - 9.2)	2.120 (0.810 - 2.560)	9.31	99
22+22+50+50	1.22	1.22	2.78	2.78	8.00 (3.7 - 9.2)	2.110 (0.810 - 2.540)	9.27	99
22+25+25+25	1.79	2.04	2.04	2.04	7.90 (3.7 - 9.2)	2.150 (0.810 - 2.670)	9.44	99
22+25+25+35	1.63	1.86	1.86	2.60	7.95 (3.7 - 9.2)	2.160 (0.810 - 2.650)	9.49	99
22+25+25+42	1.54	1.75	1.75	2.95	8.00 (3.7 - 9.2)	2.150 (0.810 - 2.630)	9.44	99
22+25+25+50	1.44	1.64	1.64	3.28	8.00 (3.7 - 9.2)	2.140 (0.810 - 2.600)	9.40	99
22+25+25+60	1.33	1.52	1.52	3.64	8.00 (3.7 - 9.2)	2.110 (0.810 - 2.570)	9.27	99
22+25+35+35	1.50	1.71	2.39	2.39	8.00 (3.7 - 9.2)	2.170 (0.810 - 2.630)	9.53	99
22+25+35+42	1.42	1.61	2.26	2.71	8.00 (3.7 - 9.2)	2.150 (0.810 - 2.610)	9.44	99
22+25+35+50	1.33	1.52	2.12	3.03	8.00 (3.7 - 9.2)	2.140 (0.810 - 2.580)	9.40	99
22+25+35+60	1.24	1.41	1.97	3.38	8.00 (3.7 - 9.2)	2.110 (0.810 - 2.550)	9.27	99
22+35+35+35	1.39	2.20	2.20	2.20	8.00 (3.7 - 9.2)	2.170 (0.810 - 2.610)	9.53	99
22+35+35+42	1.31	2.09	2.09	2.51	8.00 (3.7 - 9.2)	2.150 (0.810 - 2.580)	9.44	99
22+35+35+50	1.24	1.97	1.97	2.82	8.00 (3.7 - 9.2)	2.140 (0.810 - 2.560)	9.40	99
22+35+42+42	1.25	1.99	2.38	2.38	8.00 (3.7 - 9.2)	2.130 (0.810 - 2.560)	9.35	99
25+25+25+25	1.98	1.98	1.98	1.98	7.92 (3.7 - 9.2)	2.150 (0.810 - 2.670)	9.44	99
25+25+25+35	1.82	1.82	1.82	2.55	8.00 (3.7 - 9.2)	2.170 (0.810 - 2.650)	9.53	99
25+25+25+42	1.71	1.71	1.71	2.87	8.00 (3.7 - 9.2)	2.150 (0.810 - 2.620)	9.44	99
25+25+25+50	1.60	1.60	1.60	3.20	8.00 (3.7 - 9.2)	2.140 (0.810 - 2.590)	9.40	99
25+25+25+60	1.48	1.48	1.48	3.56	8.00 (3.7 - 9.2)	2.110 (0.810 - 2.560)	9.27	99

MXZ-4C80VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
25+25+35+35	1.67	1.67	2.33	2.33	8.00 (3.7 - 9.2)	2.170 (0.810 - 2.630)	9.53	99
25+25+35+42	1.57	1.57	2.20	2.65	8.00 (3.7 - 9.2)	2.150 (0.810 - 2.600)	9.44	99
25+25+35+50	1.48	1.48	2.07	2.96	8.00 (3.7 - 9.2)	2.140 (0.810 - 2.570)	9.40	99
25+35+35+35	1.54	2.15	2.15	2.15	8.00 (3.7 - 9.2)	2.170 (0.810 - 2.600)	9.53	99
25+35+35+42	1.46	2.04	2.04	2.45	8.00 (3.7 - 9.2)	2.150 (0.810 - 2.580)	9.44	99
35+35+35+35	2.00	2.00	2.00	2.00	8.00 (3.7 - 9.2)	2.170 (0.810 - 2.580)	9.53	99

MXZ-4C80VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15	1.70				1.70 (1.2 - 3.0)	0.59 (0.56 - 1.67)	2.59	99
20	2.20				2.20 (1.2 - 3.9)	0.76 (0.56 - 2.17)	3.34	99
22	3.30				3.30 (1.2 - 4.2)	0.86 (0.34 - 1.38)	3.78	99
25	3.60				3.60 (1.2 - 4.5)	0.96 (0.34 - 1.51)	4.22	99
35	4.00				4.00 (1.2 - 5.5)	1.11 (0.33 - 1.57)	4.87	99
42	5.40				5.40 (1.3 - 6.5)	1.58 (0.33 - 2.14)	6.94	99
50	7.20				7.20 (1.4 - 7.7)	2.27 (0.33 - 2.71)	9.97	99
60	7.90				7.90 (1.4 - 8.6)	2.27 (0.33 - 3.06)	9.97	99
71	8.60				8.60 (1.6 - 9.2)	2.43 (0.36 - 3.52)	10.67	99
15+15	1.70	1.70			3.40 (1.8 - 5.0)	0.86 (0.62 - 2.78)	3.78	99
15+20	1.67	2.23			3.90 (1.8 - 5.8)	1.01 (0.62 - 3.23)	4.44	99
15+22	1.66	2.44			4.10 (1.8 - 6.1)	1.07 (0.55 - 3.39)	4.70	99
15+25	1.65	2.75			4.40 (1.8 - 6.6)	1.16 (0.69 - 3.67)	5.09	99
15+35	2.16	5.04			7.20 (1.8 - 8.8)	1.76 (0.55 - 3.14)	7.73	99
15+42	1.97	5.53			7.50 (1.8 - 9.3)	1.89 (0.55 - 3.20)	8.30	99
15+50	1.80	6.00			7.80 (1.8 - 9.7)	2.00 (0.55 - 3.23)	8.78	99
15+60	1.72	6.88			8.60 (1.8 - 10.3)	2.27 (0.55 - 3.25)	9.97	99
15+71	1.64	7.76			9.40 (1.8 - 9.5)	2.53 (0.53 - 3.27)	11.11	99
20+20	2.20	2.20			4.40 (1.8 - 6.6)	1.16 (0.62 - 3.67)	5.09	99
20+22	2.62	2.88			5.50 (1.8 - 6.9)	1.37 (0.55 - 3.22)	6.02	99
20+25	2.98	3.72			6.70 (1.8 - 7.5)	1.60 (0.55 - 2.83)	7.03	99
20+35	2.69	4.71			7.40 (1.8 - 9.2)	1.85 (0.55 - 3.19)	8.12	99
20+42	2.48	5.22			7.70 (1.8 - 9.6)	1.96 (0.55 - 3.23)	8.61	99
20+50	2.29	5.71			8.00 (1.8 - 9.8)	2.06 (0.55 - 3.23)	9.05	99
20+60	2.30	6.90			9.20 (1.8 - 10.7)	2.48 (0.55 - 3.26)	10.89	99
20+71	2.07	7.33			9.40 (1.8 - 11.0)	2.47 (0.53 - 3.27)	10.85	99
22+22	3.30	3.30			6.60 (1.8 - 7.2)	1.57 (0.48 - 2.76)	6.90	99
22+25	3.23	3.67			6.90 (1.8 - 8.0)	1.67 (0.48 - 2.95)	7.33	99
22+35	2.89	4.61			7.50 (1.8 - 9.3)	1.89 (0.48 - 3.20)	8.30	99
22+42	2.68	5.12			7.80 (1.8 - 9.7)	2.00 (0.48 - 3.23)	8.78	99
22+50	2.51	5.69			8.20 (1.8 - 10.0)	2.13 (0.48 - 3.24)	9.35	99
22+60	2.52	6.88			9.40 (1.8 - 10.9)	2.55 (0.48 - 3.27)	11.20	99
22+71	2.22	7.18			9.40 (1.8 - 11.1)	2.45 (0.46 - 3.27)	10.76	99
25+25	3.60	3.60			7.20 (1.8 - 8.8)	1.76 (0.48 - 3.14)	7.73	99
25+35	3.17	4.43			7.60 (1.8 - 9.5)	1.93 (0.48 - 3.23)	8.48	99
25+42	2.95	4.95			7.90 (1.8 - 9.7)	2.03 (0.48 - 3.23)	8.92	99
25+50	2.87	5.73			8.60 (1.8 - 10.3)	2.27 (0.48 - 3.25)	9.97	99
25+60	2.76	6.64			9.40 (1.8 - 10.9)	2.54 (0.46 - 3.27)	11.16	99
25+71	2.45	6.95			9.40 (1.8 - 11.1)	2.42 (0.46 - 3.27)	10.63	99
35+35	4.00	4.00			8.00 (1.8 - 9.8)	2.06 (0.48 - 3.23)	9.05	99

MXZ-4C80VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
35+42	4.00	4.80			8.80 (1.8 - 10.4)	2.34 (0.48 - 3.25)	10.28	99
35+50	3.87	5.53			9.40 (1.8 - 10.9)	2.54 (0.46 - 3.27)	11.16	99
35+60	3.46	5.94			9.40 (1.8 - 11.1)	2.43 (0.46 - 3.27)	10.67	99
35+71	3.10	6.30			9.40 (1.9 - 11.2)	2.30 (0.44 - 3.32)	10.10	99
42+42	4.70	4.70			9.40 (1.8 - 10.9)	2.55 (0.46 - 3.27)	11.20	99
42+50	4.29	5.11			9.40 (1.8 - 11.1)	2.46 (0.46 - 3.27)	10.80	99
42+60	3.87	5.53			9.40 (1.9 - 11.2)	2.35 (0.44 - 3.32)	10.32	99
42+71	3.49	5.91			9.40 (1.9 - 11.2)	2.22 (0.44 - 3.32)	9.75	99
50+50	4.70	4.70			9.40 (1.9 - 11.2)	2.37 (0.44 - 3.32)	10.41	99
50+60	4.27	5.13			9.40 (1.9 - 11.2)	2.26 (0.44 - 3.32)	9.93	99
50+71	3.88	5.52			9.40 (1.9 - 11.2)	2.14 (0.44 - 3.32)	9.40	99
60+60	4.70	4.70			9.40 (1.9 - 11.2)	2.14 (0.44 - 3.32)	9.40	99
60+71	4.31	5.09			9.40 (1.9 - 11.2)	2.14 (0.44 - 3.32)	9.40	99
15+15+15	1.70	1.70	1.70		5.10 (2.6 - 8.4)	1.16 (0.66 - 3.90)	5.09	99
15+15+20	1.68	1.68	2.24		5.60 (2.6 - 8.9)	1.16 (0.65 - 3.90)	5.09	99
15+15+22	1.67	1.67	2.45		5.80 (2.6 - 9.1)	1.22 (0.61 - 3.90)	5.36	99
15+15+25	1.66	1.66	2.77		6.10 (2.6 - 9.4)	1.31 (0.61 - 3.90)	5.75	99
15+15+35	1.94	1.94	4.52		8.40 (2.6 - 10.5)	1.91 (0.61 - 3.18)	8.39	99
15+15+42	1.85	1.85	5.19		8.90 (2.6 - 11.3)	2.01 (0.61 - 3.26)	8.83	99
15+15+50	1.73	1.73	5.75		9.20 (2.6 - 11.6)	2.11 (0.61 - 3.34)	9.27	99
15+15+60	1.57	1.57	6.27		9.40 (2.6 - 11.6)	2.17 (0.61 - 3.33)	9.53	99
15+15+71	1.40	1.40	6.61		9.40 (2.6 - 11.6)	2.17 (0.61 - 3.32)	9.53	99
15+20+20	1.66	2.22	2.22		6.10 (2.6 - 9.4)	1.31 (0.65 - 3.90)	5.75	99
15+20+22	1.66	2.21	2.43		6.30 (2.6 - 9.6)	1.37 (0.61 - 3.90)	6.02	99
15+20+25	1.65	2.20	2.75		6.60 (2.6 - 9.9)	1.62 (0.74 - 3.90)	7.11	99
15+20+35	1.89	2.51	4.40		8.80 (2.6 - 10.9)	1.99 (0.61 - 3.20)	8.74	99
15+20+42	1.77	2.36	4.96		9.10 (2.6 - 11.6)	2.07 (0.61 - 3.38)	9.09	99
15+20+50	1.66	2.21	5.53		9.40 (2.6 - 11.6)	2.17 (0.61 - 3.34)	9.53	99
15+20+60	1.48	1.98	5.94		9.40 (2.6 - 11.6)	2.17 (0.61 - 3.32)	9.53	99
15+20+71	1.33	1.77	6.30		9.40 (2.6 - 11.6)	2.17 (0.61 - 3.31)	9.53	99
15+22+22	1.65	2.42	2.42		6.50 (2.6 - 9.8)	1.44 (0.57 - 3.90)	6.32	99
15+22+25	1.77	2.59	2.94		7.30 (2.6 - 10.1)	1.73 (0.57 - 3.66)	7.60	99
15+22+35	1.85	2.72	4.33		8.90 (2.6 - 11.3)	2.01 (0.57 - 3.30)	8.83	99
15+22+42	1.75	2.56	4.89		9.20 (2.6 - 11.6)	2.11 (0.57 - 3.37)	9.27	99
15+22+50	1.62	2.38	5.40		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.33)	9.53	99
15+22+60	1.45	2.13	5.81		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.32)	9.53	99
15+22+71	1.31	1.91	6.18		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.31)	9.53	99
15+25+25	1.94	3.23	3.23		8.40 (2.6 - 10.5)	1.91 (0.57 - 3.18)	8.39	99
15+25+35	1.80	3.00	4.20		9.00 (2.6 - 11.6)	2.04 (0.57 - 3.42)	8.96	99
15+25+42	1.70	2.84	4.76		9.30 (2.6 - 11.6)	2.14 (0.57 - 3.37)	9.40	99

MXZ-4C80VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15+25+50	1.57	2.61	5.22		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.33)	9.53	99
15+25+60	1.41	2.35	5.64		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.32)	9.53	99
15+25+71	1.27	2.12	6.01		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.31)	9.53	99
15+35+35	1.66	3.87	3.87		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.41)	9.53	99
15+35+42	1.53	3.58	4.29		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.36)	9.53	99
15+35+50	1.41	3.29	4.70		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.32)	9.53	99
15+35+60	1.28	2.99	5.13		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.31)	9.53	99
15+35+71	1.17	2.72	5.52		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.31)	9.53	99
15+42+42	1.42	3.99	3.99		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.31)	9.53	99
15+42+50	1.32	3.69	4.39		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.27)	9.53	99
15+42+60	1.21	3.37	4.82		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.27)	9.53	99
15+42+71	1.10	3.08	5.21		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.27)	9.53	99
15+50+50	1.23	4.09	4.09		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.24)	9.53	99
15+50+60	1.13	3.76	4.51		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.24)	9.53	99
15+50+71	1.04	3.46	4.91		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.24)	9.53	99
20+20+20	2.20	2.20	2.20		6.60 (2.6 - 9.9)	1.62 (0.66 - 3.90)	7.11	99
20+20+22	2.35	2.35	2.59		7.30 (2.6 - 10.1)	1.73 (0.61 - 3.66)	7.60	99
20+20+25	2.58	2.58	3.23		8.40 (2.6 - 10.5)	1.91 (0.61 - 3.18)	8.39	99
20+20+35	2.40	2.40	4.20		9.00 (2.6 - 11.6)	2.04 (0.61 - 3.42)	8.96	99
20+20+42	2.27	2.27	4.76		9.30 (2.6 - 11.6)	2.14 (0.61 - 3.37)	9.40	99
20+20+50	2.09	2.09	5.22		9.40 (2.6 - 11.6)	2.17 (0.61 - 3.33)	9.53	99
20+20+60	1.88	1.88	5.64		9.40 (2.6 - 11.6)	2.17 (0.61 - 3.32)	9.53	99
20+20+71	1.69	1.69	6.01		9.40 (2.6 - 11.6)	2.17 (0.61 - 3.31)	9.53	99
20+22+22	2.50	2.75	2.75		8.00 (2.6 - 10.4)	1.85 (0.57 - 3.30)	8.12	99
20+22+25	2.60	2.86	3.25		8.70 (2.6 - 10.6)	1.96 (0.57 - 3.10)	8.61	99
20+22+35	2.36	2.60	4.14		9.10 (2.6 - 11.6)	2.07 (0.57 - 3.42)	9.09	99
20+22+42	2.24	2.46	4.70		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.37)	9.53	99
20+22+50	2.04	2.25	5.11		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.33)	9.53	99
20+22+60	1.84	2.03	5.53		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.31)	9.53	99
20+22+71	1.66	1.83	5.91		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.31)	9.53	99
20+25+25	2.51	3.14	3.14		8.80 (2.6 - 10.9)	1.99 (0.57 - 3.20)	8.74	99
20+25+35	2.30	2.88	4.03		9.20 (2.6 - 11.6)	2.11 (0.57 - 3.41)	9.27	99
20+25+42	2.16	2.70	4.54		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.36)	9.53	99
20+25+50	1.98	2.47	4.95		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.32)	9.53	99
20+25+60	1.79	2.24	5.37		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.31)	9.53	99
20+25+71	1.62	2.03	5.75		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.31)	9.53	99
20+35+35	2.09	3.66	3.66		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.40)	9.53	99
20+35+42	1.94	3.39	4.07		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.35)	9.53	99
20+35+50	1.79	3.13	4.48		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.31)	9.53	99
20+35+60	1.63	2.86	4.90		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.31)	9.53	99

MXZ-4C80VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
20+35+71	1.49	2.61	5.30		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.31)	9.53	99
20+42+42	1.81	3.80	3.80		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.30)	9.53	99
20+42+50	1.68	3.53	4.20		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.27)	9.53	99
20+42+60	1.54	3.24	4.62		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.27)	9.53	99
20+42+71	1.41	2.97	5.02		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.27)	9.53	99
20+50+50	1.57	3.92	3.92		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.24)	9.53	99
20+50+60	1.45	3.62	4.34		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.24)	9.53	99
20+50+71	1.33	3.33	4.73		9.40 (2.6 - 11.6)	2.17 (0.57 - 3.24)	9.53	99
22+22+22	2.90	2.90	2.90		8.70 (2.6 - 10.6)	1.96 (0.53 - 3.06)	8.61	99
22+22+25	2.81	2.81	3.19		8.80 (2.6 - 10.9)	1.99 (0.53 - 3.20)	8.74	99
22+22+35	2.56	2.56	4.08		9.20 (2.6 - 11.6)	2.11 (0.53 - 3.41)	9.27	99
22+22+42	2.40	2.40	4.59		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.37)	9.53	99
22+22+50	2.20	2.20	5.00		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.32)	9.53	99
22+22+60	1.99	1.99	5.42		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
22+22+71	1.80	1.80	5.80		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
22+25+25	2.72	3.09	3.09		8.90 (2.6 - 11.3)	2.01 (0.53 - 3.30)	8.83	99
22+25+35	2.50	2.84	3.97		9.30 (2.6 - 11.6)	2.14 (0.53 - 3.41)	9.40	99
22+25+42	2.32	2.64	4.44		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.36)	9.53	99
22+25+50	2.13	2.42	4.85		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.32)	9.53	99
22+25+60	1.93	2.20	5.27		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
22+25+71	1.75	1.99	5.66		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
22+35+35	2.25	3.58	3.58		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.40)	9.53	99
22+35+42	2.09	3.32	3.99		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.35)	9.53	99
22+35+50	1.93	3.07	4.39		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
22+35+60	1.77	2.81	4.82		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
22+35+71	1.62	2.57	5.21		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
22+42+42	1.95	3.72	3.72		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.30)	9.53	99
22+42+50	1.81	3.46	4.12		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.27)	9.53	99
22+42+60	1.67	3.18	4.55		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.27)	9.53	99
22+42+71	1.53	2.92	4.94		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.27)	9.53	99
22+50+50	1.70	3.85	3.85		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.24)	9.53	99
22+50+60	1.57	3.56	4.27		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.24)	9.53	99
22+50+71	1.45	3.29	4.67		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.24)	9.53	99
25+25+25	3.00	3.00	3.00		9.00 (2.6 - 11.6)	2.04 (0.53 - 3.42)	8.96	99
25+25+35	2.76	2.76	3.87		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.41)	9.53	99
25+25+42	2.55	2.55	4.29		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.36)	9.53	99
25+25+50	2.35	2.35	4.70		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.32)	9.53	99
25+25+60	2.14	2.14	5.13		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
25+25+71	1.94	1.94	5.52		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
25+35+35	2.47	3.46	3.46		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.39)	9.53	99

MXZ-4C80VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
25+35+42	2.30	3.23	3.87		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.34)	9.53	99
25+35+50	2.14	2.99	4.27		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
25+35+60	1.96	2.74	4.70		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
25+35+71	1.79	2.51	5.09		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
25+42+42	2.16	3.62	3.62		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.30)	9.53	99
25+42+50	2.01	3.37	4.02		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.27)	9.53	99
25+42+60	1.85	3.11	4.44		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.27)	9.53	99
25+42+71	1.70	2.86	4.84		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.27)	9.53	99
25+50+50	1.88	3.76	3.76		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.24)	9.53	99
25+50+60	1.74	3.48	4.18		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.24)	9.53	99
35+35+35	3.13	3.13	3.13		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.38)	9.53	99
35+35+42	2.94	2.94	3.53		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.34)	9.53	99
35+35+50	2.74	2.74	3.92		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
35+35+60	2.53	2.53	4.34		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
35+35+71	2.33	2.33	4.73		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.31)	9.53	99
35+42+42	2.76	3.32	3.32		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.30)	9.53	99
35+42+50	2.59	3.11	3.70		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.27)	9.53	99
35+42+60	2.40	2.88	4.12		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.27)	9.53	99
35+50+50	2.44	3.48	3.48		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.24)	9.53	99
35+50+60	2.27	3.24	3.89		9.40 (2.6 - 11.6)	2.17 (0.53 - 3.24)	9.53	99
15+15+15+15	1.70	1.70	1.70	1.70	6.80 (3.4 - 9.3)	1.53 (0.79 - 3.90)	6.72	99
15+15+15+20	1.64	1.64	1.64	2.18	7.10 (3.4 - 9.7)	1.69 (0.79 - 3.90)	7.42	99
15+15+15+22	1.61	1.61	1.61	2.36	7.20 (3.4 - 9.8)	1.75 (0.74 - 3.90)	7.69	99
15+15+15+25	1.59	1.59	1.59	2.64	7.40 (3.4 - 10.1)	1.86 (0.74 - 3.90)	8.17	99
15+15+15+35	1.50	1.50	1.50	3.50	8.00 (3.4 - 10.8)	2.18 (0.94 - 3.90)	9.57	99
15+15+15+42	1.59	1.59	1.59	4.44	9.20 (3.4 - 11.5)	2.01 (0.74 - 3.44)	8.83	99
15+15+15+50	1.48	1.48	1.48	4.95	9.40 (3.4 - 11.6)	1.95 (0.74 - 3.37)	8.56	99
15+15+15+60	1.34	1.34	1.34	5.37	9.40 (3.4 - 11.6)	1.89 (0.74 - 3.34)	8.30	99
15+15+15+71	1.22	1.22	1.22	5.75	9.40 (3.4 - 11.6)	1.86 (0.74 - 3.30)	8.17	99
15+15+20+20	1.59	1.59	2.11	2.11	7.40 (3.4 - 10.1)	1.86 (0.79 - 3.90)	8.17	99
15+15+20+22	1.56	1.56	2.08	2.29	7.50 (3.4 - 10.2)	1.91 (0.74 - 3.90)	8.39	99
15+15+20+25	1.54	1.54	2.05	2.57	7.70 (3.4 - 10.4)	2.02 (0.74 - 3.90)	8.87	99
15+15+20+35	1.57	1.57	2.09	3.66	8.90 (3.4 - 11.3)	2.07 (0.74 - 3.60)	9.09	99
15+15+20+42	1.53	1.53	2.04	4.29	9.40 (3.4 - 11.6)	1.97 (0.74 - 3.37)	8.65	99
15+15+20+50	1.41	1.41	1.88	4.70	9.40 (3.4 - 11.6)	1.92 (0.74 - 3.36)	8.43	99
15+15+20+60	1.28	1.28	1.71	5.13	9.40 (3.4 - 11.6)	1.89 (0.74 - 3.32)	8.30	99
15+15+20+71	1.17	1.17	1.55	5.52	9.40 (3.4 - 11.6)	1.86 (0.74 - 3.28)	8.17	99
15+15+22+22	1.54	1.54	2.26	2.26	7.60 (3.4 - 10.3)	1.96 (0.69 - 3.90)	8.61	99
15+15+22+25	1.52	1.52	2.23	2.53	7.80 (3.4 - 10.6)	2.07 (0.69 - 3.90)	9.09	99
15+15+22+35	1.59	1.59	2.33	3.70	9.20 (3.4 - 11.5)	2.03 (0.69 - 3.48)	8.92	99

MXZ-4C80VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15+15+22+42	1.50	1.50	2.20	4.20	9.40 (3.4 - 11.6)	1.96 (0.69 - 3.37)	8.61	99
15+15+22+50	1.38	1.38	2.03	4.61	9.40 (3.4 - 11.6)	1.92 (0.69 - 3.35)	8.43	99
15+15+22+60	1.26	1.26	1.85	5.04	9.40 (3.4 - 11.6)	1.88 (0.69 - 3.31)	8.26	99
15+15+22+71	1.15	1.15	1.68	5.43	9.40 (3.4 - 11.6)	1.86 (0.69 - 3.27)	8.17	99
15+15+25+25	1.50	1.50	2.50	2.50	8.00 (3.4 - 10.8)	2.18 (0.89 - 3.90)	9.57	99
15+15+25+35	1.57	1.57	2.61	3.66	9.40 (3.4 - 11.6)	2.00 (0.69 - 3.42)	8.78	99
15+15+25+42	1.45	1.45	2.42	4.07	9.40 (3.4 - 11.6)	1.95 (0.69 - 3.36)	8.56	99
15+15+25+50	1.34	1.34	2.24	4.48	9.40 (3.4 - 11.6)	1.92 (0.69 - 3.34)	8.43	99
15+15+25+60	1.23	1.23	2.04	4.90	9.40 (3.4 - 11.6)	1.88 (0.69 - 3.30)	8.26	99
15+15+25+71	1.12	1.12	1.87	5.30	9.40 (3.4 - 11.6)	1.86 (0.69 - 3.26)	8.17	99
15+15+35+35	1.41	1.41	3.29	3.29	9.40 (3.4 - 11.6)	1.95 (0.69 - 3.39)	8.56	99
15+15+35+42	1.32	1.32	3.07	3.69	9.40 (3.4 - 11.6)	1.93 (0.69 - 3.32)	8.48	99
15+15+35+50	1.23	1.23	2.86	4.09	9.40 (3.4 - 11.6)	1.91 (0.69 - 3.30)	8.39	99
15+15+35+60	1.13	1.13	2.63	4.51	9.40 (3.4 - 11.6)	1.88 (0.69 - 3.26)	8.26	99
15+15+35+71	1.04	1.04	2.42	4.91	9.40 (3.4 - 11.6)	1.85 (0.69 - 3.22)	8.12	99
15+15+42+42	1.24	1.24	3.46	3.46	9.40 (3.4 - 11.6)	1.90 (0.69 - 3.25)	8.34	99
15+15+42+50	1.16	1.16	3.24	3.85	9.40 (3.4 - 11.6)	1.89 (0.69 - 3.23)	8.30	99
15+15+42+60	1.07	1.07	2.99	4.27	9.40 (3.4 - 11.6)	1.85 (0.69 - 3.19)	8.12	99
15+15+42+71	0.99	0.99	2.76	4.67	9.40 (3.4 - 11.6)	1.83 (0.69 - 3.16)	8.04	99
15+15+50+50	1.08	1.08	3.62	3.62	9.40 (3.4 - 11.6)	1.88 (0.69 - 3.21)	8.26	99
15+15+50+60	1.01	1.01	3.36	4.03	9.40 (3.4 - 11.6)	1.84 (0.69 - 3.17)	8.08	99
15+20+20+20	1.54	2.05	2.05	2.05	7.70 (3.4 - 10.4)	2.02 (0.79 - 3.90)	8.87	99
15+20+20+22	1.52	2.03	2.03	2.23	7.80 (3.4 - 10.6)	2.07 (0.74 - 3.90)	9.09	99
15+20+20+25	1.50	2.00	2.00	2.50	8.00 (3.4 - 10.8)	2.18 (0.94 - 3.90)	9.57	99
15+20+20+35	1.57	2.09	2.09	3.66	9.40 (3.4 - 11.6)	2.00 (0.74 - 3.42)	8.78	99
15+20+20+42	1.45	1.94	1.94	4.07	9.40 (3.4 - 11.6)	1.95 (0.74 - 3.36)	8.56	99
15+20+20+50	1.34	1.79	1.79	4.48	9.40 (3.4 - 11.6)	1.92 (0.74 - 3.34)	8.43	99
15+20+20+60	1.23	1.63	1.63	4.90	9.40 (3.4 - 11.6)	1.88 (0.74 - 3.30)	8.26	99
15+20+20+71	1.12	1.49	1.49	5.30	9.40 (3.4 - 11.6)	1.86 (0.74 - 3.26)	8.17	99
15+20+22+22	1.50	2.00	2.20	2.20	7.90 (3.4 - 10.7)	2.13 (0.69 - 3.90)	9.35	99
15+20+22+25	1.53	2.04	2.24	2.55	8.35 (3.4 - 11.0)	2.14 (0.69 - 3.78)	9.40	99
15+20+22+35	1.53	2.04	2.25	3.58	9.40 (3.4 - 11.6)	1.99 (0.69 - 3.41)	8.74	99
15+20+22+42	1.42	1.90	2.09	3.99	9.40 (3.4 - 11.6)	1.94 (0.69 - 3.35)	8.52	99
15+20+22+50	1.32	1.76	1.93	4.39	9.40 (3.4 - 11.6)	1.92 (0.69 - 3.33)	8.43	99
15+20+22+60	1.21	1.61	1.77	4.82	9.40 (3.4 - 11.6)	1.88 (0.69 - 3.29)	8.26	99
15+20+22+71	1.10	1.47	1.62	5.21	9.40 (3.4 - 11.6)	1.86 (0.69 - 3.25)	8.17	99
15+20+25+25	1.57	2.09	2.62	2.62	8.90 (3.4 - 11.3)	2.07 (0.69 - 3.60)	9.09	99
15+20+25+35	1.48	1.98	2.47	3.46	9.40 (3.4 - 11.6)	1.98 (0.69 - 3.40)	8.70	99
15+20+25+42	1.38	1.84	2.30	3.87	9.40 (3.4 - 11.6)	1.93 (0.69 - 3.34)	8.48	99
15+20+25+50	1.28	1.71	2.14	4.27	9.40 (3.4 - 11.6)	1.92 (0.69 - 3.32)	8.43	99

MXZ-4C80VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15+20+25+60	1.18	1.57	1.96	4.70	9.40 (3.4 - 11.6)	1.88 (0.69 - 3.28)	8.26	99
15+20+25+71	1.08	1.44	1.79	5.09	9.40 (3.4 - 11.6)	1.85 (0.69 - 3.24)	8.12	99
15+20+35+35	1.34	1.79	3.13	3.13	9.40 (3.4 - 11.6)	1.95 (0.69 - 3.37)	8.56	99
15+20+35+42	1.26	1.68	2.94	3.53	9.40 (3.4 - 11.6)	1.92 (0.69 - 3.30)	8.43	99
15+20+35+50	1.18	1.57	2.74	3.92	9.40 (3.4 - 11.6)	1.91 (0.69 - 3.28)	8.39	99
15+20+35+60	1.08	1.45	2.53	4.34	9.40 (3.4 - 11.6)	1.88 (0.69 - 3.24)	8.26	99
15+20+35+71	1.00	1.33	2.33	4.73	9.40 (3.4 - 11.6)	1.85 (0.69 - 3.20)	8.12	99
15+20+42+42	1.18	1.58	3.32	3.32	9.40 (3.4 - 11.6)	1.90 (0.69 - 3.23)	8.34	99
15+20+42+50	1.11	1.48	3.11	3.70	9.40 (3.4 - 11.6)	1.89 (0.69 - 3.21)	8.30	99
15+20+42+60	1.03	1.37	2.88	4.12	9.40 (3.4 - 11.6)	1.85 (0.69 - 3.17)	8.12	99
15+20+50+50	1.04	1.39	3.48	3.48	9.40 (3.4 - 11.6)	1.87 (0.69 - 3.19)	8.21	99
15+20+50+60	0.97	1.30	3.24	3.89	9.40 (3.4 - 11.6)	1.84 (0.69 - 3.17)	8.08	99
15+22+22+22	1.52	2.23	2.23	2.23	8.20 (3.4 - 10.9)	2.16 (0.64 - 3.84)	9.49	99
15+22+22+25	1.55	2.28	2.28	2.59	8.70 (3.4 - 11.2)	2.10 (0.64 - 3.66)	9.22	99
15+22+22+35	1.50	2.20	2.20	3.50	9.40 (3.4 - 11.6)	1.98 (0.64 - 3.41)	8.70	99
15+22+22+42	1.40	2.05	2.05	3.91	9.40 (3.4 - 11.6)	1.93 (0.64 - 3.35)	8.48	99
15+22+22+50	1.29	1.90	1.90	4.31	9.40 (3.4 - 11.6)	1.92 (0.64 - 3.32)	8.43	99
15+22+22+60	1.18	1.74	1.74	4.74	9.40 (3.4 - 11.6)	1.88 (0.64 - 3.28)	8.26	99
15+22+22+71	1.08	1.59	1.59	5.13	9.40 (3.4 - 11.6)	1.86 (0.64 - 3.24)	8.17	99
15+22+25+25	1.59	2.33	2.64	2.64	9.20 (3.4 - 11.5)	2.03 (0.64 - 3.48)	8.92	99
15+22+25+35	1.45	2.13	2.42	3.39	9.40 (3.4 - 11.6)	1.97 (0.64 - 3.40)	8.65	99
15+22+25+42	1.36	1.99	2.26	3.80	9.40 (3.4 - 11.6)	1.93 (0.64 - 3.33)	8.48	99
15+22+25+50	1.26	1.85	2.10	4.20	9.40 (3.4 - 11.6)	1.91 (0.64 - 3.31)	8.39	99
15+22+25+60	1.16	1.70	1.93	4.62	9.40 (3.4 - 11.6)	1.88 (0.64 - 3.27)	8.26	99
15+22+25+71	1.06	1.55	1.77	5.02	9.40 (3.4 - 11.6)	1.85 (0.64 - 3.23)	8.12	99
15+22+35+35	1.32	1.93	3.07	3.07	9.40 (3.4 - 11.6)	1.95 (0.64 - 3.36)	8.56	99
15+22+35+42	1.24	1.81	2.89	3.46	9.40 (3.4 - 11.6)	1.92 (0.64 - 3.29)	8.43	99
15+22+35+50	1.16	1.70	2.70	3.85	9.40 (3.4 - 11.6)	1.91 (0.64 - 3.27)	8.39	99
15+22+35+60	1.07	1.57	2.49	4.27	9.40 (3.4 - 11.6)	1.87 (0.64 - 3.23)	8.21	99
15+22+35+71	0.99	1.45	2.30	4.67	9.40 (3.4 - 11.6)	1.85 (0.64 - 3.20)	8.12	99
15+22+42+42	1.17	1.71	3.26	3.26	9.40 (3.4 - 11.6)	1.90 (0.64 - 3.23)	8.34	99
15+22+42+50	1.09	1.60	3.06	3.64	9.40 (3.4 - 11.6)	1.89 (0.64 - 3.20)	8.30	99
15+22+42+60	1.01	1.49	2.84	4.06	9.40 (3.4 - 11.6)	1.85 (0.64 - 3.16)	8.12	99
15+22+50+50	1.03	1.51	3.43	3.43	9.40 (3.4 - 11.6)	1.87 (0.64 - 3.18)	8.21	99
15+25+25+25	1.57	2.61	2.61	2.61	9.40 (3.4 - 11.6)	2.00 (0.64 - 3.42)	8.78	99
15+25+25+35	1.41	2.35	2.35	3.29	9.40 (3.4 - 11.6)	1.95 (0.64 - 3.39)	8.56	99
15+25+25+42	1.32	2.20	2.20	3.69	9.40 (3.4 - 11.6)	1.93 (0.64 - 3.32)	8.48	99
15+25+25+50	1.23	2.04	2.04	4.09	9.40 (3.4 - 11.6)	1.91 (0.64 - 3.30)	8.39	99
15+25+25+60	1.13	1.88	1.88	4.51	9.40 (3.4 - 11.6)	1.88 (0.64 - 3.26)	8.26	99
15+25+25+71	1.04	1.73	1.73	4.91	9.40 (3.4 - 11.6)	1.85 (0.64 - 3.22)	8.12	99

MXZ-4C80VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
15+25+35+35	1.28	2.14	2.99	2.99	9.40 (3.4 - 11.6)	1.95 (0.64 - 3.35)	8.56	99
15+25+35+42	1.21	2.01	2.81	3.37	9.40 (3.4 - 11.6)	1.92 (0.64 - 3.28)	8.43	99
15+25+35+50	1.13	1.88	2.63	3.76	9.40 (3.4 - 11.6)	1.91 (0.64 - 3.26)	8.39	99
15+25+35+60	1.04	1.74	2.44	4.18	9.40 (3.4 - 11.6)	1.87 (0.64 - 3.22)	8.21	99
15+25+42+42	1.14	1.90	3.18	3.18	9.40 (3.4 - 11.6)	1.90 (0.64 - 3.21)	8.34	99
15+25+42+50	1.07	1.78	2.99	3.56	9.40 (3.4 - 11.6)	1.88 (0.64 - 3.19)	8.26	99
15+25+42+60	0.99	1.65	2.78	3.97	9.40 (3.4 - 11.6)	1.85 (0.64 - 3.16)	8.12	99
15+25+50+50	1.01	1.68	3.36	3.36	9.40 (3.4 - 11.6)	1.87 (0.64 - 3.17)	8.21	99
15+35+35+35	1.18	2.74	2.74	2.74	9.40 (3.4 - 11.6)	1.94 (0.64 - 3.31)	8.52	99
15+35+35+42	1.11	2.59	2.59	3.11	9.40 (3.4 - 11.6)	1.92 (0.64 - 3.24)	8.43	99
15+35+35+50	1.04	2.44	2.44	3.48	9.40 (3.4 - 11.6)	1.90 (0.64 - 3.22)	8.34	99
15+35+35+60	0.97	2.27	2.27	3.89	9.40 (3.4 - 11.6)	1.87 (0.64 - 3.20)	8.21	99
15+35+42+42	1.05	2.46	2.95	2.95	9.40 (3.4 - 11.6)	1.89 (0.64 - 3.17)	8.30	99
15+35+42+50	0.99	2.32	2.78	3.31	9.40 (3.4 - 11.6)	1.88 (0.64 - 3.16)	8.26	99
15+42+42+42	1.00	2.80	2.80	2.80	9.40 (3.4 - 11.6)	1.87 (0.64 - 3.11)	8.21	99
20+20+20+20	2.00	2.00	2.00	2.00	8.00 (3.4 - 10.8)	2.18 (0.79 - 3.90)	9.57	99
20+20+20+22	2.04	2.04	2.04	2.24	8.35 (3.4 - 11.0)	2.14 (0.74 - 3.78)	9.40	99
20+20+20+25	2.09	2.09	2.09	2.62	8.90 (3.4 - 11.3)	2.07 (0.74 - 3.60)	9.09	99
20+20+20+35	1.98	1.98	1.98	3.46	9.40 (3.4 - 11.6)	1.98 (0.74 - 3.40)	8.70	99
20+20+20+42	1.84	1.84	1.84	3.87	9.40 (3.4 - 11.6)	1.93 (0.74 - 3.34)	8.48	99
20+20+20+50	1.71	1.71	1.71	4.27	9.40 (3.4 - 11.6)	1.92 (0.74 - 3.32)	8.43	99
20+20+20+60	1.57	1.57	1.57	4.70	9.40 (3.4 - 11.6)	1.88 (0.74 - 3.28)	8.26	99
20+20+20+71	1.44	1.44	1.44	5.09	9.40 (3.4 - 11.6)	1.85 (0.74 - 3.24)	8.12	99
20+20+22+22	2.07	2.07	2.28	2.28	8.70 (3.4 - 11.2)	2.10 (0.69 - 3.66)	9.22	99
20+20+22+25	2.11	2.11	2.33	2.64	9.20 (3.4 - 11.5)	2.03 (0.69 - 3.48)	8.92	99
20+20+22+35	1.94	1.94	2.13	3.39	9.40 (3.4 - 11.6)	1.97 (0.69 - 3.40)	8.65	99
20+20+22+42	1.81	1.81	1.99	3.80	9.40 (3.4 - 11.6)	1.93 (0.69 - 3.33)	8.48	99
20+20+22+50	1.68	1.68	1.85	4.20	9.40 (3.4 - 11.6)	1.91 (0.69 - 3.31)	8.39	99
20+20+22+60	1.54	1.54	1.70	4.62	9.40 (3.4 - 11.6)	1.88 (0.69 - 3.27)	8.26	99
20+20+22+71	1.41	1.41	1.55	5.02	9.40 (3.4 - 11.6)	1.85 (0.69 - 3.23)	8.12	99
20+20+25+25	2.09	2.09	2.61	2.61	9.40 (3.4 - 11.6)	2.00 (0.69 - 3.42)	8.78	99
20+20+25+35	1.88	1.88	2.35	3.29	9.40 (3.4 - 11.6)	1.95 (0.69 - 3.39)	8.56	99
20+20+25+42	1.76	1.76	2.20	3.69	9.40 (3.4 - 11.6)	1.93 (0.69 - 3.32)	8.48	99
20+20+25+50	1.63	1.63	2.04	4.09	9.40 (3.4 - 11.6)	1.91 (0.69 - 3.30)	8.39	99
20+20+25+60	1.50	1.50	1.88	4.51	9.40 (3.4 - 11.6)	1.88 (0.69 - 3.26)	8.26	99
20+20+25+71	1.38	1.38	1.73	4.91	9.40 (3.4 - 11.6)	1.85 (0.69 - 3.22)	8.12	99
20+20+35+35	1.71	1.71	2.99	2.99	9.40 (3.4 - 11.6)	1.95 (0.69 - 3.35)	8.56	99
20+20+35+42	1.61	1.61	2.81	3.37	9.40 (3.4 - 11.6)	1.92 (0.69 - 3.28)	8.43	99
20+20+35+50	1.50	1.50	2.63	3.76	9.40 (3.4 - 11.6)	1.91 (0.69 - 3.26)	8.39	99
20+20+35+60	1.39	1.39	2.44	4.18	9.40 (3.4 - 11.6)	1.87 (0.69 - 3.22)	8.21	99

MXZ-4C80VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
20+20+42+42	1.52	1.52	3.18	3.18	9.40 (3.4 - 11.6)	1.90 (0.69 - 3.21)	8.34	99
20+20+42+50	1.42	1.42	2.99	3.56	9.40 (3.4 - 11.6)	1.88 (0.69 - 3.19)	8.26	99
20+20+42+60	1.32	1.32	2.78	3.97	9.40 (3.4 - 11.6)	1.85 (0.69 - 3.16)	8.12	99
20+20+50+50	1.34	1.34	3.36	3.36	9.40 (3.4 - 11.6)	1.87 (0.69 - 3.17)	8.21	99
20+22+22+22	2.10	2.32	2.32	2.32	9.05 (3.4 - 11.4)	2.05 (0.64 - 3.54)	9.00	99
20+22+22+25	2.11	2.32	2.32	2.64	9.40 (3.4 - 11.6)	2.01 (0.64 - 3.42)	8.83	99
20+22+22+35	1.90	2.09	2.09	3.32	9.40 (3.4 - 11.6)	1.96 (0.64 - 3.39)	8.61	99
20+22+22+42	1.77	1.95	1.95	3.72	9.40 (3.4 - 11.6)	1.93 (0.64 - 3.33)	8.48	99
20+22+22+50	1.65	1.81	1.81	4.12	9.40 (3.4 - 11.6)	1.91 (0.64 - 3.30)	8.39	99
20+22+22+60	1.52	1.67	1.67	4.55	9.40 (3.4 - 11.6)	1.88 (0.64 - 3.26)	8.26	99
20+22+22+71	1.39	1.53	1.53	4.94	9.40 (3.4 - 11.6)	1.85 (0.64 - 3.22)	8.12	99
20+22+25+25	2.04	2.25	2.55	2.55	9.40 (3.4 - 11.6)	1.99 (0.64 - 3.41)	8.74	99
20+22+25+35	1.84	2.03	2.30	3.23	9.40 (3.4 - 11.6)	1.95 (0.64 - 3.38)	8.56	99
20+22+25+42	1.72	1.90	2.16	3.62	9.40 (3.4 - 11.6)	1.93 (0.64 - 3.31)	8.48	99
20+22+25+50	1.61	1.77	2.01	4.02	9.40 (3.4 - 11.6)	1.91 (0.64 - 3.29)	8.39	99
20+22+25+60	1.48	1.63	1.85	4.44	9.40 (3.4 - 11.6)	1.88 (0.64 - 3.25)	8.26	99
20+22+25+71	1.36	1.50	1.70	4.84	9.40 (3.4 - 11.6)	1.85 (0.64 - 3.21)	8.12	99
20+22+35+35	1.68	1.85	2.94	2.94	9.40 (3.4 - 11.6)	1.94 (0.64 - 3.34)	8.52	99
20+22+35+42	1.58	1.74	2.76	3.32	9.40 (3.4 - 11.6)	1.92 (0.64 - 3.27)	8.43	99
20+22+35+50	1.48	1.63	2.59	3.70	9.40 (3.4 - 11.6)	1.91 (0.64 - 3.25)	8.39	99
20+22+35+60	1.37	1.51	2.40	4.12	9.40 (3.4 - 11.6)	1.87 (0.64 - 3.21)	8.21	99
20+22+42+42	1.49	1.64	3.13	3.13	9.40 (3.4 - 11.6)	1.90 (0.64 - 3.21)	8.34	99
20+22+42+50	1.40	1.54	2.95	3.51	9.40 (3.4 - 11.6)	1.88 (0.64 - 3.18)	8.26	99
20+22+42+60	1.31	1.44	2.74	3.92	9.40 (3.4 - 11.6)	1.85 (0.64 - 3.16)	8.12	99
20+22+50+50	1.32	1.46	3.31	3.31	9.40 (3.4 - 11.6)	1.87 (0.64 - 3.17)	8.21	99
20+25+25+25	1.98	2.47	2.47	2.47	9.40 (3.4 - 11.6)	1.98 (0.64 - 3.40)	8.70	99
20+25+25+35	1.79	2.24	2.24	3.13	9.40 (3.4 - 11.6)	1.95 (0.64 - 3.37)	8.56	99
20+25+25+42	1.68	2.10	2.10	3.53	9.40 (3.4 - 11.6)	1.92 (0.64 - 3.30)	8.43	99
20+25+25+50	1.57	1.96	1.96	3.92	9.40 (3.4 - 11.6)	1.91 (0.64 - 3.28)	8.39	99
20+25+25+60	1.45	1.81	1.81	4.34	9.40 (3.4 - 11.6)	1.88 (0.64 - 3.24)	8.26	99
20+25+25+71	1.33	1.67	1.67	4.73	9.40 (3.4 - 11.6)	1.85 (0.64 - 3.20)	8.12	99
20+25+35+35	1.63	2.04	2.86	2.86	9.40 (3.4 - 11.6)	1.94 (0.64 - 3.33)	8.52	99
20+25+35+42	1.54	1.93	2.70	3.24	9.40 (3.4 - 11.6)	1.92 (0.64 - 3.26)	8.43	99
20+25+35+50	1.45	1.81	2.53	3.62	9.40 (3.4 - 11.6)	1.91 (0.64 - 3.24)	8.39	99
20+25+35+60	1.34	1.68	2.35	4.03	9.40 (3.4 - 11.6)	1.87 (0.64 - 3.20)	8.21	99
20+25+42+42	1.46	1.82	3.06	3.06	9.40 (3.4 - 11.6)	1.90 (0.64 - 3.19)	8.34	99
20+25+42+50	1.37	1.72	2.88	3.43	9.40 (3.4 - 11.6)	1.88 (0.64 - 3.17)	8.26	99
20+25+50+50	1.30	1.62	3.24	3.24	9.40 (3.4 - 11.6)	1.87 (0.64 - 3.17)	8.21	99
20+35+35+35	1.50	2.63	2.63	2.63	9.40 (3.4 - 11.6)	1.94 (0.64 - 3.29)	8.52	99
20+35+35+42	1.42	2.49	2.49	2.99	9.40 (3.4 - 11.6)	1.91 (0.64 - 3.22)	8.39	99

MXZ-4C80VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
20+35+35+50	1.34	2.35	2.35	3.36	9.40 (3.4 - 11.6)	1.90 (0.64 - 3.20)	8.34	99
20+35+42+42	1.35	2.37	2.84	2.84	9.40 (3.4 - 11.6)	1.89 (0.64 - 3.15)	8.30	99
22+22+22+22	2.35	2.35	2.35	2.35	9.40 (3.4 - 11.6)	2.01 (0.59 - 3.42)	8.83	99
22+22+22+25	2.27	2.27	2.27	2.58	9.40 (3.4 - 11.6)	2.00 (0.59 - 3.41)	8.78	99
22+22+22+35	2.05	2.05	2.05	3.26	9.40 (3.4 - 11.6)	1.95 (0.59 - 3.39)	8.56	99
22+22+22+42	1.91	1.91	1.91	3.66	9.40 (3.4 - 11.6)	1.93 (0.59 - 3.32)	8.48	99
22+22+22+50	1.78	1.78	1.78	4.05	9.40 (3.4 - 11.6)	1.91 (0.59 - 3.30)	8.39	99
22+22+22+60	1.64	1.64	1.64	4.48	9.40 (3.4 - 11.6)	1.88 (0.59 - 3.26)	8.26	99
22+22+22+71	1.51	1.51	1.51	4.87	9.40 (3.4 - 11.6)	1.85 (0.59 - 3.21)	8.12	99
22+22+25+25	2.20	2.20	2.50	2.50	9.40 (3.4 - 11.6)	1.98 (0.59 - 3.41)	8.70	99
22+22+25+35	1.99	1.99	2.26	3.16	9.40 (3.4 - 11.6)	1.95 (0.59 - 3.37)	8.56	99
22+22+25+42	1.86	1.86	2.12	3.56	9.40 (3.4 - 11.6)	1.92 (0.59 - 3.31)	8.43	99
22+22+25+50	1.74	1.74	1.97	3.95	9.40 (3.4 - 11.6)	1.91 (0.59 - 3.28)	8.39	99
22+22+25+60	1.60	1.60	1.82	4.37	9.40 (3.4 - 11.6)	1.88 (0.59 - 3.24)	8.26	99
22+22+25+71	1.48	1.48	1.68	4.77	9.40 (3.4 - 11.6)	1.85 (0.59 - 3.20)	8.12	99
22+22+35+35	1.81	1.81	2.89	2.89	9.40 (3.4 - 11.6)	1.94 (0.59 - 3.33)	8.52	99
22+22+35+42	1.71	1.71	2.72	3.26	9.40 (3.4 - 11.6)	1.92 (0.59 - 3.27)	8.43	99
22+22+35+50	1.60	1.60	2.55	3.64	9.40 (3.4 - 11.6)	1.91 (0.59 - 3.24)	8.39	99
22+22+35+60	1.49	1.49	2.37	4.06	9.40 (3.4 - 11.6)	1.87 (0.59 - 3.20)	8.21	99
22+22+42+42	1.62	1.62	3.08	3.08	9.40 (3.4 - 11.6)	1.90 (0.59 - 3.20)	8.34	99
22+22+42+50	1.52	1.52	2.90	3.46	9.40 (3.4 - 11.6)	1.88 (0.59 - 3.18)	8.26	99
22+22+50+50	1.44	1.44	3.26	3.26	9.40 (3.4 - 11.6)	1.87 (0.59 - 3.17)	8.21	99
22+25+25+25	2.13	2.42	2.42	2.42	9.40 (3.4 - 11.6)	1.97 (0.59 - 3.40)	8.65	99
22+25+25+35	1.93	2.20	2.20	3.07	9.40 (3.4 - 11.6)	1.95 (0.59 - 3.36)	8.56	99
22+25+25+42	1.81	2.06	2.06	3.46	9.40 (3.4 - 11.6)	1.92 (0.59 - 3.29)	8.43	99
22+25+25+50	1.70	1.93	1.93	3.85	9.40 (3.4 - 11.6)	1.91 (0.59 - 3.27)	8.39	99
22+25+25+60	1.57	1.78	1.78	4.27	9.40 (3.4 - 11.6)	1.87 (0.59 - 3.23)	8.21	99
22+25+35+35	1.77	2.01	2.81	2.81	9.40 (3.4 - 11.6)	1.94 (0.59 - 3.32)	8.52	99
22+25+35+42	1.67	1.90	2.65	3.18	9.40 (3.4 - 11.6)	1.92 (0.59 - 3.25)	8.43	99
22+25+35+50	1.57	1.78	2.49	3.56	9.40 (3.4 - 11.6)	1.90 (0.59 - 3.23)	8.34	99
22+25+35+60	1.46	1.65	2.32	3.97	9.40 (3.4 - 11.6)	1.87 (0.59 - 3.20)	8.21	99
22+35+35+35	1.63	2.59	2.59	2.59	9.40 (3.4 - 11.6)	1.94 (0.59 - 3.28)	8.52	99
22+35+35+42	1.54	2.46	2.46	2.95	9.40 (3.4 - 11.6)	1.91 (0.59 - 3.21)	8.39	99
22+35+35+50	1.46	2.32	2.32	3.31	9.40 (3.4 - 11.6)	1.90 (0.59 - 3.20)	8.34	99
22+35+42+42	1.47	2.33	2.80	2.80	9.40 (3.4 - 11.6)	1.89 (0.59 - 3.15)	8.30	99
25+25+25+25	2.35	2.35	2.35	2.35	9.40 (3.4 - 11.6)	1.95 (0.59 - 3.39)	8.56	99
25+25+25+35	2.14	2.14	2.14	2.99	9.40 (3.4 - 11.6)	1.95 (0.59 - 3.35)	8.56	99
25+25+25+42	2.01	2.01	2.01	3.37	9.40 (3.4 - 11.6)	1.92 (0.59 - 3.28)	8.43	99
25+25+25+50	1.88	1.88	1.88	3.76	9.40 (3.4 - 11.6)	1.91 (0.59 - 3.26)	8.39	99
25+25+25+60	1.74	1.74	1.74	4.18	9.40 (3.4 - 11.6)	1.87 (0.59 - 3.22)	8.21	99

MXZ-4C80VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Total			
25+25+35+35	1.96	1.96	2.74	2.74	9.40 (3.4 - 11.6)	1.94 (0.59 - 3.31)	8.52	99
25+25+35+42	1.85	1.85	2.59	3.11	9.40 (3.4 - 11.6)	1.92 (0.59 - 3.24)	8.43	99
25+25+35+50	1.74	1.74	2.44	3.48	9.40 (3.4 - 11.6)	1.90 (0.59 - 3.22)	8.34	99
25+35+35+35	1.81	2.53	2.53	2.53	9.40 (3.4 - 11.6)	1.94 (0.59 - 3.27)	8.52	99
25+35+35+42	1.72	2.40	2.40	2.88	9.40 (3.4 - 11.6)	1.91 (0.59 - 3.20)	8.39	99
35+35+35+35	2.35	2.35	2.35	2.35	9.40 (3.4 - 11.6)	1.93 (0.59 - 3.23)	8.48	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15	1.50					1.50 (1.4 - 2.1)	0.540 (0.470 - 1.000)	2.37	99
20	2.00					2.00 (1.4 - 2.8)	0.720 (0.470 - 1.330)	3.16	99
22	2.20					2.20 (1.4 - 3.0)	0.680 (0.400 - 0.920)	2.99	99
25	2.50					2.50 (1.4 - 3.3)	0.760 (0.400 - 1.010)	3.34	99
35	3.50					3.50 (1.5 - 4.3)	1.030 (0.400 - 1.290)	4.52	99
42	4.20					4.20 (1.6 - 5.0)	1.230 (0.410 - 1.460)	5.40	99
50	5.00					5.00 (1.6 - 5.6)	1.440 (0.420 - 1.630)	6.32	99
60	6.00					6.00 (1.6 - 6.6)	1.880 (0.400 - 2.130)	8.26	99
71	7.10					7.10 (1.7 - 7.4)	2.340 (0.410 - 2.710)	10.28	99
15+15	1.50	1.50				3.00 (2.0 - 4.0)	0.770 (0.660 - 2.130)	3.38	99
15+20	1.50	2.00				3.50 (2.0 - 4.6)	1.070 (0.660 - 2.530)	4.70	99
15+22	1.50	2.20				3.70 (2.0 - 4.8)	1.120 (0.630 - 2.590)	4.92	99
15+25	1.50	2.50				4.00 (2.0 - 5.2)	1.250 (0.690 - 2.800)	5.49	99
15+35	1.50	3.50				5.00 (2.0 - 6.2)	1.390 (0.610 - 1.990)	6.10	99
15+42	1.50	4.20				5.70 (2.0 - 6.8)	1.610 (0.610 - 2.370)	7.07	99
15+50	1.50	5.00				6.50 (2.0 - 7.6)	1.930 (0.610 - 2.570)	8.48	99
15+60	1.46	5.84				7.30 (2.0 - 8.3)	2.300 (0.610 - 2.830)	10.10	99
15+71	1.38	6.52				7.90 (2.0 - 8.9)	2.620 (0.620 - 3.350)	11.51	99
20+20	2.00	2.00				4.00 (2.0 - 5.2)	1.210 (0.660 - 2.760)	5.31	99
20+22	2.00	2.20				4.20 (2.0 - 5.4)	1.210 (0.630 - 2.220)	5.31	99
20+25	2.00	2.50				4.50 (2.0 - 5.7)	1.210 (0.630 - 1.740)	5.31	99
20+35	2.00	3.50				5.50 (2.0 - 6.7)	1.590 (0.610 - 2.320)	6.98	99
20+42	2.00	4.20				6.20 (2.0 - 7.3)	1.810 (0.610 - 2.570)	7.95	99
20+50	2.00	5.00				7.00 (2.0 - 8.0)	2.130 (0.610 - 2.570)	9.35	99
20+60	1.90	5.70				7.60 (2.0 - 8.6)	2.460 (0.610 - 3.110)	10.80	99
20+71	1.76	6.24				8.00 (2.0 - 8.9)	2.660 (0.620 - 3.350)	11.68	99
22+22	2.20	2.20				4.40 (2.0 - 5.6)	1.130 (0.600 - 1.600)	4.96	99
22+25	2.20	2.50				4.70 (2.0 - 5.9)	1.240 (0.600 - 1.800)	5.45	99
22+35	2.20	3.50				5.70 (2.0 - 6.8)	1.620 (0.580 - 2.340)	7.11	99
22+42	2.20	4.20				6.40 (2.0 - 7.5)	1.850 (0.580 - 2.530)	8.12	99
22+50	2.17	4.93				7.10 (2.0 - 8.1)	2.150 (0.580 - 2.620)	9.44	99
22+60	2.07	5.63				7.70 (2.0 - 8.7)	2.480 (0.580 - 3.160)	10.89	99
22+71	1.92	6.18				8.10 (2.0 - 9.0)	2.670 (0.590 - 3.370)	11.73	99
25+25	2.50	2.50				5.00 (2.0 - 6.2)	1.350 (0.580 - 1.950)	5.93	99
25+35	2.50	3.50				6.00 (2.0 - 7.1)	1.740 (0.580 - 2.540)	7.64	99
25+42	2.50	4.20				6.70 (2.0 - 7.7)	1.970 (0.580 - 2.540)	8.65	99
25+50	2.43	4.87				7.30 (2.0 - 8.3)	2.260 (0.580 - 2.800)	9.93	99
25+60	2.29	5.51				7.80 (2.0 - 8.8)	2.530 (0.590 - 3.250)	11.11	99
25+71	2.14	6.06				8.20 (2.0 - 9.0)	2.710 (0.590 - 3.370)	11.90	99
35+35	3.50	3.50				7.00 (2.0 - 8.0)	2.140 (0.580 - 2.550)	9.40	99
35+42	3.36	4.04				7.40 (2.0 - 8.4)	2.310 (0.580 - 2.910)	10.14	99
35+50	3.21	4.59				7.80 (2.0 - 8.8)	2.530 (0.590 - 3.260)	11.11	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
35+60	2.98	5.12				8.10 (2.0 - 9.0)	2.670 (0.590 - 3.380)	11.73	99
35+71	2.81	5.69				8.50 (2.1 - 9.2)	2.780 (0.580 - 3.500)	12.21	99
42+42	3.90	3.90				7.80 (2.0 - 8.8)	2.580 (0.590 - 3.280)	11.33	99
42+50	3.70	4.40				8.10 (2.0 - 9.0)	2.620 (0.590 - 3.380)	11.51	99
42+60	3.46	4.94				8.40 (2.1 - 9.1)	2.720 (0.590 - 3.440)	11.95	99
42+71	3.23	5.47				8.70 (2.1 - 9.2)	2.750 (0.560 - 3.490)	12.08	99
50+50	4.15	4.15				8.30 (2.1 - 9.1)	2.810 (0.590 - 3.480)	12.34	99
50+60	3.91	4.69				8.60 (2.1 - 9.2)	2.740 (0.570 - 3.490)	12.03	99
50+71	3.68	5.22				8.90 (2.1 - 9.3)	2.770 (0.550 - 3.540)	12.17	99
60+60	4.45	4.45				8.90 (2.1 - 9.3)	2.870 (0.550 - 3.600)	12.60	99
60+71	4.12	4.88				9.00 (2.1 - 9.4)	2.730 (0.550 - 3.580)	11.99	99
71+71	4.55	4.55				9.10 (2.1 - 9.5)	2.790 (0.550 - 3.700)	12.25	99
15+15+15	1.50	1.50	1.50			4.50 (2.9 - 5.7)	1.100 (0.770 - 3.020)	4.83	99
15+15+20	1.50	1.50	2.00			5.00 (2.9 - 6.4)	1.400 (0.780 - 3.420)	6.15	99
15+15+22	1.50	1.50	2.20			5.20 (2.9 - 6.7)	1.430 (0.750 - 3.500)	6.28	99
15+15+25	1.50	1.50	2.50			5.50 (2.9 - 7.2)	1.530 (0.750 - 3.700)	6.72	99
15+15+35	1.50	1.50	3.50			6.50 (2.9 - 8.1)	1.700 (0.750 - 2.490)	7.47	99
15+15+42	1.50	1.50	4.20			7.20 (2.9 - 8.7)	1.920 (0.750 - 2.880)	8.43	99
15+15+50	1.44	1.44	4.81			7.70 (2.9 - 9.1)	2.130 (0.760 - 3.080)	9.35	99
15+15+60	1.35	1.35	5.40			8.10 (2.9 - 9.2)	2.290 (0.770 - 3.070)	10.06	99
15+15+71	1.26	1.26	5.98			8.50 (2.9 - 9.4)	2.460 (0.780 - 3.070)	10.80	99
15+20+20	1.50	2.00	2.00			5.50 (2.9 - 7.2)	1.570 (0.780 - 3.740)	6.90	99
15+20+22	1.50	2.00	2.20			5.70 (2.9 - 7.5)	1.600 (0.750 - 3.820)	7.03	99
15+20+25	1.50	2.00	2.50			6.00 (2.9 - 7.9)	1.710 (0.830 - 3.980)	7.51	99
15+20+35	1.50	2.00	3.50			7.00 (2.9 - 8.5)	1.860 (0.750 - 2.760)	8.17	99
15+20+42	1.48	1.97	4.15			7.60 (2.9 - 9.0)	2.090 (0.750 - 3.080)	9.18	99
15+20+50	1.39	1.86	4.65			7.90 (2.9 - 9.1)	2.220 (0.760 - 3.080)	9.75	99
15+20+60	1.29	1.73	5.18			8.20 (2.9 - 9.3)	2.340 (0.770 - 3.080)	10.28	99
15+20+71	1.22	1.62	5.76			8.60 (2.9 - 9.4)	2.510 (0.780 - 3.070)	11.02	99
15+22+22	1.50	2.20	2.20			5.90 (2.9 - 7.8)	1.630 (0.720 - 3.900)	7.16	99
15+22+25	1.50	2.20	2.50			6.20 (2.9 - 8.0)	1.670 (0.720 - 3.200)	7.33	99
15+22+35	1.50	2.20	3.50			7.20 (2.9 - 8.7)	1.900 (0.720 - 2.850)	8.34	99
15+22+42	1.44	2.12	4.04			7.60 (2.9 - 9.0)	2.050 (0.720 - 3.040)	9.00	99
15+22+50	1.36	2.00	4.54			7.90 (2.9 - 9.1)	2.180 (0.730 - 3.040)	9.57	99
15+22+60	1.28	1.88	5.13			8.30 (2.9 - 9.3)	2.350 (0.740 - 3.040)	10.32	99
15+22+71	1.21	1.77	5.72			8.70 (2.9 - 9.5)	2.530 (0.750 - 3.050)	11.11	99
15+25+25	1.50	2.50	2.50			6.50 (2.9 - 8.1)	1.660 (0.720 - 2.450)	7.29	99
15+25+35	1.50	2.50	3.50			7.50 (2.9 - 9.0)	2.020 (0.720 - 3.050)	8.87	99
15+25+42	1.43	2.38	4.00			7.80 (2.9 - 9.1)	2.140 (0.730 - 3.050)	9.40	99
15+25+50	1.35	2.25	4.50			8.10 (2.9 - 9.2)	2.280 (0.740 - 3.040)	10.01	99
15+25+60	1.26	2.10	5.04			8.40 (2.9 - 9.3)	2.390 (0.750 - 3.040)	10.50	99
15+25+71	1.18	1.96	5.56			8.70 (2.9 - 9.5)	2.530 (0.740 - 3.050)	11.11	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+35+35	1.39	3.25	3.25			7.90 (2.9 - 9.1)	2.210 (0.730 - 3.060)	9.71	99
15+35+42	1.32	3.08	3.70			8.10 (2.9 - 9.2)	2.290 (0.740 - 3.050)	10.06	99
15+35+50	1.26	2.94	4.20			8.40 (2.9 - 9.3)	2.420 (0.750 - 3.050)	10.63	99
15+35+60	1.19	2.77	4.75			8.70 (2.9 - 9.5)	2.550 (0.740 - 3.060)	11.20	99
15+35+71	1.10	2.57	5.22			8.90 (2.9 - 9.8)	2.640 (0.730 - 3.110)	11.59	99
15+42+42	1.27	3.56	3.56			8.40 (2.9 - 9.3)	2.410 (0.740 - 3.050)	10.58	99
15+42+50	1.21	3.38	4.02			8.60 (2.9 - 9.4)	2.500 (0.750 - 3.040)	10.98	99
15+42+60	1.13	3.16	4.51			8.80 (2.9 - 9.7)	2.580 (0.730 - 3.090)	11.33	99
15+42+71	1.05	2.95	4.99			9.00 (2.9 - 9.9)	2.670 (0.720 - 3.120)	11.73	99
15+50+50	1.15	3.83	3.83			8.80 (2.9 - 9.7)	2.600 (0.740 - 3.090)	11.42	99
15+50+60	1.08	3.60	4.32			9.00 (2.9 - 9.9)	2.680 (0.720 - 3.120)	11.77	99
15+50+71	1.01	3.38	4.80			9.20 (2.9 - 10.4)	2.690 (0.710 - 3.280)	11.81	99
15+60+60	1.02	4.09	4.09			9.20 (2.9 - 10.4)	2.680 (0.710 - 3.280)	11.77	99
15+60+71	0.96	3.82	4.52			9.30 (2.9 - 10.6)	2.680 (0.700 - 3.330)	11.77	99
20+20+20	2.00	2.00	2.00			6.00 (2.9 - 7.9)	1.630 (0.770 - 3.900)	7.16	99
20+20+22	2.00	2.00	2.20			6.20 (2.9 - 8.0)	1.710 (0.750 - 3.240)	7.51	99
20+20+25	2.00	2.00	2.50			6.50 (2.9 - 8.1)	1.700 (0.750 - 2.490)	7.47	99
20+20+35	2.00	2.00	3.50			7.50 (2.9 - 9.0)	2.060 (0.750 - 3.090)	9.05	99
20+20+42	1.90	1.90	4.00			7.80 (2.9 - 9.1)	2.180 (0.760 - 3.090)	9.57	99
20+20+50	1.80	1.80	4.50			8.10 (2.9 - 9.2)	2.320 (0.770 - 3.080)	10.19	99
20+20+60	1.68	1.68	5.04			8.40 (2.9 - 9.3)	2.430 (0.780 - 3.080)	10.67	99
20+20+71	1.57	1.57	5.56			8.70 (2.9 - 9.5)	2.570 (0.770 - 3.090)	11.29	99
20+22+22	2.00	2.20	2.20			6.40 (2.9 - 8.0)	1.660 (0.720 - 3.200)	7.29	99
20+22+25	2.00	2.20	2.50			6.70 (2.9 - 8.2)	1.700 (0.720 - 2.520)	7.47	99
20+22+35	1.97	2.17	3.45			7.60 (2.9 - 9.0)	2.070 (0.720 - 3.050)	9.09	99
20+22+42	1.86	2.04	3.90			7.80 (2.9 - 9.1)	2.140 (0.730 - 3.050)	9.40	99
20+22+50	1.76	1.94	4.40			8.10 (2.9 - 9.2)	2.280 (0.740 - 3.040)	10.01	99
20+22+60	1.67	1.83	5.00			8.50 (2.9 - 9.4)	2.440 (0.750 - 3.040)	10.72	99
20+22+71	1.56	1.71	5.53			8.80 (2.9 - 9.7)	2.580 (0.740 - 3.090)	11.33	99
20+25+25	2.00	2.50	2.50			7.00 (2.9 - 8.5)	1.820 (0.720 - 2.720)	7.99	99
20+25+35	1.93	2.41	3.37			7.70 (2.9 - 9.1)	2.120 (0.730 - 3.060)	9.31	99
20+25+42	1.82	2.27	3.81			7.90 (2.9 - 9.1)	2.190 (0.730 - 3.050)	9.62	99
20+25+50	1.73	2.16	4.32			8.20 (2.9 - 9.3)	2.330 (0.740 - 3.050)	10.23	99
20+25+60	1.64	2.05	4.91			8.60 (2.9 - 9.4)	2.490 (0.750 - 3.040)	10.94	99
20+25+71	1.52	1.90	5.39			8.80 (2.9 - 9.7)	2.580 (0.730 - 3.090)	11.33	99
20+35+35	1.80	3.15	3.15			8.10 (2.9 - 9.2)	2.310 (0.740 - 3.060)	10.14	99
20+35+42	1.71	2.99	3.59			8.30 (2.9 - 9.3)	2.390 (0.740 - 3.060)	10.50	99
20+35+50	1.64	2.87	4.10			8.60 (2.9 - 9.4)	2.520 (0.750 - 3.050)	11.07	99
20+35+60	1.53	2.68	4.59			8.80 (2.9 - 9.7)	2.600 (0.740 - 3.100)	11.42	99
20+35+71	1.43	2.50	5.07			9.00 (2.9 - 9.9)	2.690 (0.720 - 3.130)	11.81	99
20+42+42	1.65	3.47	3.47			8.60 (2.9 - 9.4)	2.510 (0.750 - 3.050)	11.02	99
20+42+50	1.55	3.26	3.88			8.70 (2.9 - 9.5)	2.560 (0.740 - 3.060)	11.24	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
20+42+60	1.46	3.06	4.38			8.90 (2.9 - 9.8)	2.640 (0.730 - 3.110)	11.59	99
20+42+71	1.37	2.87	4.86			9.10 (2.9 - 10.1)	2.690 (0.710 - 3.190)	11.81	99
20+50+50	1.48	3.71	3.71			8.90 (2.9 - 9.8)	2.660 (0.730 - 3.110)	11.68	99
20+50+60	1.40	3.50	4.20			9.10 (2.9 - 10.1)	2.700 (0.720 - 3.190)	11.86	99
20+50+71	1.32	3.30	4.68			9.30 (2.9 - 10.6)	2.710 (0.700 - 3.340)	11.90	99
20+60+60	1.31	3.94	3.94			9.20 (2.9 - 10.4)	2.680 (0.700 - 3.280)	11.77	99
20+60+71	1.25	3.74	4.42			9.40 (2.9 - 10.8)	2.690 (0.690 - 3.400)	11.81	99
22+22+22	2.20	2.20	2.20			6.60 (2.9 - 8.1)	1.620 (0.690 - 2.410)	7.11	99
22+22+25	2.20	2.20	2.50			6.90 (2.9 - 8.4)	1.740 (0.690 - 2.610)	7.64	99
22+22+35	2.12	2.12	3.37			7.60 (2.9 - 9.0)	2.030 (0.690 - 3.010)	8.92	99
22+22+42	2.02	2.02	3.86			7.90 (2.9 - 9.1)	2.150 (0.700 - 3.010)	9.44	99
22+22+50	1.92	1.92	4.36			8.20 (2.9 - 9.3)	2.290 (0.710 - 3.010)	10.06	99
22+22+60	1.82	1.82	4.96			8.60 (2.9 - 9.4)	2.450 (0.720 - 3.000)	10.76	99
22+22+71	1.68	1.68	5.43			8.80 (2.9 - 9.7)	2.540 (0.710 - 3.050)	11.16	99
22+25+25	2.20	2.50	2.50			7.20 (2.9 - 8.7)	1.860 (0.690 - 2.810)	8.17	99
22+25+35	2.09	2.38	3.33			7.80 (2.9 - 9.1)	2.120 (0.700 - 3.020)	9.31	99
22+25+42	1.98	2.25	3.78			8.00 (2.9 - 9.2)	2.200 (0.700 - 3.010)	9.66	99
22+25+50	1.88	2.14	4.28			8.30 (2.9 - 9.3)	2.340 (0.710 - 3.010)	10.28	99
22+25+60	1.77	2.01	4.82			8.60 (2.9 - 9.4)	2.450 (0.720 - 3.000)	10.76	99
22+25+71	1.64	1.86	5.29			8.80 (2.9 - 9.7)	2.540 (0.700 - 3.050)	11.16	99
22+35+35	1.94	3.08	3.08			8.10 (2.9 - 9.2)	2.270 (0.710 - 3.020)	9.97	99
22+35+42	1.87	2.97	3.56			8.40 (2.9 - 9.3)	2.390 (0.710 - 3.020)	10.50	99
22+35+50	1.77	2.81	4.02			8.60 (2.9 - 9.4)	2.480 (0.720 - 3.010)	10.89	99
22+35+60	1.65	2.63	4.51			8.80 (2.9 - 9.7)	2.560 (0.700 - 3.060)	11.24	99
22+35+71	1.55	2.46	4.99			9.00 (2.9 - 9.9)	2.650 (0.690 - 3.090)	11.64	99
22+42+42	1.78	3.41	3.41			8.60 (2.9 - 9.4)	2.470 (0.720 - 3.010)	10.85	99
22+42+50	1.70	3.24	3.86			8.80 (2.9 - 9.7)	2.570 (0.710 - 3.060)	11.29	99
22+42+60	1.60	3.05	4.35			9.00 (2.9 - 9.9)	2.650 (0.690 - 3.090)	11.64	99
22+42+71	1.50	2.86	4.84			9.20 (2.9 - 10.4)	2.660 (0.680 - 3.250)	11.68	99
22+50+50	1.60	3.65	3.65			8.90 (2.9 - 9.8)	2.620 (0.700 - 3.070)	11.51	99
22+50+60	1.52	3.45	4.14			9.10 (2.9 - 10.1)	2.660 (0.680 - 3.150)	11.68	99
22+50+71	1.43	3.25	4.62			9.30 (2.9 - 10.6)	2.670 (0.670 - 3.300)	11.73	99
22+60+60	1.44	3.93	3.93			9.30 (2.9 - 10.6)	2.660 (0.670 - 3.300)	11.68	99
22+60+71	1.35	3.69	4.36			9.40 (2.9 - 10.8)	2.650 (0.660 - 3.360)	11.64	99
25+25+25	2.50	2.50	2.50			7.50 (2.9 - 9.0)	1.980 (0.690 - 3.010)	8.70	99
25+25+35	2.32	2.32	3.25			7.90 (2.9 - 9.1)	2.170 (0.700 - 3.020)	9.53	99
25+25+42	2.20	2.20	3.70			8.10 (2.9 - 9.2)	2.250 (0.710 - 3.010)	9.88	99
25+25+50	2.10	2.10	4.20			8.40 (2.9 - 9.3)	2.380 (0.720 - 3.010)	10.45	99
25+25+60	1.98	1.98	4.75			8.70 (2.9 - 9.5)	2.510 (0.710 - 3.020)	11.02	99
25+25+71	1.84	1.84	5.22			8.90 (2.9 - 9.8)	2.600 (0.700 - 3.070)	11.42	99
25+35+35	2.16	3.02	3.02			8.20 (2.9 - 9.3)	2.320 (0.710 - 3.030)	10.19	99
25+35+42	2.08	2.92	3.50			8.50 (2.9 - 9.4)	2.440 (0.720 - 3.020)	10.72	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
25+35+50	1.98	2.77	3.95			8.70 (2.9 - 9.5)	2.540 (0.710 - 3.030)	11.16	99
25+35+60	1.85	2.60	4.45			8.90 (2.9 - 9.8)	2.620 (0.700 - 3.080)	11.51	99
25+35+71	1.74	2.43	4.93			9.10 (2.9 - 10.1)	2.670 (0.680 - 3.160)	11.73	99
25+42+42	2.00	3.35	3.35			8.70 (2.9 - 9.5)	2.530 (0.710 - 3.030)	11.11	99
25+42+50	1.88	3.16	3.76			8.80 (2.9 - 9.7)	2.570 (0.700 - 3.060)	11.29	99
25+42+60	1.77	2.98	4.25			9.00 (2.9 - 9.9)	2.650 (0.690 - 3.090)	11.64	99
25+42+71	1.67	2.80	4.73			9.20 (2.9 - 10.4)	2.660 (0.680 - 3.250)	11.68	99
25+50+50	1.80	3.60	3.60			9.00 (2.9 - 9.9)	2.670 (0.690 - 3.090)	11.73	99
25+50+60	1.70	3.41	4.09			9.20 (2.9 - 10.4)	2.670 (0.680 - 3.250)	11.73	99
25+50+71	1.59	3.18	4.52			9.30 (2.9 - 10.6)	2.670 (0.670 - 3.300)	11.73	99
25+60+60	1.60	3.85	3.85			9.30 (2.9 - 10.6)	2.660 (0.670 - 3.300)	11.68	99
25+60+71	1.51	3.62	4.28			9.40 (2.9 - 10.8)	2.650 (0.660 - 3.360)	11.64	99
35+35+35	2.87	2.87	2.87			8.60 (2.9 - 9.4)	2.510 (0.720 - 3.030)	11.02	99
35+35+42	2.72	2.72	3.26			8.70 (2.9 - 9.5)	2.550 (0.710 - 3.040)	11.20	99
35+35+50	2.60	2.60	3.71			8.90 (2.9 - 9.8)	2.650 (0.700 - 3.090)	11.64	99
35+35+60	2.45	2.45	4.20			9.10 (2.9 - 10.1)	2.690 (0.690 - 3.170)	11.81	99
35+35+71	2.31	2.31	4.68			9.30 (2.9 - 10.6)	2.700 (0.670 - 3.320)	11.86	99
35+42+42	2.62	3.14	3.14			8.90 (2.9 - 9.8)	2.640 (0.700 - 3.090)	11.59	99
35+42+50	2.48	2.98	3.54			9.00 (2.9 - 9.9)	2.680 (0.690 - 3.100)	11.77	99
35+42+60	2.35	2.82	4.03			9.20 (2.9 - 10.4)	2.680 (0.680 - 3.260)	11.77	99
35+42+71	2.22	2.67	4.51			9.40 (2.9 - 10.8)	2.690 (0.660 - 3.380)	11.81	99
35+50+50	2.39	3.41	3.41			9.20 (2.9 - 10.4)	2.700 (0.680 - 3.260)	11.86	99
35+50+60	2.24	3.21	3.85			9.30 (2.9 - 10.6)	2.690 (0.670 - 3.310)	11.81	99
35+50+71	2.11	3.01	4.28			9.40 (2.9 - 10.8)	2.680 (0.660 - 3.370)	11.77	99
35+60+60	2.12	3.64	3.64			9.40 (2.9 - 10.8)	2.670 (0.660 - 3.370)	11.73	99
35+60+71	1.98	3.40	4.02			9.40 (2.9 - 10.8)	2.650 (0.660 - 3.360)	11.64	99
42+42+42	3.00	3.00	3.00			9.00 (2.9 - 9.9)	2.730 (0.690 - 3.130)	11.99	99
42+42+50	2.85	2.85	3.40			9.10 (2.9 - 10.1)	2.680 (0.680 - 3.160)	11.77	99
42+42+60	2.71	2.71	3.88			9.30 (2.9 - 10.6)	2.680 (0.670 - 3.310)	11.77	99
42+42+71	2.55	2.55	4.31			9.40 (2.9 - 10.8)	2.670 (0.660 - 3.370)	11.73	99
42+50+50	2.75	3.27	3.27			9.30 (2.9 - 10.6)	2.700 (0.670 - 3.310)	11.86	99
42+50+60	2.60	3.09	3.71			9.40 (2.9 - 10.8)	2.680 (0.660 - 3.370)	11.77	99
42+50+71	2.42	2.88	4.09			9.40 (2.9 - 10.8)	2.660 (0.660 - 3.360)	11.68	99
42+60+60	2.44	3.48	3.48			9.40 (2.9 - 10.8)	2.650 (0.660 - 3.360)	11.64	99
50+50+50	3.13	3.13	3.13			9.40 (2.9 - 10.8)	2.790 (0.660 - 3.430)	12.25	99
50+50+60	2.94	2.94	3.53			9.40 (2.9 - 10.8)	2.670 (0.660 - 3.360)	11.73	99
50+50+71	2.75	2.75	3.90			9.40 (2.9 - 10.8)	2.650 (0.660 - 3.350)	11.64	99
15+15+15+15	1.50	1.50	1.50	1.50		6.00 (3.7 - 6.4)	1.300 (0.910 - 3.190)	5.71	99
15+15+15+20	1.48	1.48	1.48	1.97		6.40 (3.7 - 7.0)	1.625 (0.930 - 3.465)	7.14	99
15+15+15+22	1.48	1.48	1.48	2.17		6.60 (3.7 - 7.3)	1.665 (0.900 - 3.480)	7.31	99
15+15+15+25	1.46	1.46	1.46	2.43		6.80 (3.7 - 7.7)	1.750 (0.900 - 3.555)	7.69	99
15+15+15+35	1.43	1.43	1.43	3.33		7.60 (3.7 - 8.9)	2.075 (1.000 - 3.780)	9.11	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+15+15+42	1.38	1.38	1.38	3.86		8.00 (3.7 - 9.2)	1.945 (0.900 - 2.535)	8.54	99
15+15+15+50	1.33	1.33	1.33	4.42		8.40 (3.7 - 9.7)	2.100 (0.900 - 2.740)	9.22	99
15+15+15+60	1.24	1.24	1.24	4.97		8.70 (3.7 - 10.0)	2.180 (0.900 - 2.830)	9.57	99
15+15+15+71	1.15	1.15	1.15	5.45		8.90 (3.7 - 10.1)	2.215 (0.900 - 2.835)	9.73	99
15+15+20+20	1.46	1.46	1.94	1.94		6.80 (3.7 - 7.7)	1.790 (0.930 - 3.595)	7.86	99
15+15+20+22	1.46	1.46	1.94	2.14		7.00 (3.7 - 8.0)	1.830 (0.900 - 3.610)	8.04	99
15+15+20+25	1.44	1.44	1.92	2.40		7.20 (3.7 - 8.3)	1.910 (0.900 - 3.665)	8.39	99
15+15+20+35	1.39	1.39	1.86	3.25		7.90 (3.7 - 9.1)	1.995 (0.900 - 2.955)	8.76	99
15+15+20+42	1.34	1.34	1.78	3.74		8.20 (3.7 - 9.4)	2.025 (0.900 - 2.620)	8.89	99
15+15+20+50	1.29	1.29	1.72	4.30		8.60 (3.7 - 9.9)	2.180 (0.900 - 2.825)	9.57	99
15+15+20+60	1.20	1.20	1.60	4.80		8.80 (3.7 - 10.1)	2.205 (0.900 - 2.845)	9.68	99
15+15+20+71	1.12	1.12	1.49	5.28		9.00 (3.7 - 10.2)	2.245 (0.900 - 2.855)	9.86	99
15+15+22+22	1.44	1.44	2.11	2.11		7.10 (3.7 - 8.1)	1.830 (0.870 - 3.590)	8.04	99
15+15+22+25	1.44	1.44	2.11	2.40		7.40 (3.7 - 8.6)	1.955 (0.870 - 3.685)	8.59	99
15+15+22+35	1.38	1.38	2.02	3.22		8.00 (3.7 - 9.2)	1.925 (0.870 - 2.505)	8.45	99
15+15+22+42	1.32	1.32	1.94	3.71		8.30 (3.7 - 9.6)	2.030 (0.870 - 2.665)	8.92	99
15+15+22+50	1.26	1.26	1.85	4.22		8.60 (3.7 - 9.9)	2.140 (0.870 - 2.785)	9.40	99
15+15+22+60	1.18	1.18	1.73	4.71		8.80 (3.7 - 10.1)	2.165 (0.870 - 2.805)	9.51	99
15+15+22+71	1.11	1.11	1.63	5.25		9.10 (3.7 - 10.3)	2.230 (0.870 - 2.830)	9.79	99
15+15+25+25	1.43	1.43	2.38	2.38		7.60 (3.7 - 8.9)	2.035 (0.970 - 3.740)	8.94	99
15+15+25+35	1.35	1.35	2.25	3.15		8.10 (3.7 - 9.3)	1.965 (0.870 - 2.550)	8.63	99
15+15+25+42	1.31	1.31	2.19	3.68		8.50 (3.7 - 9.8)	2.110 (0.870 - 2.750)	9.27	99
15+15+25+50	1.24	1.24	2.07	4.14		8.70 (3.7 - 10.0)	2.170 (0.870 - 2.800)	9.53	99
15+15+25+60	1.16	1.16	1.93	4.64		8.90 (3.7 - 10.1)	2.195 (0.870 - 2.805)	9.64	99
15+15+25+71	1.08	1.08	1.81	5.13		9.10 (3.7 - 10.3)	2.230 (0.870 - 2.830)	9.79	99
15+15+35+35	1.29	1.29	3.01	3.01		8.60 (3.7 - 9.9)	2.170 (0.870 - 2.805)	9.53	99
15+15+35+42	1.22	1.22	2.85	3.41		8.70 (3.7 - 10.0)	2.180 (0.870 - 2.810)	9.57	99
15+15+35+50	1.16	1.16	2.71	3.87		8.90 (3.7 - 10.1)	2.225 (0.870 - 2.815)	9.77	99
15+15+35+60	1.09	1.09	2.55	4.37		9.10 (3.7 - 10.3)	2.250 (0.870 - 2.840)	9.88	99
15+15+35+71	1.03	1.03	2.39	4.86		9.30 (3.7 - 10.4)	2.285 (0.870 - 2.845)	10.04	99
15+15+42+42	1.17	1.17	3.28	3.28		8.90 (3.7 - 10.1)	2.215 (0.870 - 2.815)	9.73	99
15+15+42+50	1.11	1.11	3.10	3.69		9.00 (3.7 - 10.2)	2.235 (0.870 - 2.825)	9.82	99
15+15+42+60	1.05	1.05	2.93	4.18		9.20 (3.7 - 10.4)	2.260 (0.870 - 2.845)	9.93	99
15+15+42+71	0.99	0.99	2.76	4.67		9.40 (3.7 - 10.5)	2.295 (0.870 - 2.850)	10.08	99
15+15+50+50	1.06	1.06	3.54	3.54		9.20 (3.7 - 10.4)	2.280 (0.870 - 2.845)	10.01	99
15+15+50+60	1.01	1.01	3.36	4.03		9.40 (3.7 - 10.5)	2.305 (0.870 - 2.850)	10.12	99
15+15+50+71	0.95	0.95	3.18	4.51		9.60 (3.7 - 10.8)	2.300 (0.850 - 2.875)	10.10	99
15+20+20+20	1.44	1.92	1.92	1.92		7.20 (3.7 - 8.3)	1.950 (0.930 - 3.705)	8.56	99
15+20+20+22	1.44	1.92	1.92	2.11		7.40 (3.7 - 8.6)	1.995 (0.900 - 3.725)	8.76	99
15+20+20+25	1.43	1.90	1.90	2.38		7.60 (3.7 - 8.9)	2.075 (1.000 - 3.780)	9.11	99
15+20+20+35	1.35	1.80	1.80	3.15		8.10 (3.7 - 9.3)	2.005 (0.900 - 2.590)	8.81	99
15+20+20+42	1.31	1.75	1.75	3.68		8.50 (3.7 - 9.8)	2.150 (0.900 - 2.790)	9.44	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+20+20+50	1.24	1.66	1.66	4.14		8.70 (3.7 - 10.0)	2.210 (0.900 - 2.840)	9.71	99
15+20+20+60	1.16	1.55	1.55	4.64		8.90 (3.7 - 10.1)	2.235 (0.900 - 2.845)	9.82	99
15+20+20+71	1.08	1.44	1.44	5.13		9.10 (3.7 - 10.3)	2.270 (0.900 - 2.870)	9.97	99
15+20+22+22	1.42	1.90	2.09	2.09		7.50 (3.7 - 8.7)	1.995 (0.870 - 3.700)	8.76	99
15+20+22+25	1.41	1.88	2.07	2.35		7.70 (3.7 - 9.0)	2.010 (0.870 - 3.330)	8.83	99
15+20+22+35	1.34	1.78	1.96	3.12		8.20 (3.7 - 9.4)	2.005 (0.870 - 2.590)	8.81	99
15+20+22+42	1.30	1.74	1.91	3.65		8.60 (3.7 - 9.9)	2.150 (0.870 - 2.795)	9.44	99
15+20+22+50	1.22	1.63	1.79	4.07		8.70 (3.7 - 10.0)	2.170 (0.870 - 2.800)	9.53	99
15+20+22+60	1.14	1.52	1.67	4.56		8.90 (3.7 - 10.1)	2.195 (0.870 - 2.805)	9.64	99
15+20+22+71	1.08	1.44	1.58	5.10		9.20 (3.7 - 10.4)	2.260 (0.870 - 2.845)	9.93	99
15+20+25+25	1.39	1.86	2.32	2.32		7.90 (3.7 - 9.1)	1.955 (0.870 - 2.915)	8.59	99
15+20+25+35	1.33	1.77	2.21	3.09		8.40 (3.7 - 9.7)	2.090 (0.870 - 2.720)	9.18	99
15+20+25+42	1.26	1.69	2.11	3.54		8.60 (3.7 - 9.9)	2.150 (0.870 - 2.795)	9.44	99
15+20+25+50	1.20	1.60	2.00	4.00		8.80 (3.7 - 10.1)	2.195 (0.870 - 2.815)	9.64	99
15+20+25+60	1.13	1.50	1.88	4.50		9.00 (3.7 - 10.2)	2.225 (0.870 - 2.825)	9.77	99
15+20+25+71	1.05	1.40	1.76	4.99		9.20 (3.7 - 10.4)	2.260 (0.870 - 2.845)	9.93	99
15+20+35+35	1.24	1.66	2.90	2.90		8.70 (3.7 - 10.0)	2.200 (0.870 - 2.820)	9.66	99
15+20+35+42	1.18	1.57	2.75	3.30		8.80 (3.7 - 10.1)	2.205 (0.870 - 2.825)	9.68	99
15+20+35+50	1.13	1.50	2.63	3.75		9.00 (3.7 - 10.2)	2.255 (0.870 - 2.835)	9.90	99
15+20+35+60	1.06	1.42	2.48	4.25		9.20 (3.7 - 10.4)	2.280 (0.870 - 2.855)	10.01	99
15+20+35+71	1.00	1.33	2.33	4.73		9.40 (3.7 - 10.5)	2.315 (0.870 - 2.860)	10.17	99
15+20+42+42	1.13	1.51	3.18	3.18		9.00 (3.7 - 10.2)	2.245 (0.870 - 2.835)	9.86	99
15+20+42+50	1.07	1.43	3.01	3.58		9.10 (3.7 - 10.3)	2.260 (0.870 - 2.840)	9.93	99
15+20+42+60	1.02	1.36	2.85	4.07		9.30 (3.7 - 10.4)	2.285 (0.870 - 2.845)	10.04	99
15+20+42+71	0.96	1.28	2.70	4.56		9.50 (3.7 - 10.6)	2.305 (0.860 - 2.860)	10.12	99
15+20+50+50	1.03	1.38	3.44	3.44		9.30 (3.7 - 10.4)	2.305 (0.870 - 2.845)	10.12	99
15+20+50+60	0.98	1.31	3.28	3.93		9.50 (3.7 - 10.6)	2.315 (0.860 - 2.860)	10.17	99
15+20+50+71	0.92	1.23	3.08	4.37		9.60 (3.7 - 10.8)	2.300 (0.850 - 2.875)	10.10	99
15+22+22+22	1.43	2.09	2.09	2.09		7.70 (3.7 - 9.0)	1.970 (0.840 - 3.290)	8.65	99
15+22+22+25	1.39	2.04	2.04	2.32		7.80 (3.7 - 9.1)	1.940 (0.840 - 2.875)	8.52	99
15+22+22+35	1.32	1.94	1.94	3.09		8.30 (3.7 - 9.6)	2.010 (0.840 - 2.635)	8.83	99
15+22+22+42	1.28	1.87	1.87	3.58		8.60 (3.7 - 9.9)	2.110 (0.840 - 2.755)	9.27	99
15+22+22+50	1.21	1.78	1.78	4.04		8.80 (3.7 - 10.1)	2.155 (0.840 - 2.775)	9.46	99
15+22+22+60	1.13	1.66	1.66	4.54		9.00 (3.7 - 10.2)	2.185 (0.840 - 2.785)	9.60	99
15+22+22+71	1.06	1.56	1.56	5.02		9.20 (3.7 - 10.4)	2.220 (0.840 - 2.805)	9.75	99
15+22+25+25	1.38	2.02	2.30	2.30		8.00 (3.7 - 9.2)	1.885 (0.840 - 2.465)	8.28	99
15+22+25+35	1.31	1.93	2.19	3.07		8.50 (3.7 - 9.8)	2.090 (0.840 - 2.720)	9.18	99
15+22+25+42	1.25	1.84	2.09	3.51		8.70 (3.7 - 10.0)	2.140 (0.840 - 2.770)	9.40	99
15+22+25+50	1.18	1.73	1.96	3.93		8.80 (3.7 - 10.1)	2.155 (0.840 - 2.775)	9.46	99
15+22+25+60	1.11	1.62	1.84	4.43		9.00 (3.7 - 10.2)	2.185 (0.840 - 2.785)	9.60	99
15+22+25+71	1.05	1.54	1.75	4.96		9.30 (3.7 - 10.4)	2.245 (0.840 - 2.805)	9.86	99
15+22+35+35	1.22	1.79	2.85	2.85		8.70 (3.7 - 10.0)	2.160 (0.840 - 2.780)	9.49	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+22+35+42	1.17	1.72	2.73	3.28		8.90 (3.7 - 10.1)	2.195 (0.840 - 2.785)	9.64	99
15+22+35+50	1.11	1.62	2.58	3.69		9.00 (3.7 - 10.2)	2.215 (0.840 - 2.795)	9.73	99
15+22+35+60	1.05	1.53	2.44	4.18		9.20 (3.7 - 10.4)	2.240 (0.840 - 2.815)	9.84	99
15+22+35+71	0.99	1.45	2.30	4.67		9.40 (3.7 - 10.5)	2.275 (0.840 - 2.820)	9.99	99
15+22+42+42	1.12	1.64	3.12	3.12		9.00 (3.7 - 10.2)	2.205 (0.840 - 2.795)	9.68	99
15+22+42+50	1.07	1.57	3.00	3.57		9.20 (3.7 - 10.4)	2.250 (0.840 - 2.815)	9.88	99
15+22+42+60	1.01	1.49	2.84	4.06		9.40 (3.7 - 10.5)	2.275 (0.840 - 2.820)	9.99	99
15+22+42+71	0.95	1.39	2.66	4.50		9.50 (3.7 - 10.6)	2.265 (0.830 - 2.820)	9.95	99
15+22+50+50	1.02	1.49	3.39	3.39		9.30 (3.7 - 10.4)	2.265 (0.840 - 2.805)	9.95	99
15+22+50+60	0.97	1.42	3.23	3.88		9.50 (3.7 - 10.6)	2.275 (0.830 - 2.820)	9.99	99
15+22+50+71	0.92	1.35	3.07	4.36		9.70 (3.7 - 10.9)	2.270 (0.810 - 2.845)	9.97	99
15+25+25+25	1.35	2.25	2.25	2.25		8.10 (3.7 - 9.3)	1.925 (0.840 - 2.510)	8.45	99
15+25+25+35	1.29	2.15	2.15	3.01		8.60 (3.7 - 9.9)	2.130 (0.840 - 2.765)	9.35	99
15+25+25+42	1.22	2.03	2.03	3.41		8.70 (3.7 - 10.0)	2.140 (0.840 - 2.770)	9.40	99
15+25+25+50	1.16	1.93	1.93	3.87		8.90 (3.7 - 10.1)	2.185 (0.840 - 2.775)	9.60	99
15+25+25+60	1.09	1.82	1.82	4.37		9.10 (3.7 - 10.3)	2.210 (0.840 - 2.800)	9.71	99
15+25+25+71	1.03	1.71	1.71	4.86		9.30 (3.7 - 10.4)	2.245 (0.840 - 2.805)	9.86	99
15+25+35+35	1.20	2.00	2.80	2.80		8.80 (3.7 - 10.1)	2.185 (0.840 - 2.795)	9.60	99
15+25+35+42	1.14	1.90	2.66	3.19		8.90 (3.7 - 10.1)	2.195 (0.840 - 2.785)	9.64	99
15+25+35+50	1.09	1.82	2.55	3.64		9.10 (3.7 - 10.3)	2.240 (0.840 - 2.810)	9.84	99
15+25+35+60	1.03	1.72	2.41	4.13		9.30 (3.7 - 10.4)	2.265 (0.840 - 2.815)	9.95	99
15+25+35+71	0.98	1.63	2.28	4.62		9.50 (3.7 - 10.6)	2.285 (0.830 - 2.830)	10.04	99
15+25+42+42	1.10	1.83	3.08	3.08		9.10 (3.7 - 10.3)	2.230 (0.840 - 2.810)	9.79	99
15+25+42+50	1.05	1.74	2.93	3.48		9.20 (3.7 - 10.4)	2.250 (0.840 - 2.815)	9.88	99
15+25+42+60	0.99	1.65	2.78	3.97		9.40 (3.7 - 10.5)	2.275 (0.840 - 2.820)	9.99	99
15+25+42+71	0.94	1.57	2.64	4.45		9.60 (3.7 - 10.8)	2.270 (0.820 - 2.845)	9.97	99
15+25+50+50	1.01	1.68	3.36	3.36		9.40 (3.7 - 10.5)	2.295 (0.840 - 2.820)	10.08	99
15+25+50+60	0.95	1.58	3.17	3.80		9.50 (3.7 - 10.6)	2.275 (0.830 - 2.820)	9.99	99
15+25+50+71	0.90	1.51	3.01	4.28		9.70 (3.7 - 10.9)	2.270 (0.810 - 2.845)	9.97	99
15+35+35+35	1.13	2.63	2.63	2.63		9.00 (3.7 - 10.2)	2.245 (0.840 - 2.815)	9.86	99
15+35+35+42	1.07	2.51	2.51	3.01		9.10 (3.7 - 10.3)	2.250 (0.840 - 2.820)	9.88	99
15+35+35+50	1.03	2.41	2.41	3.44		9.30 (3.7 - 10.4)	2.295 (0.840 - 2.825)	10.08	99
15+35+35+60	0.98	2.29	2.29	3.93		9.50 (3.7 - 10.6)	2.305 (0.830 - 2.840)	10.12	99
15+35+35+71	0.92	2.15	2.15	4.37		9.60 (3.7 - 10.8)	2.290 (0.820 - 2.855)	10.06	99
15+35+42+42	1.04	2.43	2.91	2.91		9.30 (3.7 - 10.4)	2.285 (0.840 - 2.825)	10.04	99
15+35+42+50	0.99	2.32	2.78	3.31		9.40 (3.7 - 10.5)	2.305 (0.840 - 2.830)	10.12	99
15+35+42+60	0.95	2.21	2.65	3.79		9.60 (3.7 - 10.8)	2.290 (0.820 - 2.855)	10.06	99
15+35+42+71	0.89	2.08	2.50	4.23		9.70 (3.7 - 10.9)	2.280 (0.810 - 2.855)	10.01	99
15+35+50+50	0.95	2.22	3.17	3.17		9.50 (3.7 - 10.6)	2.305 (0.830 - 2.830)	10.12	99
15+35+50+60	0.91	2.12	3.03	3.64		9.70 (3.7 - 10.9)	2.290 (0.810 - 2.855)	10.06	99
15+35+50+71	0.86	2.01	2.87	4.07		9.80 (3.7 - 11.0)	2.275 (0.800 - 2.855)	9.99	99
15+42+42+42	1.00	2.80	2.80	2.80		9.40 (3.7 - 10.5)	2.295 (0.840 - 2.830)	10.08	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+42+42+50	0.96	2.68	2.68	3.19		9.50 (3.7 - 10.6)	2.295 (0.830 - 2.830)	10.08	99
15+42+42+60	0.92	2.56	2.56	3.66		9.70 (3.7 - 10.9)	2.280 (0.810 - 2.855)	10.01	99
15+42+42+71	0.86	2.42	2.42	4.09		9.80 (3.7 - 11.0)	2.265 (0.800 - 2.855)	9.95	99
15+42+50+50	0.92	2.57	3.06	3.06		9.60 (3.7 - 10.8)	2.290 (0.820 - 2.845)	10.06	99
15+42+50+60	0.88	2.46	2.93	3.52		9.80 (3.7 - 11.0)	2.275 (0.800 - 2.855)	9.99	99
20+20+20+20	1.90	1.90	1.90	1.90		7.60 (3.7 - 8.9)	1.955 (0.910 - 3.660)	8.59	99
20+20+20+22	1.88	1.88	1.88	2.07		7.70 (3.7 - 9.0)	2.050 (0.900 - 3.370)	9.00	99
20+20+20+25	1.86	1.86	1.86	2.32		7.90 (3.7 - 9.1)	1.995 (0.900 - 2.955)	8.76	99
20+20+20+35	1.77	1.77	1.77	3.09		8.40 (3.7 - 9.7)	2.130 (0.900 - 2.760)	9.35	99
20+20+20+42	1.69	1.69	1.69	3.54		8.60 (3.7 - 9.9)	2.190 (0.900 - 2.835)	9.62	99
20+20+20+50	1.60	1.60	1.60	4.00		8.80 (3.7 - 10.1)	2.235 (0.900 - 2.855)	9.82	99
20+20+20+60	1.50	1.50	1.50	4.50		9.00 (3.7 - 10.2)	2.265 (0.900 - 2.865)	9.95	99
20+20+20+71	1.40	1.40	1.40	4.99		9.20 (3.7 - 10.4)	2.300 (0.900 - 2.885)	10.10	99
20+20+22+22	1.86	1.86	2.04	2.04		7.80 (3.7 - 9.1)	1.980 (0.870 - 2.915)	8.70	99
20+20+22+25	1.84	1.84	2.02	2.30		8.00 (3.7 - 9.2)	1.925 (0.870 - 2.505)	8.45	99
20+20+22+35	1.75	1.75	1.93	3.07		8.50 (3.7 - 9.8)	2.130 (0.870 - 2.760)	9.35	99
20+20+22+42	1.67	1.67	1.84	3.51		8.70 (3.7 - 10.0)	2.180 (0.870 - 2.810)	9.57	99
20+20+22+50	1.57	1.57	1.73	3.93		8.80 (3.7 - 10.1)	2.195 (0.870 - 2.815)	9.64	99
20+20+22+60	1.48	1.48	1.62	4.43		9.00 (3.7 - 10.2)	2.225 (0.870 - 2.825)	9.77	99
20+20+22+71	1.40	1.40	1.54	4.96		9.30 (3.7 - 10.4)	2.285 (0.870 - 2.845)	10.04	99
20+20+25+25	1.80	1.80	2.25	2.25		8.10 (3.7 - 9.3)	1.965 (0.870 - 2.550)	8.63	99
20+20+25+35	1.72	1.72	2.15	3.01		8.60 (3.7 - 9.9)	2.170 (0.870 - 2.805)	9.53	99
20+20+25+42	1.63	1.63	2.03	3.41		8.70 (3.7 - 10.0)	2.180 (0.870 - 2.810)	9.57	99
20+20+25+50	1.55	1.55	1.93	3.87		8.90 (3.7 - 10.1)	2.225 (0.870 - 2.815)	9.77	99
20+20+25+60	1.46	1.46	1.82	4.37		9.10 (3.7 - 10.3)	2.250 (0.870 - 2.840)	9.88	99
20+20+25+71	1.37	1.37	1.71	4.86		9.30 (3.7 - 10.4)	2.285 (0.870 - 2.845)	10.04	99
20+20+35+35	1.60	1.60	2.80	2.80		8.80 (3.7 - 10.1)	2.225 (0.870 - 2.835)	9.77	99
20+20+35+42	1.52	1.52	2.66	3.19		8.90 (3.7 - 10.1)	2.235 (0.870 - 2.825)	9.82	99
20+20+35+50	1.46	1.46	2.55	3.64		9.10 (3.7 - 10.3)	2.280 (0.870 - 2.850)	10.01	99
20+20+35+60	1.38	1.38	2.41	4.13		9.30 (3.7 - 10.4)	2.305 (0.870 - 2.855)	10.12	99
20+20+35+71	1.30	1.30	2.28	4.62		9.50 (3.7 - 10.6)	2.325 (0.860 - 2.870)	10.21	99
20+20+42+42	1.47	1.47	3.08	3.08		9.10 (3.7 - 10.3)	2.270 (0.870 - 2.850)	9.97	99
20+20+42+50	1.39	1.39	2.93	3.48		9.20 (3.7 - 10.4)	2.290 (0.870 - 2.855)	10.06	99
20+20+42+60	1.32	1.32	2.78	3.97		9.40 (3.7 - 10.5)	2.315 (0.870 - 2.860)	10.17	99
20+20+42+71	1.25	1.25	2.64	4.45		9.60 (3.7 - 10.8)	2.310 (0.850 - 2.885)	10.14	99
20+20+50+50	1.34	1.34	3.36	3.36		9.40 (3.7 - 10.5)	2.335 (0.870 - 2.860)	10.25	99
20+20+50+60	1.27	1.27	3.17	3.80		9.50 (3.7 - 10.6)	2.315 (0.860 - 2.860)	10.17	99
20+20+50+71	1.20	1.20	3.01	4.28		9.70 (3.7 - 10.9)	2.310 (0.840 - 2.885)	10.14	99
20+22+22+22	1.84	2.02	2.02	2.02		7.90 (3.7 - 9.1)	1.915 (0.840 - 2.875)	8.41	99
20+22+22+25	1.82	2.00	2.00	2.28		8.10 (3.7 - 9.3)	1.925 (0.840 - 2.510)	8.45	99
20+22+22+35	1.74	1.91	1.91	3.04		8.60 (3.7 - 9.9)	2.130 (0.840 - 2.765)	9.35	99
20+22+22+42	1.64	1.81	1.81	3.45		8.70 (3.7 - 10.0)	2.140 (0.840 - 2.770)	9.40	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E			
20+22+22+50	1.56	1.72	1.72	3.90		8.90 (3.7 - 10.1)	2.185 (0.840 - 2.775)	9.60
20+22+22+60	1.47	1.61	1.61	4.40		9.10 (3.7 - 10.3)	2.210 (0.840 - 2.800)	9.71
20+22+22+71	1.38	1.52	1.52	4.89		9.30 (3.7 - 10.4)	2.245 (0.840 - 2.805)	9.86
20+22+25+25	1.78	1.96	2.23	2.23		8.20 (3.7 - 9.4)	1.965 (0.840 - 2.550)	8.63
20+22+25+35	1.69	1.85	2.11	2.95		8.60 (3.7 - 9.9)	2.130 (0.840 - 2.765)	9.35
20+22+25+42	1.61	1.78	2.02	3.39		8.80 (3.7 - 10.1)	2.165 (0.840 - 2.785)	9.51
20+22+25+50	1.52	1.67	1.90	3.80		8.90 (3.7 - 10.1)	2.185 (0.840 - 2.775)	9.60
20+22+25+60	1.43	1.58	1.79	4.30		9.10 (3.7 - 10.3)	2.210 (0.840 - 2.800)	9.71
20+22+25+71	1.36	1.50	1.70	4.84		9.40 (3.7 - 10.5)	2.275 (0.840 - 2.820)	9.99
20+22+35+35	1.57	1.73	2.75	2.75		8.80 (3.7 - 10.1)	2.185 (0.840 - 2.795)	9.60
20+22+35+42	1.51	1.66	2.65	3.18		9.00 (3.7 - 10.2)	2.225 (0.840 - 2.805)	9.77
20+22+35+50	1.43	1.58	2.51	3.58		9.10 (3.7 - 10.3)	2.240 (0.840 - 2.810)	9.84
20+22+35+60	1.36	1.49	2.38	4.07		9.30 (3.7 - 10.4)	2.265 (0.840 - 2.815)	9.95
20+22+35+71	1.28	1.41	2.25	4.56		9.50 (3.7 - 10.6)	2.285 (0.830 - 2.830)	10.04
20+22+42+42	1.44	1.59	3.03	3.03		9.10 (3.7 - 10.3)	2.230 (0.840 - 2.810)	9.79
20+22+42+50	1.39	1.53	2.91	3.47		9.30 (3.7 - 10.4)	2.275 (0.840 - 2.815)	9.99
20+22+42+60	1.32	1.45	2.77	3.96		9.50 (3.7 - 10.6)	2.285 (0.830 - 2.830)	10.04
20+22+42+71	1.24	1.36	2.60	4.40		9.60 (3.7 - 10.8)	2.270 (0.820 - 2.845)	9.97
20+22+50+50	1.32	1.46	3.31	3.31		9.40 (3.7 - 10.5)	2.295 (0.840 - 2.820)	10.08
20+22+50+60	1.26	1.39	3.16	3.79		9.60 (3.7 - 10.8)	2.280 (0.820 - 2.845)	10.01
20+22+50+71	1.19	1.31	2.98	4.23		9.70 (3.7 - 10.9)	2.270 (0.810 - 2.845)	9.97
20+25+25+25	1.77	2.21	2.21	2.21		8.40 (3.7 - 9.7)	2.050 (0.840 - 2.680)	9.00
20+25+25+35	1.66	2.07	2.07	2.90		8.70 (3.7 - 10.0)	2.160 (0.840 - 2.780)	9.49
20+25+25+42	1.57	1.96	1.96	3.30		8.80 (3.7 - 10.1)	2.165 (0.840 - 2.785)	9.51
20+25+25+50	1.50	1.88	1.88	3.75		9.00 (3.7 - 10.2)	2.215 (0.840 - 2.795)	9.73
20+25+25+60	1.42	1.77	1.77	4.25		9.20 (3.7 - 10.4)	2.240 (0.840 - 2.815)	9.84
20+25+25+71	1.33	1.67	1.67	4.73		9.40 (3.7 - 10.5)	2.275 (0.840 - 2.820)	9.99
20+25+35+35	1.55	1.93	2.71	2.71		8.90 (3.7 - 10.1)	2.215 (0.840 - 2.795)	9.73
20+25+35+42	1.48	1.84	2.58	3.10		9.00 (3.7 - 10.2)	2.225 (0.840 - 2.805)	9.77
20+25+35+50	1.42	1.77	2.48	3.54		9.20 (3.7 - 10.4)	2.270 (0.840 - 2.825)	9.97
20+25+35+60	1.34	1.68	2.35	4.03		9.40 (3.7 - 10.5)	2.295 (0.840 - 2.830)	10.08
20+25+35+71	1.27	1.59	2.23	4.51		9.60 (3.7 - 10.8)	2.290 (0.820 - 2.855)	10.06
20+25+42+42	1.43	1.78	3.00	3.00		9.20 (3.7 - 10.4)	2.260 (0.840 - 2.825)	9.93
20+25+42+50	1.36	1.70	2.85	3.39		9.30 (3.7 - 10.4)	2.275 (0.840 - 2.815)	9.99
20+25+42+60	1.29	1.62	2.71	3.88		9.50 (3.7 - 10.6)	2.285 (0.830 - 2.830)	10.04
20+25+42+71	1.23	1.53	2.58	4.36		9.70 (3.7 - 10.9)	2.280 (0.810 - 2.855)	10.01
20+25+50+50	1.31	1.64	3.28	3.28		9.50 (3.7 - 10.6)	2.305 (0.830 - 2.830)	10.12
20+25+50+60	1.24	1.55	3.10	3.72		9.60 (3.7 - 10.8)	2.280 (0.820 - 2.845)	10.01
20+25+50+71	1.18	1.48	2.95	4.19		9.80 (3.7 - 11.0)	2.275 (0.800 - 2.855)	9.99
20+35+35+35	1.46	2.55	2.55	2.55		9.10 (3.7 - 10.3)	2.270 (0.840 - 2.830)	9.97
20+35+35+42	1.39	2.44	2.44	2.93		9.20 (3.7 - 10.4)	2.280 (0.840 - 2.835)	10.01
20+35+35+50	1.34	2.35	2.35	3.36		9.40 (3.7 - 10.5)	2.325 (0.840 - 2.840)	10.21

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E			
20+35+35+60	1.27	2.22	2.22	3.80		9.50 (3.7 - 10.6)	2.305 (0.830 - 2.840)	10.12
20+35+35+71	1.20	2.11	2.11	4.28		9.70 (3.7 - 10.9)	2.300 (0.810 - 2.865)	10.10
20+35+42+42	1.35	2.37	2.84	2.84		9.40 (3.7 - 10.5)	2.315 (0.840 - 2.840)	10.17
20+35+42+50	1.29	2.26	2.71	3.23		9.50 (3.7 - 10.6)	2.315 (0.830 - 2.840)	10.17
20+35+42+60	1.22	2.14	2.57	3.67		9.60 (3.7 - 10.8)	2.290 (0.820 - 2.855)	10.06
20+35+42+71	1.17	2.04	2.45	4.14		9.80 (3.7 - 11.0)	2.285 (0.800 - 2.865)	10.04
20+35+50+50	1.24	2.17	3.10	3.10		9.60 (3.7 - 10.8)	2.310 (0.820 - 2.855)	10.14
20+35+50+60	1.19	2.08	2.97	3.56		9.80 (3.7 - 11.0)	2.295 (0.800 - 2.865)	10.08
20+42+42+42	1.30	2.73	2.73	2.73		9.50 (3.7 - 10.6)	2.305 (0.830 - 2.840)	10.12
20+42+42+50	1.25	2.62	2.62	3.12		9.60 (3.7 - 10.8)	2.300 (0.820 - 2.855)	10.10
20+42+42+60	1.18	2.48	2.48	3.55		9.70 (3.7 - 10.9)	2.280 (0.810 - 2.855)	10.01
20+42+50+50	1.20	2.51	2.99	2.99		9.70 (3.7 - 10.9)	2.300 (0.810 - 2.855)	10.10
20+42+50+60	1.14	2.39	2.85	3.42		9.80 (3.7 - 11.0)	2.275 (0.800 - 2.855)	9.99
22+22+22+22	2.00	2.00	2.00	2.00		8.00 (3.7 - 9.2)	1.845 (0.810 - 2.425)	8.10
22+22+22+25	1.98	1.98	1.98	2.25		8.20 (3.7 - 9.4)	1.925 (0.810 - 2.510)	8.45
22+22+22+35	1.87	1.87	1.87	2.98		8.60 (3.7 - 9.9)	2.090 (0.810 - 2.725)	9.18
22+22+22+42	1.79	1.79	1.79	3.42		8.80 (3.7 - 10.1)	2.125 (0.810 - 2.745)	9.33
22+22+22+50	1.69	1.69	1.69	3.84		8.90 (3.7 - 10.1)	2.145 (0.810 - 2.735)	9.42
22+22+22+60	1.59	1.59	1.59	4.33		9.10 (3.7 - 10.3)	2.170 (0.810 - 2.760)	9.53
22+22+22+71	1.49	1.49	1.49	4.82		9.30 (3.7 - 10.4)	2.205 (0.810 - 2.765)	9.68
22+22+25+25	1.94	1.94	2.21	2.21		8.30 (3.7 - 9.6)	1.970 (0.810 - 2.595)	8.65
22+22+25+35	1.84	1.84	2.09	2.93		8.70 (3.7 - 10.0)	2.120 (0.810 - 2.740)	9.31
22+22+25+42	1.74	1.74	1.98	3.33		8.80 (3.7 - 10.1)	2.125 (0.810 - 2.745)	9.33
22+22+25+50	1.66	1.66	1.89	3.78		9.00 (3.7 - 10.2)	2.175 (0.810 - 2.755)	9.55
22+22+25+60	1.57	1.57	1.78	4.28		9.20 (3.7 - 10.4)	2.200 (0.810 - 2.775)	9.66
22+22+25+71	1.48	1.48	1.68	4.77		9.40 (3.7 - 10.5)	2.235 (0.810 - 2.780)	9.82
22+22+35+35	1.72	1.72	2.73	2.73		8.90 (3.7 - 10.1)	2.175 (0.810 - 2.755)	9.55
22+22+35+42	1.64	1.64	2.60	3.12		9.00 (3.7 - 10.2)	2.185 (0.810 - 2.765)	9.60
22+22+35+50	1.57	1.57	2.50	3.57		9.20 (3.7 - 10.4)	2.230 (0.810 - 2.785)	9.79
22+22+35+60	1.49	1.49	2.37	4.06		9.40 (3.7 - 10.5)	2.255 (0.810 - 2.790)	9.90
22+22+35+71	1.39	1.39	2.22	4.50		9.50 (3.7 - 10.6)	2.245 (0.800 - 2.790)	9.86
22+22+42+42	1.58	1.58	3.02	3.02		9.20 (3.7 - 10.4)	2.220 (0.810 - 2.785)	9.75
22+22+42+50	1.50	1.50	2.87	3.42		9.30 (3.7 - 10.4)	2.235 (0.810 - 2.775)	9.82
22+22+42+60	1.43	1.43	2.73	3.90		9.50 (3.7 - 10.6)	2.245 (0.800 - 2.790)	9.86
22+22+42+71	1.35	1.35	2.57	4.34		9.60 (3.7 - 10.8)	2.230 (0.790 - 2.805)	9.79
22+22+50+50	1.45	1.45	3.30	3.30		9.50 (3.7 - 10.6)	2.265 (0.800 - 2.790)	9.95
22+22+50+60	1.37	1.37	3.12	3.74		9.60 (3.7 - 10.8)	2.240 (0.790 - 2.805)	9.84
22+22+50+71	1.31	1.31	2.97	4.22		9.80 (3.7 - 11.0)	2.235 (0.770 - 2.815)	9.82
22+25+25+25	1.93	2.19	2.19	2.19		8.50 (3.7 - 9.8)	2.050 (0.810 - 2.680)	9.00
22+25+25+35	1.79	2.03	2.03	2.85		8.70 (3.7 - 10.0)	2.120 (0.810 - 2.740)	9.31
22+25+25+42	1.72	1.95	1.95	3.28		8.90 (3.7 - 10.1)	2.155 (0.810 - 2.745)	9.46
22+25+25+50	1.62	1.84	1.84	3.69		9.00 (3.7 - 10.2)	2.175 (0.810 - 2.755)	9.55

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E			
22+25+25+60	1.53	1.74	1.74	4.18		9.20 (3.7 - 10.4)	2.200 (0.810 - 2.775)	9.66
22+25+25+71	1.45	1.64	1.64	4.67		9.40 (3.7 - 10.5)	2.235 (0.810 - 2.780)	9.82
22+25+35+35	1.67	1.90	2.66	2.66		8.90 (3.7 - 10.1)	2.175 (0.810 - 2.755)	9.55
22+25+35+42	1.61	1.83	2.57	3.08		9.10 (3.7 - 10.3)	2.210 (0.810 - 2.780)	9.71
22+25+35+50	1.53	1.74	2.44	3.48		9.20 (3.7 - 10.4)	2.230 (0.810 - 2.785)	9.79
22+25+35+60	1.46	1.65	2.32	3.97		9.40 (3.7 - 10.5)	2.255 (0.810 - 2.790)	9.90
22+25+35+71	1.38	1.57	2.20	4.45		9.60 (3.7 - 10.8)	2.250 (0.790 - 2.815)	9.88
22+25+42+42	1.55	1.76	2.95	2.95		9.20 (3.7 - 10.4)	2.220 (0.810 - 2.785)	9.75
22+25+42+50	1.49	1.69	2.84	3.38		9.40 (3.7 - 10.5)	2.265 (0.810 - 2.790)	9.95
22+25+42+60	1.40	1.59	2.68	3.83		9.50 (3.7 - 10.6)	2.245 (0.800 - 2.790)	9.86
22+25+42+71	1.33	1.52	2.55	4.30		9.70 (3.7 - 10.9)	2.240 (0.780 - 2.815)	9.84
22+25+50+50	1.42	1.62	3.23	3.23		9.50 (3.7 - 10.6)	2.265 (0.800 - 2.790)	9.95
22+25+50+60	1.35	1.53	3.06	3.67		9.60 (3.7 - 10.8)	2.240 (0.790 - 2.805)	9.84
22+25+50+71	1.28	1.46	2.92	4.14		9.80 (3.7 - 11.0)	2.235 (0.770 - 2.815)	9.82
22+35+35+35	1.58	2.51	2.51	2.51		9.10 (3.7 - 10.3)	2.230 (0.810 - 2.790)	9.79
22+35+35+42	1.53	2.43	2.43	2.91		9.30 (3.7 - 10.4)	2.265 (0.810 - 2.795)	9.95
22+35+35+50	1.46	2.32	2.32	3.31		9.40 (3.7 - 10.5)	2.285 (0.810 - 2.800)	10.04
22+35+35+60	1.39	2.21	2.21	3.79		9.60 (3.7 - 10.8)	2.270 (0.790 - 2.825)	9.97
22+35+35+71	1.31	2.08	2.08	4.23		9.70 (3.7 - 10.9)	2.260 (0.780 - 2.825)	9.93
22+35+42+42	1.47	2.33	2.80	2.80		9.40 (3.7 - 10.5)	2.275 (0.810 - 2.800)	9.99
22+35+42+50	1.40	2.23	2.68	3.19		9.50 (3.7 - 10.6)	2.275 (0.800 - 2.800)	9.99
22+35+42+60	1.34	2.14	2.56	3.66		9.70 (3.7 - 10.9)	2.260 (0.780 - 2.825)	9.93
22+35+42+71	1.27	2.02	2.42	4.09		9.80 (3.7 - 11.0)	2.245 (0.770 - 2.825)	9.86
22+35+50+50	1.35	2.14	3.06	3.06		9.60 (3.7 - 10.8)	2.270 (0.790 - 2.815)	9.97
22+35+50+60	1.29	2.05	2.93	3.52		9.80 (3.7 - 11.0)	2.255 (0.770 - 2.825)	9.90
22+42+42+42	1.41	2.70	2.70	2.70		9.50 (3.7 - 10.6)	2.265 (0.800 - 2.800)	9.95
22+42+42+50	1.35	2.58	2.58	3.08		9.60 (3.7 - 10.8)	2.260 (0.790 - 2.815)	9.93
22+42+42+60	1.30	2.48	2.48	3.54		9.80 (3.7 - 11.0)	2.245 (0.770 - 2.825)	9.86
22+42+50+50	1.30	2.48	2.96	2.96		9.70 (3.7 - 10.9)	2.260 (0.780 - 2.815)	9.93
25+25+25+25	2.15	2.15	2.15	2.15		8.60 (3.7 - 9.9)	2.090 (0.810 - 2.725)	9.18
25+25+25+35	2.00	2.00	2.00	2.80		8.80 (3.7 - 10.1)	2.145 (0.810 - 2.755)	9.42
25+25+25+42	1.90	1.90	1.90	3.19		8.90 (3.7 - 10.1)	2.155 (0.810 - 2.745)	9.46
25+25+25+50	1.82	1.82	1.82	3.64		9.10 (3.7 - 10.3)	2.200 (0.810 - 2.770)	9.66
25+25+25+60	1.72	1.72	1.72	4.13		9.30 (3.7 - 10.4)	2.225 (0.810 - 2.775)	9.77
25+25+25+71	1.63	1.63	1.63	4.62		9.50 (3.7 - 10.6)	2.245 (0.800 - 2.790)	9.86
25+25+35+35	1.88	1.88	2.63	2.63		9.00 (3.7 - 10.2)	2.205 (0.810 - 2.775)	9.68
25+25+35+42	1.79	1.79	2.51	3.01		9.10 (3.7 - 10.3)	2.210 (0.810 - 2.780)	9.71
25+25+35+50	1.72	1.72	2.41	3.44		9.30 (3.7 - 10.4)	2.255 (0.810 - 2.785)	9.90
25+25+35+60	1.64	1.64	2.29	3.93		9.50 (3.7 - 10.6)	2.265 (0.800 - 2.800)	9.95
25+25+35+71	1.54	1.54	2.15	4.37		9.60 (3.7 - 10.8)	2.250 (0.790 - 2.815)	9.88
25+25+42+42	1.74	1.74	2.91	2.91		9.30 (3.7 - 10.4)	2.245 (0.810 - 2.785)	9.86
25+25+42+50	1.65	1.65	2.78	3.31		9.40 (3.7 - 10.5)	2.265 (0.810 - 2.790)	9.95

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
25+25+42+60	1.58	1.58	2.65	3.79		9.60 (3.7 - 10.8)	2.250 (0.790 - 2.815)	9.88	99
25+25+42+71	1.49	1.49	2.50	4.23		9.70 (3.7 - 10.9)	2.240 (0.780 - 2.815)	9.84	99
25+25+50+50	1.58	1.58	3.17	3.17		9.50 (3.7 - 10.6)	2.265 (0.800 - 2.790)	9.95	99
25+25+50+60	1.52	1.52	3.03	3.64		9.70 (3.7 - 10.9)	2.250 (0.780 - 2.815)	9.88	99
25+25+50+71	1.43	1.43	2.87	4.07		9.80 (3.7 - 11.0)	2.235 (0.770 - 2.815)	9.82	99
25+35+35+35	1.77	2.48	2.48	2.48		9.20 (3.7 - 10.4)	2.260 (0.810 - 2.805)	9.93	99
25+35+35+42	1.70	2.38	2.38	2.85		9.30 (3.7 - 10.4)	2.265 (0.810 - 2.795)	9.95	99
25+35+35+50	1.64	2.29	2.29	3.28		9.50 (3.7 - 10.6)	2.295 (0.800 - 2.810)	10.08	99
25+35+35+60	1.55	2.17	2.17	3.72		9.60 (3.7 - 10.8)	2.270 (0.790 - 2.825)	9.97	99
25+35+35+71	1.48	2.07	2.07	4.19		9.80 (3.7 - 11.0)	2.265 (0.770 - 2.835)	9.95	99
25+35+42+42	1.65	2.31	2.77	2.77		9.50 (3.7 - 10.6)	2.285 (0.800 - 2.810)	10.04	99
25+35+42+50	1.58	2.21	2.65	3.16		9.60 (3.7 - 10.8)	2.280 (0.790 - 2.825)	10.01	99
25+35+42+60	1.50	2.10	2.51	3.59		9.70 (3.7 - 10.9)	2.260 (0.780 - 2.825)	9.93	99
25+42+42+42	1.59	2.67	2.67	2.67		9.60 (3.7 - 10.8)	2.270 (0.790 - 2.825)	9.97	99
25+42+42+50	1.53	2.56	2.56	3.05		9.70 (3.7 - 10.9)	2.270 (0.780 - 2.825)	9.97	99
25+42+42+60	1.45	2.44	2.44	3.48		9.80 (3.7 - 11.0)	2.245 (0.770 - 2.825)	9.86	99
25+42+50+50	1.47	2.46	2.93	2.93		9.80 (3.7 - 11.0)	2.265 (0.770 - 2.825)	9.95	99
35+35+35+35	2.35	2.35	2.35	2.35		9.40 (3.7 - 10.5)	2.315 (0.810 - 2.820)	10.17	99
35+35+35+42	2.26	2.26	2.26	2.71		9.50 (3.7 - 10.6)	2.305 (0.800 - 2.820)	10.12	99
35+35+35+50	2.17	2.17	2.17	3.10		9.60 (3.7 - 10.8)	2.300 (0.790 - 2.835)	10.10	99
35+35+35+60	2.08	2.08	2.08	3.56		9.80 (3.7 - 11.0)	2.285 (0.770 - 2.845)	10.04	99
35+35+42+42	2.18	2.18	2.62	2.62		9.60 (3.7 - 10.8)	2.290 (0.790 - 2.835)	10.06	99
35+35+42+50	2.10	2.10	2.51	2.99		9.70 (3.7 - 10.9)	2.290 (0.780 - 2.835)	10.06	99
35+42+42+42	2.11	2.53	2.53	2.53		9.70 (3.7 - 10.9)	2.280 (0.780 - 2.835)	10.01	99
35+42+42+50	2.03	2.44	2.44	2.90		9.80 (3.7 - 11.0)	2.275 (0.770 - 2.835)	9.99	99
42+42+42+42	2.45	2.45	2.45	2.45		9.80 (3.7 - 11.0)	2.345 (0.770 - 2.875)	10.30	99
15+15+15+15+15	1.50	1.50	1.50	1.50	1.50	7.50 (3.9 - 8.4)	1.980 (1.090 - 3.435)	8.70	99
15+15+15+15+20	1.48	1.48	1.48	1.48	1.98	7.90 (3.9 - 8.8)	2.390 (1.080 - 3.710)	10.50	99
15+15+15+15+22	1.48	1.48	1.48	1.48	2.17	8.10 (3.9 - 9.0)	2.455 (1.020 - 3.705)	10.78	99
15+15+15+15+25	1.46	1.46	1.46	1.46	2.44	8.30 (3.9 - 9.2)	2.560 (1.020 - 3.745)	11.24	99
15+15+15+15+35	1.44	1.44	1.44	1.44	3.35	9.10 (3.9 - 10.1)	2.975 (1.020 - 3.910)	13.07	99
15+15+15+15+42	1.41	1.41	1.41	1.41	3.95	9.60 (3.9 - 10.6)	3.120 (1.020 - 3.895)	13.70	99
15+15+15+15+50	1.36	1.36	1.36	1.36	4.55	10.00 (3.9 - 11.0)	2.930 (1.020 - 3.565)	12.87	99
15+15+15+15+60	1.25	1.25	1.25	1.25	5.00	10.00 (3.9 - 11.0)	2.900 (1.020 - 3.555)	12.74	99
15+15+15+15+71	1.15	1.15	1.15	1.15	5.42	10.00 (3.9 - 11.0)	2.880 (1.020 - 3.545)	12.65	99
15+15+15+20+20	1.46	1.46	1.46	1.95	1.95	8.30 (3.9 - 9.2)	2.600 (1.080 - 3.785)	11.42	99
15+15+15+20+22	1.47	1.47	1.47	1.95	2.15	8.50 (3.9 - 9.5)	2.665 (1.020 - 3.800)	11.70	99
15+15+15+20+25	1.45	1.45	1.45	1.93	2.42	8.70 (3.9 - 9.7)	2.765 (1.020 - 3.835)	12.14	99
15+15+15+20+35	1.43	1.43	1.43	1.90	3.33	9.50 (3.9 - 10.5)	3.185 (1.330 - 3.985)	13.99	99
15+15+15+20+42	1.39	1.39	1.39	1.85	3.89	9.90 (3.9 - 10.9)	2.985 (1.020 - 3.655)	13.11	99
15+15+15+20+50	1.30	1.30	1.30	1.74	4.35	10.00 (3.9 - 11.0)	2.930 (1.020 - 3.565)	12.87	99
15+15+15+20+60	1.20	1.20	1.20	1.60	4.80	10.00 (3.9 - 11.0)	2.900 (1.020 - 3.555)	12.74	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+15+15+20+71	1.10	1.10	1.10	1.47	5.22	10.00 (3.9 - 11.0)	2.880 (1.020 - 3.545)	12.65	99
15+15+15+22+22	1.45	1.45	1.45	2.13	2.13	8.60 (3.9 - 9.6)	2.675 (0.960 - 3.780)	11.75	99
15+15+15+22+25	1.45	1.45	1.45	2.13	2.42	8.90 (3.9 - 9.9)	2.830 (0.960 - 3.835)	12.43	99
15+15+15+22+35	1.41	1.41	1.41	2.07	3.29	9.60 (3.9 - 10.6)	3.100 (0.960 - 3.865)	13.61	99
15+15+15+22+42	1.38	1.38	1.38	2.02	3.85	10.00 (3.9 - 11.0)	2.900 (0.960 - 3.535)	12.74	99
15+15+15+22+50	1.28	1.28	1.28	1.88	4.27	10.00 (3.9 - 11.0)	2.890 (0.960 - 3.525)	12.69	99
15+15+15+22+60	1.18	1.18	1.18	1.73	4.72	10.00 (3.9 - 11.0)	2.860 (0.960 - 3.515)	12.56	99
15+15+15+22+71	1.09	1.09	1.09	1.59	5.14	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
15+15+15+25+25	1.44	1.44	1.44	2.39	2.39	9.10 (3.9 - 10.1)	2.935 (0.960 - 3.870)	12.89	99
15+15+15+25+35	1.40	1.40	1.40	2.33	3.27	9.80 (3.9 - 10.8)	3.010 (0.960 - 3.705)	13.22	99
15+15+15+25+42	1.34	1.34	1.34	2.23	3.75	10.00 (3.9 - 11.0)	2.900 (0.960 - 3.535)	12.74	99
15+15+15+25+50	1.25	1.25	1.25	2.08	4.17	10.00 (3.9 - 11.0)	2.890 (0.960 - 3.525)	12.69	99
15+15+15+25+60	1.15	1.15	1.15	1.92	4.62	10.00 (3.9 - 11.0)	2.860 (0.960 - 3.515)	12.56	99
15+15+15+25+71	1.06	1.06	1.06	1.77	5.04	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
15+15+15+35+35	1.30	1.30	1.30	3.04	3.04	10.00 (3.9 - 11.0)	2.920 (0.960 - 3.545)	12.82	99
15+15+15+35+42	1.23	1.23	1.23	2.87	3.44	10.00 (3.9 - 11.0)	2.900 (0.960 - 3.535)	12.74	99
15+15+15+35+50	1.15	1.15	1.15	2.69	3.85	10.00 (3.9 - 11.0)	2.890 (0.960 - 3.525)	12.69	99
15+15+15+35+60	1.07	1.07	1.07	2.50	4.29	10.00 (3.9 - 11.0)	2.860 (0.960 - 3.515)	12.56	99
15+15+15+35+71	0.99	0.99	0.99	2.32	4.70	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
15+15+15+42+42	1.16	1.16	1.16	3.26	3.26	10.00 (3.9 - 11.0)	2.880 (0.960 - 3.525)	12.65	99
15+15+15+42+50	1.09	1.09	1.09	3.07	3.65	10.00 (3.9 - 11.0)	2.870 (0.960 - 3.515)	12.60	99
15+15+15+42+60	1.02	1.02	1.02	2.86	4.08	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
15+15+15+42+71	0.95	0.95	0.95	2.66	4.49	10.00 (3.9 - 11.0)	2.820 (0.960 - 3.495)	12.38	99
15+15+20+20+20	1.45	1.45	1.93	1.93	1.93	8.70 (3.9 - 9.7)	2.805 (1.080 - 3.875)	12.32	99
15+15+20+20+22	1.45	1.45	1.93	1.93	2.13	8.90 (3.9 - 9.9)	2.870 (1.020 - 3.875)	12.60	99
15+15+20+20+25	1.44	1.44	1.92	1.92	2.39	9.10 (3.9 - 10.1)	2.975 (1.020 - 3.910)	13.07	99
15+15+20+20+35	1.40	1.40	1.87	1.87	3.27	9.80 (3.9 - 10.8)	3.050 (1.020 - 3.745)	13.39	99
15+15+20+20+42	1.34	1.34	1.79	1.79	3.75	10.00 (3.9 - 11.0)	2.940 (1.020 - 3.575)	12.91	99
15+15+20+20+50	1.25	1.25	1.67	1.67	4.17	10.00 (3.9 - 11.0)	2.930 (1.020 - 3.565)	12.87	99
15+15+20+20+60	1.15	1.15	1.54	1.54	4.62	10.00 (3.9 - 11.0)	2.900 (1.020 - 3.555)	12.74	99
15+15+20+20+71	1.06	1.06	1.42	1.42	5.04	10.00 (3.9 - 11.0)	2.880 (1.020 - 3.545)	12.65	99
15+15+20+22+22	1.44	1.44	1.91	2.11	2.11	9.00 (3.9 - 10.0)	2.885 (0.960 - 3.850)	12.67	99
15+15+20+22+25	1.44	1.44	1.92	2.11	2.40	9.30 (3.9 - 10.3)	3.040 (0.960 - 3.910)	13.35	99
15+15+20+22+35	1.39	1.39	1.85	2.04	3.24	9.90 (3.9 - 10.9)	2.965 (0.960 - 3.625)	13.02	99
15+15+20+22+42	1.32	1.32	1.75	1.93	3.68	10.00 (3.9 - 11.0)	2.900 (0.960 - 3.535)	12.74	99
15+15+20+22+50	1.23	1.23	1.64	1.80	4.10	10.00 (3.9 - 11.0)	2.890 (0.960 - 3.525)	12.69	99
15+15+20+22+60	1.14	1.14	1.52	1.67	4.55	10.00 (3.9 - 11.0)	2.860 (0.960 - 3.515)	12.56	99
15+15+20+22+71	1.05	1.05	1.40	1.54	4.97	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
15+15+20+25+25	1.43	1.43	1.90	2.38	2.38	9.50 (3.9 - 10.5)	3.145 (1.270 - 3.945)	13.81	99
15+15+20+25+35	1.36	1.36	1.82	2.27	3.18	10.00 (3.9 - 11.0)	2.920 (0.960 - 3.545)	12.82	99
15+15+20+25+42	1.28	1.28	1.71	2.14	3.59	10.00 (3.9 - 11.0)	2.900 (0.960 - 3.535)	12.74	99
15+15+20+25+50	1.20	1.20	1.60	2.00	4.00	10.00 (3.9 - 11.0)	2.890 (0.960 - 3.525)	12.69	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+15+20+25+60	1.11	1.11	1.48	1.85	4.44	10.00 (3.9 - 11.0)	2.860 (0.960 - 3.515)	12.56	99
15+15+20+25+71	1.03	1.03	1.37	1.71	4.86	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
15+15+20+35+35	1.25	1.25	1.67	2.92	2.92	10.00 (3.9 - 11.0)	2.920 (0.960 - 3.545)	12.82	99
15+15+20+35+42	1.18	1.18	1.57	2.76	3.31	10.00 (3.9 - 11.0)	2.900 (0.960 - 3.535)	12.74	99
15+15+20+35+50	1.11	1.11	1.48	2.59	3.70	10.00 (3.9 - 11.0)	2.890 (0.960 - 3.525)	12.69	99
15+15+20+35+60	1.03	1.03	1.38	2.41	4.14	10.00 (3.9 - 11.0)	2.860 (0.960 - 3.515)	12.56	99
15+15+20+35+71	0.96	0.96	1.28	2.24	4.55	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
15+15+20+42+42	1.12	1.12	1.49	3.13	3.13	10.00 (3.9 - 11.0)	2.880 (0.960 - 3.525)	12.65	99
15+15+20+42+50	1.06	1.06	1.41	2.96	3.52	10.00 (3.9 - 11.0)	2.870 (0.960 - 3.515)	12.60	99
15+15+20+42+60	0.99	0.99	1.32	2.76	3.95	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
15+15+20+42+71	0.92	0.92	1.23	2.58	4.36	10.00 (3.9 - 11.0)	2.820 (0.960 - 3.495)	12.38	99
15+15+22+22+22	1.44	1.44	2.11	2.11	2.11	9.20 (3.9 - 10.2)	2.950 (0.900 - 3.850)	12.96	99
15+15+22+22+25	1.42	1.42	2.09	2.09	2.37	9.40 (3.9 - 10.4)	3.055 (0.900 - 3.885)	13.42	99
15+15+22+22+35	1.38	1.38	2.02	2.02	3.21	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
15+15+22+22+42	1.29	1.29	1.90	1.90	3.62	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
15+15+22+22+50	1.21	1.21	1.77	1.77	4.03	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
15+15+22+22+60	1.12	1.12	1.64	1.64	4.48	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
15+15+22+22+71	1.03	1.03	1.52	1.52	4.90	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+15+22+25+25	1.41	1.41	2.07	2.35	2.35	9.60 (3.9 - 10.6)	3.060 (0.900 - 3.825)	13.44	99
15+15+22+25+35	1.34	1.34	1.96	2.23	3.13	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
15+15+22+25+42	1.26	1.26	1.85	2.10	3.53	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
15+15+22+25+50	1.18	1.18	1.73	1.97	3.94	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
15+15+22+25+60	1.09	1.09	1.61	1.82	4.38	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
15+15+22+25+71	1.01	1.01	1.49	1.69	4.80	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+15+22+35+35	1.23	1.23	1.80	2.87	2.87	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
15+15+22+35+42	1.16	1.16	1.71	2.71	3.26	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
15+15+22+35+50	1.09	1.09	1.61	2.55	3.65	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
15+15+22+35+60	1.02	1.02	1.50	2.38	4.08	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
15+15+22+35+71	0.95	0.95	1.39	2.22	4.49	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+15+22+42+42	1.10	1.10	1.62	3.09	3.09	10.00 (3.9 - 11.0)	2.840 (0.900 - 3.485)	12.47	99
15+15+22+42+50	1.04	1.04	1.53	2.92	3.47	10.00 (3.9 - 11.0)	2.830 (0.900 - 3.475)	12.43	99
15+15+22+42+60	0.97	0.97	1.43	2.73	3.90	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+15+22+42+71	0.91	0.91	1.33	2.55	4.30	10.00 (3.9 - 11.0)	2.780 (0.900 - 3.455)	12.21	99
15+15+25+25+25	1.40	1.40	2.33	2.33	2.33	9.80 (3.9 - 10.8)	2.970 (0.900 - 3.665)	13.04	99
15+15+25+25+35	1.30	1.30	2.17	2.17	3.04	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
15+15+25+25+42	1.23	1.23	2.05	2.05	3.44	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
15+15+25+25+50	1.15	1.15	1.92	1.92	3.85	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
15+15+25+25+60	1.07	1.07	1.79	1.79	4.29	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
15+15+25+25+71	0.99	0.99	1.66	1.66	4.70	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+15+25+35+35	1.20	1.20	2.00	2.80	2.80	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
15+15+25+35+42	1.14	1.14	1.89	2.65	3.18	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
15+15+25+35+50	1.07	1.07	1.79	2.50	3.57	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+15+25+35+60	1.00	1.00	1.67	2.33	4.00	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
15+15+25+35+71	0.93	0.93	1.55	2.17	4.41	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+15+25+42+42	1.08	1.08	1.80	3.02	3.02	10.00 (3.9 - 11.0)	2.840 (0.900 - 3.485)	12.47	99
15+15+25+42+50	1.02	1.02	1.70	2.86	3.40	10.00 (3.9 - 11.0)	2.830 (0.900 - 3.475)	12.43	99
15+15+25+42+60	0.96	0.96	1.59	2.68	3.82	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+15+25+42+71	0.89	0.89	1.49	2.50	4.23	10.00 (3.9 - 11.0)	2.780 (0.900 - 3.455)	12.21	99
15+15+35+35+35	1.11	1.11	2.59	2.59	2.59	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
15+15+35+35+42	1.06	1.06	2.46	2.46	2.96	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
15+15+35+35+50	1.00	1.00	2.33	2.33	3.33	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
15+15+35+35+60	0.94	0.94	2.19	2.19	3.75	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
15+15+35+35+71	0.88	0.88	2.05	2.05	4.15	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+15+35+42+42	1.01	1.01	2.35	2.82	2.82	10.00 (3.9 - 11.0)	2.840 (0.900 - 3.485)	12.47	99
15+15+35+42+50	0.96	0.96	2.23	2.68	3.18	10.00 (3.9 - 11.0)	2.830 (0.900 - 3.475)	12.43	99
15+15+35+42+60	0.90	0.90	2.10	2.51	3.59	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+15+42+42+42	0.96	0.96	2.69	2.69	2.69	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
15+15+42+42+50	0.91	0.91	2.56	2.56	3.05	10.00 (3.9 - 11.0)	2.810 (0.900 - 3.465)	12.34	99
15+20+20+20+20	1.44	1.92	1.92	1.92	1.92	9.10 (3.9 - 10.1)	3.015 (1.080 - 3.950)	13.24	99
15+20+20+20+22	1.44	1.92	1.92	1.92	2.11	9.30 (3.9 - 10.3)	3.080 (1.020 - 3.950)	13.53	99
15+20+20+20+25	1.43	1.90	1.90	1.90	2.38	9.50 (3.9 - 10.5)	3.185 (1.330 - 3.985)	13.99	99
15+20+20+20+35	1.36	1.82	1.82	1.82	3.18	10.00 (3.9 - 11.0)	2.960 (1.020 - 3.585)	13.00	99
15+20+20+20+42	1.28	1.71	1.71	1.71	3.59	10.00 (3.9 - 11.0)	2.940 (1.020 - 3.575)	12.91	99
15+20+20+20+50	1.20	1.60	1.60	1.60	4.00	10.00 (3.9 - 11.0)	2.930 (1.020 - 3.565)	12.87	99
15+20+20+20+60	1.11	1.48	1.48	1.48	4.44	10.00 (3.9 - 11.0)	2.900 (1.020 - 3.555)	12.74	99
15+20+20+20+71	1.03	1.37	1.37	1.37	4.86	10.00 (3.9 - 11.0)	2.880 (1.020 - 3.545)	12.65	99
15+20+20+22+22	1.42	1.90	1.90	2.09	2.09	9.40 (3.9 - 10.4)	3.095 (0.960 - 3.925)	13.59	99
15+20+20+22+25	1.41	1.88	1.88	2.07	2.35	9.60 (3.9 - 10.6)	3.100 (0.960 - 3.865)	13.61	99
15+20+20+22+35	1.34	1.79	1.79	1.96	3.13	10.00 (3.9 - 11.0)	2.920 (0.960 - 3.545)	12.82	99
15+20+20+22+42	1.26	1.68	1.68	1.85	3.53	10.00 (3.9 - 11.0)	2.900 (0.960 - 3.535)	12.74	99
15+20+20+22+50	1.18	1.57	1.57	1.73	3.94	10.00 (3.9 - 11.0)	2.890 (0.960 - 3.525)	12.69	99
15+20+20+22+60	1.09	1.46	1.46	1.61	4.38	10.00 (3.9 - 11.0)	2.860 (0.960 - 3.515)	12.56	99
15+20+20+22+71	1.01	1.35	1.35	1.49	4.80	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
15+20+20+25+25	1.40	1.87	1.87	2.33	2.33	9.80 (3.9 - 10.8)	3.010 (0.960 - 3.705)	13.22	99
15+20+20+25+35	1.30	1.74	1.74	2.17	3.04	10.00 (3.9 - 11.0)	2.920 (0.960 - 3.545)	12.82	99
15+20+20+25+42	1.23	1.64	1.64	2.05	3.44	10.00 (3.9 - 11.0)	2.900 (0.960 - 3.535)	12.74	99
15+20+20+25+50	1.15	1.54	1.54	1.92	3.85	10.00 (3.9 - 11.0)	2.890 (0.960 - 3.525)	12.69	99
15+20+20+25+60	1.07	1.43	1.43	1.79	4.29	10.00 (3.9 - 11.0)	2.860 (0.960 - 3.515)	12.56	99
15+20+20+25+71	0.99	1.32	1.32	1.66	4.70	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
15+20+20+35+35	1.20	1.60	1.60	2.80	2.80	10.00 (3.9 - 11.0)	2.920 (0.960 - 3.545)	12.82	99
15+20+20+35+42	1.14	1.52	1.52	2.65	3.18	10.00 (3.9 - 11.0)	2.900 (0.960 - 3.535)	12.74	99
15+20+20+35+50	1.07	1.43	1.43	2.50	3.57	10.00 (3.9 - 11.0)	2.890 (0.960 - 3.525)	12.69	99
15+20+20+35+60	1.00	1.33	1.33	2.33	4.00	10.00 (3.9 - 11.0)	2.860 (0.960 - 3.515)	12.56	99
15+20+20+35+71	0.93	1.24	1.24	2.17	4.41	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+20+20+42+42	1.08	1.44	1.44	3.02	3.02	10.00 (3.9 - 11.0)	2.880 (0.960 - 3.525)	12.65	99
15+20+20+42+50	1.02	1.36	1.36	2.86	3.40	10.00 (3.9 - 11.0)	2.870 (0.960 - 3.515)	12.60	99
15+20+20+42+60	0.96	1.27	1.27	2.68	3.82	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
15+20+20+42+71	0.89	1.19	1.19	2.50	4.23	10.00 (3.9 - 11.0)	2.820 (0.960 - 3.495)	12.38	99
15+20+22+22+22	1.43	1.90	2.09	2.09	2.09	9.60 (3.9 - 10.6)	3.060 (0.900 - 3.825)	13.44	99
15+20+22+22+25	1.40	1.87	2.05	2.05	2.33	9.70 (3.9 - 10.7)	3.015 (0.900 - 3.745)	13.24	99
15+20+22+22+35	1.32	1.75	1.93	1.93	3.07	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
15+20+22+22+42	1.24	1.65	1.82	1.82	3.47	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
15+20+22+22+50	1.16	1.55	1.71	1.71	3.88	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
15+20+22+22+60	1.08	1.44	1.58	1.58	4.32	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
15+20+22+22+71	1.00	1.33	1.47	1.47	4.73	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+20+22+25+25	1.39	1.85	2.04	2.31	2.31	9.90 (3.9 - 10.9)	2.925 (0.900 - 3.585)	12.85	99
15+20+22+25+35	1.28	1.71	1.88	2.14	2.99	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
15+20+22+25+42	1.21	1.61	1.77	2.02	3.39	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
15+20+22+25+50	1.14	1.52	1.67	1.89	3.79	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
15+20+22+25+60	1.06	1.41	1.55	1.76	4.23	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
15+20+22+25+71	0.98	1.31	1.44	1.63	4.64	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+20+22+35+35	1.18	1.57	1.73	2.76	2.76	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
15+20+22+35+42	1.12	1.49	1.64	2.61	3.13	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
15+20+22+35+50	1.06	1.41	1.55	2.46	3.52	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
15+20+22+35+60	0.99	1.32	1.45	2.30	3.95	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
15+20+22+35+71	0.92	1.23	1.35	2.15	4.36	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+20+22+42+42	1.06	1.42	1.56	2.98	2.98	10.00 (3.9 - 11.0)	2.840 (0.900 - 3.485)	12.47	99
15+20+22+42+50	1.01	1.34	1.48	2.82	3.36	10.00 (3.9 - 11.0)	2.830 (0.900 - 3.475)	12.43	99
15+20+22+42+60	0.94	1.26	1.38	2.64	3.77	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+20+22+42+71	0.88	1.18	1.29	2.47	4.18	10.00 (3.9 - 11.0)	2.780 (0.900 - 3.455)	12.21	99
15+20+25+25+25	1.36	1.82	2.27	2.27	2.27	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
15+20+25+25+35	1.25	1.67	2.08	2.08	2.92	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
15+20+25+25+42	1.18	1.57	1.97	1.97	3.31	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
15+20+25+25+50	1.11	1.48	1.85	1.85	3.70	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
15+20+25+25+60	1.03	1.38	1.72	1.72	4.14	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
15+20+25+25+71	0.96	1.28	1.60	1.60	4.55	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+20+25+35+35	1.15	1.54	1.92	2.69	2.69	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
15+20+25+35+42	1.09	1.46	1.82	2.55	3.07	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
15+20+25+35+50	1.03	1.38	1.72	2.41	3.45	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
15+20+25+35+60	0.97	1.29	1.61	2.26	3.87	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
15+20+25+35+71	0.90	1.20	1.51	2.11	4.28	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+20+25+42+42	1.04	1.39	1.74	2.92	2.92	10.00 (3.9 - 11.0)	2.840 (0.900 - 3.485)	12.47	99
15+20+25+42+50	0.99	1.32	1.64	2.76	3.29	10.00 (3.9 - 11.0)	2.830 (0.900 - 3.475)	12.43	99
15+20+25+42+60	0.93	1.23	1.54	2.59	3.70	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+20+35+35+35	1.07	1.43	2.50	2.50	2.50	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
15+20+35+35+42	1.02	1.36	2.38	2.38	2.86	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+20+35+35+50	0.97	1.29	2.26	2.26	3.23	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
15+20+35+35+60	0.91	1.21	2.12	2.12	3.64	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
15+20+35+42+42	0.97	1.30	2.27	2.73	2.73	10.00 (3.9 - 11.0)	2.840 (0.900 - 3.485)	12.47	99
15+20+35+42+50	0.93	1.23	2.16	2.59	3.09	10.00 (3.9 - 11.0)	2.830 (0.900 - 3.475)	12.43	99
15+20+35+42+60	0.87	1.16	2.03	2.44	3.49	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
15+20+42+42+42	0.93	1.24	2.61	2.61	2.61	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
15+20+42+42+50	0.89	1.18	2.49	2.49	2.96	10.00 (3.9 - 11.0)	2.810 (0.900 - 3.465)	12.34	99
15+22+22+22+22	1.41	2.07	2.07	2.07	2.07	9.70 (3.9 - 10.7)	2.975 (0.840 - 3.705)	13.07	99
15+22+22+22+25	1.39	2.03	2.03	2.03	2.31	9.80 (3.9 - 10.8)	2.930 (0.840 - 3.625)	12.87	99
15+22+22+22+35	1.29	1.90	1.90	1.90	3.02	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
15+22+22+22+42	1.22	1.79	1.79	1.79	3.41	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
15+22+22+22+50	1.15	1.68	1.68	1.68	3.82	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
15+22+22+22+60	1.06	1.56	1.56	1.56	4.26	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
15+22+22+22+71	0.99	1.45	1.45	1.45	4.67	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
15+22+22+25+25	1.38	2.02	2.02	2.29	2.29	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
15+22+22+25+35	1.26	1.85	1.85	2.10	2.94	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
15+22+22+25+42	1.19	1.75	1.75	1.98	3.33	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
15+22+22+25+50	1.12	1.64	1.64	1.87	3.73	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
15+22+22+25+60	1.04	1.53	1.53	1.74	4.17	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
15+22+22+25+71	0.97	1.42	1.42	1.61	4.58	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
15+22+22+35+35	1.16	1.71	1.71	2.71	2.71	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
15+22+22+35+42	1.10	1.62	1.62	2.57	3.09	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
15+22+22+35+50	1.04	1.53	1.53	2.43	3.47	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
15+22+22+35+60	0.97	1.43	1.43	2.27	3.90	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
15+22+22+35+71	0.91	1.33	1.33	2.12	4.30	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
15+22+22+42+42	1.05	1.54	1.54	2.94	2.94	10.00 (3.9 - 11.0)	2.800 (0.840 - 3.445)	12.30	99
15+22+22+42+50	0.99	1.46	1.46	2.78	3.31	10.00 (3.9 - 11.0)	2.790 (0.840 - 3.435)	12.25	99
15+22+22+42+60	0.93	1.37	1.37	2.61	3.73	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
15+22+22+42+71	0.87	1.28	1.28	2.44	4.13	10.00 (3.9 - 11.0)	2.740 (0.840 - 3.415)	12.03	99
15+22+25+25+25	1.34	1.96	2.23	2.23	2.23	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
15+22+25+25+35	1.23	1.80	2.05	2.05	2.87	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
15+22+25+25+42	1.16	1.71	1.94	1.94	3.26	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
15+22+25+25+50	1.09	1.61	1.82	1.82	3.65	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
15+22+25+25+60	1.02	1.50	1.70	1.70	4.08	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
15+22+25+25+71	0.95	1.39	1.58	1.58	4.49	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
15+22+25+35+35	1.14	1.67	1.89	2.65	2.65	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
15+22+25+35+42	1.08	1.58	1.80	2.52	3.02	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
15+22+25+35+50	1.02	1.50	1.70	2.38	3.40	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
15+22+25+35+60	0.96	1.40	1.59	2.23	3.82	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
15+22+25+35+71	0.89	1.31	1.49	2.08	4.23	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
15+22+25+42+42	1.03	1.51	1.71	2.88	2.88	10.00 (3.9 - 11.0)	2.800 (0.840 - 3.445)	12.30	99
15+22+25+42+50	0.97	1.43	1.62	2.73	3.25	10.00 (3.9 - 11.0)	2.790 (0.840 - 3.435)	12.25	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+22+25+42+60	0.91	1.34	1.52	2.56	3.66	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
15+22+35+35+35	1.06	1.55	2.46	2.46	2.46	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
15+22+35+35+42	1.01	1.48	2.35	2.35	2.82	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
15+22+35+35+50	0.96	1.40	2.23	2.23	3.18	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
15+22+35+35+60	0.90	1.32	2.10	2.10	3.59	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
15+22+35+42+42	0.96	1.41	2.24	2.69	2.69	10.00 (3.9 - 11.0)	2.800 (0.840 - 3.445)	12.30	99
15+22+35+42+50	0.91	1.34	2.13	2.56	3.05	10.00 (3.9 - 11.0)	2.790 (0.840 - 3.435)	12.25	99
15+22+42+42+42	0.92	1.35	2.58	2.58	2.58	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
15+22+42+42+50	0.88	1.29	2.46	2.46	2.92	10.00 (3.9 - 11.0)	2.770 (0.840 - 3.425)	12.17	99
15+25+25+25+25	1.30	2.17	2.17	2.17	2.17	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
15+25+25+25+35	1.20	2.00	2.00	2.00	2.80	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
15+25+25+25+42	1.14	1.89	1.89	1.89	3.18	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
15+25+25+25+50	1.07	1.79	1.79	1.79	3.57	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
15+25+25+25+60	1.00	1.67	1.67	1.67	4.00	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
15+25+25+25+71	0.93	1.55	1.55	1.55	4.41	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
15+25+25+35+35	1.11	1.85	1.85	2.59	2.59	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
15+25+25+35+42	1.06	1.76	1.76	2.46	2.96	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
15+25+25+35+50	1.00	1.67	1.67	2.33	3.33	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
15+25+25+35+60	0.94	1.56	1.56	2.19	3.75	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
15+25+25+35+71	0.88	1.46	1.46	2.05	4.15	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
15+25+25+42+42	1.01	1.68	1.68	2.82	2.82	10.00 (3.9 - 11.0)	2.800 (0.840 - 3.445)	12.30	99
15+25+25+42+50	0.96	1.59	1.59	2.68	3.18	10.00 (3.9 - 11.0)	2.790 (0.840 - 3.435)	12.25	99
15+25+25+42+60	0.90	1.50	1.50	2.51	3.59	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
15+25+35+35+35	1.03	1.72	2.41	2.41	2.41	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
15+25+35+35+42	0.99	1.64	2.30	2.30	2.76	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
15+25+35+35+50	0.94	1.56	2.19	2.19	3.13	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
15+25+35+35+60	0.88	1.47	2.06	2.06	3.53	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
15+25+35+42+42	0.94	1.57	2.20	2.64	2.64	10.00 (3.9 - 11.0)	2.800 (0.840 - 3.445)	12.30	99
15+25+35+42+50	0.90	1.50	2.10	2.51	2.99	10.00 (3.9 - 11.0)	2.790 (0.840 - 3.435)	12.25	99
15+25+42+42+42	0.90	1.51	2.53	2.53	2.53	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
15+35+35+35+35	0.97	2.26	2.26	2.26	2.26	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
15+35+35+35+42	0.93	2.16	2.16	2.16	2.59	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
15+35+35+35+50	0.88	2.06	2.06	2.06	2.94	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
15+35+35+42+42	0.89	2.07	2.07	2.49	2.49	10.00 (3.9 - 11.0)	2.800 (0.840 - 3.445)	12.30	99
20+20+20+20+20	1.90	1.90	1.90	1.90	1.90	9.50 (3.9 - 10.5)	3.025 (1.090 - 3.825)	13.29	99
20+20+20+20+22	1.88	1.88	1.88	1.88	2.07	9.60 (3.9 - 10.6)	3.140 (1.020 - 3.905)	13.79	99
20+20+20+20+25	1.87	1.87	1.87	1.87	2.33	9.80 (3.9 - 10.8)	3.050 (1.020 - 3.745)	13.39	99
20+20+20+20+35	1.74	1.74	1.74	1.74	3.04	10.00 (3.9 - 11.0)	2.960 (1.020 - 3.585)	13.00	99
20+20+20+20+42	1.64	1.64	1.64	1.64	3.44	10.00 (3.9 - 11.0)	2.940 (1.020 - 3.575)	12.91	99
20+20+20+20+50	1.54	1.54	1.54	1.54	3.85	10.00 (3.9 - 11.0)	2.930 (1.020 - 3.565)	12.87	99
20+20+20+20+60	1.43	1.43	1.43	1.43	4.29	10.00 (3.9 - 11.0)	2.900 (1.020 - 3.555)	12.74	99
20+20+20+20+71	1.32	1.32	1.32	1.32	4.70	10.00 (3.9 - 11.0)	2.880 (1.020 - 3.545)	12.65	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
20+20+20+22+22	1.87	1.87	1.87	2.05	2.05	9.70 (3.9 - 10.7)	3.055 (0.960 - 3.785)	13.42	99
20+20+20+22+25	1.85	1.85	1.85	2.04	2.31	9.90 (3.9 - 10.9)	2.965 (0.960 - 3.625)	13.02	99
20+20+20+22+35	1.71	1.71	1.71	1.88	2.99	10.00 (3.9 - 11.0)	2.920 (0.960 - 3.545)	12.82	99
20+20+20+22+42	1.61	1.61	1.61	1.77	3.39	10.00 (3.9 - 11.0)	2.900 (0.960 - 3.535)	12.74	99
20+20+20+22+50	1.52	1.52	1.52	1.67	3.79	10.00 (3.9 - 11.0)	2.890 (0.960 - 3.525)	12.69	99
20+20+20+22+60	1.41	1.41	1.41	1.55	4.23	10.00 (3.9 - 11.0)	2.860 (0.960 - 3.515)	12.56	99
20+20+20+22+71	1.31	1.31	1.31	1.44	4.64	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
20+20+20+25+25	1.82	1.82	1.82	2.27	2.27	10.00 (3.9 - 11.0)	2.920 (0.960 - 3.545)	12.82	99
20+20+20+25+35	1.67	1.67	1.67	2.08	2.92	10.00 (3.9 - 11.0)	2.920 (0.960 - 3.545)	12.82	99
20+20+20+25+42	1.57	1.57	1.57	1.97	3.31	10.00 (3.9 - 11.0)	2.900 (0.960 - 3.535)	12.74	99
20+20+20+25+50	1.48	1.48	1.48	1.85	3.70	10.00 (3.9 - 11.0)	2.890 (0.960 - 3.525)	12.69	99
20+20+20+25+60	1.38	1.38	1.38	1.72	4.14	10.00 (3.9 - 11.0)	2.860 (0.960 - 3.515)	12.56	99
20+20+20+25+71	1.28	1.28	1.28	1.60	4.55	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
20+20+20+35+35	1.54	1.54	1.54	2.69	2.69	10.00 (3.9 - 11.0)	2.920 (0.960 - 3.545)	12.82	99
20+20+20+35+42	1.46	1.46	1.46	2.55	3.07	10.00 (3.9 - 11.0)	2.900 (0.960 - 3.535)	12.74	99
20+20+20+35+50	1.38	1.38	1.38	2.41	3.45	10.00 (3.9 - 11.0)	2.890 (0.960 - 3.525)	12.69	99
20+20+20+35+60	1.29	1.29	1.29	2.26	3.87	10.00 (3.9 - 11.0)	2.860 (0.960 - 3.515)	12.56	99
20+20+20+35+71	1.20	1.20	1.20	2.11	4.28	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
20+20+20+42+42	1.39	1.39	1.39	2.92	2.92	10.00 (3.9 - 11.0)	2.880 (0.960 - 3.525)	12.65	99
20+20+20+42+50	1.32	1.32	1.32	2.76	3.29	10.00 (3.9 - 11.0)	2.870 (0.960 - 3.515)	12.60	99
20+20+20+42+60	1.23	1.23	1.23	2.59	3.70	10.00 (3.9 - 11.0)	2.840 (0.960 - 3.505)	12.47	99
20+20+22+22+22	1.85	1.85	2.03	2.03	2.03	9.80 (3.9 - 10.8)	2.970 (0.900 - 3.665)	13.04	99
20+20+22+22+25	1.83	1.83	2.02	2.02	2.29	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
20+20+22+22+35	1.68	1.68	1.85	1.85	2.94	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
20+20+22+22+42	1.59	1.59	1.75	1.75	3.33	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
20+20+22+22+50	1.49	1.49	1.64	1.64	3.73	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
20+20+22+22+60	1.39	1.39	1.53	1.53	4.17	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
20+20+22+22+71	1.29	1.29	1.42	1.42	4.58	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
20+20+22+25+25	1.79	1.79	1.96	2.23	2.23	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
20+20+22+25+35	1.64	1.64	1.80	2.05	2.87	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
20+20+22+25+42	1.55	1.55	1.71	1.94	3.26	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
20+20+22+25+50	1.46	1.46	1.61	1.82	3.65	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
20+20+22+25+60	1.36	1.36	1.50	1.70	4.08	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
20+20+22+25+71	1.27	1.27	1.39	1.58	4.49	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
20+20+22+35+35	1.52	1.52	1.67	2.65	2.65	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
20+20+22+35+42	1.44	1.44	1.58	2.52	3.02	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
20+20+22+35+50	1.36	1.36	1.50	2.38	3.40	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
20+20+22+35+60	1.27	1.27	1.40	2.23	3.82	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
20+20+22+35+71	1.19	1.19	1.31	2.08	4.23	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
20+20+22+42+42	1.37	1.37	1.51	2.88	2.88	10.00 (3.9 - 11.0)	2.840 (0.900 - 3.485)	12.47	99
20+20+22+42+50	1.30	1.30	1.43	2.73	3.25	10.00 (3.9 - 11.0)	2.830 (0.900 - 3.475)	12.43	99
20+20+22+42+60	1.22	1.22	1.34	2.56	3.66	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
20+20+25+25+25	1.74	1.74	2.17	2.17	2.17	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
20+20+25+25+35	1.60	1.60	2.00	2.00	2.80	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
20+20+25+25+42	1.52	1.52	1.89	1.89	3.18	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
20+20+25+25+50	1.43	1.43	1.79	1.79	3.57	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
20+20+25+25+60	1.33	1.33	1.67	1.67	4.00	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
20+20+25+25+71	1.24	1.24	1.55	1.55	4.41	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
20+20+25+35+35	1.48	1.48	1.85	2.59	2.59	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
20+20+25+35+42	1.41	1.41	1.76	2.46	2.96	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
20+20+25+35+50	1.33	1.33	1.67	2.33	3.33	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
20+20+25+35+60	1.25	1.25	1.56	2.19	3.75	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
20+20+25+35+71	1.17	1.17	1.46	2.05	4.15	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
20+20+25+42+42	1.34	1.34	1.68	2.82	2.82	10.00 (3.9 - 11.0)	2.840 (0.900 - 3.485)	12.47	99
20+20+25+42+50	1.27	1.27	1.59	2.68	3.18	10.00 (3.9 - 11.0)	2.830 (0.900 - 3.475)	12.43	99
20+20+25+42+60	1.20	1.20	1.50	2.51	3.59	10.00 (3.9 - 11.0)	2.800 (0.900 - 3.465)	12.30	99
20+20+35+35+35	1.38	1.38	2.41	2.41	2.41	10.00 (3.9 - 11.0)	2.880 (0.900 - 3.505)	12.65	99
20+20+35+35+42	1.32	1.32	2.30	2.30	2.76	10.00 (3.9 - 11.0)	2.860 (0.900 - 3.495)	12.56	99
20+20+35+35+50	1.25	1.25	2.19	2.19	3.13	10.00 (3.9 - 11.0)	2.850 (0.900 - 3.485)	12.52	99
20+20+35+35+60	1.18	1.18	2.06	2.06	3.53	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
20+20+35+42+42	1.26	1.26	2.20	2.64	2.64	10.00 (3.9 - 11.0)	2.840 (0.900 - 3.485)	12.47	99
20+20+35+42+50	1.20	1.20	2.10	2.51	2.99	10.00 (3.9 - 11.0)	2.830 (0.900 - 3.475)	12.43	99
20+20+42+42+42	1.20	1.20	2.53	2.53	2.53	10.00 (3.9 - 11.0)	2.820 (0.900 - 3.475)	12.38	99
20+22+22+22+22	1.83	2.02	2.02	2.02	2.02	9.90 (3.9 - 10.9)	2.885 (0.840 - 3.545)	12.67	99
20+22+22+22+25	1.80	1.98	1.98	1.98	2.25	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
20+22+22+22+35	1.65	1.82	1.82	1.82	2.89	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
20+22+22+22+42	1.56	1.72	1.72	1.72	3.28	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
20+22+22+22+50	1.47	1.62	1.62	1.62	3.68	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
20+22+22+22+60	1.37	1.51	1.51	1.51	4.11	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
20+22+22+22+71	1.27	1.40	1.40	1.40	4.52	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
20+22+22+25+25	1.75	1.93	1.93	2.19	2.19	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
20+22+22+25+35	1.61	1.77	1.77	2.02	2.82	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
20+22+22+25+42	1.53	1.68	1.68	1.91	3.21	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
20+22+22+25+50	1.44	1.58	1.58	1.80	3.60	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
20+22+22+25+60	1.34	1.48	1.48	1.68	4.03	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
20+22+22+25+71	1.25	1.38	1.38	1.56	4.44	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
20+22+22+35+35	1.49	1.64	1.64	2.61	2.61	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
20+22+22+35+42	1.42	1.56	1.56	2.48	2.98	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
20+22+22+35+50	1.34	1.48	1.48	2.35	3.36	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
20+22+22+35+60	1.26	1.38	1.38	2.20	3.77	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
20+22+22+35+71	1.18	1.29	1.29	2.06	4.18	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
20+22+22+42+42	1.35	1.49	1.49	2.84	2.84	10.00 (3.9 - 11.0)	2.800 (0.840 - 3.445)	12.30	99
20+22+22+42+50	1.28	1.41	1.41	2.69	3.21	10.00 (3.9 - 11.0)	2.790 (0.840 - 3.435)	12.25	99
20+22+22+42+60	1.20	1.33	1.33	2.53	3.61	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
20+22+25+25+25	1.71	1.88	2.14	2.14	2.14	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
20+22+25+25+35	1.57	1.73	1.97	1.97	2.76	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
20+22+25+25+42	1.49	1.64	1.87	1.87	3.13	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
20+22+25+25+50	1.41	1.55	1.76	1.76	3.52	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
20+22+25+25+60	1.32	1.45	1.64	1.64	3.95	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
20+22+25+25+71	1.23	1.35	1.53	1.53	4.36	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
20+22+25+35+35	1.46	1.61	1.82	2.55	2.55	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
20+22+25+35+42	1.39	1.53	1.74	2.43	2.92	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
20+22+25+35+50	1.32	1.45	1.64	2.30	3.29	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
20+22+25+35+60	1.23	1.36	1.54	2.16	3.70	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
20+22+25+42+42	1.32	1.46	1.66	2.78	2.78	10.00 (3.9 - 11.0)	2.800 (0.840 - 3.445)	12.30	99
20+22+25+42+50	1.26	1.38	1.57	2.64	3.14	10.00 (3.9 - 11.0)	2.790 (0.840 - 3.435)	12.25	99
20+22+25+42+60	1.18	1.30	1.48	2.49	3.55	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
20+22+35+35+35	1.36	1.50	2.38	2.38	2.38	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
20+22+35+35+42	1.30	1.43	2.27	2.27	2.73	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
20+22+35+35+50	1.23	1.36	2.16	2.16	3.09	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
20+22+35+35+60	1.16	1.28	2.03	2.03	3.49	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
20+22+35+42+42	1.24	1.37	2.17	2.61	2.61	10.00 (3.9 - 11.0)	2.800 (0.840 - 3.445)	12.30	99
20+22+35+42+50	1.18	1.30	2.07	2.49	2.96	10.00 (3.9 - 11.0)	2.790 (0.840 - 3.435)	12.25	99
20+22+42+42+42	1.19	1.31	2.50	2.50	2.50	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
20+25+25+25+25	1.67	2.08	2.08	2.08	2.08	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
20+25+25+25+35	1.54	1.92	1.92	1.92	2.69	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
20+25+25+25+42	1.46	1.82	1.82	1.82	3.07	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
20+25+25+25+50	1.38	1.72	1.72	1.72	3.45	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
20+25+25+25+60	1.29	1.61	1.61	1.61	3.87	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
20+25+25+25+71	1.20	1.51	1.51	1.51	4.28	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
20+25+25+35+35	1.43	1.79	1.79	2.50	2.50	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
20+25+25+35+42	1.36	1.70	1.70	2.38	2.86	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
20+25+25+35+50	1.29	1.61	1.61	2.26	3.23	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
20+25+25+35+60	1.21	1.52	1.52	2.12	3.64	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
20+25+25+42+42	1.30	1.62	1.62	2.73	2.73	10.00 (3.9 - 11.0)	2.800 (0.840 - 3.445)	12.30	99
20+25+25+42+50	1.23	1.54	1.54	2.59	3.09	10.00 (3.9 - 11.0)	2.790 (0.840 - 3.435)	12.25	99
20+25+25+42+60	1.16	1.45	1.45	2.44	3.49	10.00 (3.9 - 11.0)	2.760 (0.840 - 3.425)	12.12	99
20+25+35+35+35	1.33	1.67	2.33	2.33	2.33	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
20+25+35+35+42	1.27	1.59	2.23	2.23	2.68	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
20+25+35+35+50	1.21	1.52	2.12	2.12	3.03	10.00 (3.9 - 11.0)	2.810 (0.840 - 3.445)	12.34	99
20+25+35+42+42	1.22	1.52	2.13	2.56	2.56	10.00 (3.9 - 11.0)	2.800 (0.840 - 3.445)	12.30	99
20+25+35+42+50	1.16	1.45	2.03	2.44	2.91	10.00 (3.9 - 11.0)	2.790 (0.840 - 3.435)	12.25	99
20+25+42+42+42	1.17	1.46	2.46	2.46	2.46	10.00 (3.9 - 11.0)	2.780 (0.840 - 3.435)	12.21	99
20+35+35+35+35	1.25	2.19	2.19	2.19	2.19	10.00 (3.9 - 11.0)	2.840 (0.840 - 3.465)	12.47	99
20+35+35+35+42	1.20	2.10	2.10	2.10	2.51	10.00 (3.9 - 11.0)	2.820 (0.840 - 3.455)	12.38	99
22+22+22+22+22	2.00	2.00	2.00	2.00	2.00	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
22+22+22+22+25	1.95	1.95	1.95	1.95	2.21	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
22+22+22+22+35	1.79	1.79	1.79	1.79	2.85	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
22+22+22+22+42	1.69	1.69	1.69	1.69	3.23	10.00 (3.9 - 11.0)	2.780 (0.780 - 3.415)	12.21	99
22+22+22+22+50	1.59	1.59	1.59	1.59	3.62	10.00 (3.9 - 11.0)	2.770 (0.780 - 3.405)	12.17	99
22+22+22+22+60	1.49	1.49	1.49	1.49	4.05	10.00 (3.9 - 11.0)	2.740 (0.780 - 3.395)	12.03	99
22+22+22+22+71	1.38	1.38	1.38	1.38	4.47	10.00 (3.9 - 11.0)	2.720 (0.780 - 3.385)	11.95	99
22+22+22+25+25	1.90	1.90	1.90	2.16	2.16	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
22+22+22+25+35	1.75	1.75	1.75	1.98	2.78	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
22+22+22+25+42	1.65	1.65	1.65	1.88	3.16	10.00 (3.9 - 11.0)	2.780 (0.780 - 3.415)	12.21	99
22+22+22+25+50	1.56	1.56	1.56	1.77	3.55	10.00 (3.9 - 11.0)	2.770 (0.780 - 3.405)	12.17	99
22+22+22+25+60	1.46	1.46	1.46	1.66	3.97	10.00 (3.9 - 11.0)	2.740 (0.780 - 3.395)	12.03	99
22+22+22+25+71	1.36	1.36	1.36	1.54	4.38	10.00 (3.9 - 11.0)	2.720 (0.780 - 3.385)	11.95	99
22+22+22+35+35	1.62	1.62	1.62	2.57	2.57	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
22+22+22+35+42	1.54	1.54	1.54	2.45	2.94	10.00 (3.9 - 11.0)	2.780 (0.780 - 3.415)	12.21	99
22+22+22+35+50	1.46	1.46	1.46	2.32	3.31	10.00 (3.9 - 11.0)	2.770 (0.780 - 3.405)	12.17	99
22+22+22+35+60	1.37	1.37	1.37	2.17	3.73	10.00 (3.9 - 11.0)	2.740 (0.780 - 3.395)	12.03	99
22+22+22+35+71	1.28	1.28	1.28	2.03	4.13	10.00 (3.9 - 11.0)	2.720 (0.780 - 3.385)	11.95	99
22+22+22+42+42	1.47	1.47	1.47	2.80	2.80	10.00 (3.9 - 11.0)	2.760 (0.780 - 3.405)	12.12	99
22+22+22+42+50	1.39	1.39	1.39	2.66	3.16	10.00 (3.9 - 11.0)	2.750 (0.780 - 3.395)	12.08	99
22+22+22+42+60	1.31	1.31	1.31	2.50	3.57	10.00 (3.9 - 11.0)	2.720 (0.780 - 3.385)	11.95	99
22+22+25+25+25	1.85	1.85	2.10	2.10	2.10	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
22+22+25+25+35	1.71	1.71	1.94	1.94	2.71	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
22+22+25+25+42	1.62	1.62	1.84	1.84	3.09	10.00 (3.9 - 11.0)	2.780 (0.780 - 3.415)	12.21	99
22+22+25+25+50	1.53	1.53	1.74	1.74	3.47	10.00 (3.9 - 11.0)	2.770 (0.780 - 3.405)	12.17	99
22+22+25+25+60	1.43	1.43	1.62	1.62	3.90	10.00 (3.9 - 11.0)	2.740 (0.780 - 3.395)	12.03	99
22+22+25+25+71	1.33	1.33	1.52	1.52	4.30	10.00 (3.9 - 11.0)	2.720 (0.780 - 3.385)	11.95	99
22+22+25+35+35	1.58	1.58	1.80	2.52	2.52	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
22+22+25+35+42	1.51	1.51	1.71	2.40	2.88	10.00 (3.9 - 11.0)	2.780 (0.780 - 3.415)	12.21	99
22+22+25+35+50	1.43	1.43	1.62	2.27	3.25	10.00 (3.9 - 11.0)	2.770 (0.780 - 3.405)	12.17	99
22+22+25+35+60	1.34	1.34	1.52	2.13	3.66	10.00 (3.9 - 11.0)	2.740 (0.780 - 3.395)	12.03	99
22+22+25+42+42	1.44	1.44	1.63	2.75	2.75	10.00 (3.9 - 11.0)	2.760 (0.780 - 3.405)	12.12	99
22+22+25+42+50	1.37	1.37	1.55	2.61	3.11	10.00 (3.9 - 11.0)	2.750 (0.780 - 3.395)	12.08	99
22+22+25+42+60	1.29	1.29	1.46	2.46	3.51	10.00 (3.9 - 11.0)	2.720 (0.780 - 3.385)	11.95	99
22+22+35+35+35	1.48	1.48	2.35	2.35	2.35	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
22+22+35+35+42	1.41	1.41	2.24	2.24	2.69	10.00 (3.9 - 11.0)	2.780 (0.780 - 3.415)	12.21	99
22+22+35+35+50	1.34	1.34	2.13	2.13	3.05	10.00 (3.9 - 11.0)	2.770 (0.780 - 3.405)	12.17	99
22+22+35+42+42	1.35	1.35	2.15	2.58	2.58	10.00 (3.9 - 11.0)	2.760 (0.780 - 3.405)	12.12	99
22+22+35+42+50	1.29	1.29	2.05	2.46	2.92	10.00 (3.9 - 11.0)	2.750 (0.780 - 3.395)	12.08	99
22+22+42+42+42	1.29	1.29	2.47	2.47	2.47	10.00 (3.9 - 11.0)	2.740 (0.780 - 3.395)	12.03	99
22+25+25+25+25	1.80	2.05	2.05	2.05	2.05	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
22+25+25+25+35	1.67	1.89	1.89	1.89	2.65	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
22+25+25+25+42	1.58	1.80	1.80	1.80	3.02	10.00 (3.9 - 11.0)	2.780 (0.780 - 3.415)	12.21	99

MXZ-5C100VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
22+25+25+25+50	1.50	1.70	1.70	1.70	3.40	10.00 (3.9 - 11.0)	2.770 (0.780 - 3.405)	12.17	99
22+25+25+25+60	1.40	1.59	1.59	1.59	3.82	10.00 (3.9 - 11.0)	2.740 (0.780 - 3.395)	12.03	99
22+25+25+25+71	1.31	1.49	1.49	1.49	4.23	10.00 (3.9 - 11.0)	2.720 (0.780 - 3.385)	11.95	99
22+25+25+35+35	1.55	1.76	1.76	2.46	2.46	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
22+25+25+35+42	1.48	1.68	1.68	2.35	2.82	10.00 (3.9 - 11.0)	2.780 (0.780 - 3.415)	12.21	99
22+25+25+35+50	1.40	1.59	1.59	2.23	3.18	10.00 (3.9 - 11.0)	2.770 (0.780 - 3.405)	12.17	99
22+25+25+35+60	1.32	1.50	1.50	2.10	3.59	10.00 (3.9 - 11.0)	2.740 (0.780 - 3.395)	12.03	99
22+25+25+42+42	1.41	1.60	1.60	2.69	2.69	10.00 (3.9 - 11.0)	2.760 (0.780 - 3.405)	12.12	99
22+25+25+42+50	1.34	1.52	1.52	2.56	3.05	10.00 (3.9 - 11.0)	2.750 (0.780 - 3.395)	12.08	99
22+25+35+35+35	1.45	1.64	2.30	2.30	2.30	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
22+25+35+35+42	1.38	1.57	2.20	2.20	2.64	10.00 (3.9 - 11.0)	2.780 (0.780 - 3.415)	12.21	99
22+25+35+35+50	1.32	1.50	2.10	2.10	2.99	10.00 (3.9 - 11.0)	2.770 (0.780 - 3.405)	12.17	99
22+25+35+42+42	1.33	1.51	2.11	2.53	2.53	10.00 (3.9 - 11.0)	2.760 (0.780 - 3.405)	12.12	99
22+35+35+35+35	1.36	2.16	2.16	2.16	2.16	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
22+35+35+35+42	1.30	2.07	2.07	2.07	2.49	10.00 (3.9 - 11.0)	2.780 (0.780 - 3.415)	12.21	99
25+25+25+25+25	2.00	2.00	2.00	2.00	2.00	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
25+25+25+25+35	1.85	1.85	1.85	1.85	2.59	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
25+25+25+25+42	1.76	1.76	1.76	1.76	2.96	10.00 (3.9 - 11.0)	2.780 (0.780 - 3.415)	12.21	99
25+25+25+25+50	1.67	1.67	1.67	1.67	3.33	10.00 (3.9 - 11.0)	2.770 (0.780 - 3.405)	12.17	99
25+25+25+25+60	1.56	1.56	1.56	1.56	3.75	10.00 (3.9 - 11.0)	2.740 (0.780 - 3.395)	12.03	99
25+25+25+25+71	1.46	1.46	1.46	1.46	4.15	10.00 (3.9 - 11.0)	2.720 (0.780 - 3.385)	11.95	99
25+25+25+35+35	1.72	1.72	1.72	2.41	2.41	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
25+25+25+35+42	1.64	1.64	1.64	2.30	2.76	10.00 (3.9 - 11.0)	2.780 (0.780 - 3.415)	12.21	99
25+25+25+35+50	1.56	1.56	1.56	2.19	3.13	10.00 (3.9 - 11.0)	2.770 (0.780 - 3.405)	12.17	99
25+25+25+35+60	1.47	1.47	1.47	2.06	3.53	10.00 (3.9 - 11.0)	2.740 (0.780 - 3.395)	12.03	99
25+25+25+42+42	1.57	1.57	1.57	2.64	2.64	10.00 (3.9 - 11.0)	2.760 (0.780 - 3.405)	12.12	99
25+25+25+42+50	1.50	1.50	1.50	2.51	2.99	10.00 (3.9 - 11.0)	2.750 (0.780 - 3.395)	12.08	99
25+25+35+35+35	1.61	1.61	2.26	2.26	2.26	10.00 (3.9 - 11.0)	2.800 (0.780 - 3.425)	12.30	99
25+25+35+35+42	1.54	1.54	2.16	2.16	2.59	10.00 (3.9 - 11.0)	2.780 (0.780 - 3.415)	12.21	99
25+25+35+35+50	1.47	1.47	2.06	2.06	2.94	10.00 (3.9 - 11.0)	2.770 (0.780 - 3.405)	12.17	99
25+25+35+42+42	1.48	1.48	2.07	2.49	2.49	10.00 (3.9 - 11.0)	2.760 (0.780 - 3.405)	12.12	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15	1.70					1.70 (1.2 - 3.0)	0.650 (0.540 - 1.670)	2.85	99
20	2.20					2.20 (1.2 - 3.9)	0.830 (0.540 - 2.170)	3.65	99
22	3.30					3.30 (1.2 - 4.2)	0.890 (0.340 - 1.590)	3.91	99
25	3.60					3.60 (1.2 - 4.5)	0.990 (0.340 - 1.740)	4.35	99
35	4.00					4.00 (1.2 - 5.5)	1.140 (0.330 - 1.810)	5.01	99
42	5.40					5.40 (1.3 - 6.5)	1.610 (0.330 - 2.260)	7.07	99
50	7.20					7.20 (1.4 - 7.7)	2.270 (0.330 - 2.710)	9.97	99
60	7.90					7.90 (1.4 - 8.6)	2.270 (0.330 - 3.060)	9.97	99
71	8.60					8.60 (1.6 - 9.2)	2.410 (0.360 - 3.520)	10.58	99
15+15	1.70	1.70				3.40 (1.8 - 5.0)	0.810 (0.590 - 2.780)	3.56	99
15+20	1.67	2.23				3.90 (1.8 - 5.8)	0.960 (0.580 - 3.230)	4.22	99
15+22	1.66	2.44				4.10 (1.8 - 6.1)	1.020 (0.530 - 3.390)	4.48	99
15+25	1.65	2.75				4.40 (1.8 - 6.6)	1.110 (0.640 - 3.670)	4.87	99
15+35	2.16	5.04				7.20 (1.8 - 8.8)	1.760 (0.530 - 3.140)	7.73	99
15+42	1.97	5.53				7.50 (1.8 - 9.3)	1.880 (0.530 - 3.200)	8.26	99
15+50	1.80	6.00				7.80 (1.8 - 9.7)	1.990 (0.530 - 3.230)	8.74	99
15+60	1.78	7.12				8.90 (1.8 - 10.2)	2.420 (0.530 - 3.350)	10.63	99
15+71	1.83	8.67				10.50 (1.8 - 11.0)	3.070 (0.510 - 3.580)	13.48	99
20+20	2.20	2.20				4.40 (1.8 - 6.6)	1.110 (0.590 - 3.670)	4.87	99
20+22	2.62	2.88				5.50 (1.8 - 6.9)	1.340 (0.530 - 3.220)	5.88	99
20+25	2.98	3.72				6.70 (1.8 - 7.5)	1.600 (0.530 - 2.830)	7.03	99
20+35	2.69	4.71				7.40 (1.8 - 9.2)	1.840 (0.530 - 3.190)	8.08	99
20+42	2.48	5.22				7.70 (1.8 - 9.6)	1.950 (0.530 - 3.230)	8.56	99
20+50	2.29	5.71				8.00 (1.8 - 9.8)	2.050 (0.530 - 3.230)	9.00	99
20+60	2.45	7.35				9.80 (1.8 - 10.7)	2.780 (0.530 - 3.490)	12.21	99
20+71	2.31	8.19				10.50 (1.8 - 11.0)	3.070 (0.510 - 3.580)	13.48	99
22+22	3.30	3.30				6.60 (1.8 - 7.2)	1.570 (0.480 - 2.760)	6.90	99
22+25	3.23	3.67				6.90 (1.8 - 8.0)	1.670 (0.480 - 2.950)	7.33	99
22+35	2.89	4.61				7.50 (1.8 - 9.3)	1.880 (0.480 - 3.200)	8.26	99
22+42	2.68	5.12				7.80 (1.8 - 9.7)	1.990 (0.480 - 3.230)	8.74	99
22+50	2.57	5.83				8.40 (1.8 - 10.0)	2.210 (0.480 - 3.290)	9.71	99
22+60	2.71	7.39				10.10 (1.8 - 10.8)	2.910 (0.480 - 3.520)	12.78	99
22+71	2.51	8.09				10.60 (1.8 - 11.9)	2.980 (0.460 - 3.770)	13.09	99
25+25	3.60	3.60				7.20 (1.8 - 8.8)	1.760 (0.480 - 3.140)	7.73	99
25+35	3.17	4.43				7.60 (1.8 - 9.5)	1.920 (0.480 - 3.230)	8.43	99
25+42	2.95	4.95				7.90 (1.8 - 9.7)	2.020 (0.480 - 3.230)	8.87	99
25+50	2.97	5.93				8.90 (1.8 - 10.2)	2.420 (0.480 - 3.350)	10.63	99
25+60	3.09	7.41				10.50 (1.8 - 11.0)	3.070 (0.460 - 3.580)	13.48	99
25+71	2.76	7.84				10.60 (1.8 - 11.9)	2.980 (0.460 - 3.770)	13.09	99
35+35	4.00	4.00				8.00 (1.8 - 9.8)	2.050 (0.480 - 3.230)	9.00	99
35+42	4.23	5.07				9.30 (1.8 - 10.4)	2.580 (0.480 - 3.410)	11.33	99
35+50	4.32	6.18				10.50 (1.8 - 11.0)	3.070 (0.460 - 3.580)	13.48	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E			
35+60	3.91	6.69				10.60 (1.8 - 11.9)	2.980 (0.460 - 3.770)	13.09
35+71	3.50	7.10				10.60 (1.9 - 11.9)	2.850 (0.440 - 3.770)	12.52
42+42	5.25	5.25				10.50 (1.8 - 11.0)	3.070 (0.460 - 3.580)	13.48
42+50	4.84	5.76				10.60 (1.8 - 11.9)	2.980 (0.460 - 3.770)	13.09
42+60	4.36	6.24				10.60 (1.9 - 11.9)	2.940 (0.440 - 3.770)	12.91
42+71	3.94	6.66				10.60 (1.9 - 12.0)	2.700 (0.440 - 3.870)	11.86
50+50	5.30	5.30				10.60 (1.9 - 11.9)	2.980 (0.440 - 3.770)	13.09
50+60	4.82	5.78				10.60 (1.9 - 12.0)	2.770 (0.440 - 3.870)	12.17
50+71	4.38	6.22				10.60 (1.9 - 12.0)	2.550 (0.440 - 3.870)	11.20
60+60	5.30	5.30				10.60 (1.9 - 12.0)	2.550 (0.440 - 3.870)	11.20
60+71	4.85	5.75				10.60 (1.9 - 12.1)	2.510 (0.440 - 3.920)	11.02
71+71	5.30	5.30				10.60 (1.9 - 12.2)	2.460 (0.440 - 3.960)	10.80
15+15+15	1.70	1.70	1.70			5.10 (2.6 - 8.4)	1.130 (0.620 - 4.100)	4.96
15+15+20	1.68	1.68	2.24			5.60 (2.6 - 8.9)	1.270 (0.620 - 4.100)	5.58
15+15+22	1.67	1.67	2.45			5.80 (2.6 - 9.1)	1.330 (0.590 - 4.100)	5.84
15+15+25	1.66	1.66	2.77			6.10 (2.6 - 9.4)	1.410 (0.590 - 4.100)	6.19
15+15+35	1.94	1.94	4.52			8.40 (2.6 - 10.5)	1.890 (0.590 - 3.210)	8.30
15+15+42	1.85	1.85	5.19			8.90 (2.6 - 11.9)	2.000 (0.590 - 3.470)	8.78
15+15+50	1.73	1.73	5.75			9.20 (2.6 - 12.6)	2.110 (0.590 - 3.670)	9.27
15+15+60	1.58	1.58	6.33			9.50 (2.6 - 12.6)	2.220 (0.590 - 3.660)	9.75
15+15+71	1.47	1.47	6.96			9.90 (2.6 - 12.6)	2.370 (0.590 - 3.640)	10.41
15+20+20	1.66	2.22	2.22			6.10 (2.6 - 9.4)	1.410 (0.620 - 4.100)	6.19
15+20+22	1.66	2.21	2.43			6.30 (2.6 - 9.6)	1.470 (0.590 - 4.100)	6.46
15+20+25	1.65	2.20	2.75			6.60 (2.6 - 9.9)	1.550 (0.680 - 4.100)	6.81
15+20+35	1.89	2.51	4.40			8.80 (2.6 - 11.3)	1.980 (0.590 - 3.300)	8.70
15+20+42	1.77	2.36	4.96			9.10 (2.6 - 12.6)	2.070 (0.590 - 3.710)	9.09
15+20+50	1.64	2.19	5.47			9.30 (2.6 - 12.6)	2.140 (0.590 - 3.660)	9.40
15+20+60	1.53	2.04	6.13			9.70 (2.6 - 12.6)	2.300 (0.590 - 3.650)	10.10
15+20+71	1.42	1.89	6.70			10.00 (2.6 - 12.6)	2.410 (0.590 - 3.620)	10.58
15+22+22	1.65	2.42	2.42			6.50 (2.6 - 9.8)	1.520 (0.560 - 4.100)	6.68
15+22+25	1.77	2.59	2.94			7.30 (2.6 - 10.1)	1.680 (0.560 - 3.800)	7.38
15+22+35	1.85	2.72	4.33			8.90 (2.6 - 11.9)	2.000 (0.560 - 3.510)	8.78
15+22+42	1.73	2.53	4.84			9.10 (2.6 - 12.6)	2.070 (0.560 - 3.700)	9.09
15+22+50	1.62	2.38	5.40			9.40 (2.6 - 12.6)	2.180 (0.560 - 3.660)	9.57
15+22+60	1.50	2.20	6.00			9.70 (2.6 - 12.6)	2.300 (0.560 - 3.640)	10.10
15+22+71	1.40	2.06	6.64			10.10 (2.6 - 12.6)	2.440 (0.560 - 3.590)	10.72
15+25+25	1.94	3.23	3.23			8.40 (2.6 - 10.5)	1.890 (0.560 - 3.210)	8.30
15+25+35	1.80	3.00	4.20			9.00 (2.6 - 12.6)	2.030 (0.560 - 3.750)	8.92
15+25+42	1.68	2.80	4.71			9.20 (2.6 - 12.6)	2.110 (0.560 - 3.700)	9.27
15+25+50	1.58	2.64	5.28			9.50 (2.6 - 12.6)	2.220 (0.560 - 3.660)	9.75
15+25+60	1.47	2.45	5.88			9.80 (2.6 - 12.6)	2.330 (0.560 - 3.640)	10.23
15+25+71	1.38	2.30	6.52			10.20 (2.6 - 12.6)	2.460 (0.560 - 3.550)	10.80

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+35+35	1.64	3.83	3.83			9.30 (2.6 - 12.6)	2.140 (0.560 - 3.730)	9.40	99
15+35+42	1.57	3.65	4.38			9.60 (2.6 - 12.6)	2.260 (0.560 - 3.680)	9.93	99
15+35+50	1.47	3.43	4.90			9.80 (2.6 - 12.6)	2.330 (0.560 - 3.640)	10.23	99
15+35+60	1.39	3.25	5.56			10.20 (2.6 - 12.6)	2.460 (0.560 - 3.570)	10.80	99
15+35+71	1.31	3.07	6.22			10.60 (2.6 - 12.6)	2.570 (0.560 - 3.420)	11.29	99
15+42+42	1.48	4.16	4.16			9.80 (2.6 - 12.6)	2.330 (0.560 - 3.630)	10.23	99
15+42+50	1.42	3.96	4.72			10.10 (2.6 - 12.6)	2.440 (0.560 - 3.560)	10.72	99
15+42+60	1.35	3.77	5.38			10.50 (2.6 - 12.6)	2.540 (0.560 - 3.440)	11.16	99
15+42+71	1.27	3.54	5.99			10.80 (2.7 - 12.6)	2.620 (0.540 - 3.310)	11.51	99
15+50+50	1.36	4.52	4.52			10.40 (2.6 - 12.6)	2.520 (0.560 - 3.430)	11.07	99
15+50+60	1.30	4.32	5.18			10.80 (2.6 - 12.6)	2.620 (0.560 - 3.300)	11.51	99
15+50+71	1.20	4.01	5.69			10.90 (2.7 - 12.6)	2.620 (0.540 - 3.220)	11.51	99
15+60+60	1.21	4.84	4.84			10.90 (2.7 - 12.6)	2.620 (0.540 - 3.220)	11.51	99
15+60+71	1.13	4.52	5.35			11.00 (2.7 - 12.6)	2.620 (0.540 - 3.140)	11.51	99
20+20+20	2.20	2.20	2.20			6.60 (2.6 - 9.9)	1.550 (0.620 - 4.100)	6.81	99
20+20+22	2.35	2.35	2.59			7.30 (2.6 - 10.1)	1.680 (0.590 - 3.800)	7.38	99
20+20+25	2.58	2.58	3.23			8.40 (2.6 - 10.5)	1.890 (0.590 - 3.210)	8.30	99
20+20+35	2.40	2.40	4.20			9.00 (2.6 - 12.6)	2.030 (0.590 - 3.750)	8.92	99
20+20+42	2.24	2.24	4.71			9.20 (2.6 - 12.6)	2.110 (0.590 - 3.700)	9.27	99
20+20+50	2.11	2.11	5.28			9.50 (2.6 - 12.6)	2.220 (0.590 - 3.660)	9.75	99
20+20+60	1.96	1.96	5.88			9.80 (2.6 - 12.6)	2.330 (0.590 - 3.640)	10.23	99
20+20+71	1.84	1.84	6.52			10.20 (2.6 - 12.6)	2.460 (0.590 - 3.550)	10.80	99
20+22+22	2.50	2.75	2.75			8.00 (2.6 - 10.4)	1.820 (0.560 - 3.360)	7.99	99
20+22+25	2.60	2.86	3.25			8.70 (2.6 - 10.6)	1.950 (0.560 - 3.060)	8.56	99
20+22+35	2.36	2.60	4.14			9.10 (2.6 - 12.6)	2.070 (0.560 - 3.750)	9.09	99
20+22+42	2.21	2.44	4.65			9.30 (2.6 - 12.6)	2.140 (0.560 - 3.700)	9.40	99
20+22+50	2.09	2.30	5.22			9.60 (2.6 - 12.6)	2.260 (0.560 - 3.650)	9.93	99
20+22+60	1.94	2.14	5.82			9.90 (2.6 - 12.6)	2.370 (0.560 - 3.640)	10.41	99
20+22+71	1.82	2.01	6.47			10.30 (2.6 - 12.6)	2.490 (0.560 - 3.530)	10.94	99
20+25+25	2.51	3.14	3.14			8.80 (2.6 - 11.3)	1.980 (0.560 - 3.300)	8.70	99
20+25+35	2.30	2.88	4.03			9.20 (2.6 - 12.6)	2.110 (0.560 - 3.740)	9.27	99
20+25+42	2.16	2.70	4.54			9.40 (2.6 - 12.6)	2.180 (0.560 - 3.690)	9.57	99
20+25+50	2.04	2.55	5.11			9.70 (2.6 - 12.6)	2.300 (0.560 - 3.650)	10.10	99
20+25+60	1.90	2.38	5.71			10.00 (2.6 - 12.6)	2.410 (0.560 - 3.630)	10.58	99
20+25+71	1.79	2.24	6.37			10.40 (2.6 - 12.6)	2.520 (0.560 - 3.490)	11.07	99
20+35+35	2.11	3.69	3.69			9.50 (2.6 - 12.6)	2.220 (0.560 - 3.730)	9.75	99
20+35+42	2.00	3.50	4.20			9.70 (2.6 - 12.6)	2.300 (0.560 - 3.670)	10.10	99
20+35+50	1.90	3.33	4.76			10.00 (2.6 - 12.6)	2.410 (0.560 - 3.630)	10.58	99
20+35+60	1.81	3.17	5.43			10.40 (2.6 - 12.6)	2.520 (0.560 - 3.500)	11.07	99
20+35+71	1.71	3.00	6.09			10.80 (2.7 - 12.6)	2.620 (0.540 - 3.360)	11.51	99
20+42+42	1.92	4.04	4.04			10.00 (2.6 - 12.6)	2.410 (0.560 - 3.620)	10.58	99
20+42+50	1.84	3.86	4.60			10.30 (2.6 - 12.6)	2.490 (0.560 - 3.500)	10.94	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
20+42+60	1.74	3.65	5.21			10.60 (2.6 - 12.6)	2.570 (0.560 - 3.370)	11.29	99
20+42+71	1.64	3.44	5.82			10.90 (2.7 - 12.6)	2.620 (0.540 - 3.270)	11.51	99
20+50+50	1.77	4.42	4.42			10.60 (2.6 - 12.6)	2.570 (0.560 - 3.370)	11.29	99
20+50+60	1.66	4.15	4.98			10.80 (2.7 - 12.6)	2.620 (0.540 - 3.260)	11.51	99
20+50+71	1.55	3.87	5.49			10.90 (2.7 - 12.6)	2.620 (0.540 - 3.180)	11.51	99
20+60+60	1.56	4.67	4.67			10.90 (2.7 - 12.6)	2.620 (0.540 - 3.190)	11.51	99
20+60+71	1.46	4.37	5.17			11.00 (2.7 - 12.6)	2.620 (0.520 - 3.110)	11.51	99
22+22+22	2.90	2.90	2.90			8.70 (2.6 - 10.6)	1.950 (0.530 - 3.060)	8.56	99
22+22+25	2.81	2.81	3.19			8.80 (2.6 - 11.3)	1.980 (0.530 - 3.300)	8.70	99
22+22+35	2.53	2.53	4.03			9.10 (2.6 - 12.6)	2.070 (0.530 - 3.740)	9.09	99
22+22+42	2.40	2.40	4.59			9.40 (2.6 - 12.6)	2.180 (0.530 - 3.690)	9.57	99
22+22+50	2.25	2.25	5.11			9.60 (2.6 - 12.6)	2.260 (0.530 - 3.650)	9.93	99
22+22+60	2.12	2.12	5.77			10.00 (2.6 - 12.6)	2.410 (0.530 - 3.630)	10.58	99
22+22+71	1.99	1.99	6.42			10.40 (2.6 - 12.6)	2.520 (0.530 - 3.500)	11.07	99
22+25+25	2.72	3.09	3.09			8.90 (2.6 - 11.9)	2.000 (0.530 - 3.510)	8.78	99
22+25+35	2.47	2.80	3.93			9.20 (2.6 - 12.6)	2.110 (0.530 - 3.740)	9.27	99
22+25+42	2.35	2.67	4.48			9.50 (2.6 - 12.6)	2.220 (0.530 - 3.690)	9.75	99
22+25+50	2.20	2.50	5.00			9.70 (2.6 - 12.6)	2.300 (0.530 - 3.640)	10.10	99
22+25+60	2.08	2.36	5.66			10.10 (2.6 - 12.6)	2.440 (0.530 - 3.600)	10.72	99
22+25+71	1.96	2.22	6.32			10.50 (2.6 - 12.6)	2.540 (0.530 - 3.460)	11.16	99
22+35+35	2.30	3.65	3.65			9.60 (2.6 - 12.6)	2.260 (0.530 - 3.720)	9.93	99
22+35+42	2.18	3.46	4.16			9.80 (2.6 - 12.6)	2.330 (0.530 - 3.670)	10.23	99
22+35+50	2.08	3.30	4.72			10.10 (2.6 - 12.6)	2.440 (0.530 - 3.600)	10.72	99
22+35+60	1.97	3.14	5.38			10.50 (2.6 - 12.6)	2.540 (0.530 - 3.480)	11.16	99
22+35+71	1.86	2.95	5.99			10.80 (2.7 - 12.6)	2.620 (0.510 - 3.350)	11.51	99
22+42+42	2.08	3.96	3.96			10.00 (2.6 - 12.6)	2.410 (0.530 - 3.610)	10.58	99
22+42+50	1.99	3.79	4.52			10.30 (2.6 - 12.6)	2.490 (0.530 - 3.470)	10.94	99
22+42+60	1.90	3.62	5.18			10.70 (2.6 - 12.6)	2.590 (0.530 - 3.350)	11.37	99
22+42+71	1.78	3.39	5.73			10.90 (2.7 - 12.6)	2.620 (0.510 - 3.250)	11.51	99
22+50+50	1.91	4.34	4.34			10.60 (2.6 - 12.6)	2.570 (0.530 - 3.340)	11.29	99
22+50+60	1.82	4.13	4.95			10.90 (2.7 - 12.6)	2.620 (0.510 - 3.250)	11.51	99
22+50+71	1.68	3.81	5.41			10.90 (2.7 - 12.6)	2.620 (0.510 - 3.160)	11.51	99
22+60+60	1.69	4.61	4.61			10.90 (2.7 - 12.6)	2.620 (0.510 - 3.170)	11.51	99
22+60+71	1.58	4.31	5.10			11.00 (2.7 - 12.6)	2.620 (0.490 - 3.110)	11.51	99
25+25+25	3.00	3.00	3.00			9.00 (2.6 - 12.6)	2.030 (0.530 - 3.750)	8.92	99
25+25+35	2.74	2.74	3.83			9.30 (2.6 - 12.6)	2.140 (0.530 - 3.730)	9.40	99
25+25+42	2.61	2.61	4.38			9.60 (2.6 - 12.6)	2.260 (0.530 - 3.680)	9.93	99
25+25+50	2.45	2.45	4.90			9.80 (2.6 - 12.6)	2.330 (0.530 - 3.640)	10.23	99
25+25+60	2.32	2.32	5.56			10.20 (2.6 - 12.6)	2.460 (0.530 - 3.570)	10.80	99
25+25+71	2.19	2.19	6.22			10.60 (2.6 - 12.6)	2.570 (0.530 - 3.420)	11.29	99
25+35+35	2.55	3.57	3.57			9.70 (2.6 - 12.6)	2.300 (0.530 - 3.720)	10.10	99
25+35+42	2.43	3.40	4.08			9.90 (2.6 - 12.6)	2.370 (0.530 - 3.670)	10.41	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
25+35+50	2.32	3.25	4.64			10.20 (2.6 - 12.6)	2.460 (0.530 - 3.570)	10.80	99
25+35+60	2.21	3.09	5.30			10.60 (2.6 - 12.6)	2.570 (0.530 - 3.440)	11.29	99
25+35+71	2.06	2.89	5.85			10.80 (2.7 - 12.6)	2.620 (0.510 - 3.320)	11.51	99
25+42+42	2.34	3.93	3.93			10.20 (2.6 - 12.6)	2.460 (0.530 - 3.570)	10.80	99
25+42+50	2.24	3.77	4.49			10.50 (2.6 - 12.6)	2.540 (0.530 - 3.440)	11.16	99
25+42+60	2.13	3.57	5.10			10.80 (2.7 - 12.6)	2.620 (0.510 - 3.310)	11.51	99
25+42+71	1.97	3.32	5.61			10.90 (2.7 - 12.6)	2.620 (0.510 - 3.230)	11.51	99
25+50+50	2.16	4.32	4.32			10.80 (2.6 - 12.6)	2.620 (0.530 - 3.300)	11.51	99
25+50+60	2.02	4.04	4.84			10.90 (2.7 - 12.6)	2.620 (0.510 - 3.220)	11.51	99
25+50+71	1.88	3.77	5.35			11.00 (2.7 - 12.6)	2.620 (0.510 - 3.140)	11.51	99
25+60+60	1.90	4.55	4.55			11.00 (2.7 - 12.6)	2.620 (0.510 - 3.150)	11.51	99
25+60+71	1.76	4.23	5.01			11.00 (2.7 - 12.6)	2.620 (0.490 - 3.110)	11.51	99
35+35+35	3.33	3.33	3.33			10.00 (2.6 - 12.6)	2.410 (0.530 - 3.700)	10.58	99
35+35+42	3.22	3.22	3.86			10.30 (2.6 - 12.6)	2.490 (0.530 - 3.570)	10.94	99
35+35+50	3.09	3.09	4.42			10.60 (2.6 - 12.6)	2.570 (0.530 - 3.440)	11.29	99
35+35+60	2.91	2.91	4.98			10.80 (2.7 - 12.6)	2.620 (0.510 - 3.330)	11.51	99
35+35+71	2.71	2.71	5.49			10.90 (2.7 - 12.6)	2.620 (0.510 - 3.250)	11.51	99
35+42+42	3.09	3.71	3.71			10.50 (2.6 - 12.6)	2.540 (0.530 - 3.440)	11.16	99
35+42+50	2.98	3.57	4.25			10.80 (2.7 - 12.6)	2.620 (0.510 - 3.310)	11.51	99
35+42+60	2.78	3.34	4.77			10.90 (2.7 - 12.6)	2.620 (0.510 - 3.240)	11.51	99
35+42+71	2.60	3.12	5.28			11.00 (2.7 - 12.6)	2.620 (0.510 - 3.160)	11.51	99
35+50+50	2.83	4.04	4.04			10.90 (2.7 - 12.6)	2.620 (0.510 - 3.220)	11.51	99
35+50+60	2.66	3.79	4.55			11.00 (2.7 - 12.6)	2.620 (0.510 - 3.150)	11.51	99
35+50+71	2.47	3.53	5.01			11.00 (2.7 - 12.6)	2.620 (0.490 - 3.110)	11.51	99
35+60+60	2.48	4.26	4.26			11.00 (2.7 - 12.6)	2.620 (0.490 - 3.110)	11.51	99
35+60+71	2.32	3.98	4.70			11.00 (2.7 - 12.6)	2.620 (0.490 - 3.110)	11.51	99
42+42+42	3.60	3.60	3.60			10.80 (2.7 - 12.6)	2.620 (0.510 - 3.430)	11.51	99
42+42+50	3.42	3.42	4.07			10.90 (2.7 - 12.6)	2.620 (0.510 - 3.220)	11.51	99
42+42+60	3.21	3.21	4.58			11.00 (2.7 - 12.6)	2.620 (0.510 - 3.150)	11.51	99
42+42+71	2.98	2.98	5.04			11.00 (2.7 - 12.6)	2.620 (0.490 - 3.100)	11.51	99
42+50+50	3.22	3.84	3.84			10.90 (2.7 - 12.6)	2.620 (0.510 - 3.130)	11.51	99
42+50+60	3.04	3.62	4.34			11.00 (2.7 - 12.6)	2.620 (0.490 - 3.070)	11.51	99
42+50+71	2.83	3.37	4.79			11.00 (2.7 - 12.6)	2.620 (0.490 - 3.070)	11.51	99
42+60+60	2.85	4.07	4.07			11.00 (2.7 - 12.6)	2.620 (0.490 - 3.070)	11.51	99
50+50+50	3.67	3.67	3.67			11.00 (2.7 - 12.6)	2.620 (0.490 - 3.250)	11.51	99
50+50+60	3.44	3.44	4.13			11.00 (2.7 - 12.6)	2.620 (0.490 - 3.040)	11.51	99
50+50+71	3.22	3.22	4.57			11.00 (2.7 - 12.6)	2.620 (0.490 - 3.040)	11.51	99
15+15+15+15	1.70	1.70	1.70	1.70		6.80 (3.4 - 9.3)	1.500 (0.750 - 4.100)	6.59	99
15+15+15+20	1.68	1.68	1.68	2.25		7.30 (3.4 - 10.1)	1.650 (0.750 - 4.100)	7.25	99
15+15+15+22	1.68	1.68	1.68	2.46		7.50 (3.4 - 10.4)	1.710 (0.710 - 4.100)	7.51	99
15+15+15+25	1.67	1.67	1.67	2.79		7.80 (3.4 - 10.9)	1.810 (0.710 - 4.100)	7.95	99
15+15+15+35	1.65	1.65	1.65	3.85		8.80 (3.4 - 12.4)	2.110 (0.870 - 4.100)	9.27	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E			
15+15+15+42	1.71	1.71	1.71	4.78		9.90 (3.4 - 13.2)	2.150 (0.710 - 3.880)	9.44 99
15+15+15+50	1.58	1.58	1.58	5.26		10.00 (3.4 - 13.3)	2.140 (0.710 - 3.870)	9.40 99
15+15+15+60	1.44	1.44	1.44	5.77		10.10 (3.4 - 13.3)	2.130 (0.710 - 3.870)	9.35 99
15+15+15+71	1.34	1.34	1.34	6.37		10.40 (3.4 - 13.3)	2.210 (0.710 - 3.870)	9.71 99
15+15+20+20	1.67	1.67	2.23	2.23		7.80 (3.4 - 10.9)	1.810 (0.750 - 4.100)	7.95 99
15+15+20+22	1.67	1.67	2.22	2.44		8.00 (3.4 - 11.2)	1.870 (0.710 - 4.100)	8.21 99
15+15+20+25	1.66	1.66	2.21	2.77		8.30 (3.4 - 11.6)	1.960 (0.710 - 4.100)	8.61 99
15+15+20+35	1.69	1.69	2.26	3.95		9.60 (3.4 - 13.0)	2.160 (0.710 - 3.970)	9.49 99
15+15+20+42	1.63	1.63	2.17	4.57		10.00 (3.4 - 13.3)	2.150 (0.710 - 3.860)	9.44 99
15+15+20+50	1.50	1.50	2.00	5.00		10.00 (3.4 - 13.3)	2.130 (0.710 - 3.870)	9.35 99
15+15+20+60	1.40	1.40	1.87	5.62		10.30 (3.4 - 13.3)	2.200 (0.710 - 3.870)	9.66 99
15+15+20+71	1.30	1.30	1.74	6.16		10.50 (3.4 - 13.3)	2.240 (0.710 - 3.870)	9.84 99
15+15+22+22	1.66	1.66	2.44	2.44		8.20 (3.4 - 11.5)	1.930 (0.670 - 4.100)	8.48 99
15+15+22+25	1.66	1.66	2.43	2.76		8.50 (3.4 - 11.9)	2.020 (0.670 - 4.100)	8.87 99
15+15+22+35	1.71	1.71	2.50	3.98		9.90 (3.4 - 13.2)	2.170 (0.670 - 3.920)	9.53 99
15+15+22+42	1.60	1.60	2.34	4.47		10.00 (3.4 - 13.3)	2.150 (0.670 - 3.860)	9.44 99
15+15+22+50	1.49	1.49	2.18	4.95		10.10 (3.4 - 13.3)	2.160 (0.670 - 3.870)	9.49 99
15+15+22+60	1.38	1.38	2.02	5.52		10.30 (3.4 - 13.3)	2.200 (0.670 - 3.870)	9.66 99
15+15+22+71	1.29	1.29	1.90	6.12		10.60 (3.4 - 13.3)	2.270 (0.670 - 3.870)	9.97 99
15+15+25+25	1.65	1.65	2.75	2.75		8.80 (3.4 - 12.4)	2.110 (0.830 - 4.100)	9.27 99
15+15+25+35	1.67	1.67	2.78	3.89		10.00 (3.4 - 13.3)	2.180 (0.670 - 3.900)	9.57 99
15+15+25+42	1.55	1.55	2.58	4.33		10.00 (3.4 - 13.3)	2.150 (0.670 - 3.860)	9.44 99
15+15+25+50	1.44	1.44	2.40	4.81		10.10 (3.4 - 13.3)	2.160 (0.670 - 3.870)	9.49 99
15+15+25+60	1.36	1.36	2.26	5.43		10.40 (3.4 - 13.3)	2.230 (0.670 - 3.870)	9.79 99
15+15+25+71	1.27	1.27	2.12	6.03		10.70 (3.4 - 13.3)	2.300 (0.670 - 3.870)	10.10 99
15+15+35+35	1.50	1.50	3.50	3.50		10.00 (3.4 - 13.3)	2.160 (0.670 - 3.900)	9.49 99
15+15+35+42	1.43	1.43	3.34	4.00		10.20 (3.4 - 13.3)	2.200 (0.670 - 3.860)	9.66 99
15+15+35+50	1.36	1.36	3.17	4.52		10.40 (3.4 - 13.3)	2.260 (0.670 - 3.870)	9.93 99
15+15+35+60	1.27	1.27	2.97	5.09		10.60 (3.4 - 13.3)	2.290 (0.670 - 3.870)	10.06 99
15+15+35+71	1.20	1.20	2.81	5.69		10.90 (3.4 - 13.3)	2.370 (0.670 - 3.870)	10.41 99
15+15+42+42	1.37	1.37	3.83	3.83		10.40 (3.4 - 13.3)	2.250 (0.670 - 3.820)	9.88 99
15+15+42+50	1.30	1.30	3.65	4.34		10.60 (3.4 - 13.3)	2.300 (0.670 - 3.830)	10.10 99
15+15+42+60	1.23	1.23	3.44	4.91		10.80 (3.4 - 13.3)	2.340 (0.670 - 3.830)	10.28 99
15+15+42+71	1.15	1.15	3.23	5.46		11.00 (3.4 - 13.3)	2.350 (0.670 - 3.830)	10.32 99
15+15+50+50	1.25	1.25	4.15	4.15		10.80 (3.4 - 13.3)	2.360 (0.670 - 3.840)	10.36 99
15+15+50+60	1.18	1.18	3.93	4.71		11.00 (3.4 - 13.3)	2.390 (0.670 - 3.840)	10.50 99
15+15+50+71	1.09	1.09	3.64	5.17		11.00 (3.4 - 13.3)	2.280 (0.670 - 3.830)	10.01 99
15+20+20+20	1.66	2.21	2.21	2.21		8.30 (3.4 - 11.6)	1.960 (0.750 - 4.100)	8.61 99
15+20+20+22	1.66	2.21	2.21	2.43		8.50 (3.4 - 11.9)	2.020 (0.710 - 4.100)	8.87 99
15+20+20+25	1.65	2.20	2.20	2.75		8.80 (3.4 - 12.4)	2.110 (0.870 - 4.100)	9.27 99
15+20+20+35	1.67	2.22	2.22	3.89		10.00 (3.4 - 13.3)	2.180 (0.710 - 3.900)	9.57 99
15+20+20+42	1.55	2.06	2.06	4.33		10.00 (3.4 - 13.3)	2.150 (0.710 - 3.860)	9.44 99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E			
15+20+20+50	1.44	1.92	1.92	4.81		10.10 (3.4 - 13.3)	2.160 (0.710 - 3.870)	9.49
15+20+20+60	1.36	1.81	1.81	5.43		10.40 (3.4 - 13.3)	2.230 (0.710 - 3.870)	9.79
15+20+20+71	1.27	1.70	1.70	6.03		10.70 (3.4 - 13.3)	2.300 (0.710 - 3.870)	10.10
15+20+22+22	1.65	2.20	2.42	2.42		8.70 (3.4 - 12.2)	2.080 (0.670 - 4.100)	9.13
15+20+22+25	1.66	2.22	2.44	2.77		9.10 (3.4 - 12.6)	2.130 (0.670 - 4.060)	9.35
15+20+22+35	1.63	2.17	2.39	3.80		10.00 (3.4 - 13.3)	2.170 (0.670 - 3.900)	9.53
15+20+22+42	1.52	2.02	2.22	4.24		10.00 (3.4 - 13.3)	2.140 (0.670 - 3.860)	9.40
15+20+22+50	1.43	1.91	2.10	4.77		10.20 (3.4 - 13.3)	2.190 (0.670 - 3.870)	9.62
15+20+22+60	1.33	1.78	1.96	5.33		10.40 (3.4 - 13.3)	2.230 (0.670 - 3.870)	9.79
15+20+22+71	1.25	1.67	1.84	5.94		10.70 (3.4 - 13.3)	2.300 (0.670 - 3.870)	10.10
15+20+25+25	1.69	2.26	2.82	2.82		9.60 (3.4 - 13.0)	2.160 (0.670 - 3.970)	9.49
15+20+25+35	1.58	2.11	2.63	3.68		10.00 (3.4 - 13.3)	2.170 (0.670 - 3.900)	9.53
15+20+25+42	1.49	1.98	2.48	4.16		10.10 (3.4 - 13.3)	2.170 (0.670 - 3.860)	9.53
15+20+25+50	1.40	1.87	2.34	4.68		10.30 (3.4 - 13.3)	2.230 (0.670 - 3.870)	9.79
15+20+25+60	1.31	1.75	2.19	5.25		10.50 (3.4 - 13.3)	2.260 (0.670 - 3.870)	9.93
15+20+25+71	1.24	1.65	2.06	5.85		10.80 (3.4 - 13.3)	2.340 (0.670 - 3.870)	10.28
15+20+35+35	1.44	1.92	3.37	3.37		10.10 (3.4 - 13.3)	2.190 (0.670 - 3.900)	9.62
15+20+35+42	1.38	1.84	3.22	3.86		10.30 (3.4 - 13.3)	2.240 (0.670 - 3.860)	9.84
15+20+35+50	1.31	1.75	3.06	4.38		10.50 (3.4 - 13.3)	2.290 (0.670 - 3.870)	10.06
15+20+35+60	1.25	1.66	2.91	4.98		10.80 (3.4 - 13.3)	2.360 (0.670 - 3.870)	10.36
15+20+35+71	1.17	1.56	2.73	5.54		11.00 (3.4 - 13.3)	2.390 (0.670 - 3.870)	10.50
15+20+42+42	1.32	1.76	3.71	3.71		10.50 (3.4 - 13.3)	2.280 (0.670 - 3.820)	10.01
15+20+42+50	1.26	1.69	3.54	4.21		10.70 (3.4 - 13.3)	2.330 (0.670 - 3.830)	10.23
15+20+42+60	1.19	1.59	3.34	4.77		10.90 (3.4 - 13.3)	2.370 (0.670 - 3.830)	10.41
15+20+42+71	1.11	1.49	3.12	5.28		11.00 (3.4 - 13.3)	2.310 (0.670 - 3.820)	10.14
15+20+50+50	1.21	1.61	4.04	4.04		10.90 (3.4 - 13.3)	2.390 (0.670 - 3.840)	10.50
15+20+50+60	1.14	1.52	3.79	4.55		11.00 (3.4 - 13.3)	2.350 (0.670 - 3.840)	10.32
15+20+50+71	1.06	1.41	3.53	5.01		11.00 (3.4 - 13.3)	2.230 (0.670 - 3.830)	9.79
15+22+22+22	1.67	2.44	2.44	2.44		9.00 (3.4 - 12.6)	2.120 (0.630 - 4.060)	9.31
15+22+22+25	1.68	2.46	2.46	2.80		9.40 (3.4 - 12.9)	2.150 (0.630 - 3.990)	9.44
15+22+22+35	1.60	2.34	2.34	3.72		10.00 (3.4 - 13.3)	2.170 (0.630 - 3.900)	9.53
15+22+22+42	1.49	2.18	2.18	4.16		10.00 (3.4 - 13.3)	2.140 (0.630 - 3.860)	9.40
15+22+22+50	1.40	2.06	2.06	4.68		10.20 (3.4 - 13.3)	2.190 (0.630 - 3.870)	9.62
15+22+22+60	1.32	1.94	1.94	5.29		10.50 (3.4 - 13.3)	2.260 (0.630 - 3.870)	9.93
15+22+22+71	1.25	1.83	1.83	5.90		10.80 (3.4 - 13.3)	2.340 (0.630 - 3.870)	10.28
15+22+25+25	1.71	2.50	2.84	2.84		9.90 (3.4 - 13.2)	2.170 (0.630 - 3.920)	9.53
15+22+25+35	1.55	2.27	2.58	3.61		10.00 (3.4 - 13.3)	2.170 (0.630 - 3.900)	9.53
15+22+25+42	1.46	2.14	2.43	4.08		10.10 (3.4 - 13.3)	2.170 (0.630 - 3.860)	9.53
15+22+25+50	1.38	2.02	2.30	4.60		10.30 (3.4 - 13.3)	2.230 (0.630 - 3.870)	9.79
15+22+25+60	1.30	1.91	2.17	5.21		10.60 (3.4 - 13.3)	2.290 (0.630 - 3.870)	10.06
15+22+25+71	1.22	1.79	2.03	5.77		10.80 (3.4 - 13.3)	2.340 (0.630 - 3.870)	10.28
15+22+35+35	1.43	2.10	3.34	3.34		10.20 (3.4 - 13.3)	2.220 (0.630 - 3.900)	9.75

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E			
15+22+35+42	1.37	2.01	3.19	3.83		10.40 (3.4 - 13.3)	2.270 (0.630 - 3.860)	9.97
15+22+35+50	1.30	1.91	3.04	4.34		10.60 (3.4 - 13.3)	2.320 (0.630 - 3.870)	10.19
15+22+35+60	1.23	1.80	2.86	4.91		10.80 (3.4 - 13.3)	2.360 (0.630 - 3.870)	10.36
15+22+35+71	1.15	1.69	2.69	5.46		11.00 (3.4 - 13.3)	2.370 (0.630 - 3.870)	10.41
15+22+42+42	1.30	1.91	3.64	3.64		10.50 (3.4 - 13.3)	2.280 (0.630 - 3.820)	10.01
15+22+42+50	1.24	1.82	3.48	4.15		10.70 (3.4 - 13.3)	2.330 (0.630 - 3.830)	10.23
15+22+42+60	1.19	1.74	3.32	4.75		11.00 (3.4 - 13.3)	2.400 (0.630 - 3.830)	10.54
15+22+42+71	1.10	1.61	3.08	5.21		11.00 (3.4 - 13.3)	2.290 (0.630 - 3.820)	10.06
15+22+50+50	1.19	1.75	3.98	3.98		10.90 (3.4 - 13.3)	2.390 (0.630 - 3.840)	10.50
15+22+50+60	1.12	1.65	3.74	4.49		11.00 (3.4 - 13.3)	2.330 (0.630 - 3.840)	10.23
15+22+50+71	1.04	1.53	3.48	4.94		11.00 (3.4 - 13.3)	2.220 (0.630 - 3.830)	9.75
15+25+25+25	1.67	2.78	2.78	2.78		10.00 (3.4 - 13.3)	2.180 (0.630 - 3.900)	9.57
15+25+25+35	1.50	2.50	2.50	3.50		10.00 (3.4 - 13.3)	2.160 (0.630 - 3.900)	9.49
15+25+25+42	1.43	2.38	2.38	4.00		10.20 (3.4 - 13.3)	2.200 (0.630 - 3.860)	9.66
15+25+25+50	1.36	2.26	2.26	4.52		10.40 (3.4 - 13.3)	2.260 (0.630 - 3.870)	9.93
15+25+25+60	1.27	2.12	2.12	5.09		10.60 (3.4 - 13.3)	2.290 (0.630 - 3.870)	10.06
15+25+25+71	1.20	2.00	2.00	5.69		10.90 (3.4 - 13.3)	2.370 (0.630 - 3.870)	10.41
15+25+35+35	1.40	2.34	3.28	3.28		10.30 (3.4 - 13.3)	2.260 (0.630 - 3.900)	9.93
15+25+35+42	1.33	2.22	3.11	3.73		10.40 (3.4 - 13.3)	2.270 (0.630 - 3.860)	9.97
15+25+35+50	1.27	2.12	2.97	4.24		10.60 (3.4 - 13.3)	2.320 (0.630 - 3.870)	10.19
15+25+35+60	1.21	2.02	2.83	4.84		10.90 (3.4 - 13.3)	2.390 (0.630 - 3.870)	10.50
15+25+35+71	1.13	1.88	2.64	5.35		11.00 (3.4 - 13.3)	2.350 (0.630 - 3.870)	10.32
15+25+42+42	1.28	2.14	3.59	3.59		10.60 (3.4 - 13.3)	2.310 (0.630 - 3.820)	10.14
15+25+42+50	1.23	2.05	3.44	4.09		10.80 (3.4 - 13.3)	2.370 (0.630 - 3.830)	10.41
15+25+42+60	1.16	1.94	3.25	4.65		11.00 (3.4 - 13.3)	2.380 (0.630 - 3.830)	10.45
15+25+42+71	1.08	1.80	3.02	5.10		11.00 (3.4 - 13.3)	2.270 (0.630 - 3.820)	9.97
15+25+50+50	1.18	1.96	3.93	3.93		11.00 (3.4 - 13.3)	2.420 (0.630 - 3.840)	10.63
15+25+50+60	1.10	1.83	3.67	4.40		11.00 (3.4 - 13.3)	2.300 (0.630 - 3.830)	10.10
15+25+50+71	1.02	1.71	3.42	4.85		11.00 (3.4 - 13.3)	2.190 (0.630 - 3.830)	9.62
15+35+35+35	1.31	3.06	3.06	3.06		10.50 (3.4 - 13.3)	2.320 (0.630 - 3.900)	10.19
15+35+35+42	1.26	2.95	2.95	3.54		10.70 (3.4 - 13.3)	2.360 (0.630 - 3.860)	10.36
15+35+35+50	1.21	2.83	2.83	4.04		10.90 (3.4 - 13.3)	2.420 (0.630 - 3.870)	10.63
15+35+35+60	1.14	2.66	2.66	4.55		11.00 (3.4 - 13.3)	2.380 (0.630 - 3.870)	10.45
15+35+35+71	1.06	2.47	2.47	5.01		11.00 (3.4 - 13.3)	2.260 (0.630 - 3.860)	9.93
15+35+42+42	1.22	2.85	3.42	3.42		10.90 (3.4 - 13.3)	2.410 (0.630 - 3.820)	10.58
15+35+42+50	1.16	2.71	3.25	3.87		11.00 (3.4 - 13.3)	2.410 (0.630 - 3.830)	10.58
15+35+42+60	1.09	2.53	3.04	4.34		11.00 (3.4 - 13.3)	2.300 (0.630 - 3.820)	10.10
15+35+42+71	1.01	2.36	2.83	4.79		11.00 (3.4 - 13.3)	2.180 (0.630 - 3.810)	9.57
15+35+50+50	1.10	2.57	3.67	3.67		11.00 (3.4 - 13.3)	2.330 (0.630 - 3.830)	10.23
15+35+50+60	1.03	2.41	3.44	4.13		11.00 (3.4 - 13.3)	2.220 (0.630 - 3.830)	9.75
15+35+50+71	0.96	2.25	3.22	4.57		11.00 (3.5 - 13.3)	2.130 (0.620 - 3.820)	9.35
15+42+42+42	1.17	3.28	3.28	3.28		11.00 (3.4 - 13.3)	2.410 (0.630 - 3.780)	10.58

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E			
15+42+42+50	1.11	3.10	3.10	3.69		11.00 (3.4 - 13.3)	2.330 (0.630 - 3.780)	10.23
15+42+42+60	1.04	2.91	2.91	4.15		11.00 (3.4 - 13.3)	2.220 (0.630 - 3.780)	9.75
15+42+42+71	0.97	2.72	2.72	4.59		11.00 (3.5 - 13.3)	2.120 (0.620 - 3.770)	9.31
15+42+50+50	1.05	2.94	3.50	3.50		11.00 (3.4 - 13.3)	2.250 (0.630 - 3.790)	9.88
15+42+50+60	0.99	2.77	3.29	3.95		11.00 (3.4 - 13.3)	2.140 (0.630 - 3.780)	9.40
20+20+20+20	2.20	2.20	2.20	2.20		8.80 (3.4 - 12.4)	2.110 (0.750 - 4.100)	9.27
20+20+20+22	2.22	2.22	2.22	2.44		9.10 (3.4 - 12.6)	2.130 (0.710 - 4.060)	9.35
20+20+20+25	2.26	2.26	2.26	2.82		9.60 (3.4 - 13.0)	2.160 (0.710 - 3.970)	9.49
20+20+20+35	2.11	2.11	2.11	3.68		10.00 (3.4 - 13.3)	2.170 (0.710 - 3.900)	9.53
20+20+20+42	1.98	1.98	1.98	4.16		10.10 (3.4 - 13.3)	2.170 (0.710 - 3.860)	9.53
20+20+20+50	1.87	1.87	1.87	4.68		10.30 (3.4 - 13.3)	2.230 (0.710 - 3.870)	9.79
20+20+20+60	1.75	1.75	1.75	5.25		10.50 (3.4 - 13.3)	2.260 (0.710 - 3.870)	9.93
20+20+20+71	1.65	1.65	1.65	5.85		10.80 (3.4 - 13.3)	2.340 (0.710 - 3.870)	10.28
20+20+22+22	2.24	2.24	2.46	2.46		9.40 (3.4 - 12.9)	2.150 (0.670 - 3.990)	9.44
20+20+22+25	2.28	2.28	2.50	2.84		9.90 (3.4 - 13.2)	2.170 (0.670 - 3.920)	9.53
20+20+22+35	2.06	2.06	2.27	3.61		10.00 (3.4 - 13.3)	2.170 (0.670 - 3.900)	9.53
20+20+22+42	1.94	1.94	2.14	4.08		10.10 (3.4 - 13.3)	2.170 (0.670 - 3.860)	9.53
20+20+22+50	1.84	1.84	2.02	4.60		10.30 (3.4 - 13.3)	2.230 (0.670 - 3.870)	9.79
20+20+22+60	1.74	1.74	1.91	5.21		10.60 (3.4 - 13.3)	2.290 (0.670 - 3.870)	10.06
20+20+22+71	1.62	1.62	1.79	5.77		10.80 (3.4 - 13.3)	2.340 (0.670 - 3.870)	10.28
20+20+25+25	2.22	2.22	2.78	2.78		10.00 (3.4 - 13.3)	2.180 (0.670 - 3.900)	9.57
20+20+25+35	2.00	2.00	2.50	3.50		10.00 (3.4 - 13.3)	2.160 (0.670 - 3.900)	9.49
20+20+25+42	1.91	1.91	2.38	4.00		10.20 (3.4 - 13.3)	2.200 (0.670 - 3.860)	9.66
20+20+25+50	1.81	1.81	2.26	4.52		10.40 (3.4 - 13.3)	2.260 (0.670 - 3.870)	9.93
20+20+25+60	1.70	1.70	2.12	5.09		10.60 (3.4 - 13.3)	2.290 (0.670 - 3.870)	10.06
20+20+25+71	1.60	1.60	2.00	5.69		10.90 (3.4 - 13.3)	2.370 (0.670 - 3.870)	10.41
20+20+35+35	1.87	1.87	3.28	3.28		10.30 (3.4 - 13.3)	2.260 (0.670 - 3.900)	9.93
20+20+35+42	1.78	1.78	3.11	3.73		10.40 (3.4 - 13.3)	2.270 (0.670 - 3.860)	9.97
20+20+35+50	1.70	1.70	2.97	4.24		10.60 (3.4 - 13.3)	2.320 (0.670 - 3.870)	10.19
20+20+35+60	1.61	1.61	2.83	4.84		10.90 (3.4 - 13.3)	2.390 (0.670 - 3.870)	10.50
20+20+35+71	1.51	1.51	2.64	5.35		11.00 (3.4 - 13.3)	2.350 (0.670 - 3.870)	10.32
20+20+42+42	1.71	1.71	3.59	3.59		10.60 (3.4 - 13.3)	2.310 (0.670 - 3.820)	10.14
20+20+42+50	1.64	1.64	3.44	4.09		10.80 (3.4 - 13.3)	2.370 (0.670 - 3.830)	10.41
20+20+42+60	1.55	1.55	3.25	4.65		11.00 (3.4 - 13.3)	2.380 (0.670 - 3.830)	10.45
20+20+42+71	1.44	1.44	3.02	5.10		11.00 (3.4 - 13.3)	2.270 (0.670 - 3.820)	9.97
20+20+50+50	1.57	1.57	3.93	3.93		11.00 (3.4 - 13.3)	2.420 (0.670 - 3.840)	10.63
20+20+50+60	1.47	1.47	3.67	4.40		11.00 (3.4 - 13.3)	2.300 (0.670 - 3.830)	10.10
20+20+50+71	1.37	1.37	3.42	4.85		11.00 (3.4 - 13.3)	2.190 (0.670 - 3.830)	9.62
20+22+22+22	2.26	2.48	2.48	2.48		9.70 (3.4 - 13.1)	2.160 (0.630 - 3.940)	9.49
20+22+22+25	2.25	2.47	2.47	2.81		10.00 (3.4 - 13.3)	2.180 (0.630 - 3.900)	9.57
20+22+22+35	2.02	2.22	2.22	3.54		10.00 (3.4 - 13.3)	2.160 (0.630 - 3.900)	9.49
20+22+22+42	1.92	2.12	2.12	4.04		10.20 (3.4 - 13.3)	2.200 (0.630 - 3.860)	9.66

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E			
20+22+22+50	1.82	2.01	2.01	4.56		10.40 (3.4 - 13.3)	2.260 (0.630 - 3.870)	9.93
20+22+22+60	1.71	1.88	1.88	5.13		10.60 (3.4 - 13.3)	2.290 (0.630 - 3.870)	99
20+22+22+71	1.61	1.78	1.78	5.73		10.90 (3.4 - 13.3)	2.370 (0.630 - 3.870)	99
20+22+25+25	2.17	2.39	2.72	2.72		10.00 (3.4 - 13.3)	2.170 (0.630 - 3.900)	99
20+22+25+35	1.98	2.18	2.48	3.47		10.10 (3.4 - 13.3)	2.190 (0.630 - 3.900)	99
20+22+25+42	1.87	2.06	2.34	3.93		10.20 (3.4 - 13.3)	2.200 (0.630 - 3.860)	99
20+22+25+50	1.78	1.96	2.22	4.44		10.40 (3.4 - 13.3)	2.260 (0.630 - 3.870)	99
20+22+25+60	1.69	1.85	2.11	5.06		10.70 (3.4 - 13.3)	2.320 (0.630 - 3.870)	99
20+22+25+71	1.59	1.75	1.99	5.66		11.00 (3.4 - 13.3)	2.400 (0.630 - 3.870)	99
20+22+35+35	1.84	2.02	3.22	3.22		10.30 (3.4 - 13.3)	2.260 (0.630 - 3.900)	99
20+22+35+42	1.76	1.94	3.09	3.71		10.50 (3.4 - 13.3)	2.300 (0.630 - 3.860)	99
20+22+35+50	1.69	1.85	2.95	4.21		10.70 (3.4 - 13.3)	2.350 (0.630 - 3.870)	99
20+22+35+60	1.59	1.75	2.78	4.77		10.90 (3.4 - 13.3)	2.390 (0.630 - 3.870)	99
20+22+35+71	1.49	1.64	2.60	5.28		11.00 (3.4 - 13.3)	2.330 (0.630 - 3.860)	99
20+22+42+42	1.70	1.87	3.57	3.57		10.70 (3.4 - 13.3)	2.340 (0.630 - 3.820)	99
20+22+42+50	1.63	1.79	3.42	4.07		10.90 (3.4 - 13.3)	2.400 (0.630 - 3.830)	99
20+22+42+60	1.53	1.68	3.21	4.58		11.00 (3.4 - 13.3)	2.370 (0.630 - 3.830)	99
20+22+42+71	1.42	1.56	2.98	5.04		11.00 (3.4 - 13.3)	2.250 (0.630 - 3.820)	99
20+22+50+50	1.55	1.70	3.87	3.87		11.00 (3.4 - 13.3)	2.400 (0.630 - 3.840)	99
20+22+50+60	1.45	1.59	3.62	4.34		11.00 (3.4 - 13.3)	2.290 (0.630 - 3.830)	99
20+22+50+71	1.35	1.48	3.37	4.79		11.00 (3.4 - 13.3)	2.170 (0.630 - 3.820)	99
20+25+25+25	2.11	2.63	2.63	2.63		10.00 (3.4 - 13.3)	2.170 (0.630 - 3.900)	99
20+25+25+35	1.92	2.40	2.40	3.37		10.10 (3.4 - 13.3)	2.190 (0.630 - 3.900)	99
20+25+25+42	1.84	2.30	2.30	3.86		10.30 (3.4 - 13.3)	2.240 (0.630 - 3.860)	99
20+25+25+50	1.75	2.19	2.19	4.38		10.50 (3.4 - 13.3)	2.290 (0.630 - 3.870)	99
20+25+25+60	1.66	2.08	2.08	4.98		10.80 (3.4 - 13.3)	2.360 (0.630 - 3.870)	99
20+25+25+71	1.56	1.95	1.95	5.54		11.00 (3.4 - 13.3)	2.390 (0.630 - 3.870)	99
20+25+35+35	1.81	2.26	3.17	3.17		10.40 (3.4 - 13.3)	2.290 (0.630 - 3.900)	99
20+25+35+42	1.74	2.17	3.04	3.65		10.60 (3.4 - 13.3)	2.330 (0.630 - 3.860)	99
20+25+35+50	1.66	2.08	2.91	4.15		10.80 (3.4 - 13.3)	2.390 (0.630 - 3.870)	99
20+25+35+60	1.57	1.96	2.75	4.71		11.00 (3.4 - 13.3)	2.420 (0.630 - 3.870)	99
20+25+35+71	1.46	1.82	2.55	5.17		11.00 (3.4 - 13.3)	2.310 (0.630 - 3.860)	99
20+25+42+42	1.66	2.07	3.48	3.48		10.70 (3.4 - 13.3)	2.340 (0.630 - 3.820)	99
20+25+42+50	1.59	1.99	3.34	3.98		10.90 (3.4 - 13.3)	2.400 (0.630 - 3.830)	99
20+25+42+60	1.50	1.87	3.14	4.49		11.00 (3.4 - 13.3)	2.340 (0.630 - 3.830)	99
20+25+42+71	1.39	1.74	2.92	4.94		11.00 (3.4 - 13.3)	2.230 (0.630 - 3.820)	99
20+25+50+50	1.52	1.90	3.79	3.79		11.00 (3.4 - 13.3)	2.380 (0.630 - 3.840)	99
20+25+50+60	1.42	1.77	3.55	4.26		11.00 (3.4 - 13.3)	2.260 (0.630 - 3.830)	99
20+25+50+71	1.33	1.66	3.31	4.70		11.00 (3.4 - 13.3)	2.150 (0.630 - 3.820)	99
20+35+35+35	1.70	2.97	2.97	2.97		10.60 (3.4 - 13.3)	2.350 (0.630 - 3.900)	99
20+35+35+42	1.64	2.86	2.86	3.44		10.80 (3.4 - 13.3)	2.400 (0.630 - 3.860)	99
20+35+35+50	1.57	2.75	2.75	3.93		11.00 (3.4 - 13.3)	2.450 (0.630 - 3.870)	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E			
20+35+35+60	1.47	2.57	2.57	4.40		11.00 (3.4 - 13.3)	2.330 (0.630 - 3.860)	10.23
20+35+35+71	1.37	2.39	2.39	4.85		11.00 (3.4 - 13.3)	2.220 (0.630 - 3.860)	9.75
20+35+42+42	1.58	2.77	3.32	3.32		11.00 (3.4 - 13.3)	2.440 (0.630 - 3.820)	10.72
20+35+42+50	1.50	2.62	3.14	3.74		11.00 (3.4 - 13.3)	2.370 (0.630 - 3.830)	10.41
20+35+42+60	1.40	2.45	2.94	4.20		11.00 (3.4 - 13.3)	2.250 (0.630 - 3.820)	9.88
20+35+42+71	1.31	2.29	2.75	4.65		11.00 (3.5 - 13.3)	2.140 (0.620 - 3.810)	9.40
20+35+50+50	1.42	2.48	3.55	3.55		11.00 (3.4 - 13.3)	2.290 (0.630 - 3.830)	10.06
20+35+50+60	1.33	2.33	3.33	4.00		11.00 (3.4 - 13.3)	2.180 (0.630 - 3.820)	9.57
20+42+42+42	1.51	3.16	3.16	3.16		11.00 (3.4 - 13.3)	2.370 (0.630 - 3.780)	10.41
20+42+42+50	1.43	3.00	3.00	3.57		11.00 (3.4 - 13.3)	2.290 (0.630 - 3.780)	10.06
20+42+42+60	1.34	2.82	2.82	4.02		11.00 (3.4 - 13.3)	2.170 (0.630 - 3.770)	9.53
20+42+50+50	1.36	2.85	3.40	3.40		11.00 (3.4 - 13.3)	2.210 (0.630 - 3.780)	9.71
20+42+50+60	1.28	2.69	3.20	3.84		11.00 (3.5 - 13.3)	2.130 (0.620 - 3.780)	9.35
22+22+22+22	2.50	2.50	2.50	2.50		10.00 (3.4 - 13.3)	2.180 (0.590 - 3.900)	9.57
22+22+22+25	2.42	2.42	2.42	2.75		10.00 (3.4 - 13.3)	2.180 (0.590 - 3.900)	9.57
22+22+22+35	2.18	2.18	2.18	3.47		10.00 (3.4 - 13.3)	2.160 (0.590 - 3.900)	9.49
22+22+22+42	2.08	2.08	2.08	3.97		10.20 (3.4 - 13.3)	2.200 (0.590 - 3.860)	9.66
22+22+22+50	1.97	1.97	1.97	4.48		10.40 (3.4 - 13.3)	2.260 (0.590 - 3.870)	9.93
22+22+22+60	1.87	1.87	1.87	5.10		10.70 (3.4 - 13.3)	2.320 (0.590 - 3.870)	10.19
22+22+22+71	1.75	1.75	1.75	5.65		10.90 (3.4 - 13.3)	2.370 (0.590 - 3.870)	10.41
22+22+25+25	2.34	2.34	2.66	2.66		10.00 (3.4 - 13.3)	2.170 (0.590 - 3.900)	9.53
22+22+25+35	2.14	2.14	2.43	3.40		10.10 (3.4 - 13.3)	2.190 (0.590 - 3.900)	9.62
22+22+25+42	2.04	2.04	2.32	3.90		10.30 (3.4 - 13.3)	2.240 (0.590 - 3.860)	9.84
22+22+25+50	1.94	1.94	2.21	4.41		10.50 (3.4 - 13.3)	2.290 (0.590 - 3.870)	10.06
22+22+25+60	1.82	1.82	2.07	4.98		10.70 (3.4 - 13.3)	2.320 (0.590 - 3.870)	10.19
22+22+25+71	1.73	1.73	1.96	5.58		11.00 (3.4 - 13.3)	2.400 (0.590 - 3.870)	10.54
22+22+35+35	2.01	2.01	3.19	3.19		10.40 (3.4 - 13.3)	2.290 (0.590 - 3.900)	10.06
22+22+35+42	1.91	1.91	3.04	3.64		10.50 (3.4 - 13.3)	2.300 (0.590 - 3.860)	10.10
22+22+35+50	1.82	1.82	2.90	4.15		10.70 (3.4 - 13.3)	2.350 (0.590 - 3.870)	10.32
22+22+35+60	1.74	1.74	2.77	4.75		11.00 (3.4 - 13.3)	2.420 (0.590 - 3.870)	10.63
22+22+35+71	1.61	1.61	2.57	5.21		11.00 (3.4 - 13.3)	2.310 (0.590 - 3.860)	10.14
22+22+42+42	1.84	1.84	3.51	3.51		10.70 (3.4 - 13.3)	2.340 (0.590 - 3.820)	10.28
22+22+42+50	1.76	1.76	3.37	4.01		10.90 (3.4 - 13.3)	2.400 (0.590 - 3.830)	10.54
22+22+42+60	1.66	1.66	3.16	4.52		11.00 (3.4 - 13.3)	2.350 (0.590 - 3.830)	10.32
22+22+42+71	1.54	1.54	2.94	4.97		11.00 (3.4 - 13.3)	2.230 (0.590 - 3.820)	9.79
22+22+50+50	1.68	1.68	3.82	3.82		11.00 (3.4 - 13.3)	2.390 (0.590 - 3.840)	10.50
22+22+50+60	1.57	1.57	3.57	4.29		11.00 (3.4 - 13.3)	2.270 (0.590 - 3.830)	9.97
22+22+50+71	1.47	1.47	3.33	4.73		11.00 (3.4 - 13.3)	2.160 (0.590 - 3.820)	9.49
22+25+25+25	2.27	2.58	2.58	2.58		10.00 (3.4 - 13.3)	2.170 (0.590 - 3.900)	9.53
22+25+25+35	2.10	2.38	2.38	3.34		10.20 (3.4 - 13.3)	2.220 (0.590 - 3.900)	9.75
22+25+25+42	2.01	2.28	2.28	3.83		10.40 (3.4 - 13.3)	2.270 (0.590 - 3.860)	9.97
22+25+25+50	1.91	2.17	2.17	4.34		10.60 (3.4 - 13.3)	2.320 (0.590 - 3.870)	10.19

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E			
22+25+25+60	1.80	2.05	2.05	4.91		10.80 (3.4 - 13.3)	2.360 (0.590 - 3.870)	10.36
22+25+25+71	1.69	1.92	1.92	5.46		11.00 (3.4 - 13.3)	2.370 (0.590 - 3.870)	10.41
22+25+35+35	1.96	2.22	3.11	3.11		10.40 (3.4 - 13.3)	2.290 (0.590 - 3.900)	10.06
22+25+35+42	1.88	2.14	2.99	3.59		10.60 (3.4 - 13.3)	2.330 (0.590 - 3.860)	10.23
22+25+35+50	1.80	2.05	2.86	4.09		10.80 (3.4 - 13.3)	2.390 (0.590 - 3.870)	10.50
22+25+35+60	1.70	1.94	2.71	4.65		11.00 (3.4 - 13.3)	2.400 (0.590 - 3.870)	10.54
22+25+35+71	1.58	1.80	2.52	5.10		11.00 (3.4 - 13.3)	2.290 (0.590 - 3.860)	10.06
22+25+42+42	1.81	2.06	3.46	3.46		10.80 (3.4 - 13.3)	2.380 (0.590 - 3.820)	10.45
22+25+42+50	1.74	1.98	3.32	3.96		11.00 (3.4 - 13.3)	2.430 (0.590 - 3.830)	10.67
22+25+42+60	1.62	1.85	3.10	4.43		11.00 (3.4 - 13.3)	2.320 (0.590 - 3.820)	10.19
22+25+42+71	1.51	1.72	2.89	4.88		11.00 (3.4 - 13.3)	2.210 (0.590 - 3.820)	9.71
22+25+50+50	1.65	1.87	3.74	3.74		11.00 (3.4 - 13.3)	2.360 (0.590 - 3.840)	10.36
22+25+50+60	1.54	1.75	3.50	4.20		11.00 (3.4 - 13.3)	2.240 (0.590 - 3.830)	9.84
22+25+50+71	1.44	1.64	3.27	4.65		11.00 (3.5 - 13.3)	2.130 (0.580 - 3.820)	9.35
22+35+35+35	1.85	2.95	2.95	2.95		10.70 (3.4 - 13.3)	2.380 (0.590 - 3.900)	10.45
22+35+35+42	1.79	2.85	2.85	3.42		10.90 (3.4 - 13.3)	2.430 (0.590 - 3.860)	10.67
22+35+35+50	1.70	2.71	2.71	3.87		11.00 (3.4 - 13.3)	2.430 (0.590 - 3.870)	10.67
22+35+35+60	1.59	2.53	2.53	4.34		11.00 (3.4 - 13.3)	2.320 (0.590 - 3.860)	10.19
22+35+35+71	1.48	2.36	2.36	4.79		11.00 (3.4 - 13.3)	2.200 (0.590 - 3.850)	9.66
22+35+42+42	1.72	2.73	3.28	3.28		11.00 (3.4 - 13.3)	2.430 (0.590 - 3.820)	10.67
22+35+42+50	1.62	2.58	3.10	3.69		11.00 (3.4 - 13.3)	2.350 (0.590 - 3.820)	10.32
22+35+42+60	1.52	2.42	2.91	4.15		11.00 (3.4 - 13.3)	2.240 (0.590 - 3.820)	9.84
22+35+42+71	1.42	2.26	2.72	4.59		11.00 (3.5 - 13.3)	2.140 (0.580 - 3.810)	9.40
22+35+50+50	1.54	2.45	3.50	3.50		11.00 (3.4 - 13.3)	2.270 (0.590 - 3.830)	9.97
22+35+50+60	1.45	2.31	3.29	3.95		11.00 (3.4 - 13.3)	2.160 (0.590 - 3.820)	9.49
22+42+42+42	1.64	3.12	3.12	3.12		11.00 (3.4 - 13.3)	2.350 (0.590 - 3.770)	10.32
22+42+42+50	1.55	2.96	2.96	3.53		11.00 (3.4 - 13.3)	2.270 (0.590 - 3.780)	9.97
22+42+42+60	1.46	2.78	2.78	3.98		11.00 (3.4 - 13.3)	2.160 (0.590 - 3.770)	9.49
22+42+50+50	1.48	2.82	3.35	3.35		11.00 (3.4 - 13.3)	2.190 (0.590 - 3.780)	9.62
25+25+25+25	2.50	2.50	2.50	2.50		10.00 (3.4 - 13.3)	2.160 (0.590 - 3.900)	9.49
25+25+25+35	2.34	2.34	2.34	3.28		10.30 (3.4 - 13.3)	2.260 (0.590 - 3.900)	9.93
25+25+25+42	2.22	2.22	2.22	3.73		10.40 (3.4 - 13.3)	2.270 (0.590 - 3.860)	9.97
25+25+25+50	2.12	2.12	2.12	4.24		10.60 (3.4 - 13.3)	2.320 (0.590 - 3.870)	10.19
25+25+25+60	2.02	2.02	2.02	4.84		10.90 (3.4 - 13.3)	2.390 (0.590 - 3.870)	10.50
25+25+25+71	1.88	1.88	1.88	5.35		11.00 (3.4 - 13.3)	2.350 (0.590 - 3.870)	10.32
25+25+35+35	2.19	2.19	3.06	3.06		10.50 (3.4 - 13.3)	2.320 (0.590 - 3.900)	10.19
25+25+35+42	2.11	2.11	2.95	3.54		10.70 (3.4 - 13.3)	2.360 (0.590 - 3.860)	10.36
25+25+35+50	2.02	2.02	2.83	4.04		10.90 (3.4 - 13.3)	2.420 (0.590 - 3.870)	10.63
25+25+35+60	1.90	1.90	2.66	4.55		11.00 (3.4 - 13.3)	2.380 (0.590 - 3.870)	10.45
25+25+35+71	1.76	1.76	2.47	5.01		11.00 (3.4 - 13.3)	2.260 (0.590 - 3.860)	9.93
25+25+42+42	2.03	2.03	3.42	3.42		10.90 (3.4 - 13.3)	2.410 (0.590 - 3.820)	10.58
25+25+42+50	1.94	1.94	3.25	3.87		11.00 (3.4 - 13.3)	2.410 (0.590 - 3.830)	10.58

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)					Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E			
25+25+42+60	1.81	1.81	3.04	4.34		11.00 (3.4 - 13.3)	2.300 (0.590 - 3.820)	10.10
25+25+42+71	1.69	1.69	2.83	4.79		11.00 (3.4 - 13.3)	2.180 (0.590 - 3.810)	9.57
25+25+50+50	1.83	1.83	3.67	3.67		11.00 (3.4 - 13.3)	2.330 (0.590 - 3.830)	10.23
25+25+50+60	1.72	1.72	3.44	4.13		11.00 (3.4 - 13.3)	2.220 (0.590 - 3.830)	9.75
25+25+50+71	1.61	1.61	3.22	4.57		11.00 (3.5 - 13.3)	2.130 (0.580 - 3.820)	9.35
25+35+35+35	2.08	2.91	2.91	2.91		10.80 (3.4 - 13.3)	2.420 (0.590 - 3.900)	10.63
25+35+35+42	1.99	2.78	2.78	3.34		10.90 (3.4 - 13.3)	2.430 (0.590 - 3.860)	10.67
25+35+35+50	1.90	2.66	2.66	3.79		11.00 (3.4 - 13.3)	2.410 (0.590 - 3.870)	10.58
25+35+35+60	1.77	2.48	2.48	4.26		11.00 (3.4 - 13.3)	2.290 (0.590 - 3.860)	10.06
25+35+35+71	1.66	2.32	2.32	4.70		11.00 (3.4 - 13.3)	2.180 (0.590 - 3.850)	9.57
25+35+42+42	1.91	2.67	3.21	3.21		11.00 (3.4 - 13.3)	2.410 (0.590 - 3.820)	10.58
25+35+42+50	1.81	2.53	3.04	3.62		11.00 (3.4 - 13.3)	2.330 (0.590 - 3.820)	10.23
25+35+42+60	1.70	2.38	2.85	4.07		11.00 (3.4 - 13.3)	2.210 (0.590 - 3.810)	9.71
25+42+42+42	1.82	3.06	3.06	3.06		11.00 (3.4 - 13.3)	2.330 (0.590 - 3.770)	10.23
25+42+42+50	1.73	2.91	2.91	3.46		11.00 (3.4 - 13.3)	2.250 (0.590 - 3.780)	9.88
25+42+42+60	1.63	2.73	2.73	3.91		11.00 (3.5 - 13.3)	2.140 (0.580 - 3.770)	9.40
25+42+50+50	1.65	2.77	3.29	3.29		11.00 (3.4 - 13.3)	2.170 (0.590 - 3.780)	9.53
35+35+35+35	2.75	2.75	2.75	2.75		11.00 (3.4 - 13.3)	2.480 (0.590 - 3.900)	10.89
35+35+35+42	2.62	2.62	2.62	3.14		11.00 (3.4 - 13.3)	2.400 (0.590 - 3.860)	10.54
35+35+35+50	2.48	2.48	2.48	3.55		11.00 (3.4 - 13.3)	2.320 (0.590 - 3.860)	10.19
35+35+35+60	2.33	2.33	2.33	4.00		11.00 (3.4 - 13.3)	2.210 (0.590 - 3.850)	9.71
35+35+42+42	2.50	2.50	3.00	3.00		11.00 (3.4 - 13.3)	2.320 (0.590 - 3.810)	10.19
35+35+42+50	2.38	2.38	2.85	3.40		11.00 (3.4 - 13.3)	2.240 (0.590 - 3.810)	9.84
35+42+42+42	2.39	2.87	2.87	2.87		11.00 (3.4 - 13.3)	2.240 (0.590 - 3.770)	9.84
35+42+42+50	2.28	2.73	2.73	3.25		11.00 (3.5 - 13.3)	2.170 (0.580 - 3.770)	9.53
42+42+42+42	2.75	2.75	2.75	2.75		11.00 (3.5 - 13.3)	2.240 (0.580 - 3.880)	9.84
15+15+15+15+15	1.70	1.70	1.70	1.70	1.70	8.50 (4.1 - 11.5)	1.910 (0.880 - 4.100)	8.39
15+15+15+15+20	1.69	1.69	1.69	1.69	2.25	9.00 (4.1 - 11.8)	2.250 (0.860 - 4.100)	9.88
15+15+15+15+22	1.68	1.68	1.68	1.68	2.47	9.20 (4.1 - 11.9)	2.320 (0.860 - 4.100)	10.19
15+15+15+15+25	1.68	1.68	1.68	1.68	2.79	9.50 (4.1 - 12.1)	2.420 (0.860 - 4.100)	10.63
15+15+15+15+35	1.66	1.66	1.66	1.66	3.87	10.50 (4.1 - 12.7)	2.770 (0.860 - 4.100)	12.17
15+15+15+15+42	1.65	1.65	1.65	1.65	4.61	11.20 (4.1 - 13.2)	2.960 (0.860 - 4.100)	13.00
15+15+15+15+50	1.64	1.64	1.64	1.64	5.45	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15
15+15+15+15+60	1.50	1.50	1.50	1.50	6.00	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15
15+15+15+15+71	1.37	1.37	1.37	1.37	6.50	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15
15+15+15+20+20	1.68	1.68	1.68	2.24	2.24	9.50 (4.1 - 12.1)	2.420 (0.860 - 4.100)	10.63
15+15+15+20+22	1.67	1.67	1.67	2.23	2.45	9.70 (4.1 - 12.2)	2.490 (0.860 - 4.100)	10.94
15+15+15+20+25	1.67	1.67	1.67	2.22	2.78	10.00 (4.1 - 12.4)	2.600 (0.860 - 4.100)	11.42
15+15+15+20+35	1.65	1.65	1.65	2.20	3.85	11.00 (4.1 - 13.0)	2.950 (0.960 - 4.100)	12.96
15+15+15+20+42	1.64	1.64	1.64	2.19	4.59	11.70 (4.1 - 13.7)	2.980 (0.860 - 4.100)	13.09
15+15+15+20+50	1.57	1.57	1.57	2.09	5.22	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15
15+15+15+20+60	1.44	1.44	1.44	1.92	5.76	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+15+15+20+71	1.32	1.32	1.32	1.76	6.26	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99
15+15+15+22+22	1.67	1.67	1.67	2.45	2.45	9.90 (4.1 - 12.3)	2.520 (0.840 - 4.100)	11.07	99
15+15+15+22+25	1.66	1.66	1.66	2.44	2.77	10.20 (4.1 - 12.5)	2.630 (0.840 - 4.100)	11.55	99
15+15+15+22+35	1.65	1.65	1.65	2.42	3.84	11.20 (4.1 - 13.2)	2.920 (0.840 - 4.100)	12.82	99
15+15+15+22+42	1.64	1.64	1.64	2.40	4.59	11.90 (4.1 - 13.9)	2.950 (0.840 - 4.100)	12.96	99
15+15+15+22+50	1.54	1.54	1.54	2.26	5.13	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+15+22+60	1.42	1.42	1.42	2.08	5.67	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+15+22+71	1.30	1.30	1.30	1.91	6.17	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+15+25+25	1.66	1.66	1.66	2.76	2.76	10.50 (4.1 - 12.7)	2.730 (0.840 - 4.100)	11.99	99
15+15+15+25+35	1.64	1.64	1.64	2.74	3.83	11.50 (4.1 - 13.5)	2.930 (0.840 - 4.100)	12.87	99
15+15+15+25+42	1.61	1.61	1.61	2.68	4.50	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+15+25+50	1.50	1.50	1.50	2.50	5.00	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+15+25+60	1.38	1.38	1.38	2.31	5.54	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+15+25+71	1.28	1.28	1.28	2.13	6.04	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+15+35+35	1.57	1.57	1.57	3.65	3.65	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+15+35+42	1.48	1.48	1.48	3.44	4.13	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+15+35+50	1.38	1.38	1.38	3.23	4.62	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+15+35+60	1.29	1.29	1.29	3.00	5.14	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+15+35+71	1.19	1.19	1.19	2.78	5.64	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+15+42+42	1.40	1.40	1.40	3.91	3.91	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
15+15+15+42+50	1.31	1.31	1.31	3.68	4.38	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
15+15+15+42+60	1.22	1.22	1.22	3.43	4.90	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
15+15+15+42+71	1.14	1.14	1.14	3.19	5.39	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
15+15+20+20+20	1.67	1.67	2.22	2.22	2.22	10.00 (4.1 - 12.4)	2.600 (0.860 - 4.100)	11.42	99
15+15+20+20+22	1.66	1.66	2.22	2.22	2.44	10.20 (4.1 - 12.5)	2.670 (0.860 - 4.100)	11.73	99
15+15+20+20+25	1.66	1.66	2.21	2.21	2.76	10.50 (4.1 - 12.7)	2.770 (0.860 - 4.100)	12.17	99
15+15+20+20+35	1.64	1.64	2.19	2.19	3.83	11.50 (4.1 - 13.5)	2.970 (0.860 - 4.100)	13.04	99
15+15+20+20+42	1.61	1.61	2.14	2.14	4.50	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99
15+15+20+20+50	1.50	1.50	2.00	2.00	5.00	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99
15+15+20+20+60	1.38	1.38	1.85	1.85	5.54	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99
15+15+20+20+71	1.28	1.28	1.70	1.70	6.04	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99
15+15+20+22+22	1.66	1.66	2.21	2.43	2.43	10.40 (4.1 - 12.6)	2.700 (0.840 - 4.100)	11.86	99
15+15+20+22+25	1.65	1.65	2.21	2.43	2.76	10.70 (4.1 - 12.8)	2.800 (0.840 - 4.100)	12.30	99
15+15+20+22+35	1.64	1.64	2.19	2.41	3.83	11.70 (4.1 - 13.7)	2.940 (0.840 - 4.100)	12.91	99
15+15+20+22+42	1.58	1.58	2.11	2.32	4.42	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+20+22+50	1.48	1.48	1.97	2.16	4.92	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+20+22+60	1.36	1.36	1.82	2.00	5.45	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+20+22+71	1.26	1.26	1.68	1.85	5.96	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+20+25+25	1.65	1.65	2.20	2.75	2.75	11.00 (4.1 - 13.0)	2.910 (0.940 - 4.100)	12.78	99
15+15+20+25+35	1.64	1.64	2.18	2.73	3.82	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+20+25+42	1.54	1.54	2.05	2.56	4.31	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+20+25+50	1.44	1.44	1.92	2.40	4.80	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+15+20+25+60	1.33	1.33	1.78	2.22	5.33	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+20+25+71	1.23	1.23	1.64	2.05	5.84	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+20+35+35	1.50	1.50	2.00	3.50	3.50	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+20+35+42	1.42	1.42	1.89	3.31	3.97	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+20+35+50	1.33	1.33	1.78	3.11	4.44	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+20+35+60	1.24	1.24	1.66	2.90	4.97	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+20+35+71	1.15	1.15	1.54	2.69	5.46	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+15+20+42+42	1.34	1.34	1.79	3.76	3.76	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
15+15+20+42+50	1.27	1.27	1.69	3.55	4.23	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
15+15+20+42+60	1.18	1.18	1.58	3.32	4.74	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
15+15+20+42+71	1.10	1.10	1.47	3.09	5.23	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
15+15+22+22+22	1.66	1.66	2.43	2.43	2.43	10.60 (4.1 - 12.8)	2.730 (0.820 - 4.100)	11.99	99
15+15+22+22+25	1.65	1.65	2.42	2.42	2.75	10.90 (4.1 - 12.9)	2.830 (0.820 - 4.100)	12.43	99
15+15+22+22+35	1.64	1.64	2.40	2.40	3.82	11.90 (4.1 - 13.9)	2.910 (0.820 - 4.100)	12.78	99
15+15+22+22+42	1.55	1.55	2.28	2.28	4.34	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+22+22+50	1.45	1.45	2.13	2.13	4.84	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+22+22+60	1.34	1.34	1.97	1.97	5.37	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+22+22+71	1.24	1.24	1.82	1.82	5.88	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+22+25+25	1.65	1.65	2.42	2.75	2.75	11.20 (4.1 - 13.2)	2.880 (0.820 - 4.100)	12.65	99
15+15+22+25+35	1.61	1.61	2.36	2.68	3.75	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+22+25+42	1.51	1.51	2.22	2.52	4.24	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+22+25+50	1.42	1.42	2.08	2.36	4.72	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+22+25+60	1.31	1.31	1.93	2.19	5.26	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+22+25+71	1.22	1.22	1.78	2.03	5.76	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+22+35+35	1.48	1.48	2.16	3.44	3.44	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+22+35+42	1.40	1.40	2.05	3.26	3.91	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+22+35+50	1.31	1.31	1.93	3.07	4.38	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+22+35+60	1.22	1.22	1.80	2.86	4.90	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+22+35+71	1.14	1.14	1.67	2.66	5.39	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+22+42+42	1.32	1.32	1.94	3.71	3.71	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+15+22+42+50	1.25	1.25	1.83	3.50	4.17	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+15+22+42+60	1.17	1.17	1.71	3.27	4.68	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+15+22+42+71	1.09	1.09	1.60	3.05	5.16	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+15+25+25+25	1.64	1.64	2.74	2.74	2.74	11.50 (4.1 - 13.5)	2.890 (0.820 - 4.100)	12.69	99
15+15+25+25+35	1.57	1.57	2.61	2.61	3.65	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+25+25+42	1.48	1.48	2.46	2.46	4.13	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+25+25+50	1.38	1.38	2.31	2.31	4.62	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+25+25+60	1.29	1.29	2.14	2.14	5.14	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+25+25+71	1.19	1.19	1.99	1.99	5.64	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+25+35+35	1.44	1.44	2.40	3.36	3.36	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+25+35+42	1.36	1.36	2.27	3.18	3.82	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+25+35+50	1.29	1.29	2.14	3.00	4.29	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+15+25+35+60	1.20	1.20	2.00	2.80	4.80	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+25+35+71	1.12	1.12	1.86	2.61	5.29	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+25+42+42	1.29	1.29	2.16	3.63	3.63	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+15+25+42+50	1.22	1.22	2.04	3.43	4.08	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+15+25+42+60	1.15	1.15	1.91	3.21	4.59	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+15+25+42+71	1.07	1.07	1.79	3.00	5.07	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+15+35+35+35	1.33	1.33	3.11	3.11	3.11	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+35+35+42	1.27	1.27	2.96	2.96	3.55	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+35+35+50	1.20	1.20	2.80	2.80	4.00	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+35+35+60	1.13	1.13	2.63	2.63	4.50	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+35+35+71	1.05	1.05	2.46	2.46	4.98	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+15+35+42+42	1.21	1.21	2.82	3.38	3.38	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+15+35+42+50	1.15	1.15	2.68	3.21	3.82	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+15+35+42+60	1.08	1.08	2.51	3.02	4.31	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+15+42+42+42	1.15	1.15	3.23	3.23	3.23	12.00 (4.1 - 14.0)	2.875 (0.820 - 4.100)	12.63	99
15+15+42+42+50	1.10	1.10	3.07	3.07	3.66	12.00 (4.1 - 14.0)	2.875 (0.820 - 4.100)	12.63	99
15+20+20+20+20	1.66	2.21	2.21	2.21	2.21	10.50 (4.1 - 12.7)	2.770 (0.860 - 4.100)	12.17	99
15+20+20+20+22	1.65	2.21	2.21	2.21	2.43	10.70 (4.1 - 12.8)	2.840 (0.860 - 4.100)	12.47	99
15+20+20+20+25	1.65	2.20	2.20	2.20	2.75	11.00 (4.1 - 13.0)	2.950 (0.960 - 4.100)	12.96	99
15+20+20+20+35	1.64	2.18	2.18	2.18	3.82	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99
15+20+20+20+42	1.54	2.05	2.05	2.05	4.31	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99
15+20+20+20+50	1.44	1.92	1.92	1.92	4.80	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99
15+20+20+20+60	1.33	1.78	1.78	1.78	5.33	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99
15+20+20+20+71	1.23	1.64	1.64	1.64	5.84	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99
15+20+20+22+22	1.65	2.20	2.20	2.42	2.42	10.90 (4.1 - 12.9)	2.870 (0.840 - 4.100)	12.60	99
15+20+20+22+25	1.65	2.20	2.20	2.42	2.75	11.20 (4.1 - 13.2)	2.920 (0.840 - 4.100)	12.82	99
15+20+20+22+35	1.61	2.14	2.14	2.36	3.75	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+20+20+22+42	1.51	2.02	2.02	2.22	4.24	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+20+20+22+50	1.42	1.89	1.89	2.08	4.72	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+20+20+22+60	1.31	1.75	1.75	1.93	5.26	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+20+20+22+71	1.22	1.62	1.62	1.78	5.76	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+20+20+25+25	1.64	2.19	2.19	2.74	2.74	11.50 (4.1 - 13.5)	2.930 (0.840 - 4.100)	12.87	99
15+20+20+25+35	1.57	2.09	2.09	2.61	3.65	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+20+20+25+42	1.48	1.97	1.97	2.46	4.13	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+20+20+25+50	1.38	1.85	1.85	2.31	4.62	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+20+20+25+60	1.29	1.71	1.71	2.14	5.14	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+20+20+25+71	1.19	1.59	1.59	1.99	5.64	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+20+20+35+35	1.44	1.92	1.92	3.36	3.36	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+20+20+35+42	1.36	1.82	1.82	3.18	3.82	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+20+20+35+50	1.29	1.71	1.71	3.00	4.29	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+20+20+35+60	1.20	1.60	1.60	2.80	4.80	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
15+20+20+35+71	1.12	1.49	1.49	2.61	5.29	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+20+20+42+42	1.29	1.73	1.73	3.63	3.63	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
15+20+20+42+50	1.22	1.63	1.63	3.43	4.08	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
15+20+20+42+60	1.15	1.53	1.53	3.21	4.59	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
15+20+20+42+71	1.07	1.43	1.43	3.00	5.07	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
15+20+22+22+22	1.65	2.20	2.42	2.42	2.42	11.10 (4.1 - 13.1)	2.870 (0.820 - 4.100)	12.60	99
15+20+22+22+25	1.64	2.19	2.41	2.41	2.74	11.40 (4.1 - 13.4)	2.890 (0.820 - 4.100)	12.69	99
15+20+22+22+35	1.58	2.11	2.32	2.32	3.68	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+22+42	1.49	1.98	2.18	2.18	4.17	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+22+50	1.40	1.86	2.05	2.05	4.65	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+22+60	1.29	1.73	1.90	1.90	5.18	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+22+71	1.20	1.60	1.76	1.76	5.68	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+25+25	1.64	2.19	2.41	2.73	2.73	11.70 (4.1 - 13.7)	2.900 (0.820 - 4.100)	12.74	99
15+20+22+25+35	1.54	2.05	2.26	2.56	3.59	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+25+42	1.45	1.94	2.13	2.42	4.06	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+25+50	1.36	1.82	2.00	2.27	4.55	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+25+60	1.27	1.69	1.86	2.11	5.07	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+25+71	1.18	1.57	1.73	1.96	5.57	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+35+35	1.42	1.89	2.08	3.31	3.31	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+35+42	1.34	1.79	1.97	3.13	3.76	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+35+50	1.27	1.69	1.86	2.96	4.23	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+35+60	1.18	1.58	1.74	2.76	4.74	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+35+71	1.10	1.47	1.62	2.58	5.23	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+22+42+42	1.28	1.70	1.87	3.57	3.57	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+20+22+42+50	1.21	1.61	1.77	3.38	4.03	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+20+22+42+60	1.13	1.51	1.66	3.17	4.53	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+20+22+42+71	1.06	1.41	1.55	2.96	5.01	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+20+25+25+25	1.64	2.18	2.73	2.73	2.73	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+25+25+35	1.50	2.00	2.50	2.50	3.50	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+25+25+42	1.42	1.89	2.36	2.36	3.97	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+25+25+50	1.33	1.78	2.22	2.22	4.44	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+25+25+60	1.24	1.66	2.07	2.07	4.97	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+25+25+71	1.15	1.54	1.92	1.92	5.46	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+25+35+35	1.38	1.85	2.31	3.23	3.23	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+25+35+42	1.31	1.75	2.19	3.07	3.68	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+25+35+50	1.24	1.66	2.07	2.90	4.14	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+25+35+60	1.16	1.55	1.94	2.71	4.65	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+25+35+71	1.08	1.45	1.81	2.53	5.13	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+25+42+42	1.25	1.67	2.08	3.50	3.50	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+20+25+42+50	1.18	1.58	1.97	3.32	3.95	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+20+25+42+60	1.11	1.48	1.85	3.11	4.44	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+20+35+35+35	1.29	1.71	3.00	3.00	3.00	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+35+35+42	1.22	1.63	2.86	2.86	3.43	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+20+35+35+50	1.16	1.55	2.71	2.71	3.87	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+35+35+60	1.09	1.45	2.55	2.55	4.36	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
15+20+35+42+42	1.17	1.56	2.73	3.27	3.27	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+20+35+42+50	1.11	1.48	2.59	3.11	3.70	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+20+35+42+60	1.05	1.40	2.44	2.93	4.19	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
15+20+42+42+42	1.12	1.49	3.13	3.13	3.13	12.00 (4.1 - 14.0)	2.875 (0.820 - 4.100)	12.63	99
15+20+42+42+50	1.07	1.42	2.98	2.98	3.55	12.00 (4.1 - 14.0)	2.875 (0.820 - 4.100)	12.63	99
15+22+22+22+22	1.65	2.41	2.41	2.41	2.41	11.30 (4.1 - 13.3)	2.840 (0.800 - 4.100)	12.47	99
15+22+22+22+25	1.64	2.41	2.41	2.41	2.74	11.60 (4.1 - 13.6)	2.860 (0.800 - 4.100)	12.56	99
15+22+22+22+35	1.55	2.28	2.28	2.28	3.62	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+22+42	1.46	2.15	2.15	2.15	4.10	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+22+50	1.37	2.02	2.02	2.02	4.58	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+22+60	1.28	1.87	1.87	1.87	5.11	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+22+71	1.18	1.74	1.74	1.74	5.61	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+25+25	1.64	2.40	2.40	2.73	2.73	11.90 (4.1 - 13.9)	2.870 (0.800 - 4.100)	12.60	99
15+22+22+25+35	1.51	2.22	2.22	2.52	3.53	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+25+42	1.43	2.10	2.10	2.38	4.00	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+25+50	1.34	1.97	1.97	2.24	4.48	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+25+60	1.25	1.83	1.83	2.08	5.00	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+25+71	1.16	1.70	1.70	1.94	5.50	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+35+35	1.40	2.05	2.05	3.26	3.26	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+35+42	1.32	1.94	1.94	3.09	3.71	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+35+50	1.25	1.83	1.83	2.92	4.17	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+35+60	1.17	1.71	1.71	2.73	4.68	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+35+71	1.09	1.60	1.60	2.55	5.16	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+22+42+42	1.26	1.85	1.85	3.52	3.52	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
15+22+22+42+50	1.19	1.75	1.75	3.34	3.97	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
15+22+22+42+60	1.12	1.64	1.64	3.13	4.47	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
15+22+22+42+71	1.05	1.53	1.53	2.93	4.95	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
15+22+25+25+25	1.61	2.36	2.68	2.68	2.68	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+25+25+35	1.48	2.16	2.46	2.46	3.44	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+25+25+42	1.40	2.05	2.33	2.33	3.91	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+25+25+50	1.31	1.93	2.19	2.19	4.38	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+25+25+60	1.22	1.80	2.04	2.04	4.90	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+25+25+71	1.14	1.67	1.90	1.90	5.39	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+25+35+35	1.36	2.00	2.27	3.18	3.18	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+25+35+42	1.29	1.90	2.16	3.02	3.63	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+25+35+50	1.22	1.80	2.04	2.86	4.08	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+25+35+60	1.15	1.68	1.91	2.68	4.59	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+25+35+71	1.07	1.57	1.79	2.50	5.07	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+25+42+42	1.23	1.81	2.05	3.45	3.45	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
15+22+25+42+50	1.17	1.71	1.95	3.27	3.90	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
15+22+25+42+60	1.10	1.61	1.83	3.07	4.39	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
15+22+35+35+35	1.27	1.86	2.96	2.96	2.96	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+35+35+42	1.21	1.77	2.82	2.82	3.38	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+35+35+50	1.15	1.68	2.68	2.68	3.82	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+35+35+60	1.08	1.58	2.51	2.51	4.31	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+22+35+42+42	1.15	1.69	2.69	3.23	3.23	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
15+22+35+42+50	1.10	1.61	2.56	3.07	3.66	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
15+22+42+42+42	1.10	1.62	3.09	3.09	3.09	12.00 (4.1 - 14.0)	2.835 (0.800 - 4.100)	12.45	99
15+22+42+42+50	1.05	1.54	2.95	2.95	3.51	12.00 (4.1 - 14.0)	2.835 (0.800 - 4.100)	12.45	99
15+25+25+25+25	1.57	2.61	2.61	2.61	2.61	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+25+25+35	1.44	2.40	2.40	2.40	3.36	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+25+25+42	1.36	2.27	2.27	2.27	3.82	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+25+25+50	1.29	2.14	2.14	2.14	4.29	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+25+25+60	1.20	2.00	2.00	2.00	4.80	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+25+25+71	1.12	1.86	1.86	1.86	5.29	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+25+35+35	1.33	2.22	2.22	3.11	3.11	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+25+35+42	1.27	2.11	2.11	2.96	3.55	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+25+35+50	1.20	2.00	2.00	2.80	4.00	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+25+35+60	1.13	1.88	1.88	2.63	4.50	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+25+35+71	1.05	1.75	1.75	2.46	4.98	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+25+42+42	1.21	2.01	2.01	3.38	3.38	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
15+25+25+42+50	1.15	1.91	1.91	3.21	3.82	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
15+25+25+42+60	1.08	1.80	1.80	3.02	4.31	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
15+25+35+35+35	1.24	2.07	2.90	2.90	2.90	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+35+35+42	1.18	1.97	2.76	2.76	3.32	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+35+35+50	1.13	1.88	2.63	2.63	3.75	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+35+35+60	1.06	1.76	2.47	2.47	4.24	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+25+35+42+42	1.13	1.89	2.64	3.17	3.17	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
15+25+35+42+50	1.08	1.80	2.51	3.02	3.59	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
15+25+42+42+42	1.08	1.81	3.04	3.04	3.04	12.00 (4.1 - 14.0)	2.835 (0.800 - 4.100)	12.45	99
15+35+35+35+35	1.16	2.71	2.71	2.71	2.71	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+35+35+35+42	1.11	2.59	2.59	2.59	3.11	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+35+35+35+50	1.06	2.47	2.47	2.47	3.53	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
15+35+35+42+42	1.07	2.49	2.49	2.98	2.98	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
20+20+20+20+20	2.20	2.20	2.20	2.20	2.20	11.00 (4.1 - 13.0)	2.790 (0.880 - 4.100)	12.25	99
20+20+20+20+22	2.20	2.20	2.20	2.20	2.42	11.20 (4.1 - 13.2)	2.960 (0.860 - 4.100)	13.00	99
20+20+20+20+25	2.19	2.19	2.19	2.19	2.74	11.50 (4.1 - 13.5)	2.970 (0.860 - 4.100)	13.04	99
20+20+20+20+35	2.09	2.09	2.09	2.09	3.65	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99
20+20+20+20+42	1.97	1.97	1.97	1.97	4.13	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99
20+20+20+20+50	1.85	1.85	1.85	1.85	4.62	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99
20+20+20+20+60	1.71	1.71	1.71	1.71	5.14	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99
20+20+20+20+71	1.59	1.59	1.59	1.59	5.64	12.00 (4.1 - 14.0)	2.995 (0.860 - 4.100)	13.15	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
20+20+20+22+22	2.19	2.19	2.19	2.41	2.41	11.40 (4.1 - 13.4)	2.930 (0.840 - 4.100)	12.87	99
20+20+20+22+25	2.19	2.19	2.19	2.41	2.73	11.70 (4.1 - 13.7)	2.940 (0.840 - 4.100)	12.91	99
20+20+20+22+35	2.05	2.05	2.05	2.26	3.59	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+22+42	1.94	1.94	1.94	2.13	4.06	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+22+50	1.82	1.82	1.82	2.00	4.55	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+22+60	1.69	1.69	1.69	1.86	5.07	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+22+71	1.57	1.57	1.57	1.73	5.57	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+25+25	2.18	2.18	2.18	2.73	2.73	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+25+35	2.00	2.00	2.00	2.50	3.50	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+25+42	1.89	1.89	1.89	2.36	3.97	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+25+50	1.78	1.78	1.78	2.22	4.44	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+25+60	1.66	1.66	1.66	2.07	4.97	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+25+71	1.54	1.54	1.54	1.92	5.46	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+35+35	1.85	1.85	1.85	3.23	3.23	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+35+42	1.75	1.75	1.75	3.07	3.68	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+35+50	1.66	1.66	1.66	2.90	4.14	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+35+60	1.55	1.55	1.55	2.71	4.65	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+35+71	1.45	1.45	1.45	2.53	5.13	12.00 (4.1 - 14.0)	2.955 (0.840 - 4.100)	12.98	99
20+20+20+42+42	1.67	1.67	1.67	3.50	3.50	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
20+20+20+42+50	1.58	1.58	1.58	3.32	3.95	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
20+20+20+42+60	1.48	1.48	1.48	3.11	4.44	12.00 (4.1 - 14.0)	2.935 (0.840 - 4.100)	12.89	99
20+20+22+22+22	2.19	2.19	2.41	2.41	2.41	11.60 (4.1 - 13.6)	2.900 (0.820 - 4.100)	12.74	99
20+20+22+22+25	2.18	2.18	2.40	2.40	2.73	11.90 (4.1 - 13.9)	2.910 (0.820 - 4.100)	12.78	99
20+20+22+22+35	2.02	2.02	2.22	2.22	3.53	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+22+42	1.90	1.90	2.10	2.10	4.00	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+22+50	1.79	1.79	1.97	1.97	4.48	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+22+60	1.67	1.67	1.83	1.83	5.00	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+22+71	1.55	1.55	1.70	1.70	5.50	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+25+25	2.14	2.14	2.36	2.68	2.68	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+25+35	1.97	1.97	2.16	2.46	3.44	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+25+42	1.86	1.86	2.05	2.33	3.91	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+25+50	1.75	1.75	1.93	2.19	4.38	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+25+60	1.63	1.63	1.80	2.04	4.90	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+25+71	1.52	1.52	1.67	1.90	5.39	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+35+35	1.82	1.82	2.00	3.18	3.18	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+35+42	1.73	1.73	1.90	3.02	3.63	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+35+50	1.63	1.63	1.80	2.86	4.08	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+35+60	1.53	1.53	1.68	2.68	4.59	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+35+71	1.43	1.43	1.57	2.50	5.07	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+22+42+42	1.64	1.64	1.81	3.45	3.45	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
20+20+22+42+50	1.56	1.56	1.71	3.27	3.90	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
20+20+22+42+60	1.46	1.46	1.61	3.07	4.39	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
20+20+25+25+25	2.09	2.09	2.61	2.61	2.61	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+25+25+35	1.92	1.92	2.40	2.40	3.36	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+25+25+42	1.82	1.82	2.27	2.27	3.82	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+25+25+50	1.71	1.71	2.14	2.14	4.29	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+25+25+60	1.60	1.60	2.00	2.00	4.80	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+25+25+71	1.49	1.49	1.86	1.86	5.29	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+25+35+35	1.78	1.78	2.22	3.11	3.11	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+25+35+42	1.69	1.69	2.11	2.96	3.55	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+25+35+50	1.60	1.60	2.00	2.80	4.00	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+25+35+60	1.50	1.50	1.88	2.63	4.50	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+25+35+71	1.40	1.40	1.75	2.46	4.98	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+25+42+42	1.61	1.61	2.01	3.38	3.38	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
20+20+25+42+50	1.53	1.53	1.91	3.21	3.82	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
20+20+25+42+60	1.44	1.44	1.80	3.02	4.31	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
20+20+35+35+35	1.66	1.66	2.90	2.90	2.90	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+35+35+42	1.58	1.58	2.76	2.76	3.32	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+35+35+50	1.50	1.50	2.63	2.63	3.75	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+35+35+60	1.41	1.41	2.47	2.47	4.24	12.00 (4.1 - 14.0)	2.915 (0.820 - 4.100)	12.80	99
20+20+35+42+42	1.51	1.51	2.64	3.17	3.17	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
20+20+35+42+50	1.44	1.44	2.51	3.02	3.59	12.00 (4.1 - 14.0)	2.895 (0.820 - 4.100)	12.71	99
20+20+42+42+42	1.45	1.45	3.04	3.04	3.04	12.00 (4.1 - 14.0)	2.875 (0.820 - 4.100)	12.63	99
20+22+22+22+22	2.19	2.40	2.40	2.40	2.40	11.80 (4.1 - 13.8)	2.870 (0.800 - 4.100)	12.60	99
20+22+22+22+25	2.16	2.38	2.38	2.38	2.70	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+22+35	1.98	2.18	2.18	2.18	3.47	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+22+42	1.88	2.06	2.06	2.06	3.94	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+22+50	1.76	1.94	1.94	1.94	4.41	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+22+60	1.64	1.81	1.81	1.81	4.93	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+22+71	1.53	1.68	1.68	1.68	5.43	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+25+25	2.11	2.32	2.32	2.63	2.63	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+25+35	1.94	2.13	2.13	2.42	3.39	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+25+42	1.83	2.02	2.02	2.29	3.85	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+25+50	1.73	1.90	1.90	2.16	4.32	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+25+60	1.61	1.77	1.77	2.01	4.83	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+25+71	1.50	1.65	1.65	1.88	5.33	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+35+35	1.79	1.97	1.97	3.13	3.13	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+35+42	1.70	1.87	1.87	2.98	3.57	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+35+50	1.61	1.77	1.77	2.82	4.03	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+35+60	1.51	1.66	1.66	2.64	4.53	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+35+71	1.41	1.55	1.55	2.47	5.01	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+22+42+42	1.62	1.78	1.78	3.41	3.41	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
20+22+22+42+50	1.54	1.69	1.69	3.23	3.85	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
20+22+22+42+60	1.45	1.59	1.59	3.04	4.34	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
20+22+25+25+25	2.05	2.26	2.56	2.56	2.56	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+25+25+35	1.89	2.08	2.36	2.36	3.31	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+25+25+42	1.79	1.97	2.24	2.24	3.76	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+25+25+50	1.69	1.86	2.11	2.11	4.23	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+25+25+60	1.58	1.74	1.97	1.97	4.74	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+25+25+71	1.47	1.62	1.84	1.84	5.23	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+25+35+35	1.75	1.93	2.19	3.07	3.07	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+25+35+42	1.67	1.83	2.08	2.92	3.50	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+25+35+50	1.58	1.74	1.97	2.76	3.95	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+25+35+60	1.48	1.63	1.85	2.59	4.44	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+25+42+42	1.59	1.75	1.99	3.34	3.34	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
20+22+25+42+50	1.51	1.66	1.89	3.17	3.77	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
20+22+25+42+60	1.42	1.56	1.78	2.98	4.26	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
20+22+35+35+35	1.63	1.80	2.86	2.86	2.86	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+35+35+42	1.56	1.71	2.73	2.73	3.27	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+35+35+50	1.48	1.63	2.59	2.59	3.70	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+35+35+60	1.40	1.53	2.44	2.44	4.19	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+22+35+42+42	1.49	1.64	2.61	3.13	3.13	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
20+22+35+42+50	1.42	1.56	2.49	2.98	3.55	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
20+22+42+42+42	1.43	1.57	3.00	3.00	3.00	12.00 (4.1 - 14.0)	2.835 (0.800 - 4.100)	12.45	99
20+25+25+25+25	2.00	2.50	2.50	2.50	2.50	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+25+25+25+35	1.85	2.31	2.31	2.31	3.23	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+25+25+25+42	1.75	2.19	2.19	2.19	3.68	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+25+25+25+50	1.66	2.07	2.07	2.07	4.14	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+25+25+25+60	1.55	1.94	1.94	1.94	4.65	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+25+25+25+71	1.45	1.81	1.81	1.81	5.13	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+25+25+35+35	1.71	2.14	2.14	3.00	3.00	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+25+25+35+42	1.63	2.04	2.04	2.86	3.43	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+25+25+35+50	1.55	1.94	1.94	2.71	3.87	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+25+25+35+60	1.45	1.82	1.82	2.55	4.36	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+25+25+42+42	1.56	1.95	1.95	3.27	3.27	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
20+25+25+42+50	1.48	1.85	1.85	3.11	3.70	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
20+25+25+42+60	1.40	1.74	1.74	2.93	4.19	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
20+25+35+35+35	1.60	2.00	2.80	2.80	2.80	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+25+35+35+42	1.53	1.91	2.68	2.68	3.21	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+25+35+35+50	1.45	1.82	2.55	2.55	3.64	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+25+35+42+42	1.46	1.83	2.56	3.07	3.07	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
20+25+35+42+50	1.40	1.74	2.44	2.93	3.49	12.00 (4.1 - 14.0)	2.855 (0.800 - 4.100)	12.54	99
20+25+42+42+42	1.40	1.75	2.95	2.95	2.95	12.00 (4.1 - 14.0)	2.835 (0.800 - 4.100)	12.45	99
20+35+35+35+35	1.50	2.63	2.63	2.63	2.63	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
20+35+35+35+42	1.44	2.51	2.51	2.51	3.02	12.00 (4.1 - 14.0)	2.875 (0.800 - 4.100)	12.63	99
22+22+22+22+22	2.40	2.40	2.40	2.40	2.40	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
22+22+22+22+25	2.34	2.34	2.34	2.34	2.65	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+22+35	2.15	2.15	2.15	2.15	3.41	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+22+42	2.03	2.03	2.03	2.03	3.88	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+22+50	1.91	1.91	1.91	1.91	4.35	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+22+60	1.78	1.78	1.78	1.78	4.86	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+22+71	1.66	1.66	1.66	1.66	5.36	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+25+25	2.28	2.28	2.28	2.59	2.59	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+25+35	2.10	2.10	2.10	2.38	3.33	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+25+42	1.98	1.98	1.98	2.26	3.79	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+25+50	1.87	1.87	1.87	2.13	4.26	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+25+60	1.75	1.75	1.75	1.99	4.77	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+25+71	1.63	1.63	1.63	1.85	5.26	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+35+35	1.94	1.94	1.94	3.09	3.09	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+35+42	1.85	1.85	1.85	2.94	3.52	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+35+50	1.75	1.75	1.75	2.78	3.97	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+35+60	1.64	1.64	1.64	2.61	4.47	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+35+71	1.53	1.53	1.53	2.44	4.95	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+22+42+42	1.76	1.76	1.76	3.36	3.36	12.00 (4.1 - 14.0)	2.815 (0.780 - 4.100)	12.36	99
22+22+22+42+50	1.67	1.67	1.67	3.19	3.80	12.00 (4.1 - 14.0)	2.815 (0.780 - 4.100)	12.36	99
22+22+22+42+60	1.57	1.57	1.57	3.00	4.29	12.00 (4.1 - 14.0)	2.815 (0.780 - 4.100)	12.36	99
22+22+25+25+25	2.22	2.22	2.52	2.52	2.52	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+25+25+35	2.05	2.05	2.33	2.33	3.26	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+25+25+42	1.94	1.94	2.21	2.21	3.71	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+25+25+50	1.83	1.83	2.08	2.08	4.17	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+25+25+60	1.71	1.71	1.95	1.95	4.68	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+25+25+71	1.60	1.60	1.82	1.82	5.16	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+25+35+35	1.90	1.90	2.16	3.02	3.02	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+25+35+42	1.81	1.81	2.05	2.88	3.45	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+25+35+50	1.71	1.71	1.95	2.73	3.90	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+25+35+60	1.61	1.61	1.83	2.56	4.39	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+25+42+42	1.73	1.73	1.96	3.29	3.29	12.00 (4.1 - 14.0)	2.815 (0.780 - 4.100)	12.36	99
22+22+25+42+50	1.64	1.64	1.86	3.13	3.73	12.00 (4.1 - 14.0)	2.815 (0.780 - 4.100)	12.36	99
22+22+25+42+60	1.54	1.54	1.75	2.95	4.21	12.00 (4.1 - 14.0)	2.815 (0.780 - 4.100)	12.36	99
22+22+35+35+35	1.77	1.77	2.82	2.82	2.82	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+35+35+42	1.69	1.69	2.69	2.69	3.23	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+35+35+50	1.61	1.61	2.56	2.56	3.66	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+22+35+42+42	1.62	1.62	2.58	3.09	3.09	12.00 (4.1 - 14.0)	2.815 (0.780 - 4.100)	12.36	99
22+22+35+42+50	1.54	1.54	2.46	2.95	3.51	12.00 (4.1 - 14.0)	2.815 (0.780 - 4.100)	12.36	99
22+22+42+42+42	1.55	1.55	2.96	2.96	2.96	12.00 (4.1 - 14.0)	2.795 (0.780 - 4.100)	12.27	99
22+25+25+25+25	2.16	2.46	2.46	2.46	2.46	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+25+25+25+35	2.00	2.27	2.27	2.27	3.18	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+25+25+25+42	1.90	2.16	2.16	2.16	3.63	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99

MXZ-5C100VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Total			
22+25+25+25+50	1.80	2.04	2.04	2.04	4.08	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+25+25+25+60	1.68	1.91	1.91	1.91	4.59	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+25+25+25+71	1.57	1.79	1.79	1.79	5.07	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+25+25+35+35	1.86	2.11	2.11	2.96	2.96	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+25+25+35+42	1.77	2.01	2.01	2.82	3.38	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+25+25+35+50	1.68	1.91	1.91	2.68	3.82	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+25+25+35+60	1.58	1.80	1.80	2.51	4.31	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+25+25+42+42	1.69	1.92	1.92	3.23	3.23	12.00 (4.1 - 14.0)	2.815 (0.780 - 4.100)	12.36	99
22+25+25+42+50	1.61	1.83	1.83	3.07	3.66	12.00 (4.1 - 14.0)	2.815 (0.780 - 4.100)	12.36	99
22+25+35+35+35	1.74	1.97	2.76	2.76	2.76	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+25+35+35+42	1.66	1.89	2.64	2.64	3.17	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+25+35+35+50	1.58	1.80	2.51	2.51	3.59	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+25+35+42+42	1.59	1.81	2.53	3.04	3.04	12.00 (4.1 - 14.0)	2.815 (0.780 - 4.100)	12.36	99
22+35+35+35+35	1.63	2.59	2.59	2.59	2.59	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
22+35+35+35+42	1.56	2.49	2.49	2.49	2.98	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
25+25+25+25+25	2.40	2.40	2.40	2.40	2.40	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
25+25+25+25+35	2.22	2.22	2.22	2.22	3.11	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
25+25+25+25+42	2.11	2.11	2.11	2.11	3.55	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
25+25+25+25+50	2.00	2.00	2.00	2.00	4.00	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
25+25+25+25+60	1.88	1.88	1.88	1.88	4.50	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
25+25+25+25+71	1.75	1.75	1.75	1.75	4.98	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
25+25+25+35+35	2.07	2.07	2.07	2.90	2.90	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
25+25+25+35+42	1.97	1.97	1.97	2.76	3.32	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
25+25+25+35+50	1.88	1.88	1.88	2.63	3.75	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
25+25+25+35+60	1.76	1.76	1.76	2.47	4.24	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
25+25+25+42+42	1.89	1.89	1.89	3.17	3.17	12.00 (4.1 - 14.0)	2.815 (0.780 - 4.100)	12.36	99
25+25+25+42+50	1.80	1.80	1.80	3.02	3.59	12.00 (4.1 - 14.0)	2.815 (0.780 - 4.100)	12.36	99
25+25+35+35+35	1.94	1.94	2.71	2.71	2.71	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
25+25+35+35+42	1.85	1.85	2.59	2.59	3.11	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
25+25+35+35+50	1.76	1.76	2.47	2.47	3.53	12.00 (4.1 - 14.0)	2.835 (0.780 - 4.100)	12.45	99
25+25+35+42+42	1.78	1.78	2.49	2.98	2.98	12.00 (4.1 - 14.0)	2.815 (0.780 - 4.100)	12.36	99

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15	1.50						1.50 (1.40 - 2.10)	0.96 (0.89 - 1.15)	4.39 95
20	2.00						2.00 (1.80 - 2.80)	0.98 (0.89 - 1.54)	4.49 95
22	2.20						2.20 (2.00 - 3.00)	0.89 (0.85 - 0.94)	4.07 95
25	2.50						2.50 (2.20 - 3.30)	0.89 (0.85 - 0.97)	4.07 95
35	3.50						3.50 (2.50 - 4.30)	1.03 (0.85 - 1.18)	4.71 95
42	4.20						4.20 (2.50 - 5.00)	1.23 (0.85 - 1.46)	5.63 95
50	5.00						5.00 (2.60 - 5.60)	1.44 (0.85 - 1.63)	6.59 95
60	6.00						6.00 (2.70 - 7.50)	1.84 (0.83 - 2.31)	8.42 95
71	7.10						7.10 (2.70 - 8.70)	2.31 (0.83 - 2.84)	10.57 95
15+15	1.50	1.50					3.00 (2.50 - 4.20)	0.91 (0.88 - 2.30)	4.08 97
15+20	1.50	2.00					3.50 (2.50 - 4.90)	1.07 (0.88 - 2.69)	4.80 97
15+22	1.50	2.20					3.70 (2.50 - 5.10)	1.13 (0.88 - 2.80)	5.06 97
15+25	1.50	2.50					4.00 (2.50 - 5.50)	1.22 (0.88 - 3.02)	5.47 97
15+35	1.50	3.50					5.00 (2.70 - 6.50)	1.35 (0.84 - 2.28)	6.05 97
15+42	1.50	4.20					5.70 (2.70 - 7.20)	1.63 (0.84 - 2.52)	7.31 97
15+50	1.50	5.00					6.50 (2.80 - 7.90)	1.94 (0.84 - 2.75)	8.70 97
15+60	1.50	6.00					7.50 (2.80 - 8.70)	2.94 (0.84 - 3.02)	13.18 97
15+71	1.48	7.02					8.50 (2.80 - 9.30)	2.95 (0.84 - 3.13)	13.22 97
20+20	2.00	2.00					4.00 (2.50 - 5.50)	1.22 (0.88 - 3.02)	5.47 97
20+22	2.00	2.20					4.20 (2.60 - 5.70)	1.18 (0.86 - 2.46)	5.29 97
20+25	2.00	2.50					4.50 (2.70 - 6.00)	1.17 (0.84 - 1.96)	5.24 97
20+35	2.00	3.50					5.50 (2.70 - 7.00)	1.55 (0.84 - 2.45)	6.95 97
20+42	2.00	4.20					6.20 (2.80 - 7.60)	1.82 (0.84 - 2.65)	8.16 97
20+50	2.00	5.00					7.00 (2.80 - 8.40)	2.14 (0.84 - 2.92)	9.59 97
20+60	2.00	6.00					8.00 (2.80 - 9.00)	2.94 (0.84 - 3.08)	13.18 97
20+71	1.89	6.71					8.60 (2.80 - 9.30)	2.95 (0.84 - 3.13)	13.22 97
22+22	2.20	2.20					4.40 (2.70 - 5.90)	1.13 (0.84 - 1.90)	5.06 97
22+25	2.20	2.50					4.70 (2.70 - 6.20)	1.24 (0.84 - 2.09)	5.56 97
22+35	2.20	3.50					5.70 (2.70 - 7.20)	1.63 (0.84 - 2.52)	7.31 97
22+42	2.20	4.20					6.40 (2.80 - 7.80)	1.90 (0.84 - 2.72)	8.52 97
22+50	2.20	5.00					7.20 (2.80 - 8.50)	2.93 (0.84 - 2.97)	13.13 97
22+60	2.20	6.00					8.20 (2.80 - 9.10)	2.95 (0.84 - 3.11)	13.22 97
22+71	2.06	6.64					8.70 (2.80 - 9.40)	2.95 (0.84 - 3.13)	13.22 97
25+25	2.50	2.50					5.00 (2.70 - 6.50)	1.35 (0.84 - 2.28)	6.05 97
25+35	2.50	3.50					6.00 (2.80 - 7.50)	1.75 (0.84 - 2.62)	7.84 97
25+42	2.50	4.20					6.70 (2.80 - 8.10)	2.02 (0.84 - 2.82)	9.05 97
25+50	2.50	5.00					7.50 (2.80 - 8.70)	2.94 (0.84 - 3.02)	13.18 97
25+60	2.47	5.93					8.40 (2.80 - 9.20)	2.95 (0.84 - 3.13)	13.22 97
25+71	2.29	6.51					8.80 (2.80 - 9.40)	2.95 (0.84 - 3.13)	13.22 97
35+35	3.50	3.50					7.00 (2.80 - 8.40)	2.14 (0.84 - 2.92)	9.59 97
35+42	3.50	4.20					7.70 (2.80 - 8.80)	2.94 (0.84 - 3.04)	13.18 97
35+50	3.46	4.94					8.40 (2.80 - 9.20)	2.95 (0.84 - 3.13)	13.22 97
35+60	3.21	5.49					8.70 (2.80 - 9.40)	2.95 (0.84 - 3.13)	13.22 97
35+71	3.00	6.10					9.10 (2.80 - 9.70)	2.98 (0.83 - 3.16)	13.36 97
42+42	4.20	4.20					8.40 (2.80 - 9.20)	2.95 (0.84 - 3.13)	13.22 97
42+50	3.97	4.73					8.70 (2.80 - 9.40)	2.95 (0.84 - 3.13)	13.22 97

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
42+60	3.71	5.29					9.00 (2.80 - 9.60)	2.96 (0.84 - 3.14)	13.27 97
42+71	3.49	5.91					9.40 (2.90 - 10.00)	3.01 (0.82 - 3.20)	13.49 97
50+50	4.45	4.45					8.90 (2.80 - 9.50)	2.95 (0.84 - 3.13)	13.22 97
50+60	4.23	5.07					9.30 (2.90 - 9.90)	3.00 (0.83 - 3.19)	13.45 97
50+71	3.97	5.63					9.60 (2.90 - 10.20)	3.04 (0.81 - 3.23)	13.63 97
60+60	4.80	4.80					9.60 (2.90 - 10.20)	3.04 (0.81 - 3.23)	13.63 97
60+71	4.44	5.26					9.70 (2.90 - 10.30)	3.05 (0.81 - 3.24)	13.67 97
71+71	4.85	4.85					9.70 (2.90 - 10.30)	3.05 (0.81 - 3.24)	13.67 97
15+15+15	1.50	1.50	1.50				4.50 (2.90 - 6.00)	1.20 (0.95 - 3.28)	5.38 97
15+15+20	1.50	1.50	2.00				5.00 (2.90 - 6.80)	1.34 (0.95 - 3.56)	6.01 97
15+15+22	1.50	1.50	2.20				5.20 (2.90 - 7.10)	1.40 (0.95 - 3.67)	6.28 97
15+15+25	1.50	1.50	2.50				5.50 (3.00 - 7.50)	1.49 (0.95 - 3.81)	6.68 97
15+15+35	1.50	1.50	3.50				6.50 (3.20 - 8.50)	1.60 (0.90 - 2.50)	7.17 97
15+15+42	1.50	1.50	4.20				7.20 (3.20 - 9.20)	1.85 (0.89 - 3.00)	8.29 97
15+15+50	1.54	1.54	5.13				8.20 (3.20 - 9.80)	2.35 (0.89 - 3.40)	10.53 97
15+15+60	1.48	1.48	5.93				8.90 (3.30 - 10.40)	2.73 (0.89 - 3.75)	12.24 97
15+15+71	1.43	1.43	6.75				9.60 (3.30 - 11.00)	3.10 (0.89 - 4.11)	13.90 97
15+20+20	1.50	2.00	2.00				5.50 (3.00 - 7.50)	1.49 (0.95 - 3.81)	6.68 97
15+20+22	1.50	2.00	2.20				5.70 (3.00 - 7.80)	1.54 (0.95 - 3.91)	6.90 97
15+20+25	1.50	2.00	2.50				6.00 (3.00 - 8.30)	1.63 (0.95 - 4.09)	7.31 97
15+20+35	1.50	2.00	3.50				7.00 (3.20 - 8.90)	1.76 (0.89 - 2.79)	7.89 97
15+20+42	1.48	1.97	4.15				7.60 (3.20 - 9.60)	2.03 (0.89 - 3.28)	9.10 97
15+20+50	1.45	1.93	4.82				8.20 (3.20 - 10.10)	2.35 (0.89 - 3.58)	10.53 97
15+20+60	1.41	1.87	5.62				8.90 (3.30 - 10.60)	2.73 (0.89 - 3.87)	12.24 97
15+20+71	1.36	1.81	6.43				9.60 (3.30 - 11.20)	3.10 (0.89 - 4.23)	13.90 97
15+22+22	1.50	2.20	2.20				5.90 (3.00 - 8.10)	1.60 (0.95 - 4.02)	7.17 97
15+22+25	1.50	2.20	2.50				6.20 (3.10 - 8.40)	1.62 (0.93 - 3.30)	7.26 97
15+22+35	1.50	2.20	3.50				7.20 (3.20 - 9.20)	1.85 (0.89 - 3.00)	8.29 97
15+22+42	1.42	2.09	3.99				7.50 (3.20 - 9.70)	1.98 (0.89 - 3.34)	8.87 97
15+22+50	1.41	2.07	4.71				8.20 (3.20 - 10.20)	2.35 (0.89 - 3.64)	10.53 97
15+22+60	1.38	2.02	5.51				8.90 (3.30 - 10.70)	2.73 (0.89 - 3.93)	12.24 97
15+22+71	1.33	1.96	6.31				9.60 (3.30 - 11.20)	3.10 (0.89 - 4.23)	13.90 97
15+25+25	1.50	2.50	2.50				6.50 (3.20 - 8.50)	1.60 (0.90 - 2.50)	7.17 97
15+25+35	1.50	2.50	3.50				7.50 (3.20 - 9.50)	1.98 (0.89 - 3.22)	8.87 97
15+25+42	1.50	2.50	4.20				8.20 (3.20 - 9.90)	2.35 (0.89 - 3.46)	10.53 97
15+25+50	1.48	2.47	4.94				8.90 (3.30 - 10.40)	2.73 (0.89 - 3.75)	12.24 97
15+25+60	1.44	2.40	5.76				9.60 (3.30 - 10.90)	3.10 (0.89 - 4.05)	13.90 97
15+25+71	1.31	2.18	6.20				9.70 (3.30 - 11.30)	3.20 (0.89 - 4.29)	14.34 97
15+35+35	1.45	3.38	3.38				8.20 (3.20 - 10.10)	2.35 (0.89 - 3.58)	10.53 97
15+35+42	1.45	3.39	4.06				8.90 (3.30 - 10.50)	2.73 (0.89 - 3.81)	12.24 97
15+35+50	1.44	3.36	4.80				9.60 (3.30 - 10.90)	3.10 (0.89 - 4.05)	13.90 97
15+35+60	1.32	3.09	5.29				9.70 (3.30 - 11.30)	3.20 (0.89 - 4.29)	14.34 97
15+35+71	1.21	2.83	5.75				9.80 (3.30 - 11.40)	3.29 (0.89 - 4.36)	14.75 97
15+42+42	1.35	3.78	3.78				8.90 (3.30 - 10.90)	2.73 (0.89 - 4.05)	12.24 97
15+42+50	1.35	3.77	4.49				9.60 (3.30 - 11.20)	3.10 (0.89 - 4.23)	13.90 97
15+42+60	1.26	3.52	5.03				9.80 (3.30 - 11.40)	3.29 (0.89 - 4.36)	14.75 97

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+42+71	1.17	3.28	5.55				10.00 (3.30 - 11.60)	3.44 (0.89 - 4.49)	15.42 97
15+50+50	1.27	4.22	4.22				9.70 (3.30 - 11.30)	3.20 (0.89 - 4.29)	14.34 97
15+50+60	1.19	3.96	4.75				9.90 (3.30 - 11.50)	3.39 (0.89 - 4.42)	15.19 97
15+50+71	1.13	3.75	5.33				10.20 (3.30 - 11.80)	3.54 (0.89 - 4.64)	15.87 97
15+60+60	1.13	4.53	4.53				10.20 (3.30 - 11.80)	3.54 (0.89 - 4.64)	15.87 97
15+60+71	1.08	4.32	5.11				10.50 (3.30 - 12.10)	3.69 (0.89 - 4.86)	16.54 97
15+71+71	1.03	4.88	4.88				10.80 (3.30 - 12.40)	3.71 (0.88 - 4.80)	16.63 97
20+20+20	2.00	2.00	2.00				6.00 (3.00 - 8.30)	1.63 (0.95 - 4.09)	7.31 97
20+20+22	2.00	2.00	2.20				6.20 (3.10 - 8.40)	1.62 (0.93 - 3.30)	7.26 97
20+20+25	2.00	2.00	2.50				6.50 (3.20 - 8.50)	1.60 (0.90 - 2.50)	7.17 97
20+20+35	2.00	2.00	3.50				7.50 (3.20 - 9.50)	1.98 (0.89 - 3.22)	8.87 97
20+20+42	2.00	2.00	4.20				8.20 (3.20 - 9.90)	2.35 (0.89 - 3.46)	10.53 97
20+20+50	1.98	1.98	4.94				8.90 (3.30 - 10.40)	2.73 (0.89 - 3.75)	12.24 97
20+20+60	1.92	1.92	5.76				9.60 (3.30 - 10.90)	3.10 (0.89 - 4.05)	13.90 97
20+20+71	1.75	1.75	6.20				9.70 (3.30 - 11.30)	3.20 (0.89 - 4.29)	14.34 97
20+22+22	2.00	2.20	2.20				6.40 (3.10 - 8.40)	1.60 (0.91 - 3.30)	7.17 97
20+22+25	2.00	2.20	2.50				6.70 (3.20 - 8.60)	1.63 (0.89 - 2.57)	7.31 97
20+22+35	1.97	2.17	3.45				7.60 (3.20 - 9.60)	2.03 (0.89 - 3.28)	9.10 97
20+22+42	1.95	2.15	4.10				8.20 (3.20 - 10.00)	2.35 (0.89 - 3.52)	10.53 97
20+22+50	1.93	2.13	4.84				8.90 (3.30 - 10.50)	2.73 (0.89 - 3.81)	12.24 97
20+22+60	1.88	2.07	5.65				9.60 (3.30 - 11.00)	3.10 (0.89 - 4.11)	13.90 97
20+22+71	1.72	1.89	6.09				9.70 (3.30 - 11.30)	3.20 (0.89 - 4.29)	14.34 97
20+25+25	2.00	2.50	2.50				7.00 (3.20 - 8.90)	1.76 (0.89 - 2.79)	7.89 97
20+25+35	2.05	2.56	3.59				8.20 (3.20 - 9.80)	2.35 (0.89 - 3.40)	10.53 97
20+25+42	1.89	2.36	3.96				8.20 (3.20 - 10.20)	2.35 (0.89 - 3.64)	10.53 97
20+25+50	1.87	2.34	4.68				8.90 (3.30 - 10.60)	2.73 (0.89 - 3.87)	12.24 97
20+25+60	1.83	2.29	5.49				9.60 (3.30 - 11.20)	3.10 (0.89 - 4.23)	13.90 97
20+25+71	1.69	2.11	6.00				9.80 (3.30 - 11.40)	3.29 (0.89 - 4.36)	14.75 97
20+35+35	1.98	3.46	3.46				8.90 (3.30 - 10.40)	2.73 (0.89 - 3.75)	12.24 97
20+35+42	1.84	3.21	3.85				8.90 (3.30 - 10.70)	2.73 (0.89 - 3.93)	12.24 97
20+35+50	1.83	3.20	4.57				9.60 (3.30 - 11.20)	3.10 (0.89 - 4.23)	13.90 97
20+35+60	1.69	2.95	5.06				9.70 (3.30 - 11.30)	3.20 (0.89 - 4.29)	14.34 97
20+35+71	1.57	2.75	5.58				9.90 (3.30 - 11.50)	3.39 (0.89 - 4.42)	15.19 97
20+42+42	1.85	3.88	3.88				9.60 (3.30 - 11.10)	3.10 (0.89 - 4.17)	13.90 97
20+42+50	1.73	3.64	4.33				9.70 (3.30 - 11.30)	3.20 (0.89 - 4.29)	14.34 97
20+42+60	1.61	3.37	4.82				9.80 (3.30 - 11.40)	3.29 (0.89 - 4.36)	14.75 97
20+42+71	1.52	3.19	5.39				10.10 (3.30 - 11.70)	3.49 (0.89 - 4.57)	15.64 97
20+50+50	1.63	4.08	4.08				9.80 (3.30 - 11.40)	3.29 (0.89 - 4.36)	14.75 97
20+50+60	1.54	3.85	4.62				10.00 (3.30 - 11.60)	3.44 (0.89 - 4.49)	15.42 97
20+50+71	1.46	3.65	5.19				10.30 (3.30 - 11.90)	3.59 (0.89 - 4.71)	16.09 97
20+60+60	1.47	4.41	4.41				10.30 (3.30 - 11.90)	3.59 (0.89 - 4.71)	16.09 97
20+60+71	1.40	4.21	4.98				10.60 (3.30 - 12.20)	3.74 (0.89 - 4.93)	16.76 97
20+71+71	1.36	4.82	4.82				11.00 (3.30 - 12.50)	3.68 (0.87 - 4.74)	16.49 97
22+22+22	2.20	2.20	2.20				6.60 (3.20 - 8.50)	1.59 (0.89 - 2.50)	7.13 97
22+22+25	2.20	2.20	2.50				6.90 (3.20 - 8.80)	1.72 (0.89 - 2.72)	7.71 97
22+22+35	2.09	2.09	3.32				7.50 (3.20 - 9.70)	1.98 (0.89 - 3.34)	8.87 97

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
22+22+42	2.10	2.10	4.00				8.20 (3.20 - 10.10)	2.35 (0.89 - 3.58)	10.53 97
22+22+50	2.08	2.08	4.73				8.90 (3.30 - 10.60)	2.73 (0.89 - 3.87)	12.24 97
22+22+60	2.03	2.03	5.54				9.60 (3.30 - 11.10)	3.10 (0.89 - 4.17)	13.90 97
22+22+71	1.86	1.86	5.99				9.70 (3.30 - 11.30)	3.20 (0.89 - 4.29)	14.34 97
22+25+25	2.20	2.50	2.50				7.20 (3.20 - 9.20)	1.85 (0.89 - 3.00)	8.29 97
22+25+35	2.20	2.50	3.50				8.20 (3.20 - 9.90)	2.35 (0.89 - 3.46)	10.53 97
22+25+42	2.03	2.30	3.87				8.20 (3.20 - 10.30)	2.35 (0.89 - 3.70)	10.53 97
22+25+50	2.02	2.29	4.59				8.90 (3.30 - 10.70)	2.73 (0.89 - 3.93)	12.24 97
22+25+60	1.97	2.24	5.38				9.60 (3.30 - 11.20)	3.10 (0.89 - 4.23)	13.90 97
22+25+71	1.83	2.08	5.90				9.80 (3.30 - 11.40)	3.29 (0.89 - 4.36)	14.75 97
22+35+35	2.13	3.39	3.39				8.90 (3.30 - 10.50)	2.73 (0.89 - 3.81)	12.24 97
22+35+42	1.98	3.15	3.78				8.90 (3.30 - 10.90)	2.73 (0.89 - 4.05)	12.24 97
22+35+50	1.97	3.14	4.49				9.60 (3.30 - 11.20)	3.10 (0.89 - 4.23)	13.90 97
22+35+60	1.84	2.93	5.03				9.80 (3.30 - 11.40)	3.29 (0.89 - 4.36)	14.75 97
22+35+71	1.72	2.73	5.55				10.00 (3.30 - 11.60)	3.44 (0.89 - 4.49)	15.42 97
22+42+42	1.99	3.80	3.80				9.60 (3.30 - 11.20)	3.10 (0.89 - 4.23)	13.90 97
22+42+50	1.87	3.57	4.25				9.70 (3.30 - 11.30)	3.20 (0.89 - 4.29)	14.34 97
22+42+60	1.76	3.35	4.79				9.90 (3.30 - 11.50)	3.39 (0.89 - 4.42)	15.19 97
22+42+71	1.66	3.17	5.36				10.20 (3.30 - 11.80)	3.54 (0.89 - 4.64)	15.87 97
22+50+50	1.77	4.02	4.02				9.80 (3.30 - 11.40)	3.29 (0.89 - 4.36)	14.75 97
22+50+60	1.68	3.83	4.59				10.10 (3.30 - 11.70)	3.49 (0.89 - 4.57)	15.64 97
22+50+71	1.60	3.64	5.16				10.40 (3.30 - 12.00)	3.64 (0.89 - 4.78)	16.32 97
22+60+60	1.61	4.39	4.39				10.40 (3.30 - 12.00)	3.64 (0.89 - 4.78)	16.32 97
22+60+71	1.54	4.20	4.97				10.70 (3.30 - 12.30)	3.73 (0.89 - 4.87)	16.72 97
22+71+71	1.48	4.76	4.76				11.00 (3.30 - 12.60)	3.68 (0.87 - 4.68)	16.49 97
25+25+25	2.50	2.50	2.50				7.50 (3.20 - 9.50)	1.98 (0.89 - 3.22)	8.87 97
25+25+35	2.41	2.41	3.38				8.20 (3.20 - 10.10)	2.35 (0.89 - 3.58)	10.53 97
25+25+42	2.42	2.42	4.06				8.90 (3.30 - 10.50)	2.73 (0.89 - 3.81)	12.24 97
25+25+50	2.40	2.40	4.80				9.60 (3.30 - 10.90)	3.10 (0.89 - 4.05)	13.90 97
25+25+60	2.20	2.20	5.29				9.70 (3.30 - 11.30)	3.20 (0.89 - 4.29)	14.34 97
25+25+71	2.02	2.02	5.75				9.80 (3.30 - 11.40)	3.29 (0.89 - 4.36)	14.75 97
25+35+35	2.34	3.28	3.28				8.90 (3.30 - 10.60)	2.73 (0.89 - 3.87)	12.24 97
25+35+42	2.35	3.29	3.95				9.60 (3.30 - 11.00)	3.10 (0.89 - 4.11)	13.90 97
25+35+50	2.20	3.09	4.41				9.70 (3.30 - 11.30)	3.20 (0.89 - 4.29)	14.34 97
25+35+60	2.04	2.86	4.90				9.80 (3.30 - 11.40)	3.29 (0.89 - 4.36)	14.75 97
25+35+71	1.91	2.67	5.42				10.00 (3.30 - 11.60)	3.44 (0.89 - 4.49)	15.42 97
25+42+42	2.22	3.74	3.74				9.70 (3.30 - 11.30)	3.20 (0.89 - 4.29)	14.34 97
25+42+50	2.09	3.52	4.19				9.80 (3.30 - 11.40)	3.29 (0.89 - 4.36)	14.75 97
25+42+60	1.95	3.27	4.68				9.90 (3.30 - 11.50)	3.39 (0.89 - 4.42)	15.19 97
25+42+71	1.87	3.13	5.30				10.30 (3.30 - 11.90)	3.59 (0.89 - 4.71)	16.09 97
25+50+50	1.98	3.96	3.96				9.90 (3.30 - 11.50)	3.39 (0.89 - 4.42)	15.19 97
25+50+60	1.89	3.78	4.53				10.20 (3.30 - 11.80)	3.54 (0.89 - 4.64)	15.87 97
25+50+71	1.80	3.60	5.11				10.50 (3.30 - 12.10)	3.69 (0.89 - 4.86)	16.54 97
25+60+60	1.81	4.34	4.34				10.50 (3.30 - 12.10)	3.69 (0.89 - 4.86)	16.54 97
25+60+71	1.73	4.15	4.92				10.80 (3.30 - 12.40)	3.71 (0.88 - 4.80)	16.63 97
25+71+71	1.66	4.72	4.72				11.10 (3.40 - 12.70)	3.67 (0.87 - 4.61)	16.45 97

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
35+35+35	3.20	3.20	3.20				9.60 (3.30 - 11.20)	3.10 (0.89 - 4.23)	13.90 97
35+35+42	3.03	3.03	3.64				9.70 (3.30 - 11.30)	3.20 (0.89 - 4.29)	14.34 97
35+35+50	2.86	2.86	4.08				9.80 (3.30 - 11.40)	3.29 (0.89 - 4.36)	14.75 97
35+35+60	2.69	2.69	4.62				10.00 (3.30 - 11.60)	3.44 (0.89 - 4.49)	15.42 97
35+35+71	2.56	2.56	5.19				10.30 (3.30 - 11.90)	3.59 (0.89 - 4.71)	16.09 97
35+42+42	2.88	3.46	3.46				9.80 (3.30 - 11.40)	3.29 (0.89 - 4.36)	14.75 97
35+42+50	2.73	3.27	3.90				9.90 (3.30 - 11.50)	3.39 (0.89 - 4.42)	15.19 97
35+42+60	2.61	3.13	4.47				10.20 (3.30 - 11.80)	3.54 (0.89 - 4.64)	15.87 97
35+42+71	2.48	2.98	5.04				10.50 (3.30 - 12.10)	3.69 (0.89 - 4.86)	16.54 97
35+50+50	2.64	3.78	3.78				10.20 (3.30 - 11.80)	3.54 (0.89 - 4.64)	15.87 97
35+50+60	2.53	3.62	4.34				10.50 (3.30 - 12.10)	3.69 (0.89 - 4.86)	16.54 97
35+50+71	2.42	3.46	4.92				10.80 (3.30 - 12.40)	3.71 (0.88 - 4.80)	16.63 97
35+60+60	2.44	4.18	4.18				10.80 (3.30 - 12.30)	3.71 (0.88 - 4.87)	16.63 97
35+60+71	2.34	4.01	4.75				11.10 (3.40 - 12.60)	3.67 (0.87 - 4.68)	16.45 97
35+71+71	2.25	4.57	4.57				11.40 (3.40 - 12.90)	3.62 (0.85 - 4.48)	16.23 97
42+42+42	3.30	3.30	3.30				9.90 (3.30 - 11.50)	3.39 (0.89 - 4.42)	15.19 97
42+42+50	3.17	3.17	3.77				10.10 (3.30 - 11.70)	3.49 (0.89 - 4.57)	15.64 97
42+42+60	3.03	3.03	4.33				10.40 (3.30 - 12.00)	3.64 (0.89 - 4.78)	16.32 97
42+42+71	2.93	2.93	4.95				10.80 (3.30 - 12.30)	3.71 (0.88 - 4.87)	16.63 97
42+50+50	3.08	3.66	3.66				10.40 (3.30 - 12.00)	3.64 (0.89 - 4.78)	16.32 97
42+50+60	2.96	3.52	4.22				10.70 (3.30 - 12.30)	3.73 (0.89 - 4.87)	16.72 97
42+50+71	2.83	3.37	4.79				11.00 (3.30 - 12.50)	3.68 (0.87 - 4.74)	16.49 97
42+60+60	2.85	4.07	4.07				11.00 (3.30 - 12.50)	3.68 (0.87 - 4.74)	16.49 97
42+60+71	2.74	3.92	4.64				11.30 (3.40 - 12.80)	3.64 (0.86 - 4.55)	16.32 97
50+50+50	3.53	3.53	3.53				10.60 (3.30 - 12.20)	3.74 (0.89 - 4.93)	16.76 97
50+50+60	3.41	3.41	4.09				10.90 (3.30 - 12.50)	3.70 (0.88 - 4.74)	16.58 97
50+50+71	3.27	3.27	4.65				11.20 (3.40 - 12.80)	3.65 (0.86 - 4.55)	16.36 97
50+60+60	3.29	3.95	3.95				11.20 (3.40 - 12.70)	3.65 (0.86 - 4.61)	16.36 97
60+60+60	3.83	3.83	3.83				11.50 (3.40 - 13.00)	3.61 (0.85 - 4.42)	16.18 97
15+15+15+15	1.50	1.50	1.50	1.50			6.00 (3.10 - 8.40)	1.45 (0.91 - 4.13)	6.37 99
15+15+15+20	1.50	1.50	1.50	2.00			6.50 (3.10 - 9.00)	1.65 (0.91 - 4.19)	7.25 99
15+15+15+22	1.50	1.50	1.50	2.20			6.70 (3.10 - 9.20)	1.73 (0.91 - 4.21)	7.60 99
15+15+15+25	1.50	1.50	1.50	2.50			7.00 (3.10 - 9.50)	1.86 (0.91 - 4.24)	8.17 99
15+15+15+35	1.50	1.50	1.50	3.50			8.00 (3.10 - 10.60)	2.26 (0.91 - 4.34)	9.93 99
15+15+15+42	1.50	1.50	1.50	4.20			8.70 (3.30 - 11.00)	2.30 (0.88 - 3.85)	10.10 99
15+15+15+50	1.50	1.50	1.50	5.00			9.50 (3.30 - 11.50)	2.75 (0.87 - 3.98)	12.08 99
15+15+15+60	1.44	1.44	1.44	5.77			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
15+15+15+71	1.33	1.33	1.33	6.30			10.30 (3.30 - 12.00)	3.19 (0.87 - 4.14)	14.01 99
15+15+20+20	1.50	1.50	2.00	2.00			7.00 (3.10 - 9.50)	1.86 (0.91 - 4.24)	8.17 99
15+15+20+22	1.50	1.50	2.00	2.20			7.20 (3.10 - 9.70)	1.94 (0.91 - 4.25)	8.52 99
15+15+20+25	1.50	1.50	2.00	2.50			7.50 (3.10 - 10.10)	2.06 (0.91 - 4.29)	9.05 99
15+15+20+35	1.50	1.50	2.00	3.50			8.50 (3.20 - 10.90)	2.29 (0.89 - 3.97)	10.06 99
15+15+20+42	1.50	1.50	2.00	4.20			9.20 (3.30 - 11.30)	2.56 (0.87 - 3.93)	11.24 99
15+15+20+50	1.50	1.50	2.00	5.00			10.00 (3.30 - 11.80)	3.07 (0.87 - 4.05)	13.48 99
15+15+20+60	1.39	1.39	1.85	5.56			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
15+15+20+71	1.29	1.29	1.72	6.10			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+15+22+22	1.50	1.50	2.20	2.20			7.40 (3.10 - 9.90)	2.02 (0.91 - 4.27)	8.87 99
15+15+22+25	1.50	1.50	2.20	2.50			7.70 (3.10 - 10.30)	2.14 (0.91 - 4.31)	9.40 99
15+15+22+35	1.50	1.50	2.20	3.50			8.70 (3.30 - 11.00)	2.30 (0.88 - 3.85)	10.10 99
15+15+22+42	1.50	1.50	2.20	4.20			9.40 (3.30 - 11.40)	2.69 (0.87 - 3.95)	11.81 99
15+15+22+50	1.47	1.47	2.16	4.90			10.00 (3.30 - 11.80)	3.07 (0.87 - 4.05)	13.48 99
15+15+22+60	1.37	1.37	2.00	5.46			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
15+15+22+71	1.27	1.27	1.86	6.00			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
15+15+25+25	1.50	1.50	2.50	2.50			8.00 (3.10 - 10.60)	2.26 (0.91 - 4.34)	9.93 99
15+15+25+35	1.50	1.50	2.50	3.50			9.00 (3.30 - 11.10)	2.44 (0.87 - 3.88)	10.72 99
15+15+25+42	1.50	1.50	2.50	4.20			9.70 (3.30 - 11.60)	2.88 (0.87 - 4.00)	12.65 99
15+15+25+50	1.44	1.44	2.40	4.81			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
15+15+25+60	1.34	1.34	2.24	5.37			10.30 (3.30 - 12.00)	3.19 (0.87 - 4.14)	14.01 99
15+15+25+71	1.25	1.25	2.08	5.92			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
15+15+35+35	1.50	1.50	3.50	3.50			10.00 (3.30 - 11.80)	3.07 (0.87 - 4.05)	13.48 99
15+15+35+42	1.42	1.42	3.30	3.96			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
15+15+35+50	1.34	1.34	3.13	4.48			10.30 (3.30 - 12.00)	3.19 (0.87 - 4.14)	14.01 99
15+15+35+60	1.25	1.25	2.91	4.99			10.40 (3.40 - 12.20)	3.23 (0.87 - 4.24)	14.19 99
15+15+35+71	1.17	1.17	2.73	5.53			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
15+15+42+42	1.34	1.34	3.76	3.76			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
15+15+42+50	1.28	1.28	3.58	4.26			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
15+15+42+60	1.20	1.20	3.37	4.82			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
15+15+42+71	1.12	1.12	3.14	5.31			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+15+50+50	1.21	1.21	4.04	4.04			10.50 (3.40 - 12.30)	3.27 (0.87 - 4.28)	14.36 99
15+15+50+60	1.15	1.15	3.82	4.59			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+15+50+71	1.06	1.06	3.54	5.03			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+15+60+60	1.07	1.07	4.28	4.28			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+15+60+71	1.01	1.01	4.02	4.76			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+15+71+71	0.94	0.94	4.46	4.46			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+20+20+20	1.50	2.00	2.00	2.00			7.50 (3.10 - 10.10)	2.06 (0.91 - 4.29)	9.05 99
15+20+20+22	1.50	2.00	2.00	2.20			7.70 (3.10 - 10.30)	2.14 (0.91 - 4.31)	9.40 99
15+20+20+25	1.50	2.00	2.00	2.50			8.00 (3.10 - 10.60)	2.26 (0.91 - 4.34)	9.93 99
15+20+20+35	1.50	2.00	2.00	3.50			9.00 (3.30 - 11.10)	2.44 (0.87 - 3.88)	10.72 99
15+20+20+42	1.50	2.00	2.00	4.20			9.70 (3.30 - 11.60)	2.88 (0.87 - 4.00)	12.65 99
15+20+20+50	1.44	1.92	1.92	4.81			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
15+20+20+60	1.34	1.79	1.79	5.37			10.30 (3.30 - 12.00)	3.19 (0.87 - 4.14)	14.01 99
15+20+20+71	1.25	1.67	1.67	5.92			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
15+20+22+22	1.50	2.00	2.20	2.20			7.90 (3.10 - 10.50)	2.22 (0.91 - 4.33)	9.75 99
15+20+22+25	1.50	2.00	2.20	2.50			8.20 (3.20 - 10.70)	2.27 (0.90 - 4.22)	9.97 99
15+20+22+35	1.50	2.00	2.20	3.50			9.20 (3.30 - 11.30)	2.56 (0.87 - 3.93)	11.24 99
15+20+22+42	1.50	2.00	2.20	4.20			9.90 (3.30 - 11.70)	3.01 (0.87 - 4.03)	13.22 99
15+20+22+50	1.42	1.89	2.08	4.72			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
15+20+22+60	1.32	1.76	1.94	5.28			10.30 (3.30 - 12.10)	3.19 (0.87 - 4.19)	14.01 99
15+20+22+71	1.23	1.64	1.80	5.82			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
15+20+25+25	1.50	2.00	2.50	2.50			8.50 (3.20 - 10.90)	2.29 (0.89 - 3.97)	10.06 99
15+20+25+35	1.50	2.00	2.50	3.50			9.50 (3.30 - 11.50)	2.75 (0.87 - 3.98)	12.08 99
15+20+25+42	1.47	1.96	2.45	4.12			10.00 (3.30 - 11.80)	3.07 (0.87 - 4.05)	13.48 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+20+25+50	1.39	1.85	2.32	4.64			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
15+20+25+60	1.30	1.73	2.17	5.20			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
15+20+25+71	1.20	1.60	2.00	5.69			10.50 (3.40 - 12.30)	3.27 (0.87 - 4.28)	14.36 99
15+20+35+35	1.44	1.92	3.37	3.37			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
15+20+35+42	1.37	1.82	3.19	3.83			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
15+20+35+50	1.30	1.73	3.03	4.33			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
15+20+35+60	1.21	1.62	2.83	4.85			10.50 (3.40 - 12.30)	3.27 (0.87 - 4.28)	14.36 99
15+20+35+71	1.14	1.52	2.66	5.39			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+20+42+42	1.30	1.73	3.64	3.64			10.30 (3.30 - 12.10)	3.19 (0.87 - 4.19)	14.01 99
15+20+42+50	1.24	1.65	3.47	4.13			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
15+20+42+60	1.16	1.55	3.25	4.64			10.60 (3.40 - 12.40)	3.31 (0.87 - 4.33)	14.54 99
15+20+42+71	1.08	1.45	3.04	5.13			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+20+50+50	1.18	1.57	3.93	3.93			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
15+20+50+60	1.11	1.48	3.69	4.43			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+20+50+71	1.04	1.38	3.46	4.92			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+20+60+60	1.05	1.39	4.18	4.18			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+20+60+71	0.98	1.30	3.90	4.62			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+20+71+71	0.92	1.22	4.33	4.33			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+22+22+22	1.50	2.20	2.20	2.20			8.10 (3.10 - 10.70)	2.27 (0.91 - 4.22)	9.97 99
15+22+22+25	1.50	2.20	2.20	2.50			8.40 (3.20 - 10.80)	2.29 (0.89 - 4.10)	10.06 99
15+22+22+35	1.50	2.20	2.20	3.50			9.40 (3.30 - 11.40)	2.69 (0.87 - 3.95)	11.81 99
15+22+22+42	1.49	2.18	2.18	4.16			10.00 (3.30 - 11.80)	3.07 (0.87 - 4.05)	13.48 99
15+22+22+50	1.40	2.06	2.06	4.68			10.20 (3.30 - 11.90)	3.15 (0.87 - 4.10)	13.83 99
15+22+22+60	1.30	1.90	1.90	5.19			10.30 (3.30 - 12.10)	3.19 (0.87 - 4.19)	14.01 99
15+22+22+71	1.21	1.78	1.78	5.73			10.50 (3.40 - 12.30)	3.27 (0.87 - 4.28)	14.36 99
15+22+25+25	1.50	2.20	2.50	2.50			8.70 (3.30 - 11.00)	2.30 (0.88 - 3.85)	10.10 99
15+22+25+35	1.50	2.20	2.50	3.50			9.70 (3.30 - 11.60)	2.88 (0.87 - 4.00)	12.65 99
15+22+25+42	1.46	2.14	2.43	4.08			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
15+22+25+50	1.37	2.00	2.28	4.55			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
15+22+25+60	1.28	1.88	2.13	5.11			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
15+22+25+71	1.20	1.75	1.99	5.66			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
15+22+35+35	1.42	2.08	3.30	3.30			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
15+22+35+42	1.34	1.97	3.13	3.76			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
15+22+35+50	1.28	1.88	2.98	4.26			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
15+22+35+60	1.20	1.77	2.81	4.82			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
15+22+35+71	1.12	1.65	2.62	5.31			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+22+42+42	1.29	1.89	3.61	3.61			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
15+22+42+50	1.22	1.79	3.42	4.07			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
15+22+42+60	1.15	1.69	3.23	4.62			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+22+42+71	1.07	1.57	3.00	5.06			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+22+50+50	1.16	1.70	3.87	3.87			10.60 (3.40 - 12.40)	3.31 (0.87 - 4.33)	14.54 99
15+22+50+60	1.09	1.60	3.64	4.37			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+22+50+71	1.03	1.50	3.42	4.85			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+22+60+60	1.03	1.51	4.13	4.13			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+22+60+71	0.96	1.41	3.86	4.56			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+22+71+71	0.91	1.33	4.28	4.28			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+25+25+25	1.50	2.50	2.50	2.50			9.00 (3.30 - 11.10)	2.44 (0.87 - 3.88)	10.72 99
15+25+25+35	1.50	2.50	2.50	3.50			10.00 (3.30 - 11.80)	3.07 (0.87 - 4.05)	13.48 99
15+25+25+42	1.42	2.36	2.36	3.96			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
15+25+25+50	1.34	2.24	2.24	4.48			10.30 (3.30 - 12.00)	3.19 (0.87 - 4.14)	14.01 99
15+25+25+60	1.25	2.08	2.08	4.99			10.40 (3.40 - 12.20)	3.23 (0.87 - 4.24)	14.19 99
15+25+25+71	1.17	1.95	1.95	5.53			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
15+25+35+35	1.39	2.32	3.25	3.25			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
15+25+35+42	1.32	2.20	3.08	3.70			10.30 (3.30 - 12.10)	3.19 (0.87 - 4.19)	14.01 99
15+25+35+50	1.25	2.08	2.91	4.16			10.40 (3.40 - 12.20)	3.23 (0.87 - 4.24)	14.19 99
15+25+35+60	1.18	1.96	2.75	4.71			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
15+25+35+71	1.10	1.83	2.57	5.20			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+25+42+42	1.26	2.10	3.52	3.52			10.40 (3.40 - 12.20)	3.23 (0.87 - 4.24)	14.19 99
15+25+42+50	1.20	2.01	3.37	4.02			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
15+25+42+60	1.13	1.88	3.16	4.52			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+25+42+71	1.05	1.75	2.94	4.97			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+25+50+50	1.15	1.91	3.82	3.82			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+25+50+60	1.07	1.78	3.57	4.28			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+25+50+71	1.01	1.68	3.35	4.76			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+25+60+60	1.01	1.69	4.05	4.05			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+25+60+71	0.95	1.58	3.79	4.48			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+35+35+35	1.30	3.03	3.03	3.03			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
15+35+35+42	1.24	2.89	2.89	3.47			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
15+35+35+50	1.18	2.75	2.75	3.93			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
15+35+35+60	1.11	2.58	2.58	4.43			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+35+35+71	1.04	2.42	2.42	4.92			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+35+42+42	1.19	2.77	3.32	3.32			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
15+35+42+50	1.13	2.64	3.16	3.77			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+35+42+60	1.06	2.46	2.96	4.22			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+35+42+71	0.99	2.32	2.78	4.70			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+35+50+50	1.07	2.50	3.57	3.57			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+35+50+60	1.01	2.36	3.38	4.05			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+35+50+71	0.95	2.21	3.16	4.48			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+35+60+60	0.95	2.22	3.81	3.81			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+42+42+42	1.14	3.19	3.19	3.19			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+42+42+50	1.08	3.02	3.02	3.59			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
15+42+42+60	1.02	2.85	2.85	4.08			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+42+42+71	0.95	2.67	2.67	4.51			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+42+50+50	1.03	2.89	3.44	3.44			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+42+50+60	0.97	2.72	3.23	3.88			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+42+50+71	0.91	2.55	3.03	4.31			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+42+60+60	0.92	2.56	3.66	3.66			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+50+50+50	0.98	3.27	3.27	3.27			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+50+50+60	0.93	3.09	3.09	3.70			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+20+20+20	2.00	2.00	2.00	2.00			8.00 (3.10 - 10.60)	2.26 (0.91 - 4.34)	9.93 99
20+20+20+22	2.00	2.00	2.00	2.20			8.20 (3.20 - 10.70)	2.27 (0.90 - 4.22)	9.97 99
20+20+20+25	2.00	2.00	2.00	2.50			8.50 (3.20 - 10.90)	2.29 (0.89 - 3.97)	10.06 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
20+20+20+35	2.00	2.00	2.00	3.50			9.50 (3.30 - 11.50)	2.75 (0.87 - 3.98)	12.08 99
20+20+20+42	1.96	1.96	1.96	4.12			10.00 (3.30 - 11.80)	3.07 (0.87 - 4.05)	13.48 99
20+20+20+50	1.85	1.85	1.85	4.64			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
20+20+20+60	1.73	1.73	1.73	5.20			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
20+20+20+71	1.60	1.60	1.60	5.69			10.50 (3.40 - 12.30)	3.27 (0.87 - 4.28)	14.36 99
20+20+22+22	2.00	2.00	2.20	2.20			8.40 (3.20 - 10.80)	2.29 (0.89 - 4.10)	10.06 99
20+20+22+25	2.00	2.00	2.20	2.50			8.70 (3.30 - 11.00)	2.30 (0.88 - 3.85)	10.10 99
20+20+22+35	2.00	2.00	2.20	3.50			9.70 (3.30 - 11.60)	2.88 (0.87 - 4.00)	12.65 99
20+20+22+42	1.94	1.94	2.14	4.08			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
20+20+22+50	1.82	1.82	2.00	4.55			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
20+20+22+60	1.70	1.70	1.88	5.11			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
20+20+22+71	1.59	1.59	1.75	5.66			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
20+20+25+25	2.00	2.00	2.50	2.50			9.00 (3.30 - 11.10)	2.44 (0.87 - 3.88)	10.72 99
20+20+25+35	2.00	2.00	2.50	3.50			10.00 (3.30 - 11.80)	3.07 (0.87 - 4.05)	13.48 99
20+20+25+42	1.89	1.89	2.36	3.96			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
20+20+25+50	1.79	1.79	2.24	4.48			10.30 (3.30 - 12.00)	3.19 (0.87 - 4.14)	14.01 99
20+20+25+60	1.66	1.66	2.08	4.99			10.40 (3.40 - 12.20)	3.23 (0.87 - 4.24)	14.19 99
20+20+25+71	1.56	1.56	1.95	5.53			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
20+20+35+35	1.85	1.85	3.25	3.25			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
20+20+35+42	1.76	1.76	3.08	3.70			10.30 (3.30 - 12.10)	3.19 (0.87 - 4.19)	14.01 99
20+20+35+50	1.66	1.66	2.91	4.16			10.40 (3.40 - 12.20)	3.23 (0.87 - 4.24)	14.19 99
20+20+35+60	1.57	1.57	2.75	4.71			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
20+20+35+71	1.47	1.47	2.57	5.20			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+20+42+42	1.68	1.68	3.52	3.52			10.40 (3.40 - 12.20)	3.23 (0.87 - 4.24)	14.19 99
20+20+42+50	1.61	1.61	3.37	4.02			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
20+20+42+60	1.51	1.51	3.16	4.52			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+20+42+71	1.40	1.40	2.94	4.97			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+20+50+50	1.53	1.53	3.82	3.82			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+20+50+60	1.43	1.43	3.57	4.28			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+20+50+71	1.34	1.34	3.35	4.76			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+20+60+60	1.35	1.35	4.05	4.05			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+20+60+71	1.26	1.26	3.79	4.48			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+22+22+22	2.00	2.20	2.20	2.20			8.60 (3.30 - 10.90)	2.30 (0.88 - 3.97)	10.10 99
20+22+22+25	2.00	2.20	2.20	2.50			8.90 (3.30 - 11.10)	2.37 (0.87 - 3.88)	10.41 99
20+22+22+35	2.00	2.20	2.20	3.50			9.90 (3.30 - 11.70)	3.01 (0.87 - 4.03)	13.22 99
20+22+22+42	1.91	2.10	2.10	4.00			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
20+22+22+50	1.79	1.97	1.97	4.47			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
20+22+22+60	1.68	1.85	1.85	5.03			10.40 (3.40 - 12.20)	3.23 (0.87 - 4.24)	14.19 99
20+22+22+71	1.57	1.73	1.73	5.57			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
20+22+25+25	2.00	2.20	2.50	2.50			9.20 (3.30 - 11.30)	2.56 (0.87 - 3.93)	11.24 99
20+22+25+35	1.96	2.16	2.45	3.43			10.00 (3.30 - 11.80)	3.07 (0.87 - 4.05)	13.48 99
20+22+25+42	1.87	2.06	2.34	3.93			10.20 (3.30 - 11.90)	3.15 (0.87 - 4.10)	13.83 99
20+22+25+50	1.76	1.94	2.20	4.40			10.30 (3.30 - 12.10)	3.19 (0.87 - 4.19)	14.01 99
20+22+25+60	1.65	1.82	2.07	4.96			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
20+22+25+71	1.55	1.71	1.94	5.51			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+22+35+35	1.82	2.00	3.19	3.19			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
20+22+35+42	1.73	1.90	3.03	3.64			10.30 (3.30 - 12.10)	3.19 (0.87 - 4.19)	14.01 99
20+22+35+50	1.65	1.82	2.89	4.13			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
20+22+35+60	1.55	1.70	2.71	4.64			10.60 (3.40 - 12.40)	3.31 (0.87 - 4.33)	14.54 99
20+22+35+71	1.45	1.59	2.53	5.13			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+22+42+42	1.67	1.83	3.50	3.50			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
20+22+42+50	1.58	1.74	3.32	3.96			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
20+22+42+60	1.49	1.63	3.12	4.46			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+22+42+71	1.39	1.53	2.93	4.95			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+22+50+50	1.51	1.66	3.77	3.77			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+22+50+60	1.41	1.55	3.52	4.22			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+22+50+71	1.33	1.46	3.31	4.70			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+22+60+60	1.33	1.47	4.00	4.00			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+22+60+71	1.25	1.37	3.75	4.43			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+25+25+25	2.00	2.50	2.50	2.50			9.50 (3.30 - 11.50)	2.75 (0.87 - 3.98)	12.08 99
20+25+25+35	1.92	2.40	2.40	3.37			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
20+25+25+42	1.82	2.28	2.28	3.83			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
20+25+25+50	1.73	2.17	2.17	4.33			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
20+25+25+60	1.62	2.02	2.02	4.85			10.50 (3.40 - 12.30)	3.27 (0.87 - 4.28)	14.36 99
20+25+25+71	1.52	1.90	1.90	5.39			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+25+35+35	1.79	2.24	3.13	3.13			10.30 (3.30 - 12.00)	3.19 (0.87 - 4.14)	14.01 99
20+25+35+42	1.70	2.13	2.98	3.58			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
20+25+35+50	1.62	2.02	2.83	4.04			10.50 (3.40 - 12.30)	3.27 (0.87 - 4.28)	14.36 99
20+25+35+60	1.53	1.91	2.68	4.59			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+25+35+71	1.42	1.77	2.48	5.03			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+25+42+42	1.63	2.03	3.42	3.42			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
20+25+42+50	1.55	1.93	3.25	3.87			10.60 (3.40 - 12.40)	3.31 (0.87 - 4.33)	14.54 99
20+25+42+60	1.46	1.82	3.06	4.37			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+25+42+71	1.37	1.71	2.87	4.85			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+25+50+50	1.48	1.84	3.69	3.69			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+25+50+60	1.39	1.74	3.48	4.18			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+25+50+71	1.30	1.63	3.25	4.62			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+25+60+60	1.31	1.64	3.93	3.93			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+25+60+71	1.23	1.53	3.68	4.36			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+35+35+35	1.66	2.91	2.91	2.91			10.40 (3.40 - 12.20)	3.23 (0.87 - 4.24)	14.19 99
20+35+35+42	1.61	2.81	2.81	3.37			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
20+35+35+50	1.53	2.68	2.68	3.82			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+35+35+60	1.43	2.50	2.50	4.28			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+35+35+71	1.34	2.35	2.35	4.76			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+35+42+42	1.54	2.69	3.23	3.23			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+35+42+50	1.46	2.55	3.06	3.64			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+35+42+60	1.38	2.41	2.89	4.13			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+35+42+71	1.29	2.25	2.70	4.56			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+35+50+50	1.39	2.44	3.48	3.48			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+35+50+60	1.31	2.29	3.27	3.93			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+35+50+71	1.23	2.15	3.07	4.36			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+35+60+60	1.23	2.16	3.70	3.70			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
20+42+42+42	1.47	3.08	3.08	3.08			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
20+42+42+50	1.40	2.95	2.95	3.51			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+42+42+60	1.32	2.77	2.77	3.95			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+42+42+71	1.23	2.59	2.59	4.38			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+42+50+50	1.33	2.80	3.33	3.33			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+42+50+60	1.26	2.64	3.14	3.77			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+50+50+50	1.27	3.18	3.18	3.18			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
20+50+50+60	1.20	3.00	3.00	3.60			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+22+22+22	2.20	2.20	2.20	2.20			8.80 (3.30 - 11.00)	2.31 (0.87 - 3.85)	10.14 99
22+22+22+25	2.20	2.20	2.20	2.50			9.10 (3.30 - 11.20)	2.50 (0.87 - 3.90)	10.98 99
22+22+22+35	2.18	2.18	2.18	3.47			10.00 (3.30 - 11.80)	3.07 (0.87 - 4.05)	13.48 99
22+22+22+42	2.06	2.06	2.06	3.93			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
22+22+22+50	1.95	1.95	1.95	4.44			10.30 (3.30 - 12.00)	3.19 (0.87 - 4.14)	14.01 99
22+22+22+60	1.83	1.83	1.83	5.00			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
22+22+22+71	1.70	1.70	1.70	5.49			10.60 (3.40 - 12.40)	3.31 (0.87 - 4.33)	14.54 99
22+22+25+25	2.20	2.20	2.50	2.50			9.40 (3.30 - 11.40)	2.69 (0.87 - 3.95)	11.81 99
22+22+25+35	2.14	2.14	2.43	3.40			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
22+22+25+42	2.02	2.02	2.30	3.86			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
22+22+25+50	1.90	1.90	2.16	4.33			10.30 (3.30 - 12.10)	3.19 (0.87 - 4.19)	14.01 99
22+22+25+60	1.79	1.79	2.03	4.88			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
22+22+25+71	1.68	1.68	1.91	5.43			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+22+35+35	1.97	1.97	3.13	3.13			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
22+22+35+42	1.89	1.89	3.01	3.61			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
22+22+35+50	1.79	1.79	2.85	4.07			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
22+22+35+60	1.69	1.69	2.69	4.62			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+22+35+71	1.57	1.57	2.50	5.06			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+22+42+42	1.80	1.80	3.45	3.45			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
22+22+42+50	1.71	1.71	3.27	3.90			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
22+22+42+60	1.61	1.61	3.08	4.40			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+22+42+71	1.51	1.51	2.89	4.88			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+22+50+50	1.63	1.63	3.72	3.72			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+22+50+60	1.54	1.54	3.51	4.21			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+22+50+71	1.44	1.44	3.27	4.65			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+22+60+60	1.45	1.45	3.95	3.95			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+22+60+71	1.36	1.36	3.70	4.38			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+25+25+25	2.20	2.50	2.50	2.50			9.70 (3.30 - 11.60)	2.88 (0.87 - 4.00)	12.65 99
22+25+25+35	2.08	2.36	2.36	3.30			10.10 (3.30 - 11.90)	3.11 (0.87 - 4.10)	13.66 99
22+25+25+42	1.97	2.24	2.24	3.76			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
22+25+25+50	1.88	2.13	2.13	4.26			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
22+25+25+60	1.77	2.01	2.01	4.82			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
22+25+25+71	1.65	1.87	1.87	5.31			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+25+35+35	1.94	2.20	3.08	3.08			10.30 (3.30 - 12.10)	3.19 (0.87 - 4.19)	14.01 99
22+25+35+42	1.85	2.10	2.94	3.52			10.40 (3.40 - 12.20)	3.23 (0.87 - 4.24)	14.19 99
22+25+35+50	1.77	2.01	2.81	4.02			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
22+25+35+60	1.66	1.88	2.64	4.52			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+25+35+71	1.54	1.75	2.45	4.97			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
22+25+42+42	1.76	2.00	3.37	3.37			10.50 (3.40 - 12.30)	3.27 (0.87 - 4.28)	14.36 99
22+25+42+50	1.69	1.92	3.23	3.85			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+25+42+60	1.58	1.80	3.02	4.31			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+25+42+71	1.49	1.69	2.84	4.79			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+25+50+50	1.60	1.82	3.64	3.64			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+25+50+60	1.51	1.72	3.44	4.13			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+25+50+71	1.41	1.61	3.21	4.56			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+25+60+60	1.42	1.62	3.88	3.88			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+25+60+71	1.33	1.52	3.64	4.31			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+35+35+35	1.82	2.89	2.89	2.89			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
22+35+35+42	1.74	2.77	2.77	3.32			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
22+35+35+50	1.66	2.64	2.64	3.77			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+35+35+60	1.55	2.46	2.46	4.22			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+35+35+71	1.46	2.32	2.32	4.70			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+35+42+42	1.67	2.66	3.19	3.19			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+35+42+50	1.58	2.51	3.02	3.59			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+35+42+60	1.49	2.38	2.85	4.08			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+35+42+71	1.40	2.22	2.67	4.51			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+35+50+50	1.51	2.41	3.44	3.44			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+35+50+60	1.42	2.26	3.23	3.88			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+35+50+71	1.33	2.12	3.03	4.31			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+35+60+60	1.34	2.14	3.66	3.66			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+42+42+42	1.59	3.04	3.04	3.04			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
22+42+42+50	1.52	2.91	2.91	3.46			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+42+42+60	1.43	2.73	2.73	3.90			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+42+42+71	1.34	2.56	2.56	4.33			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+42+50+50	1.45	2.77	3.29	3.29			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+42+50+60	1.37	2.61	3.10	3.72			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
22+50+50+50	1.38	3.14	3.14	3.14			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+25+25+25	2.50	2.50	2.50	2.50			10.00 (3.30 - 11.80)	3.07 (0.87 - 4.05)	13.48 99
25+25+25+35	2.32	2.32	2.32	3.25			10.20 (3.30 - 12.00)	3.15 (0.87 - 4.14)	13.83 99
25+25+25+42	2.20	2.20	2.20	3.70			10.30 (3.30 - 12.10)	3.19 (0.87 - 4.19)	14.01 99
25+25+25+50	2.08	2.08	2.08	4.16			10.40 (3.40 - 12.20)	3.23 (0.87 - 4.24)	14.19 99
25+25+25+60	1.96	1.96	1.96	4.71			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
25+25+25+71	1.83	1.83	1.83	5.20			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
25+25+35+35	2.17	2.17	3.03	3.03			10.40 (3.40 - 12.10)	3.23 (0.87 - 4.19)	14.19 99
25+25+35+42	2.07	2.07	2.89	3.47			10.50 (3.40 - 12.20)	3.27 (0.87 - 4.24)	14.36 99
25+25+35+50	1.96	1.96	2.75	3.93			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
25+25+35+60	1.84	1.84	2.58	4.43			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
25+25+35+71	1.73	1.73	2.42	4.92			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+25+42+42	1.98	1.98	3.32	3.32			10.60 (3.40 - 12.30)	3.31 (0.87 - 4.28)	14.54 99
25+25+42+50	1.88	1.88	3.16	3.77			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
25+25+42+60	1.76	1.76	2.96	4.22			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
25+25+42+71	1.66	1.66	2.78	4.70			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+25+50+50	1.78	1.78	3.57	3.57			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
25+25+50+60	1.69	1.69	3.38	4.05			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
25+25+50+71	1.58	1.58	3.16	4.48			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+25+60+60	1.59	1.59	3.81	3.81			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+35+35+35	2.02	2.83	2.83	2.83			10.50 (3.40 - 12.30)	3.27 (0.87 - 4.28)	14.36 99
25+35+35+42	1.93	2.71	2.71	3.25			10.60 (3.40 - 12.40)	3.31 (0.87 - 4.33)	14.54 99
25+35+35+50	1.84	2.58	2.58	3.69			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
25+35+35+60	1.74	2.44	2.44	4.18			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+35+35+71	1.63	2.28	2.28	4.62			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+35+42+42	1.86	2.60	3.12	3.12			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
25+35+42+50	1.76	2.46	2.96	3.52			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
25+35+42+60	1.67	2.33	2.80	4.00			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+35+42+71	1.56	2.18	2.62	4.43			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+35+50+50	1.69	2.36	3.38	3.38			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+35+50+60	1.59	2.22	3.18	3.81			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+35+60+60	1.50	2.10	3.60	3.60			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+42+42+42	1.77	2.98	2.98	2.98			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
25+42+42+50	1.70	2.85	2.85	3.40			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+42+42+60	1.60	2.68	2.68	3.83			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+42+42+71	1.50	2.52	2.52	4.26			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+42+50+50	1.62	2.72	3.23	3.23			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+42+50+60	1.53	2.56	3.05	3.66			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
25+50+50+50	1.54	3.09	3.09	3.09			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
35+35+35+35	2.68	2.68	2.68	2.68			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
35+35+35+42	2.55	2.55	2.55	3.06			10.70 (3.40 - 12.40)	3.35 (0.87 - 4.33)	14.71 99
35+35+35+50	2.44	2.44	2.44	3.48			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
35+35+35+60	2.29	2.29	2.29	3.93			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
35+35+35+71	2.15	2.15	2.15	4.36			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
35+35+42+42	2.45	2.45	2.95	2.95			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
35+35+42+50	2.33	2.33	2.80	3.33			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
35+35+42+60	2.20	2.20	2.64	3.77			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
35+35+50+50	2.22	2.22	3.18	3.18			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
35+35+50+60	2.10	2.10	3.00	3.60			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
35+42+42+42	2.35	2.82	2.82	2.82			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
35+42+42+50	2.24	2.68	2.68	3.20			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
35+42+42+60	2.11	2.53	2.53	3.62			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
35+42+50+50	2.14	2.56	3.05	3.05			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
42+42+42+42	2.70	2.70	2.70	2.70			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
42+42+42+50	2.58	2.58	2.58	3.07			10.80 (3.40 - 12.50)	3.38 (0.87 - 4.40)	14.84 99
15+15+15+15+15	1.50	1.50	1.50	1.50	1.50		7.50 (3.30 - 10.50)	1.80 (0.93 - 4.91)	7.91 99
15+15+15+15+20	1.50	1.50	1.50	1.50	2.00		8.00 (3.30 - 10.80)	2.07 (0.93 - 5.04)	9.09 99
15+15+15+15+22	1.50	1.50	1.50	1.50	2.20		8.20 (3.30 - 10.90)	2.18 (0.93 - 5.09)	9.57 99
15+15+15+15+25	1.50	1.50	1.50	1.50	2.50		8.50 (3.30 - 11.00)	2.34 (0.93 - 5.13)	10.28 99
15+15+15+15+35	1.50	1.50	1.50	1.50	3.50		9.50 (3.30 - 11.50)	2.87 (0.93 - 5.35)	12.60 99
15+15+15+15+42	1.50	1.50	1.50	1.50	4.20		10.20 (3.30 - 12.10)	3.18 (0.92 - 5.55)	13.97 99
15+15+15+15+50	1.50	1.50	1.50	1.50	5.00		11.00 (3.50 - 13.20)	3.35 (0.89 - 5.81)	14.71 99
15+15+15+15+60	1.45	1.45	1.45	1.45	5.80		11.60 (3.50 - 13.20)	3.71 (0.89 - 5.78)	16.29 99
15+15+15+15+71	1.36	1.36	1.36	1.36	6.45		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+15+15+20+20	1.50	1.50	1.50	2.00	2.00		8.50 (3.30 - 11.00)	2.34 (0.93 - 5.13)	10.28 99
15+15+15+20+22	1.50	1.50	1.50	2.00	2.20		8.70 (3.30 - 11.10)	2.44 (0.93 - 5.17)	10.72 99
15+15+15+20+25	1.50	1.50	1.50	2.00	2.50		9.00 (3.30 - 11.30)	2.60 (0.93 - 5.26)	11.42 99
15+15+15+20+35	1.50	1.50	1.50	2.00	3.50		10.00 (3.30 - 11.80)	3.14 (0.93 - 5.48)	13.79 99
15+15+15+20+42	1.50	1.50	1.50	2.00	4.20		10.70 (3.40 - 12.80)	3.29 (0.90 - 5.72)	14.45 99
15+15+15+20+50	1.47	1.47	1.47	1.97	4.91		11.30 (3.50 - 13.20)	3.53 (0.89 - 5.79)	15.50 99
15+15+15+20+60	1.43	1.43	1.43	1.90	5.71		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+15+15+20+71	1.32	1.32	1.32	1.76	6.26		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+15+22+22	1.50	1.50	1.50	2.20	2.20		8.90 (3.30 - 11.20)	2.55 (0.93 - 5.22)	11.20 99
15+15+15+22+25	1.50	1.50	1.50	2.20	2.50		9.20 (3.30 - 11.40)	2.71 (0.93 - 5.30)	11.90 99
15+15+15+22+35	1.50	1.50	1.50	2.20	3.50		10.20 (3.30 - 12.10)	3.18 (0.92 - 5.55)	13.97 99
15+15+15+22+42	1.50	1.50	1.50	2.20	4.20		10.90 (3.50 - 13.10)	3.33 (0.89 - 5.79)	14.62 99
15+15+15+22+50	1.46	1.46	1.46	2.14	4.87		11.40 (3.50 - 13.20)	3.59 (0.89 - 5.79)	15.77 99
15+15+15+22+60	1.41	1.41	1.41	2.06	5.62		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+15+15+22+71	1.30	1.30	1.30	1.91	6.17		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+15+25+25	1.50	1.50	1.50	2.50	2.50		9.50 (3.30 - 11.50)	2.87 (0.93 - 5.35)	12.60 99
15+15+15+25+35	1.50	1.50	1.50	2.50	3.50		10.50 (3.40 - 12.50)	3.25 (0.91 - 5.65)	14.27 99
15+15+15+25+42	1.49	1.49	1.49	2.48	4.16		11.10 (3.50 - 13.20)	3.41 (0.89 - 5.80)	14.98 99
15+15+15+25+50	1.45	1.45	1.45	2.42	4.83		11.60 (3.50 - 13.20)	3.71 (0.89 - 5.78)	16.29 99
15+15+15+25+60	1.37	1.37	1.37	2.29	5.49		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+15+15+25+71	1.28	1.28	1.28	2.13	6.04		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+15+35+35	1.47	1.47	1.47	3.44	3.44		11.30 (3.50 - 13.20)	3.53 (0.89 - 5.79)	15.50 99
15+15+15+35+42	1.44	1.44	1.44	3.36	4.03		11.70 (3.50 - 13.20)	3.77 (0.89 - 5.77)	16.56 99
15+15+15+35+50	1.37	1.37	1.37	3.20	4.58		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+15+15+35+60	1.29	1.29	1.29	3.00	5.14		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+15+35+71	1.20	1.20	1.20	2.80	5.69		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+15+42+42	1.38	1.38	1.38	3.87	3.87		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+15+15+42+50	1.31	1.31	1.31	3.68	4.38		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+15+42+60	1.22	1.22	1.22	3.43	4.90		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+15+42+71	1.15	1.15	1.15	3.22	5.44		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+15+50+50	1.24	1.24	1.24	4.14	4.14		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+15+50+60	1.17	1.17	1.17	3.90	4.68		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+15+50+71	1.09	1.09	1.09	3.64	5.18		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+15+60+60	1.10	1.10	1.10	4.40	4.40		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+15+60+71	1.04	1.04	1.04	4.16	4.92		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+20+20+20	1.50	1.50	2.00	2.00	2.00		9.00 (3.30 - 11.30)	2.60 (0.93 - 5.26)	11.42 99
15+15+20+20+22	1.50	1.50	2.00	2.00	2.20		9.20 (3.30 - 11.40)	2.71 (0.93 - 5.30)	11.90 99
15+15+20+20+25	1.50	1.50	2.00	2.00	2.50		9.50 (3.30 - 11.50)	2.87 (0.93 - 5.35)	12.60 99
15+15+20+20+35	1.50	1.50	2.00	2.00	3.50		10.50 (3.40 - 12.50)	3.25 (0.91 - 5.65)	14.27 99
15+15+20+20+42	1.49	1.49	1.98	1.98	4.16		11.10 (3.50 - 13.20)	3.41 (0.89 - 5.80)	14.98 99
15+15+20+20+50	1.45	1.45	1.93	1.93	4.83		11.60 (3.50 - 13.20)	3.71 (0.89 - 5.78)	16.29 99
15+15+20+20+60	1.37	1.37	1.83	1.83	5.49		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+15+20+20+71	1.28	1.28	1.70	1.70	6.04		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+20+22+22	1.50	1.50	2.00	2.20	2.20		9.40 (3.30 - 11.50)	2.82 (0.93 - 5.35)	12.38 99
15+15+20+22+25	1.50	1.50	2.00	2.20	2.50		9.70 (3.30 - 11.60)	2.98 (0.93 - 5.39)	13.09 99
15+15+20+22+35	1.50	1.50	2.00	2.20	3.50		10.70 (3.40 - 12.80)	3.29 (0.90 - 5.72)	14.45 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+15+20+22+42	1.47	1.47	1.96	2.16	4.13		11.20 (3.50 - 13.20)	3.47 (0.89 - 5.80)	15.24 99
15+15+20+22+50	1.44	1.44	1.92	2.11	4.80		11.70 (3.50 - 13.20)	3.77 (0.89 - 5.77)	16.56 99
15+15+20+22+60	1.35	1.35	1.80	1.98	5.41		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+15+20+22+71	1.26	1.26	1.68	1.85	5.96		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+20+25+25	1.50	1.50	2.00	2.50	2.50		10.00 (3.30 - 11.80)	3.14 (0.93 - 5.48)	13.79 99
15+15+20+25+35	1.50	1.50	2.00	2.50	3.50		11.00 (3.50 - 13.20)	3.35 (0.89 - 5.81)	14.71 99
15+15+20+25+42	1.46	1.46	1.95	2.44	4.09		11.40 (3.50 - 13.20)	3.59 (0.89 - 5.79)	15.77 99
15+15+20+25+50	1.43	1.43	1.90	2.38	4.76		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+15+20+25+60	1.33	1.33	1.78	2.22	5.33		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+20+25+71	1.23	1.23	1.64	2.05	5.84		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+20+35+35	1.45	1.45	1.93	3.38	3.38		11.60 (3.50 - 13.20)	3.71 (0.89 - 5.78)	16.29 99
15+15+20+35+42	1.41	1.41	1.87	3.28	3.94		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+15+20+35+50	1.33	1.33	1.78	3.11	4.44		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+20+35+60	1.24	1.24	1.66	2.90	4.97		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+20+35+71	1.16	1.16	1.55	2.71	5.51		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+20+42+42	1.34	1.34	1.79	3.76	3.76		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+20+42+50	1.27	1.27	1.69	3.55	4.23		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+20+42+60	1.19	1.19	1.59	3.34	4.78		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+20+42+71	1.11	1.11	1.48	3.12	5.27		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+20+50+50	1.21	1.21	1.61	4.03	4.03		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+20+50+60	1.13	1.13	1.51	3.78	4.54		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+20+50+71	1.07	1.07	1.43	3.57	5.07		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+20+60+60	1.08	1.08	1.44	4.31	4.31		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+22+22+22	1.50	1.50	2.20	2.20	2.20		9.60 (3.30 - 11.60)	2.93 (0.93 - 5.39)	12.87 99
15+15+22+22+25	1.50	1.50	2.20	2.20	2.50		9.90 (3.30 - 11.70)	3.09 (0.93 - 5.44)	13.57 99
15+15+22+22+35	1.50	1.50	2.20	2.20	3.50		10.90 (3.50 - 13.10)	3.33 (0.89 - 5.79)	14.62 99
15+15+22+22+42	1.47	1.47	2.16	2.16	4.13		11.40 (3.50 - 13.20)	3.59 (0.89 - 5.79)	15.77 99
15+15+22+22+50	1.43	1.43	2.09	2.09	4.76		11.80 (3.50 - 13.20)	3.83 (0.89 - 5.76)	16.82 99
15+15+22+22+60	1.34	1.34	1.97	1.97	5.37		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+22+22+71	1.24	1.24	1.82	1.82	5.88		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+22+25+25	1.50	1.50	2.20	2.50	2.50		10.20 (3.30 - 12.10)	3.18 (0.92 - 5.55)	13.97 99
15+15+22+25+35	1.49	1.49	2.18	2.48	3.47		11.10 (3.50 - 13.20)	3.41 (0.89 - 5.80)	14.98 99
15+15+22+25+42	1.45	1.45	2.13	2.42	4.06		11.50 (3.50 - 13.20)	3.65 (0.89 - 5.78)	16.03 99
15+15+22+25+50	1.41	1.41	2.06	2.34	4.69		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+15+22+25+60	1.31	1.31	1.93	2.19	5.26		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+22+25+71	1.22	1.22	1.78	2.03	5.76		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+22+35+35	1.44	1.44	2.11	3.36	3.36		11.70 (3.50 - 13.20)	3.77 (0.89 - 5.77)	16.56 99
15+15+22+35+42	1.38	1.38	2.03	3.23	3.87		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+15+22+35+50	1.31	1.31	1.93	3.07	4.38		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+22+35+60	1.22	1.22	1.80	2.86	4.90		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+22+35+71	1.15	1.15	1.68	2.68	5.44		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+22+42+42	1.32	1.32	1.94	3.71	3.71		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+22+42+50	1.25	1.25	1.83	3.50	4.17		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+22+42+60	1.18	1.18	1.73	3.30	4.71		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+22+42+71	1.10	1.10	1.61	3.08	5.21		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+22+50+50	1.19	1.19	1.75	3.98	3.98		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+15+22+50+60	1.12	1.12	1.64	3.73	4.48		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+22+50+71	1.06	1.06	1.55	3.53	5.01		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+22+60+60	1.06	1.06	1.56	4.26	4.26		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+25+25+25	1.50	1.50	2.50	2.50	2.50		10.50 (3.40 - 12.50)	3.25 (0.91 - 5.65)	14.27 99
15+15+25+25+35	1.47	1.47	2.46	2.46	3.44		11.30 (3.50 - 13.20)	3.53 (0.89 - 5.79)	15.50 99
15+15+25+25+42	1.44	1.44	2.40	2.40	4.03		11.70 (3.50 - 13.20)	3.77 (0.89 - 5.77)	16.56 99
15+15+25+25+50	1.37	1.37	2.29	2.29	4.58		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+15+25+25+60	1.29	1.29	2.14	2.14	5.14		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+25+25+71	1.20	1.20	2.00	2.00	5.69		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+25+35+35	1.43	1.43	2.38	3.33	3.33		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+15+25+35+42	1.35	1.35	2.25	3.16	3.79		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+15+25+35+50	1.29	1.29	2.14	3.00	4.29		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+25+35+60	1.21	1.21	2.02	2.82	4.84		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+25+35+71	1.13	1.13	1.88	2.63	5.34		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+25+42+42	1.29	1.29	2.16	3.63	3.63		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+25+42+50	1.22	1.22	2.04	3.43	4.08		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+25+42+60	1.16	1.16	1.93	3.24	4.62		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+25+42+71	1.09	1.09	1.82	3.05	5.16		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+25+50+50	1.17	1.17	1.95	3.90	3.90		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+25+50+60	1.10	1.10	1.83	3.67	4.40		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+25+50+71	1.04	1.04	1.73	3.47	4.92		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+25+60+60	1.05	1.05	1.74	4.18	4.18		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+35+35+35	1.33	1.33	3.11	3.11	3.11		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+35+35+42	1.27	1.27	2.96	2.96	3.55		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+35+35+50	1.21	1.21	2.82	2.82	4.03		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+35+35+60	1.13	1.13	2.65	2.65	4.54		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+35+35+71	1.07	1.07	2.50	2.50	5.07		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+35+42+42	1.21	1.21	2.82	3.38	3.38		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+15+35+42+50	1.16	1.16	2.70	3.24	3.85		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+35+42+60	1.10	1.10	2.56	3.07	4.38		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+35+42+71	1.03	1.03	2.40	2.88	4.87		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+35+50+50	1.10	1.10	2.57	3.67	3.67		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+35+50+60	1.05	1.05	2.44	3.49	4.18		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+42+42+42	1.16	1.16	3.26	3.26	3.26		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+42+42+50	1.11	1.11	3.10	3.10	3.69		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+15+42+42+60	1.05	1.05	2.94	2.94	4.21		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+42+50+50	1.06	1.06	2.98	3.55	3.55		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+50+50+50	1.02	1.02	3.39	3.39	3.39		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+20+20+20	1.50	2.00	2.00	2.00	2.00		9.50 (3.30 - 11.50)	2.87 (0.93 - 5.35)	12.60 99
15+20+20+20+22	1.50	2.00	2.00	2.00	2.20		9.70 (3.30 - 11.60)	2.98 (0.93 - 5.39)	13.09 99
15+20+20+20+25	1.50	2.00	2.00	2.00	2.50		10.00 (3.30 - 11.80)	3.14 (0.93 - 5.48)	13.79 99
15+20+20+20+35	1.50	2.00	2.00	2.00	3.50		11.00 (3.50 - 13.20)	3.35 (0.89 - 5.81)	14.71 99
15+20+20+20+42	1.46	1.95	1.95	1.95	4.09		11.40 (3.50 - 13.20)	3.59 (0.89 - 5.79)	15.77 99
15+20+20+20+50	1.43	1.90	1.90	1.90	4.76		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+20+20+20+60	1.33	1.78	1.78	1.78	5.33		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+20+20+71	1.23	1.64	1.64	1.64	5.84		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+20+20+22+22	1.50	2.00	2.00	2.20	2.20		9.90 (3.30 - 11.70)	3.09 (0.93 - 5.44)	13.57 99
15+20+20+22+25	1.50	2.00	2.00	2.20	2.50		10.20 (3.30 - 12.10)	3.18 (0.92 - 5.55)	13.97 99
15+20+20+22+35	1.49	1.98	1.98	2.18	3.47		11.10 (3.50 - 13.20)	3.41 (0.89 - 5.80)	14.98 99
15+20+20+22+42	1.45	1.93	1.93	2.13	4.06		11.50 (3.50 - 13.20)	3.65 (0.89 - 5.78)	16.03 99
15+20+20+22+50	1.41	1.87	1.87	2.06	4.69		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+20+20+22+60	1.31	1.75	1.75	1.93	5.26		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+20+22+71	1.22	1.62	1.62	1.78	5.76		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+20+25+25	1.50	2.00	2.00	2.50	2.50		10.50 (3.40 - 12.50)	3.25 (0.91 - 5.65)	14.27 99
15+20+20+25+35	1.47	1.97	1.97	2.46	3.44		11.30 (3.50 - 13.20)	3.53 (0.89 - 5.79)	15.50 99
15+20+20+25+42	1.44	1.92	1.92	2.40	4.03		11.70 (3.50 - 13.20)	3.77 (0.89 - 5.77)	16.56 99
15+20+20+25+50	1.37	1.83	1.83	2.29	4.58		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+20+20+25+60	1.29	1.71	1.71	2.14	5.14		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+20+25+71	1.20	1.60	1.60	2.00	5.69		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+20+35+35	1.43	1.90	1.90	3.33	3.33		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+20+20+35+42	1.35	1.80	1.80	3.16	3.79		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+20+20+35+50	1.29	1.71	1.71	3.00	4.29		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+20+35+60	1.21	1.61	1.61	2.82	4.84		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+20+35+71	1.13	1.50	1.50	2.63	5.34		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+20+42+42	1.29	1.73	1.73	3.63	3.63		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+20+42+50	1.22	1.63	1.63	3.43	4.08		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+20+42+60	1.16	1.54	1.54	3.24	4.62		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+20+42+71	1.09	1.45	1.45	3.05	5.16		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+20+50+50	1.17	1.56	1.56	3.90	3.90		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+20+50+60	1.10	1.47	1.47	3.67	4.40		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+20+50+71	1.04	1.39	1.39	3.47	4.92		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+20+60+60	1.05	1.39	1.39	4.18	4.18		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+22+22+22	1.50	2.00	2.20	2.20	2.20		10.10 (3.30 - 11.90)	3.16 (0.93 - 5.50)	13.88 99
15+20+22+22+25	1.50	2.00	2.20	2.20	2.50		10.40 (3.40 - 12.40)	3.22 (0.91 - 5.62)	14.14 99
15+20+22+22+35	1.47	1.96	2.16	2.16	3.44		11.20 (3.50 - 13.20)	3.47 (0.89 - 5.80)	15.24 99
15+20+22+22+42	1.45	1.93	2.13	2.13	4.06		11.70 (3.50 - 13.20)	3.77 (0.89 - 5.77)	16.56 99
15+20+22+22+50	1.38	1.84	2.03	2.03	4.61		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+20+22+22+60	1.29	1.73	1.90	1.90	5.18		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+22+22+71	1.21	1.61	1.77	1.77	5.73		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+22+25+25	1.50	2.00	2.20	2.50	2.50		10.70 (3.40 - 12.80)	3.29 (0.90 - 5.72)	14.45 99
15+20+22+25+35	1.46	1.95	2.14	2.44	3.41		11.40 (3.50 - 13.20)	3.59 (0.89 - 5.79)	15.77 99
15+20+22+25+42	1.43	1.90	2.09	2.38	4.00		11.80 (3.50 - 13.20)	3.83 (0.89 - 5.76)	16.82 99
15+20+22+25+50	1.35	1.80	1.98	2.25	4.51		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+20+22+25+60	1.27	1.69	1.86	2.11	5.07		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+22+25+71	1.19	1.58	1.74	1.98	5.62		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+22+35+35	1.41	1.87	2.06	3.28	3.28		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+20+22+35+42	1.34	1.79	1.97	3.13	3.76		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+22+35+50	1.27	1.69	1.86	2.96	4.23		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+22+35+60	1.19	1.59	1.75	2.79	4.78		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+22+35+71	1.11	1.48	1.63	2.60	5.27		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+22+42+42	1.28	1.70	1.87	3.57	3.57		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+22+42+50	1.21	1.61	1.77	3.38	4.03		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+20+22+42+60	1.14	1.52	1.67	3.20	4.57		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+22+42+71	1.08	1.44	1.58	3.01	5.10		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+22+50+50	1.16	1.54	1.70	3.85	3.85		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+22+50+60	1.10	1.46	1.61	3.65	4.38		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+22+50+71	1.03	1.37	1.51	3.43	4.87		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+22+60+60	1.03	1.38	1.52	4.14	4.14		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+25+25+25	1.50	2.00	2.50	2.50	2.50		11.00 (3.50 - 13.20)	3.35 (0.89 - 5.81)	14.71 99
15+20+25+25+35	1.45	1.93	2.42	2.42	3.38		11.60 (3.50 - 13.20)	3.71 (0.89 - 5.78)	16.29 99
15+20+25+25+42	1.41	1.87	2.34	2.34	3.94		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+20+25+25+50	1.33	1.78	2.22	2.22	4.44		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+25+25+60	1.24	1.66	2.07	2.07	4.97		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+25+25+71	1.16	1.55	1.94	1.94	5.51		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+25+35+35	1.37	1.83	2.29	3.20	3.20		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+20+25+35+42	1.31	1.75	2.19	3.07	3.68		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+25+35+50	1.24	1.66	2.07	2.90	4.14		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+25+35+60	1.17	1.56	1.95	2.73	4.68		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+25+35+71	1.09	1.46	1.82	2.55	5.18		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+25+42+42	1.25	1.67	2.08	3.50	3.50		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+25+42+50	1.19	1.59	1.99	3.34	3.98		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+25+42+60	1.12	1.49	1.87	3.14	4.48		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+25+42+71	1.06	1.41	1.76	2.96	5.01		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+25+50+50	1.13	1.51	1.89	3.78	3.78		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+25+50+60	1.08	1.44	1.79	3.59	4.31		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+25+60+60	1.02	1.36	1.69	4.07	4.07		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+35+35+35	1.29	1.71	3.00	3.00	3.00		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+35+35+42	1.22	1.63	2.86	2.86	3.43		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+20+35+35+50	1.17	1.56	2.73	2.73	3.90		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+35+35+60	1.10	1.47	2.57	2.57	4.40		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+35+35+71	1.04	1.39	2.43	2.43	4.92		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+35+42+42	1.18	1.57	2.75	3.30	3.30		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+35+42+50	1.12	1.49	2.61	3.14	3.73		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+35+42+60	1.06	1.42	2.48	2.98	4.26		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+35+50+50	1.08	1.44	2.51	3.59	3.59		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+35+50+60	1.02	1.36	2.37	3.39	4.07		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+42+42+42	1.13	1.50	3.16	3.16	3.16		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+20+42+42+50	1.08	1.44	3.03	3.03	3.61		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+42+42+60	1.02	1.36	2.86	2.86	4.09		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+20+42+50+50	1.03	1.38	2.89	3.45	3.45		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+22+22+22+22	1.50	2.20	2.20	2.20	2.20		10.30 (3.40 - 12.20)	3.20 (0.92 - 5.57)	14.05 99
15+22+22+22+25	1.50	2.20	2.20	2.20	2.50		10.60 (3.40 - 12.60)	3.27 (0.91 - 5.67)	14.36 99
15+22+22+22+35	1.47	2.16	2.16	2.16	3.44		11.40 (3.50 - 13.20)	3.59 (0.89 - 5.79)	15.77 99
15+22+22+22+42	1.44	2.11	2.11	2.11	4.03		11.80 (3.50 - 13.20)	3.83 (0.89 - 5.77)	16.82 99
15+22+22+22+50	1.36	2.00	2.00	2.00	4.54		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+22+22+22+60	1.28	1.87	1.87	1.87	5.11		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+22+22+22+71	1.19	1.75	1.75	1.75	5.65		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+22+25+25	1.50	2.20	2.20	2.50	2.50		10.90 (3.50 - 13.10)	3.33 (0.89 - 5.79)	14.62 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+22+22+25+35	1.45	2.13	2.13	2.42	3.38		11.50 (3.50 - 13.20)	3.65 (0.89 - 5.78)	16.03 99
15+22+22+25+42	1.42	2.08	2.08	2.36	3.97		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+22+22+25+50	1.34	1.97	1.97	2.24	4.48		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+22+22+25+60	1.25	1.83	1.83	2.08	5.00		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+22+22+25+71	1.17	1.72	1.72	1.95	5.54		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+22+35+35	1.38	2.03	2.03	3.23	3.23		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+22+22+35+42	1.32	1.94	1.94	3.09	3.71		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+22+22+35+50	1.25	1.83	1.83	2.92	4.17		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+22+22+35+60	1.18	1.73	1.73	2.75	4.71		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+22+35+71	1.10	1.61	1.61	2.57	5.21		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+22+42+42	1.26	1.85	1.85	3.52	3.52		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+22+22+42+50	1.20	1.76	1.76	3.37	4.01		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+22+42+60	1.13	1.65	1.65	3.16	4.51		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+22+42+71	1.06	1.56	1.56	2.98	5.04		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+22+22+50+50	1.14	1.67	1.67	3.81	3.81		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+22+50+60	1.08	1.59	1.59	3.61	4.33		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+22+22+50+71	1.02	1.49	1.49	3.39	4.81		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+22+22+60+60	1.02	1.50	1.50	4.09	4.09		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+22+25+25+25	1.49	2.18	2.48	2.48	2.48		11.10 (3.50 - 13.20)	3.41 (0.89 - 5.80)	14.98 99
15+22+25+25+35	1.44	2.11	2.40	2.40	3.36		11.70 (3.50 - 13.20)	3.77 (0.89 - 5.77)	16.56 99
15+22+25+25+42	1.38	2.03	2.31	2.31	3.87		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+22+25+25+50	1.31	1.93	2.19	2.19	4.38		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+22+25+25+60	1.22	1.80	2.04	2.04	4.90		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+22+25+25+71	1.15	1.68	1.91	1.91	5.44		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+25+35+35	1.35	1.98	2.25	3.16	3.16		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+22+25+35+42	1.29	1.90	2.16	3.02	3.63		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+22+25+35+50	1.22	1.80	2.04	2.86	4.08		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+22+25+35+60	1.16	1.70	1.93	2.70	4.62		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+25+35+71	1.09	1.60	1.82	2.54	5.16		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+22+25+42+42	1.23	1.81	2.05	3.45	3.45		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+22+25+42+50	1.18	1.73	1.96	3.30	3.93		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+25+42+60	1.11	1.62	1.84	3.10	4.43		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+25+42+71	1.05	1.53	1.74	2.93	4.95		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+22+25+50+50	1.12	1.64	1.87	3.73	3.73		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+25+50+60	1.06	1.56	1.77	3.55	4.26		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+22+35+35+35	1.27	1.86	2.96	2.96	2.96		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+22+35+35+42	1.21	1.77	2.82	2.82	3.38		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+22+35+35+50	1.16	1.70	2.70	2.70	3.85		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+35+35+60	1.10	1.61	2.56	2.56	4.38		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+22+35+35+71	1.03	1.51	2.40	2.40	4.87		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+22+35+42+42	1.16	1.71	2.71	3.26	3.26		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+35+42+50	1.11	1.62	2.58	3.10	3.69		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+35+42+60	1.05	1.54	2.45	2.94	4.21		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+22+35+50+50	1.06	1.56	2.48	3.55	3.55		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+22+42+42+42	1.11	1.63	3.12	3.12	3.12		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+22+42+42+50	1.07	1.57	3.00	3.00	3.57		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+22+42+50+50	1.02	1.50	2.86	3.41	3.41		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+25+25+25+25	1.47	2.46	2.46	2.46	2.46		11.30 (3.50 - 13.20)	3.53 (0.89 - 5.79)	15.50 99
15+25+25+25+35	1.43	2.38	2.38	2.38	3.33		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+25+25+25+42	1.35	2.25	2.25	2.25	3.79		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
15+25+25+25+50	1.29	2.14	2.14	2.14	4.29		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+25+25+25+60	1.21	2.02	2.02	2.02	4.84		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+25+25+25+71	1.13	1.88	1.88	1.88	5.34		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+25+25+35+35	1.33	2.22	2.22	3.11	3.11		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+25+25+35+42	1.27	2.11	2.11	2.96	3.55		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+25+25+35+50	1.21	2.02	2.02	2.82	4.03		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+25+25+35+60	1.13	1.89	1.89	2.65	4.54		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+25+25+35+71	1.07	1.78	1.78	2.50	5.07		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+25+25+42+42	1.21	2.01	2.01	3.38	3.38		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+25+25+42+50	1.16	1.93	1.93	3.24	3.85		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+25+25+42+60	1.10	1.83	1.83	3.07	4.38		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+25+25+42+71	1.03	1.71	1.71	2.88	4.87		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+25+25+50+50	1.10	1.83	1.83	3.67	3.67		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+25+25+50+60	1.05	1.74	1.74	3.49	4.18		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+25+35+35+35	1.24	2.07	2.90	2.90	2.90		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
15+25+35+35+42	1.19	1.99	2.79	2.79	3.34		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+25+35+35+50	1.13	1.89	2.65	2.65	3.78		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+25+35+35+60	1.08	1.79	2.51	2.51	4.31		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+25+35+42+42	1.14	1.90	2.66	3.20	3.20		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+25+35+42+50	1.10	1.83	2.56	3.07	3.65		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+25+35+42+60	1.03	1.72	2.41	2.89	4.14		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+25+35+50+50	1.05	1.74	2.44	3.49	3.49		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+25+42+42+42	1.09	1.82	3.06	3.06	3.06		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+25+42+42+50	1.05	1.75	2.94	2.94	3.51		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+35+35+35+35	1.17	2.73	2.73	2.73	2.73		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+35+35+35+42	1.12	2.61	2.61	2.61	3.14		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
15+35+35+35+50	1.08	2.51	2.51	2.51	3.59		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+35+35+35+60	1.02	2.37	2.37	2.37	4.07		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+35+35+42+42	1.08	2.53	2.53	3.03	3.03		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+35+35+42+50	1.03	2.41	2.41	2.89	3.45		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+35+42+42+42	1.04	2.43	2.91	2.91	2.91		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+20+20+20+20	2.00	2.00	2.00	2.00	2.00		10.00 (3.30 - 11.80)	3.14 (0.93 - 5.48)	13.79 99
20+20+20+20+22	2.00	2.00	2.00	2.00	2.20		10.20 (3.30 - 12.10)	3.18 (0.92 - 5.55)	13.97 99
20+20+20+20+25	2.00	2.00	2.00	2.00	2.50		10.50 (3.40 - 12.50)	3.25 (0.91 - 5.65)	14.27 99
20+20+20+20+35	1.97	1.97	1.97	1.97	3.44		11.30 (3.50 - 13.20)	3.53 (0.89 - 5.79)	15.50 99
20+20+20+20+42	1.92	1.92	1.92	1.92	4.03		11.70 (3.50 - 13.20)	3.77 (0.89 - 5.77)	16.56 99
20+20+20+20+50	1.83	1.83	1.83	1.83	4.58		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
20+20+20+20+60	1.71	1.71	1.71	1.71	5.14		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+20+20+71	1.60	1.60	1.60	1.60	5.69		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+20+22+22	2.00	2.00	2.00	2.20	2.20		10.40 (3.40 - 12.40)	3.22 (0.91 - 5.62)	14.14 99
20+20+20+22+25	2.00	2.00	2.00	2.20	2.50		10.70 (3.40 - 12.80)	3.29 (0.90 - 5.72)	14.45 99
20+20+20+22+35	1.95	1.95	1.95	2.14	3.41		11.40 (3.50 - 13.20)	3.59 (0.89 - 5.79)	15.77 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
20+20+20+22+42	1.90	1.90	1.90	2.09	4.00		11.80 (3.50 - 13.20)	3.83 (0.89 - 5.76)	16.82 99
20+20+20+22+50	1.80	1.80	1.80	1.98	4.51		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
20+20+20+22+60	1.69	1.69	1.69	1.86	5.07		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+20+22+71	1.58	1.58	1.58	1.74	5.62		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+20+25+25	2.00	2.00	2.00	2.50	2.50		11.00 (3.50 - 13.20)	3.35 (0.89 - 5.81)	14.71 99
20+20+20+25+35	1.93	1.93	1.93	2.42	3.38		11.60 (3.50 - 13.20)	3.71 (0.89 - 5.78)	16.29 99
20+20+20+25+42	1.87	1.87	1.87	2.34	3.94		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
20+20+20+25+50	1.78	1.78	1.78	2.22	4.44		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+20+25+60	1.66	1.66	1.66	2.07	4.97		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+20+25+71	1.55	1.55	1.55	1.94	5.51		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+20+35+35	1.83	1.83	1.83	3.20	3.20		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
20+20+20+35+42	1.75	1.75	1.75	3.07	3.68		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+20+35+50	1.66	1.66	1.66	2.90	4.14		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+20+35+60	1.56	1.56	1.56	2.73	4.68		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+20+35+71	1.46	1.46	1.46	2.55	5.18		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+20+42+42	1.67	1.67	1.67	3.50	3.50		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+20+42+50	1.59	1.59	1.59	3.34	3.98		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+20+42+60	1.49	1.49	1.49	3.14	4.48		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+20+42+71	1.41	1.41	1.41	2.96	5.01		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+20+20+50+50	1.51	1.51	1.51	3.78	3.78		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+20+50+60	1.44	1.44	1.44	3.59	4.31		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+20+20+60+60	1.36	1.36	1.36	4.07	4.07		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+20+22+22+22	2.00	2.00	2.20	2.20	2.20		10.60 (3.40 - 12.60)	3.27 (0.91 - 5.67)	14.36 99
20+20+22+22+25	2.00	2.00	2.20	2.20	2.50		10.90 (3.50 - 13.10)	3.33 (0.89 - 5.79)	14.62 99
20+20+22+22+35	1.93	1.93	2.13	2.13	3.38		11.50 (3.50 - 13.20)	3.65 (0.89 - 5.78)	16.03 99
20+20+22+22+42	1.89	1.89	2.08	2.08	3.97		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
20+20+22+22+50	1.79	1.79	1.97	1.97	4.48		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+22+22+60	1.67	1.67	1.83	1.83	5.00		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+22+22+71	1.56	1.56	1.72	1.72	5.54		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+22+25+25	1.98	1.98	2.18	2.48	2.48		11.10 (3.50 - 13.20)	3.41 (0.89 - 5.80)	14.98 99
20+20+22+25+35	1.92	1.92	2.11	2.40	3.36		11.70 (3.50 - 13.20)	3.77 (0.89 - 5.77)	16.56 99
20+20+22+25+42	1.84	1.84	2.03	2.31	3.87		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
20+20+22+25+50	1.75	1.75	1.93	2.19	4.38		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+22+25+60	1.63	1.63	1.80	2.04	4.90		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+22+25+71	1.53	1.53	1.68	1.91	5.44		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+22+35+35	1.80	1.80	1.98	3.16	3.16		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
20+20+22+35+42	1.73	1.73	1.90	3.02	3.63		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+22+35+50	1.63	1.63	1.80	2.86	4.08		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+22+35+60	1.54	1.54	1.70	2.70	4.62		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+22+35+71	1.45	1.45	1.60	2.54	5.16		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+20+22+42+42	1.64	1.64	1.81	3.45	3.45		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+22+42+50	1.57	1.57	1.73	3.30	3.93		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+22+42+60	1.48	1.48	1.62	3.10	4.43		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+22+42+71	1.39	1.39	1.53	2.93	4.95		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+20+22+50+50	1.49	1.49	1.64	3.73	3.73		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+22+50+60	1.42	1.42	1.56	3.55	4.26		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
20+20+25+25+25	1.97	1.97	2.46	2.46	2.46		11.30 (3.50 - 13.20)	3.53 (0.89 - 5.79)	15.50 99
20+20+25+25+35	1.90	1.90	2.38	2.38	3.33		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
20+20+25+25+42	1.80	1.80	2.25	2.25	3.79		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
20+20+25+25+50	1.71	1.71	2.14	2.14	4.29		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+25+25+60	1.61	1.61	2.02	2.02	4.84		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+25+25+71	1.50	1.50	1.88	1.88	5.34		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+25+35+35	1.78	1.78	2.22	3.11	3.11		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+25+35+42	1.69	1.69	2.11	2.96	3.55		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+25+35+50	1.61	1.61	2.02	2.82	4.03		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+25+35+60	1.51	1.51	1.89	2.65	4.54		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+25+35+71	1.43	1.43	1.78	2.50	5.07		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+20+25+42+42	1.61	1.61	2.01	3.38	3.38		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+25+42+50	1.54	1.54	1.93	3.24	3.85		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+25+42+60	1.46	1.46	1.83	3.07	4.38		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+20+25+42+71	1.37	1.37	1.71	2.88	4.87		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+20+25+50+50	1.47	1.47	1.83	3.67	3.67		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+25+50+60	1.39	1.39	1.74	3.49	4.18		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+20+35+35+35	1.66	1.66	2.90	2.90	2.90		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+20+35+35+42	1.59	1.59	2.79	2.79	3.34		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+35+35+50	1.51	1.51	2.65	2.65	3.78		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+35+35+60	1.44	1.44	2.51	2.51	4.31		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+20+35+42+42	1.52	1.52	2.66	3.20	3.20		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+35+42+50	1.46	1.46	2.56	3.07	3.65		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+20+35+42+60	1.38	1.38	2.41	2.89	4.14		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+20+35+50+50	1.39	1.39	2.44	3.49	3.49		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+20+42+42+42	1.46	1.46	3.06	3.06	3.06		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+20+42+42+50	1.40	1.40	2.94	2.94	3.51		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+22+22+22+22	2.00	2.20	2.20	2.20	2.20		10.80 (3.50 - 12.90)	3.31 (0.90 - 5.74)	14.54 99
20+22+22+22+25	2.00	2.20	2.20	2.20	2.50		11.10 (3.50 - 13.20)	3.41 (0.89 - 5.81)	14.98 99
20+22+22+22+35	1.93	2.13	2.13	2.13	3.38		11.70 (3.50 - 13.20)	3.77 (0.89 - 5.77)	16.56 99
20+22+22+22+42	1.86	2.05	2.05	2.05	3.90		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
20+22+22+22+50	1.76	1.94	1.94	1.94	4.41		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+22+22+22+60	1.64	1.81	1.81	1.81	4.93		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+22+22+22+71	1.54	1.70	1.70	1.70	5.47		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+22+25+25	1.96	2.16	2.16	2.46	2.46		11.20 (3.50 - 13.20)	3.47 (0.89 - 5.80)	15.24 99
20+22+22+25+35	1.90	2.09	2.09	2.38	3.33		11.80 (3.50 - 13.20)	3.83 (0.89 - 5.76)	16.82 99
20+22+22+25+42	1.82	2.00	2.00	2.27	3.82		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
20+22+22+25+50	1.73	1.90	1.90	2.16	4.32		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+22+22+25+60	1.61	1.77	1.77	2.01	4.83		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+22+22+25+71	1.51	1.66	1.66	1.89	5.37		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+22+35+35	1.79	1.97	1.97	3.13	3.13		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+22+22+35+42	1.70	1.87	1.87	2.98	3.57		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+22+22+35+50	1.61	1.77	1.77	2.82	4.03		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+22+22+35+60	1.52	1.67	1.67	2.66	4.57		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+22+35+71	1.44	1.58	1.58	2.51	5.10		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+22+22+42+42	1.62	1.78	1.78	3.41	3.41		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
20+22+22+42+50	1.55	1.71	1.71	3.26	3.88		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+22+42+60	1.46	1.60	1.60	3.06	4.37		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+22+42+71	1.38	1.52	1.52	2.89	4.89		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+22+22+50+50	1.48	1.62	1.62	3.69	3.69		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+22+50+60	1.40	1.54	1.54	3.51	4.21		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+22+25+25+25	1.95	2.14	2.44	2.44	2.44		11.40 (3.50 - 13.20)	3.59 (0.89 - 5.79)	15.77 99
20+22+25+25+35	1.87	2.06	2.34	2.34	3.28		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
20+22+25+25+42	1.79	1.97	2.24	2.24	3.76		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+22+25+25+50	1.69	1.86	2.11	2.11	4.23		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+22+25+25+60	1.59	1.75	1.99	1.99	4.78		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+25+25+71	1.48	1.63	1.86	1.86	5.27		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+25+35+35	1.75	1.93	2.19	3.07	3.07		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+22+25+35+42	1.67	1.83	2.08	2.92	3.50		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+22+25+35+50	1.59	1.75	1.99	2.79	3.98		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+25+35+60	1.49	1.64	1.87	2.61	4.48		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+25+35+71	1.41	1.55	1.76	2.47	5.01		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+22+25+42+42	1.60	1.76	2.00	3.37	3.37		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+25+42+50	1.52	1.67	1.90	3.20	3.81		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+25+42+60	1.44	1.59	1.80	3.03	4.33		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+22+25+42+71	1.36	1.49	1.69	2.85	4.81		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+22+25+50+50	1.46	1.61	1.83	3.65	3.65		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+22+25+50+60	1.38	1.52	1.72	3.45	4.14		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+22+35+35+35	1.63	1.80	2.86	2.86	2.86		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+22+35+35+42	1.57	1.73	2.75	2.75	3.30		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+35+35+50	1.49	1.64	2.61	2.61	3.73		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+35+35+60	1.42	1.56	2.48	2.48	4.26		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+22+35+42+42	1.50	1.65	2.63	3.16	3.16		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+22+35+42+50	1.44	1.59	2.53	3.03	3.61		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+22+35+42+60	1.36	1.50	2.39	2.86	4.09		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+22+35+50+50	1.38	1.52	2.41	3.45	3.45		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+22+42+42+42	1.45	1.60	3.05	3.05	3.05		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+22+42+42+50	1.39	1.53	2.91	2.91	3.47		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+25+25+25+25	1.93	2.42	2.42	2.42	2.42		11.60 (3.50 - 13.20)	3.71 (0.89 - 5.78)	16.29 99
20+25+25+25+35	1.83	2.29	2.29	2.29	3.20		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
20+25+25+25+42	1.75	2.19	2.19	2.19	3.68		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+25+25+25+50	1.66	2.07	2.07	2.07	4.14		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+25+25+25+60	1.56	1.95	1.95	1.95	4.68		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+25+25+25+71	1.46	1.82	1.82	1.82	5.18		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+25+25+35+35	1.71	2.14	2.14	3.00	3.00		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+25+25+35+42	1.63	2.04	2.04	2.86	3.43		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
20+25+25+35+50	1.56	1.95	1.95	2.73	3.90		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+25+25+35+60	1.47	1.83	1.83	2.57	4.40		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+25+25+35+71	1.39	1.73	1.73	2.43	4.92		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+25+25+42+42	1.57	1.96	1.96	3.30	3.30		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+25+25+42+50	1.49	1.87	1.87	3.14	3.73		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+25+25+42+60	1.42	1.77	1.77	2.98	4.26		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
20+25+25+50+50	1.44	1.79	1.79	3.59	3.59		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+25+25+50+60	1.36	1.69	1.69	3.39	4.07		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+25+35+35+35	1.61	2.02	2.82	2.82	2.82		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+25+35+35+42	1.54	1.93	2.70	2.70	3.24		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+25+35+35+50	1.47	1.83	2.57	2.57	3.67		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+25+35+35+60	1.39	1.74	2.44	2.44	4.18		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+25+35+42+42	1.48	1.84	2.58	3.10	3.10		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+25+35+42+50	1.42	1.77	2.48	2.98	3.55		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+25+35+50+50	1.36	1.69	2.37	3.39	3.39		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+25+42+42+42	1.43	1.78	3.00	3.00	3.00		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+25+42+42+50	1.36	1.70	2.86	2.86	3.41		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+35+35+35+35	1.51	2.65	2.65	2.65	2.65		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
20+35+35+35+42	1.46	2.56	2.56	2.56	3.07		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+35+35+35+50	1.39	2.44	2.44	2.44	3.49		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
20+35+35+42+42	1.40	2.45	2.45	2.94	2.94		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+22+22+22+22	2.20	2.20	2.20	2.20	2.20		11.00 (3.50 - 13.20)	3.35 (0.89 - 5.81)	14.71 99
22+22+22+22+25	2.18	2.18	2.18	2.18	2.48		11.20 (3.50 - 13.20)	3.47 (0.89 - 5.80)	15.24 99
22+22+22+22+35	2.11	2.11	2.11	2.11	3.36		11.80 (3.50 - 13.20)	3.83 (0.89 - 5.77)	16.82 99
22+22+22+22+42	2.01	2.01	2.01	2.01	3.84		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
22+22+22+22+50	1.91	1.91	1.91	1.91	4.35		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
22+22+22+22+60	1.78	1.78	1.78	1.78	4.86		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
22+22+22+22+71	1.67	1.67	1.67	1.67	5.40		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+22+25+25	2.16	2.16	2.16	2.46	2.46		11.40 (3.50 - 13.20)	3.59 (0.89 - 5.79)	15.77 99
22+22+22+25+35	2.08	2.08	2.08	2.36	3.31		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
22+22+22+25+42	1.97	1.97	1.97	2.24	3.76		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
22+22+22+25+50	1.87	1.87	1.87	2.13	4.26		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
22+22+22+25+60	1.76	1.76	1.76	2.00	4.81		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+22+25+71	1.64	1.64	1.64	1.87	5.30		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+22+35+35	1.94	1.94	1.94	3.09	3.09		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
22+22+22+35+42	1.85	1.85	1.85	2.94	3.52		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
22+22+22+35+50	1.76	1.76	1.76	2.80	4.01		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+22+35+60	1.65	1.65	1.65	2.63	4.51		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+22+35+71	1.56	1.56	1.56	2.48	5.04		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+22+22+42+42	1.77	1.77	1.77	3.39	3.39		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+22+42+50	1.68	1.68	1.68	3.22	3.83		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+22+42+60	1.60	1.60	1.60	3.05	4.36		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+22+22+42+71	1.50	1.50	1.50	2.86	4.84		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+22+22+50+50	1.60	1.60	1.60	3.64	3.64		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+22+50+60	1.53	1.53	1.53	3.47	4.16		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+22+25+25+25	2.13	2.13	2.42	2.42	2.42		11.50 (3.50 - 13.20)	3.65 (0.89 - 5.78)	16.03 99
22+22+25+25+35	2.03	2.03	2.31	2.31	3.23		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
22+22+25+25+42	1.94	1.94	2.21	2.21	3.71		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
22+22+25+25+50	1.83	1.83	2.08	2.08	4.17		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
22+22+25+25+60	1.73	1.73	1.96	1.96	4.71		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+25+25+71	1.61	1.61	1.83	1.83	5.21		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+25+35+35	1.90	1.90	2.16	3.02	3.02		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
22+22+25+35+42	1.81	1.81	2.05	2.88	3.45		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
22+22+25+35+50	1.73	1.73	1.96	2.75	3.93		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+25+35+60	1.62	1.62	1.84	2.58	4.43		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+25+35+71	1.53	1.53	1.74	2.44	4.95		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+22+25+42+42	1.74	1.74	1.98	3.32	3.32		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+25+42+50	1.65	1.65	1.88	3.16	3.76		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+25+42+60	1.57	1.57	1.78	3.00	4.28		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+22+25+50+50	1.59	1.59	1.80	3.61	3.61		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+22+25+50+60	1.50	1.50	1.70	3.41	4.09		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+22+35+35+35	1.77	1.77	2.82	2.82	2.82		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
22+22+35+35+42	1.71	1.71	2.71	2.71	3.26		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+35+35+50	1.62	1.62	2.58	2.58	3.69		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+35+35+60	1.54	1.54	2.45	2.45	4.21		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+22+35+42+42	1.63	1.63	2.60	3.12	3.12		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+22+35+42+50	1.57	1.57	2.50	3.00	3.57		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+22+35+50+50	1.50	1.50	2.39	3.41	3.41		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+22+42+42+42	1.58	1.58	3.01	3.01	3.01		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+22+42+42+50	1.51	1.51	2.88	2.88	3.43		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+25+25+25+25	2.11	2.40	2.40	2.40	2.40		11.70 (3.50 - 13.20)	3.77 (0.89 - 5.77)	16.56 99
22+25+25+25+35	1.98	2.25	2.25	2.25	3.16		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
22+25+25+25+42	1.90	2.16	2.16	2.16	3.63		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
22+25+25+25+50	1.80	2.04	2.04	2.04	4.08		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
22+25+25+25+60	1.70	1.93	1.93	1.93	4.62		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+25+25+25+71	1.60	1.82	1.82	1.82	5.16		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+25+25+35+35	1.86	2.11	2.11	2.96	2.96		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
22+25+25+35+42	1.77	2.01	2.01	2.82	3.38		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
22+25+25+35+50	1.70	1.93	1.93	2.70	3.85		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+25+25+35+60	1.61	1.83	1.83	2.56	4.38		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+25+25+35+71	1.51	1.71	1.71	2.40	4.87		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+25+25+42+42	1.71	1.94	1.94	3.26	3.26		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+25+25+42+50	1.62	1.84	1.84	3.10	3.69		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+25+25+42+60	1.54	1.75	1.75	2.94	4.21		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+25+25+50+50	1.56	1.77	1.77	3.55	3.55		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+25+35+35+35	1.75	1.99	2.79	2.79	2.79		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+25+35+35+42	1.67	1.90	2.66	2.66	3.20		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+25+35+35+50	1.61	1.83	2.56	2.56	3.65		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+25+35+35+60	1.52	1.72	2.41	2.41	4.14		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+25+35+42+42	1.60	1.82	2.55	3.06	3.06		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+25+35+42+50	1.54	1.75	2.45	2.94	3.51		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+25+42+42+42	1.55	1.76	2.96	2.96	2.96		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+35+35+35+35	1.64	2.61	2.61	2.61	2.61		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
22+35+35+35+42	1.59	2.53	2.53	2.53	3.03		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+35+35+35+50	1.52	2.41	2.41	2.41	3.45		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
22+35+35+42+42	1.53	2.43	2.43	2.91	2.91		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
25+25+25+25+25	2.38	2.38	2.38	2.38	2.38		11.90 (3.50 - 13.20)	3.89 (0.89 - 5.76)	17.08 99
25+25+25+25+35	2.22	2.22	2.22	2.22	3.11		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
25+25+25+25+42	2.11	2.11	2.11	2.11	3.55		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
25+25+25+25+50	2.02	2.02	2.02	2.02	4.03		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
25+25+25+25+60	1.89	1.89	1.89	1.89	4.54		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
25+25+25+25+71	1.78	1.78	1.78	1.78	5.07		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
25+25+25+35+35	2.07	2.07	2.07	2.90	2.90		12.00 (3.50 - 13.30)	3.94 (0.89 - 5.78)	17.30 99
25+25+25+35+42	1.99	1.99	1.99	2.79	3.34		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
25+25+25+35+50	1.89	1.89	1.89	2.65	3.78		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
25+25+25+35+60	1.79	1.79	1.79	2.51	4.31		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
25+25+25+42+42	1.90	1.90	1.90	3.20	3.20		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
25+25+25+42+50	1.83	1.83	1.83	3.07	3.65		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
25+25+25+42+60	1.72	1.72	1.72	2.89	4.14		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
25+25+25+50+50	1.74	1.74	1.74	3.49	3.49		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
25+25+35+35+35	1.95	1.95	2.73	2.73	2.73		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
25+25+35+35+42	1.87	1.87	2.61	2.61	3.14		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
25+25+35+35+50	1.79	1.79	2.51	2.51	3.59		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
25+25+35+35+60	1.69	1.69	2.37	2.37	4.07		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
25+25+35+42+42	1.80	1.80	2.53	3.03	3.03		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
25+25+35+42+50	1.72	1.72	2.41	2.89	3.45		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
25+25+42+42+42	1.73	1.73	2.91	2.91	2.91		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
25+35+35+35+35	1.83	2.57	2.57	2.57	2.57		12.10 (3.50 - 13.30)	3.98 (0.89 - 5.78)	17.48 99
25+35+35+35+42	1.77	2.48	2.48	2.48	2.98		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
25+35+35+35+50	1.69	2.37	2.37	2.37	3.39		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
25+35+35+42+42	1.70	2.39	2.39	2.86	2.86		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
35+35+35+35+35	2.44	2.44	2.44	2.44	2.44		12.20 (3.50 - 13.40)	4.03 (0.89 - 5.79)	17.70 99
15+15+15+15+15+15	1.50	1.50	1.50	1.50	1.50	1.50	9.00 (3.30 - 12.40)	2.40 (0.91 - 5.61)	10.54 99
15+15+15+15+15+20	1.48	1.48	1.48	1.48	1.48	1.98	9.40 (3.30 - 12.40)	2.65 (0.91 - 5.61)	11.64 99
15+15+15+15+15+22	1.48	1.48	1.48	1.48	1.48	2.18	9.60 (3.30 - 12.50)	2.78 (0.91 - 5.63)	12.21 99
15+15+15+15+15+25	1.47	1.47	1.47	1.47	1.47	2.45	9.80 (3.30 - 12.50)	2.91 (0.91 - 5.63)	12.78 99
15+15+15+15+15+35	1.45	1.45	1.45	1.45	1.45	3.37	10.60 (3.30 - 12.50)	3.41 (0.91 - 5.63)	14.98 99
15+15+15+15+15+42	1.44	1.44	1.44	1.44	1.44	4.02	11.20 (3.30 - 12.60)	3.79 (0.91 - 5.65)	16.64 99
15+15+15+15+15+50	1.40	1.40	1.40	1.40	1.40	4.68	11.70 (3.40 - 13.10)	3.79 (0.90 - 5.49)	16.64 99
15+15+15+15+15+60	1.33	1.33	1.33	1.33	1.33	5.33	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03 99
15+15+15+15+15+71	1.23	1.23	1.23	1.23	1.23	5.84	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
15+15+15+15+20+20	1.47	1.47	1.47	1.47	1.96	1.96	9.80 (3.30 - 12.50)	2.91 (0.91 - 5.63)	12.78 99
15+15+15+15+20+22	1.47	1.47	1.47	1.47	1.96	2.16	10.00 (3.30 - 12.50)	3.03 (0.91 - 5.63)	13.31 99
15+15+15+15+20+25	1.46	1.46	1.46	1.46	1.94	2.43	10.20 (3.30 - 12.50)	3.16 (0.91 - 5.63)	13.88 99
15+15+15+15+20+35	1.43	1.43	1.43	1.43	1.91	3.35	11.00 (3.30 - 12.60)	3.67 (0.91 - 5.65)	16.12 99
15+15+15+15+20+42	1.41	1.41	1.41	1.41	1.89	3.96	11.50 (3.30 - 12.80)	3.88 (0.91 - 5.59)	17.04 99
15+15+15+15+20+50	1.37	1.37	1.37	1.37	1.83	4.58	11.90 (3.50 - 13.40)	3.70 (0.89 - 5.40)	16.25 99
15+15+15+15+20+60	1.29	1.29	1.29	1.29	1.71	5.14	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99 99
15+15+15+15+20+71	1.19	1.19	1.19	1.19	1.59	5.64	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+15+15+22+22	1.46	1.46	1.46	1.46	2.14	2.14	10.10 (3.30 - 12.50)	3.10 (0.91 - 5.63)	13.61 99
15+15+15+15+22+25	1.46	1.46	1.46	1.46	2.14	2.43	10.40 (3.30 - 12.50)	3.29 (0.91 - 5.63)	14.45 99
15+15+15+15+22+35	1.44	1.44	1.44	1.44	2.11	3.35	11.20 (3.30 - 12.60)	3.79 (0.91 - 5.65)	16.64 99
15+15+15+15+22+42	1.40	1.40	1.40	1.40	2.06	3.93	11.60 (3.40 - 12.90)	3.83 (0.90 - 5.56)	16.82 99
15+15+15+15+22+50	1.36	1.36	1.36	1.36	2.00	4.55	12.00 (3.50 - 13.50)	3.66 (0.88 - 5.37)	16.07 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+15+15+15+22+60	1.27	1.27	1.27	1.27	1.86	5.07	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94	99
15+15+15+15+22+71	1.18	1.18	1.18	1.18	1.73	5.57	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+15+25+25	1.45	1.45	1.45	1.45	2.41	2.41	10.60 (3.30 - 12.50)	3.41 (0.91 - 5.63)	14.98	99
15+15+15+15+25+35	1.43	1.43	1.43	1.43	2.38	3.33	11.40 (3.30 - 12.60)	3.92 (0.91 - 5.65)	17.22	99
15+15+15+15+25+42	1.39	1.39	1.39	1.39	2.32	3.90	11.80 (3.40 - 13.20)	3.75 (0.89 - 5.46)	16.47	99
15+15+15+15+25+50	1.33	1.33	1.33	1.33	2.22	4.44	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99
15+15+15+15+25+60	1.24	1.24	1.24	1.24	2.07	4.97	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
15+15+15+15+25+71	1.15	1.15	1.15	1.15	1.92	5.46	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+15+35+35	1.37	1.37	1.37	1.37	3.20	3.20	11.90 (3.50 - 13.40)	3.70 (0.89 - 5.40)	16.25	99
15+15+15+15+35+42	1.31	1.31	1.31	1.31	3.07	3.68	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99
15+15+15+15+35+50	1.24	1.24	1.24	1.24	2.90	4.14	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
15+15+15+15+35+60	1.16	1.16	1.16	1.16	2.71	4.65	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+15+35+71	1.08	1.08	1.08	1.08	2.53	5.13	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+15+42+42	1.25	1.25	1.25	1.25	3.50	3.50	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94	99
15+15+15+15+42+50	1.18	1.18	1.18	1.18	3.32	3.95	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+15+42+60	1.11	1.11	1.11	1.11	3.11	4.44	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+15+42+71	1.04	1.04	1.04	1.04	2.91	4.92	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+15+50+50	1.13	1.13	1.13	1.13	3.75	3.75	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+15+50+60	1.06	1.06	1.06	1.06	3.53	4.24	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+15+60+60	1.00	1.00	1.00	1.00	4.00	4.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+20+20+20	1.46	1.46	1.46	1.94	1.94	1.94	10.20 (3.30 - 12.50)	3.16 (0.91 - 5.63)	13.88	99
15+15+15+20+20+22	1.46	1.46	1.46	1.94	1.94	2.14	10.40 (3.30 - 12.50)	3.29 (0.91 - 5.63)	14.45	99
15+15+15+20+20+25	1.45	1.45	1.45	1.93	1.93	2.41	10.60 (3.30 - 12.50)	3.41 (0.91 - 5.63)	14.98	99
15+15+15+20+20+35	1.43	1.43	1.43	1.90	1.90	3.33	11.40 (3.30 - 12.60)	3.92 (0.91 - 5.65)	17.22	99
15+15+15+20+20+42	1.39	1.39	1.39	1.86	1.86	3.90	11.80 (3.40 - 13.20)	3.75 (0.89 - 5.46)	16.47	99
15+15+15+20+20+50	1.33	1.33	1.33	1.78	1.78	4.44	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99
15+15+15+20+20+60	1.24	1.24	1.24	1.66	1.66	4.97	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
15+15+15+20+20+71	1.15	1.15	1.15	1.54	1.54	5.46	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+20+22+22	1.44	1.44	1.44	1.93	2.12	2.12	10.50 (3.30 - 12.50)	3.35 (0.91 - 5.63)	14.71	99
15+15+15+20+22+25	1.45	1.45	1.45	1.93	2.12	2.41	10.80 (3.30 - 12.60)	3.54 (0.91 - 5.65)	15.55	99
15+15+15+20+22+35	1.41	1.41	1.41	1.89	2.07	3.30	11.50 (3.30 - 12.80)	3.88 (0.91 - 5.59)	17.04	99
15+15+15+20+22+42	1.38	1.38	1.38	1.84	2.03	3.87	11.90 (3.50 - 13.40)	3.70 (0.89 - 5.40)	16.25	99
15+15+15+20+22+50	1.31	1.31	1.31	1.75	1.93	4.38	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99
15+15+15+20+22+60	1.22	1.22	1.22	1.63	1.80	4.90	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
15+15+15+20+22+71	1.14	1.14	1.14	1.52	1.67	5.39	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+20+25+25	1.43	1.43	1.43	1.91	2.39	2.39	11.00 (3.30 - 12.60)	3.67 (0.91 - 5.65)	16.12	99
15+15+15+20+25+35	1.40	1.40	1.40	1.87	2.34	3.28	11.70 (3.40 - 13.10)	3.79 (0.90 - 5.49)	16.64	99
15+15+15+20+25+42	1.36	1.36	1.36	1.82	2.27	3.82	12.00 (3.50 - 13.50)	3.66 (0.88 - 5.37)	16.07	99
15+15+15+20+25+50	1.29	1.29	1.29	1.71	2.14	4.29	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99	99
15+15+15+20+25+60	1.20	1.20	1.20	1.60	2.00	4.80	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+20+25+71	1.12	1.12	1.12	1.49	1.86	5.29	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+20+35+35	1.33	1.33	1.33	1.78	3.11	3.11	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99
15+15+15+20+35+42	1.27	1.27	1.27	1.69	2.96	3.55	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94	99
15+15+15+20+35+50	1.20	1.20	1.20	1.60	2.80	4.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+20+35+60	1.13	1.13	1.13	1.50	2.63	4.50	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+20+35+71	1.05	1.05	1.05	1.40	2.46	4.98	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+15+15+20+42+42	1.21	1.21	1.21	1.61	3.38	3.38	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+20+42+50	1.15	1.15	1.15	1.53	3.21	3.82	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+20+42+60	1.08	1.08	1.08	1.44	3.02	4.31	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+20+42+71	1.01	1.01	1.01	1.35	2.83	4.79	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+20+50+50	1.09	1.09	1.09	1.45	3.64	3.64	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+20+50+60	1.03	1.03	1.03	1.37	3.43	4.11	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+22+22+22	1.45	1.45	1.45	2.12	2.12	2.12	10.70 (3.30 - 12.50)	3.48 (0.91 - 5.63)	15.28	99
15+15+15+22+22+25	1.43	1.43	1.43	2.10	2.10	2.39	10.90 (3.30 - 12.60)	3.60 (0.91 - 5.65)	15.81	99
15+15+15+22+22+35	1.40	1.40	1.40	2.06	2.06	3.27	11.60 (3.40 - 12.90)	3.83 (0.90 - 5.56)	16.82	99
15+15+15+22+22+42	1.37	1.37	1.37	2.02	2.02	3.85	12.00 (3.50 - 13.50)	3.66 (0.88 - 5.37)	16.07	99
15+15+15+22+22+50	1.29	1.29	1.29	1.90	1.90	4.32	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99	99
15+15+15+22+22+60	1.21	1.21	1.21	1.77	1.77	4.83	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+22+22+71	1.13	1.13	1.13	1.65	1.65	5.33	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+22+25+25	1.44	1.44	1.44	2.11	2.39	2.39	11.20 (3.30 - 12.60)	3.79 (0.91 - 5.65)	16.64	99
15+15+15+22+25+35	1.39	1.39	1.39	2.04	2.32	3.25	11.80 (3.40 - 13.20)	3.75 (0.89 - 5.46)	16.47	99
15+15+15+22+25+42	1.34	1.34	1.34	1.97	2.24	3.76	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99
15+15+15+22+25+50	1.27	1.27	1.27	1.86	2.11	4.23	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94	99
15+15+15+22+25+60	1.18	1.18	1.18	1.74	1.97	4.74	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+22+25+71	1.10	1.10	1.10	1.62	1.84	5.23	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+22+35+35	1.31	1.31	1.31	1.93	3.07	3.07	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99
15+15+15+22+35+42	1.25	1.25	1.25	1.83	2.92	3.50	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94	99
15+15+15+22+35+50	1.18	1.18	1.18	1.74	2.76	3.95	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+22+35+60	1.11	1.11	1.11	1.63	2.59	4.44	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+22+35+71	1.04	1.04	1.04	1.53	2.43	4.92	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+22+42+42	1.19	1.19	1.19	1.75	3.34	3.34	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+22+42+50	1.13	1.13	1.13	1.66	3.17	3.77	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+22+42+60	1.07	1.07	1.07	1.56	2.98	4.26	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+22+42+71	1.00	1.00	1.00	1.47	2.80	4.73	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+22+50+50	1.08	1.08	1.08	1.58	3.59	3.59	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+22+50+60	1.02	1.02	1.02	1.49	3.39	4.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+25+25+25	1.43	1.43	1.43	2.38	2.38	2.38	11.40 (3.30 - 12.60)	3.92 (0.91 - 5.65)	17.22	99
15+15+15+25+25+35	1.37	1.37	1.37	2.29	2.29	3.20	11.90 (3.50 - 13.40)	3.70 (0.89 - 5.40)	16.25	99
15+15+15+25+25+42	1.31	1.31	1.31	2.19	2.19	3.68	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99
15+15+15+25+25+50	1.24	1.24	1.24	2.07	2.07	4.14	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
15+15+15+25+25+60	1.16	1.16	1.16	1.94	1.94	4.65	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+25+25+71	1.08	1.08	1.08	1.81	1.81	5.13	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+25+35+35	1.29	1.29	1.29	2.14	3.00	3.00	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99	99
15+15+15+25+35+42	1.22	1.22	1.22	2.04	2.86	3.43	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
15+15+15+25+35+50	1.16	1.16	1.16	1.94	2.71	3.87	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+25+35+60	1.09	1.09	1.09	1.82	2.55	4.36	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+25+35+71	1.02	1.02	1.02	1.70	2.39	4.84	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+25+42+42	1.17	1.17	1.17	1.95	3.27	3.27	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+25+42+50	1.11	1.11	1.11	1.85	3.11	3.70	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+25+42+60	1.05	1.05	1.05	1.74	2.93	4.19	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+25+50+50	1.06	1.06	1.06	1.76	3.53	3.53	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+15+25+50+60	1.00	1.00	1.00	1.67	3.33	4.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+15+15+35+35+35	1.20	1.20	1.20	2.80	2.80	2.80	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+15+35+35+42	1.15	1.15	1.15	2.68	2.68	3.21	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+15+35+35+50	1.09	1.09	1.09	2.55	2.55	3.64	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+15+35+35+60	1.03	1.03	1.03	2.40	2.40	4.11	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+15+35+42+42	1.10	1.10	1.10	2.56	3.07	3.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+15+35+42+50	1.05	1.05	1.05	2.44	2.93	3.49	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+15+35+50+50	1.00	1.00	1.00	2.33	3.33	3.33	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+15+42+42+42	1.05	1.05	1.05	2.95	2.95	2.95	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+15+42+42+50	1.01	1.01	1.01	2.82	2.82	3.35	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+20+20+20	1.45	1.45	1.93	1.93	1.93	1.93	10.60 (3.30 - 12.50)	3.41 (0.91 - 5.63)	14.98 99
15+15+20+20+20+22	1.45	1.45	1.93	1.93	1.93	2.12	10.80 (3.30 - 12.60)	3.54 (0.91 - 5.65)	15.55 99
15+15+20+20+20+25	1.43	1.43	1.91	1.91	1.91	2.39	11.00 (3.30 - 12.60)	3.67 (0.91 - 5.65)	16.12 99
15+15+20+20+20+35	1.40	1.40	1.87	1.87	1.87	3.28	11.70 (3.40 - 13.10)	3.79 (0.90 - 5.49)	16.64 99
15+15+20+20+20+42	1.36	1.36	1.82	1.82	1.82	3.82	12.00 (3.50 - 13.50)	3.66 (0.88 - 5.37)	16.07 99
15+15+20+20+20+50	1.29	1.29	1.71	1.71	1.71	4.29	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99 99
15+15+20+20+20+60	1.20	1.20	1.60	1.60	1.60	4.80	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+20+20+71	1.12	1.12	1.49	1.49	1.49	5.29	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+20+22+22	1.43	1.43	1.91	1.91	2.10	2.10	10.90 (3.30 - 12.60)	3.60 (0.91 - 5.65)	15.81 99
15+15+20+20+22+25	1.44	1.44	1.91	1.91	2.11	2.39	11.20 (3.30 - 12.60)	3.79 (0.91 - 5.65)	16.64 99
15+15+20+20+22+35	1.39	1.39	1.86	1.86	2.04	3.25	11.80 (3.40 - 13.20)	3.75 (0.89 - 5.46)	16.47 99
15+15+20+20+22+42	1.34	1.34	1.79	1.79	1.97	3.76	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03 99
15+15+20+20+22+50	1.27	1.27	1.69	1.69	1.86	4.23	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94 99
15+15+20+20+22+60	1.18	1.18	1.58	1.58	1.74	4.74	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+20+22+71	1.10	1.10	1.47	1.47	1.62	5.23	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+20+25+25	1.43	1.43	1.90	1.90	2.38	2.38	11.40 (3.30 - 12.60)	3.92 (0.91 - 5.65)	17.22 99
15+15+20+20+25+35	1.37	1.37	1.83	1.83	2.29	3.20	11.90 (3.50 - 13.40)	3.70 (0.89 - 5.40)	16.25 99
15+15+20+20+25+42	1.31	1.31	1.75	1.75	2.19	3.68	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03 99
15+15+20+20+25+50	1.24	1.24	1.66	1.66	2.07	4.14	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
15+15+20+20+25+60	1.16	1.16	1.55	1.55	1.94	4.65	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+20+25+71	1.08	1.08	1.45	1.45	1.81	5.13	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+20+35+35	1.29	1.29	1.71	1.71	3.00	3.00	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99 99
15+15+20+20+35+42	1.22	1.22	1.63	1.63	2.86	3.43	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
15+15+20+20+35+50	1.16	1.16	1.55	1.55	2.71	3.87	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+20+35+60	1.09	1.09	1.45	1.45	2.55	4.36	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+20+35+71	1.02	1.02	1.36	1.36	2.39	4.84	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+20+42+42	1.17	1.17	1.56	1.56	3.27	3.27	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+20+42+50	1.11	1.11	1.48	1.48	3.11	3.70	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+20+42+60	1.05	1.05	1.40	1.40	2.93	4.19	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+20+50+50	1.06	1.06	1.41	1.41	3.53	3.53	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+20+50+60	1.00	1.00	1.33	1.33	3.33	4.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+20+22+22+22	1.44	1.44	1.91	2.11	2.11	2.11	11.10 (3.30 - 12.60)	3.73 (0.91 - 5.65)	16.38 99
15+15+20+22+22+25	1.42	1.42	1.90	2.09	2.09	2.37	11.30 (3.30 - 12.60)	3.86 (0.91 - 5.65)	16.95 99
15+15+20+22+22+35	1.38	1.38	1.84	2.03	2.03	3.23	11.90 (3.50 - 13.40)	3.70 (0.89 - 5.40)	16.25 99
15+15+20+22+22+42	1.32	1.32	1.76	1.94	1.94	3.71	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03 99
15+15+20+22+22+50	1.25	1.25	1.67	1.83	1.83	4.17	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94 99
15+15+20+22+22+60	1.17	1.17	1.56	1.71	1.71	4.68	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+15+20+22+22+71	1.09	1.09	1.45	1.60	1.60	5.16	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+22+25+25	1.41	1.41	1.89	2.07	2.36	2.36	11.50 (3.30 - 12.80)	3.88 (0.91 - 5.59)	17.04	99
15+15+20+22+25+35	1.36	1.36	1.82	2.00	2.27	3.18	12.00 (3.50 - 13.50)	3.66 (0.88 - 5.37)	16.07	99
15+15+20+22+25+42	1.29	1.29	1.73	1.90	2.16	3.63	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99	99
15+15+20+22+25+50	1.22	1.22	1.63	1.80	2.04	4.08	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
15+15+20+22+25+60	1.15	1.15	1.53	1.68	1.91	4.59	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+22+25+71	1.07	1.07	1.43	1.57	1.79	5.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+22+35+35	1.27	1.27	1.69	1.86	2.96	2.96	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94	99
15+15+20+22+35+42	1.21	1.21	1.61	1.77	2.82	3.38	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+22+35+50	1.15	1.15	1.53	1.68	2.68	3.82	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+22+35+60	1.08	1.08	1.44	1.58	2.51	4.31	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+22+35+71	1.01	1.01	1.35	1.48	2.36	4.79	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+22+42+42	1.15	1.15	1.54	1.69	3.23	3.23	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+22+42+50	1.10	1.10	1.46	1.61	3.07	3.66	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+22+42+60	1.03	1.03	1.38	1.52	2.90	4.14	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+22+50+50	1.05	1.05	1.40	1.53	3.49	3.49	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+25+25+25	1.40	1.40	1.87	2.34	2.34	2.34	11.70 (3.40 - 13.10)	3.79 (0.90 - 5.49)	16.64	99
15+15+20+25+25+35	1.33	1.33	1.78	2.22	2.22	3.11	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99
15+15+20+25+25+42	1.27	1.27	1.69	2.11	2.11	3.55	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94	99
15+15+20+25+25+50	1.20	1.20	1.60	2.00	2.00	4.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+25+25+60	1.13	1.13	1.50	1.88	1.88	4.50	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+25+25+71	1.05	1.05	1.40	1.75	1.75	4.98	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+25+35+35	1.24	1.24	1.66	2.07	2.90	2.90	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
15+15+20+25+35+42	1.18	1.18	1.58	1.97	2.76	3.32	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+25+35+50	1.13	1.13	1.50	1.88	2.63	3.75	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+25+35+60	1.06	1.06	1.41	1.76	2.47	4.24	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+25+42+42	1.13	1.13	1.51	1.89	3.17	3.17	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+25+42+50	1.08	1.08	1.44	1.80	3.02	3.59	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+25+42+60	1.02	1.02	1.36	1.69	2.85	4.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+25+50+50	1.03	1.03	1.37	1.71	3.43	3.43	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+35+35+35	1.16	1.16	1.55	2.71	2.71	2.71	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+35+35+42	1.11	1.11	1.48	2.59	2.59	3.11	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+35+35+50	1.06	1.06	1.41	2.47	2.47	3.53	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+35+35+60	1.00	1.00	1.33	2.33	2.33	4.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+35+42+42	1.07	1.07	1.42	2.49	2.98	2.98	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+35+42+50	1.02	1.02	1.36	2.37	2.85	3.39	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+20+42+42+42	1.02	1.02	1.36	2.86	2.86	2.86	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+22+22+22	1.42	1.42	2.09	2.09	2.09	2.09	11.20 (3.30 - 12.60)	3.79 (0.91 - 5.65)	16.64	99
15+15+22+22+22+25	1.43	1.43	2.09	2.09	2.09	2.38	11.50 (3.30 - 12.80)	3.88 (0.91 - 5.59)	17.04	99
15+15+22+22+22+35	1.37	1.37	2.02	2.02	2.02	3.21	12.00 (3.50 - 13.50)	3.66 (0.88 - 5.37)	16.07	99
15+15+22+22+22+42	1.30	1.30	1.91	1.91	1.91	3.65	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99	99
15+15+22+22+22+50	1.23	1.23	1.81	1.81	1.81	4.11	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
15+15+22+22+22+60	1.15	1.15	1.69	1.69	1.69	4.62	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+22+22+71	1.08	1.08	1.58	1.58	1.58	5.10	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+22+25+25	1.40	1.40	2.06	2.06	2.34	2.34	11.60 (3.40 - 12.90)	3.83 (0.90 - 5.56)	16.82	99
15+15+22+22+25+35	1.34	1.34	1.97	1.97	2.24	3.13	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+15+22+22+25+42	1.28	1.28	1.87	1.87	2.13	3.57	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99	99
15+15+22+22+25+50	1.21	1.21	1.77	1.77	2.01	4.03	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+22+25+60	1.13	1.13	1.66	1.66	1.89	4.53	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+22+25+71	1.06	1.06	1.55	1.55	1.76	5.01	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+22+35+35	1.25	1.25	1.83	1.83	2.92	2.92	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94	99
15+15+22+22+35+42	1.19	1.19	1.75	1.75	2.78	3.34	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+22+35+50	1.13	1.13	1.66	1.66	2.64	3.77	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+22+35+60	1.07	1.07	1.56	1.56	2.49	4.26	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+22+35+71	1.00	1.00	1.47	1.47	2.33	4.73	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+22+42+42	1.14	1.14	1.67	1.67	3.19	3.19	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+22+42+50	1.08	1.08	1.59	1.59	3.04	3.61	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+22+42+60	1.02	1.02	1.50	1.50	2.86	4.09	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+22+50+50	1.03	1.03	1.52	1.52	3.45	3.45	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+25+25+25	1.39	1.39	2.04	2.32	2.32	2.32	11.80 (3.40 - 13.20)	3.75 (0.89 - 5.46)	16.47	99
15+15+22+25+25+35	1.31	1.31	1.93	2.19	2.19	3.07	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99
15+15+22+25+25+42	1.25	1.25	1.83	2.08	2.08	3.50	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94	99
15+15+22+25+25+50	1.18	1.18	1.74	1.97	1.97	3.95	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+25+25+60	1.11	1.11	1.63	1.85	1.85	4.44	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+25+25+71	1.04	1.04	1.53	1.73	1.73	4.92	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+25+35+35	1.22	1.22	1.80	2.04	2.86	2.86	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
15+15+22+25+35+42	1.17	1.17	1.71	1.95	2.73	3.27	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+25+35+50	1.11	1.11	1.63	1.85	2.59	3.70	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+25+35+60	1.05	1.05	1.53	1.74	2.44	4.19	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+25+42+42	1.12	1.12	1.64	1.86	3.13	3.13	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+25+42+50	1.07	1.07	1.56	1.78	2.98	3.55	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+25+42+60	1.01	1.01	1.47	1.68	2.82	4.02	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+25+50+50	1.02	1.02	1.49	1.69	3.39	3.39	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+35+35+35	1.15	1.15	1.68	2.68	2.68	2.68	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+35+35+42	1.10	1.10	1.61	2.56	2.56	3.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+35+35+50	1.05	1.05	1.53	2.44	2.44	3.49	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+35+42+42	1.05	1.05	1.54	2.46	2.95	2.95	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+35+42+50	1.01	1.01	1.47	2.35	2.82	3.35	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+22+42+42+42	1.01	1.01	1.48	2.83	2.83	2.83	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+25+25+25+25	1.37	1.37	2.29	2.29	2.29	2.29	11.90 (3.50 - 13.40)	3.70 (0.89 - 5.40)	16.25	99
15+15+25+25+25+35	1.29	1.29	2.14	2.14	2.14	3.00	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99	99
15+15+25+25+25+42	1.22	1.22	2.04	2.04	2.04	3.43	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
15+15+25+25+25+50	1.16	1.16	1.94	1.94	1.94	3.87	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+25+25+25+60	1.09	1.09	1.82	1.82	1.82	4.36	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+25+25+25+71	1.02	1.02	1.70	1.70	1.70	4.84	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+25+25+35+35	1.20	1.20	2.00	2.00	2.80	2.80	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+25+25+35+42	1.15	1.15	1.91	1.91	2.68	3.21	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+25+25+35+50	1.09	1.09	1.82	1.82	2.55	3.64	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+25+25+35+60	1.03	1.03	1.71	1.71	2.40	4.11	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+25+25+42+42	1.10	1.10	1.83	1.83	3.07	3.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+25+25+42+50	1.05	1.05	1.74	1.74	2.93	3.49	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+15+25+25+50+50	1.00	1.00	1.67	1.67	3.33	3.33	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+15+25+35+35+35	1.13	1.13	1.88	2.63	2.63	2.63	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+25+35+35+42	1.08	1.08	1.80	2.51	2.51	3.02	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+25+35+35+50	1.03	1.03	1.71	2.40	2.40	3.43	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+25+35+42+42	1.03	1.03	1.72	2.41	2.90	2.90	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+35+35+35+35	1.06	1.06	2.47	2.47	2.47	2.47	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+15+35+35+35+42	1.02	1.02	2.37	2.37	2.37	2.85	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+20+20+20	1.43	1.91	1.91	1.91	1.91	1.91	11.00 (3.30 - 12.60)	3.67 (0.91 - 5.65)	16.12 99
15+20+20+20+20+22	1.44	1.91	1.91	1.91	1.91	2.11	11.20 (3.30 - 12.60)	3.79 (0.91 - 5.65)	16.64 99
15+20+20+20+20+25	1.43	1.90	1.90	1.90	1.90	2.38	11.40 (3.30 - 12.60)	3.92 (0.91 - 5.65)	17.22 99
15+20+20+20+20+35	1.37	1.83	1.83	1.83	1.83	3.20	11.90 (3.50 - 13.40)	3.70 (0.89 - 5.40)	16.25 99
15+20+20+20+20+42	1.31	1.75	1.75	1.75	1.75	3.68	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03 99
15+20+20+20+20+50	1.24	1.66	1.66	1.66	1.66	4.14	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
15+20+20+20+20+60	1.16	1.55	1.55	1.55	1.55	4.65	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+20+20+71	1.08	1.45	1.45	1.45	1.45	5.13	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+20+22+22	1.42	1.90	1.90	1.90	2.09	2.09	11.30 (3.30 - 12.60)	3.86 (0.91 - 5.65)	16.95 99
15+20+20+20+22+25	1.41	1.89	1.89	1.89	2.07	2.36	11.50 (3.30 - 12.80)	3.88 (0.91 - 5.59)	17.04 99
15+20+20+20+22+35	1.36	1.82	1.82	1.82	2.00	3.18	12.00 (3.50 - 13.50)	3.66 (0.88 - 5.37)	16.07 99
15+20+20+20+22+42	1.29	1.73	1.73	1.73	1.90	3.63	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99 99
15+20+20+20+22+50	1.22	1.63	1.63	1.63	1.80	4.08	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
15+20+20+20+22+60	1.15	1.53	1.53	1.53	1.68	4.59	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+20+22+71	1.07	1.43	1.43	1.43	1.57	5.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+20+25+25	1.40	1.87	1.87	1.87	2.34	2.34	11.70 (3.40 - 13.10)	3.79 (0.90 - 5.49)	16.64 99
15+20+20+20+25+35	1.33	1.78	1.78	1.78	2.22	3.11	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03 99
15+20+20+20+25+42	1.27	1.69	1.69	1.69	2.11	3.55	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94 99
15+20+20+20+25+50	1.20	1.60	1.60	1.60	2.00	4.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+20+25+60	1.13	1.50	1.50	1.50	1.88	4.50	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+20+25+71	1.05	1.40	1.40	1.40	1.75	4.98	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+20+35+35	1.24	1.66	1.66	1.66	2.90	2.90	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
15+20+20+20+35+42	1.18	1.58	1.58	1.58	2.76	3.32	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+20+35+50	1.13	1.50	1.50	1.50	2.63	3.75	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+20+35+60	1.06	1.41	1.41	1.41	2.47	4.24	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+20+42+42	1.13	1.51	1.51	1.51	3.17	3.17	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+20+42+50	1.08	1.44	1.44	1.44	3.02	3.59	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+20+42+60	1.02	1.36	1.36	1.36	2.85	4.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+20+50+50	1.03	1.37	1.37	1.37	3.43	3.43	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+22+22+22	1.43	1.90	1.90	2.09	2.09	2.09	11.50 (3.30 - 12.80)	3.88 (0.91 - 5.59)	17.04 99
15+20+20+22+22+25	1.40	1.87	1.87	2.06	2.06	2.34	11.60 (3.40 - 12.90)	3.83 (0.90 - 5.56)	16.82 99
15+20+20+22+22+35	1.34	1.79	1.79	1.97	1.97	3.13	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03 99
15+20+20+22+22+42	1.28	1.70	1.70	1.87	1.87	3.57	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99 99
15+20+20+22+22+50	1.21	1.61	1.61	1.77	1.77	4.03	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+22+22+60	1.13	1.51	1.51	1.66	1.66	4.53	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+22+22+71	1.06	1.41	1.41	1.55	1.55	5.01	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+20+22+25+25	1.39	1.86	1.86	2.04	2.32	2.32	11.80 (3.40 - 13.20)	3.75 (0.89 - 5.46)	16.47 99
15+20+20+22+25+35	1.31	1.75	1.75	1.93	2.19	3.07	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03 99
15+20+20+22+25+42	1.25	1.67	1.67	1.83	2.08	3.50	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94 99
15+20+20+22+25+50	1.18	1.58	1.58	1.74	1.97	3.95	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+20+20+22+25+60	1.11	1.48	1.48	1.63	1.85	4.44	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+22+25+71	1.04	1.39	1.39	1.53	1.73	4.92	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+22+35+35	1.22	1.63	1.63	1.80	2.86	2.86	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
15+20+20+22+35+42	1.17	1.56	1.56	1.71	2.73	3.27	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+22+35+50	1.11	1.48	1.48	1.63	2.59	3.70	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+22+35+60	1.05	1.40	1.40	1.53	2.44	4.19	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+22+42+42	1.12	1.49	1.49	1.64	3.13	3.13	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+22+42+50	1.07	1.42	1.42	1.56	2.98	3.55	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+22+42+60	1.01	1.34	1.34	1.47	2.82	4.02	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+22+50+50	1.02	1.36	1.36	1.49	3.39	3.39	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+25+25+25	1.37	1.83	1.83	2.29	2.29	2.29	11.90 (3.50 - 13.40)	3.70 (0.89 - 5.40)	16.25	99
15+20+20+25+25+35	1.29	1.71	1.71	2.14	2.14	3.00	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99	99
15+20+20+25+25+42	1.22	1.63	1.63	2.04	2.04	3.43	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
15+20+20+25+25+50	1.16	1.55	1.55	1.94	1.94	3.87	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+25+25+60	1.09	1.45	1.45	1.82	1.82	4.36	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+25+25+71	1.02	1.36	1.36	1.70	1.70	4.84	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+25+35+35	1.20	1.60	1.60	2.00	2.80	2.80	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+25+35+42	1.15	1.53	1.53	1.91	2.68	3.21	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+25+35+50	1.09	1.45	1.45	1.82	2.55	3.64	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+25+35+60	1.03	1.37	1.37	1.71	2.40	4.11	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+25+42+42	1.10	1.46	1.46	1.83	3.07	3.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+25+42+50	1.05	1.40	1.40	1.74	2.93	3.49	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+25+50+50	1.00	1.33	1.33	1.67	3.33	3.33	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+35+35+35	1.13	1.50	1.50	2.63	2.63	2.63	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+35+35+42	1.08	1.44	1.44	2.51	2.51	3.02	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+35+35+50	1.03	1.37	1.37	2.40	2.40	3.43	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+20+35+42+42	1.03	1.38	1.38	2.41	2.90	2.90	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+22+22+22+22	1.41	1.89	2.07	2.07	2.07	2.07	11.60 (3.40 - 12.90)	3.83 (0.90 - 5.56)	16.82	99
15+20+22+22+22+25	1.39	1.86	2.04	2.04	2.04	2.32	11.70 (3.40 - 13.10)	3.79 (0.90 - 5.49)	16.64	99
15+20+22+22+22+35	1.32	1.76	1.94	1.94	1.94	3.09	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99
15+20+22+22+22+42	1.26	1.68	1.85	1.85	1.85	3.52	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94	99
15+20+22+22+22+50	1.19	1.59	1.75	1.75	1.75	3.97	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+22+22+22+60	1.12	1.49	1.64	1.64	1.64	4.47	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+22+22+22+71	1.05	1.40	1.53	1.53	1.53	4.95	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+22+22+25+25	1.38	1.84	2.03	2.03	2.31	2.31	11.90 (3.50 - 13.40)	3.70 (0.89 - 5.40)	16.25	99
15+20+22+22+25+35	1.29	1.73	1.90	1.90	2.16	3.02	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99	99
15+20+22+22+25+42	1.23	1.64	1.81	1.81	2.05	3.45	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
15+20+22+22+25+50	1.17	1.56	1.71	1.71	1.95	3.90	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+22+22+25+60	1.10	1.46	1.61	1.61	1.83	4.39	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+22+22+25+71	1.03	1.37	1.51	1.51	1.71	4.87	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+22+22+35+35	1.21	1.61	1.77	1.77	2.82	2.82	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+22+22+35+42	1.15	1.54	1.69	1.69	2.69	3.23	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+22+22+35+50	1.10	1.46	1.61	1.61	2.56	3.66	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+22+22+35+60	1.03	1.38	1.52	1.52	2.41	4.14	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+22+22+42+42	1.10	1.47	1.62	1.62	3.09	3.09	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+20+22+22+42+50	1.05	1.40	1.54	1.54	2.95	3.51	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+20+22+22+50+50	1.01	1.34	1.47	1.47	3.35	3.35	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+22+25+25+25	1.36	1.82	2.00	2.27	2.27	2.27	12.00 (3.50 - 13.50)	3.66 (0.88 - 5.37)	16.07 99
15+20+22+25+25+35	1.27	1.69	1.86	2.11	2.11	2.96	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94 99
15+20+22+25+25+42	1.21	1.61	1.77	2.01	2.01	3.38	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+22+25+25+50	1.15	1.53	1.68	1.91	1.91	3.82	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+22+25+25+60	1.08	1.44	1.58	1.80	1.80	4.31	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+22+25+25+71	1.01	1.35	1.48	1.69	1.69	4.79	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+22+25+35+35	1.18	1.58	1.74	1.97	2.76	2.76	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+22+25+35+42	1.13	1.51	1.66	1.89	2.64	3.17	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+22+25+35+50	1.08	1.44	1.58	1.80	2.51	3.59	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+22+25+35+60	1.02	1.36	1.49	1.69	2.37	4.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+22+25+42+42	1.08	1.45	1.59	1.81	3.04	3.04	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+22+25+42+50	1.03	1.38	1.52	1.72	2.90	3.45	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+22+35+35+35	1.11	1.48	1.63	2.59	2.59	2.59	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+22+35+35+42	1.07	1.42	1.56	2.49	2.49	2.98	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+22+35+35+50	1.02	1.36	1.49	2.37	2.37	3.39	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+22+35+42+42	1.02	1.36	1.50	2.39	2.86	2.86	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+25+25+25+25	1.33	1.78	2.22	2.22	2.22	2.22	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03 99
15+20+25+25+25+35	1.24	1.66	2.07	2.07	2.07	2.90	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
15+20+25+25+25+42	1.18	1.58	1.97	1.97	1.97	3.32	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+25+25+25+50	1.13	1.50	1.88	1.88	1.88	3.75	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+25+25+25+60	1.06	1.41	1.76	1.76	1.76	4.24	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+25+25+35+35	1.16	1.55	1.94	1.94	2.71	2.71	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+25+25+35+42	1.11	1.48	1.85	1.85	2.59	3.11	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+25+25+35+50	1.06	1.41	1.76	1.76	2.47	3.53	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+25+25+35+60	1.00	1.33	1.67	1.67	2.33	4.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+25+25+42+42	1.07	1.42	1.78	1.78	2.98	2.98	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+25+25+42+50	1.02	1.36	1.69	1.69	2.85	3.39	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+25+35+35+35	1.09	1.45	1.82	2.55	2.55	2.55	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+25+35+35+42	1.05	1.40	1.74	2.44	2.44	2.93	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+25+35+35+50	1.00	1.33	1.67	2.33	2.33	3.33	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+25+35+42+42	1.01	1.34	1.68	2.35	2.82	2.82	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+20+35+35+35+35	1.03	1.37	2.40	2.40	2.40	2.40	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+22+22+22+22+22	1.40	2.06	2.06	2.06	2.06	2.06	11.70 (3.40 - 13.10)	3.79 (0.90 - 5.49)	16.64 99
15+22+22+22+22+25	1.38	2.03	2.03	2.03	2.03	2.30	11.80 (3.40 - 13.20)	3.75 (0.89 - 5.46)	16.47 99
15+22+22+22+22+35	1.30	1.91	1.91	1.91	1.91	3.04	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99 99
15+22+22+22+22+42	1.24	1.82	1.82	1.82	1.82	3.48	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
15+22+22+22+22+50	1.18	1.73	1.73	1.73	1.73	3.92	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+22+22+22+22+60	1.10	1.62	1.62	1.62	1.62	4.42	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+22+22+22+22+71	1.03	1.52	1.52	1.52	1.52	4.90	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+22+22+22+25+25	1.37	2.02	2.02	2.02	2.29	2.29	12.00 (3.50 - 13.50)	3.66 (0.88 - 5.37)	16.07 99
15+22+22+22+25+35	1.28	1.87	1.87	1.87	2.13	2.98	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99 99
15+22+22+22+25+42	1.22	1.78	1.78	1.78	2.03	3.41	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
15+22+22+22+25+50	1.15	1.69	1.69	1.69	1.92	3.85	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+22+22+22+25+60	1.08	1.59	1.59	1.59	1.81	4.34	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
15+22+22+22+25+71	1.02	1.49	1.49	1.49	1.69	4.81	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+22+22+22+35+35	1.19	1.75	1.75	1.75	2.78	2.78	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+22+35+42	1.14	1.67	1.67	1.67	2.66	3.19	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+22+35+50	1.08	1.59	1.59	1.59	2.53	3.61	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+22+35+60	1.02	1.50	1.50	1.50	2.39	4.09	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+22+42+42	1.09	1.60	1.60	1.60	3.05	3.05	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+22+42+50	1.04	1.53	1.53	1.53	2.91	3.47	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+25+25+25	1.34	1.97	1.97	2.24	2.24	2.24	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99
15+22+22+25+25+35	1.25	1.83	1.83	2.08	2.08	2.92	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94	99
15+22+22+25+25+42	1.19	1.75	1.75	1.99	1.99	3.34	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+25+25+50	1.13	1.66	1.66	1.89	1.89	3.77	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+25+25+60	1.07	1.56	1.56	1.78	1.78	4.26	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+25+25+71	1.00	1.47	1.47	1.67	1.67	4.73	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+25+35+35	1.17	1.71	1.71	1.95	2.73	2.73	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+25+35+42	1.12	1.64	1.64	1.86	2.61	3.13	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+25+35+50	1.07	1.56	1.56	1.78	2.49	3.55	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+25+35+60	1.01	1.47	1.47	1.68	2.35	4.02	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+25+42+42	1.07	1.57	1.57	1.79	3.00	3.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+25+42+50	1.02	1.50	1.50	1.70	2.86	3.41	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+35+35+35	1.10	1.61	1.61	2.56	2.56	2.56	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+35+35+42	1.05	1.54	1.54	2.46	2.46	2.95	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+35+35+50	1.01	1.47	1.47	2.35	2.35	3.35	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+22+35+42+42	1.01	1.48	1.48	2.36	2.83	2.83	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+25+35+35+42	1.03	1.52	1.72	2.41	2.41	2.90	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+22+35+35+35+35	1.02	1.49	2.37	2.37	2.37	2.37	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+25+25+25+25+25	1.29	2.14	2.14	2.14	2.14	2.14	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99	99
15+25+25+25+25+35	1.20	2.00	2.00	2.00	2.00	2.80	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+25+25+25+25+42	1.15	1.91	1.91	1.91	1.91	3.21	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+25+25+25+25+50	1.09	1.82	1.82	1.82	1.82	3.64	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+25+25+25+25+60	1.03	1.71	1.71	1.71	1.71	4.11	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+25+25+25+35+35	1.13	1.88	1.88	1.88	2.63	2.63	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+25+25+25+35+42	1.08	1.80	1.80	1.80	2.51	3.02	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+25+25+25+35+50	1.03	1.71	1.71	1.71	2.40	3.43	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+25+25+25+42+42	1.03	1.72	1.72	1.72	2.90	2.90	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+25+25+35+35+35	1.06	1.76	1.76	2.47	2.47	2.47	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+25+25+35+35+42	1.02	1.69	1.69	2.37	2.37	2.85	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
15+25+35+35+35+35	1.00	1.67	2.33	2.33	2.33	2.33	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+20+20+20+20+20	1.90	1.90	1.90	1.90	1.90	1.90	11.40 (3.30 - 12.60)	3.92 (0.91 - 5.65)	17.22	99
20+20+20+20+20+22	1.89	1.89	1.89	1.89	1.89	2.07	11.50 (3.30 - 12.80)	3.88 (0.91 - 5.59)	17.04	99
20+20+20+20+20+25	1.87	1.87	1.87	1.87	1.87	2.34	11.70 (3.40 - 13.10)	3.79 (0.90 - 5.49)	16.64	99
20+20+20+20+20+35	1.78	1.78	1.78	1.78	1.78	3.11	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99
20+20+20+20+20+42	1.69	1.69	1.69	1.69	1.69	3.55	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94	99
20+20+20+20+20+50	1.60	1.60	1.60	1.60	1.60	4.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+20+20+20+20+60	1.50	1.50	1.50	1.50	1.50	4.50	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+20+20+20+20+71	1.40	1.40	1.40	1.40	1.40	4.98	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+20+20+20+22+22	1.87	1.87	1.87	1.87	2.06	2.06	11.60 (3.40 - 12.90)	3.83 (0.90 - 5.56)	16.82	99
20+20+20+20+22+25	1.86	1.86	1.86	1.86	2.04	2.32	11.80 (3.40 - 13.20)	3.75 (0.89 - 5.46)	16.47	99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
20+20+20+20+22+35	1.75	1.75	1.75	1.75	1.93	3.07	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03 99
20+20+20+20+22+42	1.67	1.67	1.67	1.67	1.83	3.50	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94 99
20+20+20+20+22+50	1.58	1.58	1.58	1.58	1.74	3.95	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+20+22+60	1.48	1.48	1.48	1.48	1.63	4.44	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+20+22+71	1.39	1.39	1.39	1.39	1.53	4.92	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+20+25+25	1.83	1.83	1.83	1.83	2.29	2.29	11.90 (3.50 - 13.40)	3.70 (0.89 - 5.40)	16.25 99
20+20+20+20+25+35	1.71	1.71	1.71	1.71	2.14	3.00	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99 99
20+20+20+20+25+42	1.63	1.63	1.63	1.63	2.04	3.43	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
20+20+20+20+25+50	1.55	1.55	1.55	1.55	1.94	3.87	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+20+25+60	1.45	1.45	1.45	1.45	1.82	4.36	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+20+25+71	1.36	1.36	1.36	1.36	1.70	4.84	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+20+35+35	1.60	1.60	1.60	1.60	2.80	2.80	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+20+35+42	1.53	1.53	1.53	1.53	2.68	3.21	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+20+35+50	1.45	1.45	1.45	1.45	2.55	3.64	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+20+35+60	1.37	1.37	1.37	1.37	2.40	4.11	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+20+42+42	1.46	1.46	1.46	1.46	3.07	3.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+20+42+50	1.40	1.40	1.40	1.40	2.93	3.49	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+20+50+50	1.33	1.33	1.33	1.33	3.33	3.33	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+22+22+22	1.86	1.86	1.86	2.04	2.04	2.04	11.70 (3.40 - 13.10)	3.79 (0.90 - 5.49)	16.64 99
20+20+20+22+22+25	1.84	1.84	1.84	2.03	2.03	2.31	11.90 (3.50 - 13.40)	3.70 (0.89 - 5.40)	16.25 99
20+20+20+22+22+35	1.73	1.73	1.73	1.90	1.90	3.02	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99 99
20+20+20+22+22+42	1.64	1.64	1.64	1.81	1.81	3.45	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
20+20+20+22+22+50	1.56	1.56	1.56	1.71	1.71	3.90	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+22+22+60	1.46	1.46	1.46	1.61	1.61	4.39	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+22+22+71	1.37	1.37	1.37	1.51	1.51	4.87	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+22+25+25	1.82	1.82	1.82	2.00	2.27	2.27	12.00 (3.50 - 13.50)	3.66 (0.88 - 5.37)	16.07 99
20+20+20+22+25+35	1.69	1.69	1.69	1.86	2.11	2.96	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94 99
20+20+20+22+25+42	1.61	1.61	1.61	1.77	2.01	3.38	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+22+25+50	1.53	1.53	1.53	1.68	1.91	3.82	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+22+25+60	1.44	1.44	1.44	1.58	1.80	4.31	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+22+25+71	1.35	1.35	1.35	1.48	1.69	4.79	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+22+35+35	1.58	1.58	1.58	1.74	2.76	2.76	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+22+35+42	1.51	1.51	1.51	1.66	2.64	3.17	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+22+35+50	1.44	1.44	1.44	1.58	2.51	3.59	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+22+35+60	1.36	1.36	1.36	1.49	2.37	4.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+22+42+42	1.45	1.45	1.45	1.59	3.04	3.04	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+22+42+50	1.38	1.38	1.38	1.52	2.90	3.45	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+25+25+25	1.78	1.78	1.78	2.22	2.22	2.22	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03 99
20+20+20+25+25+35	1.66	1.66	1.66	2.07	2.07	2.90	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
20+20+20+25+25+42	1.58	1.58	1.58	1.97	1.97	3.32	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+25+25+50	1.50	1.50	1.50	1.88	1.88	3.75	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+25+25+60	1.41	1.41	1.41	1.76	1.76	4.24	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+25+35+35	1.55	1.55	1.55	1.94	2.71	2.71	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+25+35+42	1.48	1.48	1.48	1.85	2.59	3.11	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+25+35+50	1.41	1.41	1.41	1.76	2.47	3.53	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+25+35+60	1.33	1.33	1.33	1.67	2.33	4.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
20+20+20+25+42+42	1.42	1.42	1.42	1.78	2.98	2.98	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+25+42+50	1.36	1.36	1.36	1.69	2.85	3.39	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+35+35+35	1.45	1.45	1.45	2.55	2.55	2.55	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+35+35+42	1.40	1.40	1.40	2.44	2.44	2.93	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+35+35+50	1.33	1.33	1.33	2.33	2.33	3.33	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+20+35+42+42	1.34	1.34	1.34	2.35	2.82	2.82	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+22+22+22	1.84	1.84	2.03	2.03	2.03	2.03	11.80 (3.40 - 13.20)	3.75 (0.89 - 5.46)	16.47 99
20+20+22+22+22+25	1.83	1.83	2.02	2.02	2.02	2.29	12.00 (3.50 - 13.50)	3.66 (0.88 - 5.37)	16.07 99
20+20+22+22+22+35	1.70	1.70	1.87	1.87	1.87	2.98	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99 99
20+20+22+22+22+42	1.62	1.62	1.78	1.78	1.78	3.41	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
20+20+22+22+22+50	1.54	1.54	1.69	1.69	1.69	3.85	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+22+22+60	1.45	1.45	1.59	1.59	1.59	4.34	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+22+22+71	1.36	1.36	1.49	1.49	1.49	4.81	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+22+25+25	1.79	1.79	1.97	1.97	2.24	2.24	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03 99
20+20+22+22+25+35	1.67	1.67	1.83	1.83	2.08	2.92	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94 99
20+20+22+22+25+42	1.59	1.59	1.75	1.75	1.99	3.34	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+22+25+50	1.51	1.51	1.66	1.66	1.89	3.77	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+22+25+60	1.42	1.42	1.56	1.56	1.78	4.26	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+22+25+71	1.33	1.33	1.47	1.47	1.67	4.73	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+22+35+35	1.56	1.56	1.71	1.71	2.73	2.73	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+22+35+42	1.49	1.49	1.64	1.64	2.61	3.13	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+22+35+50	1.42	1.42	1.56	1.56	2.49	3.55	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+22+35+60	1.34	1.34	1.47	1.47	2.35	4.02	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+22+42+42	1.43	1.43	1.57	1.57	3.00	3.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+22+42+50	1.36	1.36	1.50	1.50	2.86	3.41	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+25+25+25	1.75	1.75	1.93	2.19	2.19	2.19	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03 99
20+20+22+25+25+35	1.63	1.63	1.80	2.04	2.04	2.86	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
20+20+22+25+25+42	1.56	1.56	1.71	1.95	1.95	3.27	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+25+25+50	1.48	1.48	1.63	1.85	1.85	3.70	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+25+25+60	1.40	1.40	1.53	1.74	1.74	4.19	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+25+35+35	1.53	1.53	1.68	1.91	2.68	2.68	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+25+35+42	1.46	1.46	1.61	1.83	2.56	3.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+25+35+50	1.40	1.40	1.53	1.74	2.44	3.49	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+25+42+42	1.40	1.40	1.54	1.75	2.95	2.95	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+25+42+50	1.34	1.34	1.47	1.68	2.82	3.35	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+35+35+35	1.44	1.44	1.58	2.51	2.51	2.51	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+22+35+35+42	1.38	1.38	1.52	2.41	2.41	2.90	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+25+25+25+25	1.71	1.71	2.14	2.14	2.14	2.14	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99 99
20+20+25+25+25+35	1.60	1.60	2.00	2.00	2.00	2.80	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+25+25+25+42	1.53	1.53	1.91	1.91	1.91	3.21	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+25+25+25+50	1.45	1.45	1.82	1.82	1.82	3.64	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+25+25+25+60	1.37	1.37	1.71	1.71	1.71	4.11	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+25+25+35+35	1.50	1.50	1.88	1.88	2.63	2.63	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+25+25+35+42	1.44	1.44	1.80	1.80	2.51	3.02	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+25+25+35+50	1.37	1.37	1.71	1.71	2.40	3.43	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+20+25+25+42+42	1.38	1.38	1.72	1.72	2.90	2.90	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
20+20+25+35+35+35	1.41	1.41	1.76	2.47	2.47	2.47	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+20+25+35+35+42	1.36	1.36	1.69	2.37	2.37	2.85	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+20+35+35+35+35	1.33	1.33	2.33	2.33	2.33	2.33	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+22+22+22	1.83	2.01	2.01	2.01	2.01	2.01	11.90 (3.50 - 13.40)	3.70 (0.89 - 5.40)	16.25	99
20+22+22+22+22+25	1.80	1.98	1.98	1.98	1.98	2.26	12.00 (3.50 - 13.50)	3.66 (0.88 - 5.37)	16.07	99
20+22+22+22+22+35	1.68	1.85	1.85	1.85	1.85	2.94	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94	99
20+22+22+22+22+42	1.60	1.76	1.76	1.76	1.76	3.36	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+22+22+50	1.52	1.67	1.67	1.67	1.67	3.80	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+22+22+60	1.43	1.57	1.57	1.57	1.57	4.29	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+22+22+71	1.34	1.47	1.47	1.47	1.47	4.76	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+22+25+25	1.76	1.94	1.94	1.94	2.21	2.21	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03	99
20+22+22+22+25+35	1.64	1.81	1.81	1.81	2.05	2.88	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
20+22+22+22+25+42	1.57	1.73	1.73	1.73	1.96	3.29	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+22+25+50	1.49	1.64	1.64	1.64	1.86	3.73	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+22+25+60	1.40	1.54	1.54	1.54	1.75	4.21	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+22+35+35	1.54	1.69	1.69	1.69	2.69	2.69	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+22+35+42	1.47	1.62	1.62	1.62	2.58	3.09	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+22+35+50	1.40	1.54	1.54	1.54	2.46	3.51	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+22+42+42	1.41	1.55	1.55	1.55	2.96	2.96	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+22+42+50	1.35	1.48	1.48	1.48	2.83	3.37	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+25+25+25	1.73	1.90	1.90	2.16	2.16	2.16	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99	99
20+22+22+25+25+35	1.61	1.77	1.77	2.01	2.01	2.82	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+25+25+42	1.54	1.69	1.69	1.92	1.92	3.23	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+25+25+50	1.46	1.61	1.61	1.83	1.83	3.66	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+25+25+60	1.38	1.52	1.52	1.72	1.72	4.14	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+25+35+35	1.51	1.66	1.66	1.89	2.64	2.64	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+25+35+42	1.45	1.59	1.59	1.81	2.53	3.04	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+25+35+50	1.38	1.52	1.52	1.72	2.41	3.45	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+25+42+42	1.39	1.53	1.53	1.73	2.91	2.91	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+35+35+35	1.42	1.56	1.56	2.49	2.49	2.49	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+22+35+35+42	1.36	1.50	1.50	2.39	2.39	2.86	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+25+25+25+25	1.69	1.86	2.11	2.11	2.11	2.11	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94	99
20+22+25+25+25+35	1.58	1.74	1.97	1.97	1.97	2.76	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+25+25+25+42	1.51	1.66	1.89	1.89	1.89	3.17	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+25+25+25+50	1.44	1.58	1.80	1.80	1.80	3.59	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+25+25+25+60	1.36	1.49	1.69	1.69	1.69	4.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+25+25+35+35	1.48	1.63	1.85	1.85	2.59	2.59	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+25+25+35+42	1.42	1.56	1.78	1.78	2.49	2.98	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+25+25+35+50	1.36	1.49	1.69	1.69	2.37	3.39	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+25+25+42+42	1.36	1.50	1.70	1.70	2.86	2.86	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+25+35+35+35	1.40	1.53	1.74	2.44	2.44	2.44	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+22+25+35+35+42	1.34	1.47	1.68	2.35	2.35	2.82	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+25+25+25+25+25	1.66	2.07	2.07	2.07	2.07	2.07	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90	99
20+25+25+25+25+35	1.55	1.94	1.94	1.94	1.94	2.71	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+25+25+25+25+42	1.48	1.85	1.85	1.85	1.85	3.11	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
20+25+25+25+25+50	1.41	1.76	1.76	1.76	1.76	3.53	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
20+25+25+25+25+60	1.33	1.67	1.67	1.67	1.67	4.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+25+25+25+35+35	1.45	1.82	1.82	1.82	2.55	2.55	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+25+25+25+35+42	1.40	1.74	1.74	1.74	2.44	2.93	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+25+25+25+35+50	1.33	1.67	1.67	1.67	2.33	3.33	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+25+25+25+42+42	1.34	1.68	1.68	1.68	2.82	2.82	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
20+25+25+35+35+35	1.37	1.71	1.71	2.40	2.40	2.40	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+22+22+22	2.00	2.00	2.00	2.00	2.00	2.00	12.00 (3.50 - 13.50)	3.66 (0.88 - 5.37)	16.07 99
22+22+22+22+22+25	1.96	1.96	1.96	1.96	1.96	2.22	12.00 (3.50 - 13.50)	3.65 (0.88 - 5.36)	16.03 99
22+22+22+22+22+35	1.82	1.82	1.82	1.82	1.82	2.90	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
22+22+22+22+22+42	1.74	1.74	1.74	1.74	1.74	3.32	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+22+22+50	1.65	1.65	1.65	1.65	1.65	3.75	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+22+22+60	1.55	1.55	1.55	1.55	1.55	4.24	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+22+25+25	1.91	1.91	1.91	1.91	2.17	2.17	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99 99
22+22+22+22+25+35	1.78	1.78	1.78	1.78	2.03	2.84	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
22+22+22+22+25+42	1.70	1.70	1.70	1.70	1.94	3.25	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+22+25+50	1.62	1.62	1.62	1.62	1.84	3.68	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+22+25+60	1.53	1.53	1.53	1.53	1.73	4.16	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+22+35+35	1.67	1.67	1.67	1.67	2.66	2.66	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+22+35+42	1.60	1.60	1.60	1.60	2.55	3.05	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+22+35+50	1.53	1.53	1.53	1.53	2.43	3.47	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+22+42+42	1.53	1.53	1.53	1.53	2.93	2.93	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+22+42+50	1.47	1.47	1.47	1.47	2.80	3.33	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+25+25+25	1.87	1.87	1.87	2.13	2.13	2.13	12.00 (3.50 - 13.50)	3.64 (0.88 - 5.35)	15.99 99
22+22+22+25+25+35	1.75	1.75	1.75	1.99	1.99	2.78	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+25+25+42	1.67	1.67	1.67	1.90	1.90	3.19	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+25+25+50	1.59	1.59	1.59	1.81	1.81	3.61	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+25+25+60	1.50	1.50	1.50	1.70	1.70	4.09	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+25+35+35	1.64	1.64	1.64	1.86	2.61	2.61	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+25+35+42	1.57	1.57	1.57	1.79	2.50	3.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+25+35+50	1.50	1.50	1.50	1.70	2.39	3.41	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+25+42+42	1.51	1.51	1.51	1.71	2.88	2.88	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+35+35+35	1.54	1.54	1.54	2.46	2.46	2.46	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+22+35+35+42	1.48	1.48	1.48	2.36	2.36	2.83	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+25+25+25+25	1.83	1.83	2.08	2.08	2.08	2.08	12.00 (3.50 - 13.50)	3.63 (0.88 - 5.34)	15.94 99
22+22+25+25+25+35	1.71	1.71	1.95	1.95	1.95	2.73	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+25+25+25+42	1.64	1.64	1.86	1.86	1.86	3.13	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+25+25+25+50	1.56	1.56	1.78	1.78	1.78	3.55	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+25+25+25+60	1.47	1.47	1.68	1.68	1.68	4.02	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+25+25+35+35	1.61	1.61	1.83	1.83	2.56	2.56	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+25+25+35+42	1.54	1.54	1.75	1.75	2.46	2.95	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+25+25+35+50	1.47	1.47	1.68	1.68	2.35	3.35	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+25+25+42+42	1.48	1.48	1.69	1.69	2.83	2.83	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+22+25+35+35+35	1.52	1.52	1.72	2.41	2.41	2.41	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+25+25+25+25+25	1.80	2.04	2.04	2.04	2.04	2.04	12.00 (3.50 - 13.50)	3.62 (0.88 - 5.33)	15.90 99
22+25+25+25+25+35	1.68	1.91	1.91	1.91	1.91	2.68	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99
22+25+25+25+25+42	1.61	1.83	1.83	1.83	1.83	3.07	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85 99

MXZ-6C120VA COOLING

Indoor units combination	Cooling capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
22+25+25+25+25+50	1.53	1.74	1.74	1.74	1.74	3.49	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
22+25+25+25+35+35	1.58	1.80	1.80	1.80	2.51	2.51	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
22+25+25+25+35+42	1.52	1.72	1.72	1.72	2.41	2.90	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
22+25+25+35+35+35	1.49	1.69	1.69	2.37	2.37	2.37	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
25+25+25+25+25+25	2.00	2.00	2.00	2.00	2.00	2.00	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
25+25+25+25+25+35	1.88	1.88	1.88	1.88	1.88	2.63	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
25+25+25+25+25+42	1.80	1.80	1.80	1.80	1.80	3.02	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
25+25+25+25+25+50	1.71	1.71	1.71	1.71	1.71	3.43	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
25+25+25+25+35+35	1.76	1.76	1.76	1.76	2.47	2.47	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
25+25+25+25+35+42	1.69	1.69	1.69	1.69	2.37	2.85	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99
25+25+25+35+35+35	1.67	1.67	1.67	2.33	2.33	2.33	12.00 (3.50 - 13.50)	3.61 (0.88 - 5.32)	15.85	99

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption(kW)	Current (A)	Power factor(%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15	1.70						1.03 (1.50 - 3.00)	4.71	95
20	2.20						1.07 (2.00 - 3.90)	4.90	95
22	3.30						1.11 (2.70 - 4.20)	5.08	95
25	3.60						1.17 (2.70 - 4.50)	5.35	95
35	4.00						1.14 (2.70 - 5.50)	5.22	95
42	5.40						1.61 (2.70 - 6.50)	7.37	95
50	7.20						2.27 (2.70 - 7.70)	10.39	95
60	7.90						2.27 (2.70 - 9.30)	10.39	95
71	8.60						2.41 (2.70 - 9.90)	11.03	95
15+15	1.70	1.70					0.94 (2.70 - 5.30)	4.21	97
15+20	1.67	2.23					1.09 (2.70 - 6.20)	4.89	97
15+22	1.66	2.44					1.14 (2.70 - 6.50)	5.11	97
15+25	1.65	2.75					1.23 (2.70 - 7.00)	5.51	97
15+35	2.16	5.04					1.95 (2.80 - 9.00)	8.74	97
15+42	1.97	5.53					2.09 (2.80 - 9.50)	9.37	97
15+50	1.80	6.00					2.22 (2.80 - 10.10)	9.95	97
15+60	1.80	7.20					2.63 (2.80 - 10.90)	11.79	97
15+71	1.90	9.00					3.46 (2.80 - 11.80)	15.51	97
20+20	2.20	2.20					1.23 (2.70 - 7.00)	5.51	97
20+22	2.62	2.88					1.49 (2.80 - 7.30)	6.68	97
20+25	2.98	3.72					1.78 (2.80 - 7.80)	7.98	97
20+35	2.69	4.71					2.04 (2.80 - 9.40)	9.14	97
20+42	2.48	5.22					2.18 (2.80 - 9.80)	9.77	97
20+50	2.29	5.71					2.31 (2.80 - 10.40)	10.35	97
20+60	2.50	7.50					3.09 (2.80 - 11.30)	13.85	97
20+71	2.42	8.58					3.46 (2.80 - 12.10)	15.51	97
22+22	3.30	3.30					1.74 (2.80 - 7.60)	7.80	97
22+25	3.23	3.67					1.85 (2.80 - 8.30)	8.29	97
22+35	2.89	4.61					2.09 (2.80 - 9.50)	9.37	97
22+42	2.68	5.12					2.22 (2.80 - 10.00)	9.95	97
22+50	2.57	5.83					2.36 (2.80 - 10.60)	10.58	97
22+60	2.79	7.61					3.27 (2.80 - 11.50)	14.66	97
22+71	2.63	8.47					3.47 (2.80 - 12.30)	15.55	97
25+25	3.60	3.60					1.95 (2.80 - 9.00)	8.74	97
25+35	3.17	4.43					2.13 (2.80 - 9.70)	9.55	97
25+42	2.95	4.95					2.27 (2.80 - 10.20)	10.17	97
25+50	3.00	6.00					2.63 (2.80 - 10.90)	11.79	97
25+60	3.18	7.62					3.45 (2.80 - 11.80)	15.46	97
25+71	2.92	8.28					3.47 (2.80 - 12.50)	15.55	97
35+35	4.00	4.00					2.31 (2.80 - 10.40)	10.35	97
35+42	4.27	5.13					2.81 (2.80 - 11.10)	12.60	97
35+50	4.45	6.35					3.45 (2.80 - 11.80)	15.46	97
35+60	4.09	7.01					3.47 (2.80 - 12.40)	15.55	97
35+71	3.73	7.57					3.38 (2.80 - 12.70)	15.15	97
42+42	5.40	5.40					3.45 (2.80 - 11.70)	15.46	97
42+50	5.07	6.03					3.47 (2.80 - 12.20)	15.55	97

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
42+60	4.65	6.65					11.30 (2.80 - 12.70)	3.45 (0.83 - 3.92)	15.46	97
42+71	4.20	7.10					11.30 (2.80 - 12.80)	3.27 (0.81 - 3.59)	14.66	97
50+50	5.65	5.65					11.30 (2.80 - 12.70)	3.48 (0.83 - 3.92)	15.60	97
50+60	5.14	6.16					11.30 (2.80 - 12.80)	3.32 (0.82 - 3.59)	14.88	97
50+71	4.67	6.63					11.30 (2.80 - 12.80)	3.15 (0.80 - 3.59)	14.12	97
60+60	5.65	5.65					11.30 (2.80 - 12.80)	3.15 (0.80 - 3.59)	14.12	97
60+71	5.18	6.12					11.30 (2.80 - 12.90)	3.12 (0.80 - 3.57)	13.98	97
71+71	5.65	5.65					11.30 (2.80 - 13.00)	3.08 (0.80 - 3.55)	13.81	97
15+15+15	1.70	1.70	1.70				5.10 (3.10 - 8.90)	1.13 (0.82 - 3.99)	5.06	97
15+15+20	1.68	1.68	2.24				5.60 (3.10 - 9.40)	1.28 (0.82 - 4.22)	5.74	97
15+15+22	1.67	1.67	2.45				5.80 (3.10 - 9.60)	1.34 (0.82 - 4.31)	6.01	97
15+15+25	1.66	1.66	2.77				6.10 (3.10 - 10.00)	1.43 (0.82 - 4.49)	6.41	97
15+15+35	2.17	2.17	5.06				9.40 (3.20 - 12.30)	2.35 (0.78 - 4.27)	10.53	97
15+15+42	2.19	2.19	6.13				10.50 (3.20 - 13.20)	2.82 (0.77 - 4.28)	12.64	97
15+15+50	2.06	2.06	6.88				11.00 (3.20 - 13.70)	3.12 (0.77 - 4.44)	13.98	97
15+15+60	1.90	1.90	7.60				11.40 (3.20 - 14.00)	3.37 (0.77 - 4.63)	15.11	97
15+15+71	1.75	1.75	8.30				11.80 (3.20 - 14.40)	3.62 (0.77 - 4.88)	16.23	97
15+20+20	1.66	2.22	2.22				6.10 (3.10 - 10.00)	1.43 (0.82 - 4.49)	6.41	97
15+20+22	1.66	2.21	2.43				6.30 (3.10 - 10.20)	1.49 (0.82 - 4.58)	6.68	97
15+20+25	1.65	2.20	2.75				6.60 (3.10 - 10.50)	1.58 (0.82 - 4.72)	7.08	97
15+20+35	2.21	2.94	5.15				10.30 (3.20 - 13.00)	2.71 (0.77 - 4.25)	12.15	97
15+20+42	2.12	2.83	5.95				10.90 (3.20 - 13.60)	3.05 (0.77 - 4.38)	13.67	97
15+20+50	1.98	2.64	6.59				11.20 (3.20 - 13.80)	3.24 (0.77 - 4.51)	14.52	97
15+20+60	1.83	2.44	7.33				11.60 (3.20 - 14.20)	3.50 (0.77 - 4.75)	15.69	97
15+20+71	1.70	2.26	8.04				12.00 (3.20 - 14.50)	3.75 (0.77 - 4.94)	16.81	97
15+22+22	1.65	2.42	2.42				6.50 (3.10 - 10.40)	1.55 (0.82 - 4.67)	6.95	97
15+22+25	1.86	2.73	3.10				7.70 (3.10 - 11.20)	1.88 (0.80 - 4.54)	8.43	97
15+22+35	2.19	3.21	5.10				10.50 (3.20 - 13.20)	2.82 (0.77 - 4.28)	12.64	97
15+22+42	2.09	3.06	5.85				11.00 (3.20 - 13.60)	3.12 (0.77 - 4.38)	13.98	97
15+22+50	1.95	2.86	6.49				11.30 (3.20 - 13.90)	3.31 (0.77 - 4.57)	14.84	97
15+22+60	1.81	2.65	7.24				11.70 (3.20 - 14.20)	3.56 (0.77 - 4.75)	15.96	97
15+22+71	1.68	2.46	7.95				12.10 (3.20 - 14.50)	3.79 (0.77 - 4.94)	16.99	97
15+25+25	2.17	3.62	3.62				9.40 (3.20 - 12.30)	2.35 (0.78 - 4.27)	10.53	97
15+25+35	2.16	3.60	5.04				10.80 (3.20 - 13.50)	2.99 (0.77 - 4.32)	13.40	97
15+25+42	2.03	3.38	5.69				11.10 (3.20 - 13.70)	3.18 (0.77 - 4.44)	14.25	97
15+25+50	1.90	3.17	6.33				11.40 (3.20 - 14.00)	3.37 (0.77 - 4.63)	15.11	97
15+25+60	1.77	2.95	7.08				11.80 (3.20 - 14.30)	3.62 (0.77 - 4.82)	16.23	97
15+25+71	1.65	2.75	7.80				12.20 (3.20 - 14.60)	3.83 (0.77 - 4.85)	17.17	97
15+35+35	1.98	4.61	4.61				11.20 (3.20 - 13.80)	3.24 (0.77 - 4.51)	14.52	97
15+35+42	1.88	4.38	5.25				11.50 (3.20 - 14.10)	3.43 (0.77 - 4.69)	15.37	97
15+35+50	1.77	4.13	5.90				11.80 (3.20 - 14.30)	3.62 (0.77 - 4.82)	16.23	97
15+35+60	1.65	3.85	6.60				12.10 (3.20 - 14.50)	3.79 (0.77 - 4.94)	16.99	97
15+35+71	1.55	3.62	7.33				12.50 (3.20 - 14.70)	3.96 (0.77 - 4.75)	17.75	97
15+42+42	1.79	5.01	5.01				11.80 (3.20 - 14.30)	3.62 (0.77 - 4.82)	16.23	97
15+42+50	1.70	4.75	5.65				12.10 (3.20 - 14.50)	3.79 (0.77 - 4.94)	16.99	97
15+42+60	1.58	4.42	6.31				12.30 (3.20 - 14.60)	3.88 (0.77 - 4.85)	17.39	97

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+42+71	1.48	4.13	6.99				12.60 (3.20 - 14.70)	4.00 (0.77 - 4.75)	17.93	97
15+50+50	1.60	5.35	5.35				12.30 (3.20 - 14.60)	3.88 (0.77 - 4.85)	17.39	97
15+50+60	1.51	5.04	6.05				12.60 (3.20 - 14.70)	4.00 (0.77 - 4.75)	17.93	97
15+50+71	1.41	4.71	6.68				12.80 (3.20 - 14.70)	4.02 (0.77 - 4.75)	18.02	97
15+60+60	1.42	5.69	5.69				12.80 (3.20 - 14.70)	4.02 (0.77 - 4.75)	18.02	97
15+60+71	1.34	5.34	6.32				13.00 (3.20 - 14.80)	4.04 (0.77 - 4.56)	18.11	97
15+71+71	1.26	5.97	5.97				13.20 (3.20 - 14.90)	4.00 (0.77 - 4.57)	17.93	97
20+20+20	2.20	2.20	2.20				6.60 (3.10 - 10.50)	1.58 (0.82 - 4.72)	7.08	97
20+20+22	2.48	2.48	2.73				7.70 (3.10 - 11.20)	1.88 (0.80 - 4.54)	8.43	97
20+20+25	2.89	2.89	3.62				9.40 (3.20 - 12.30)	2.35 (0.78 - 4.27)	10.53	97
20+20+35	2.88	2.88	5.04				10.80 (3.20 - 13.50)	2.99 (0.77 - 4.32)	13.40	97
20+20+42	2.71	2.71	5.69				11.10 (3.20 - 13.70)	3.18 (0.77 - 4.44)	14.25	97
20+20+50	2.53	2.53	6.33				11.40 (3.20 - 14.00)	3.37 (0.77 - 4.63)	15.11	97
20+20+60	2.36	2.36	7.08				11.80 (3.20 - 14.30)	3.62 (0.77 - 4.82)	16.23	97
20+20+71	2.20	2.20	7.80				12.20 (3.20 - 14.60)	3.83 (0.77 - 4.85)	17.17	97
20+22+22	2.75	3.03	3.03				8.80 (3.20 - 11.90)	2.19 (0.79 - 4.37)	9.82	97
20+22+25	2.99	3.28	3.73				10.00 (3.20 - 12.70)	2.55 (0.77 - 4.20)	11.43	97
20+22+35	2.83	3.11	4.95				10.90 (3.20 - 13.60)	3.05 (0.77 - 4.38)	13.67	97
20+22+42	2.67	2.93	5.60				11.20 (3.20 - 13.80)	3.24 (0.77 - 4.51)	14.52	97
20+22+50	2.50	2.75	6.25				11.50 (3.20 - 14.10)	3.43 (0.77 - 4.69)	15.37	97
20+22+60	2.33	2.57	7.00				11.90 (3.20 - 14.40)	3.69 (0.77 - 4.88)	16.54	97
20+22+71	2.16	2.38	7.67				12.20 (3.20 - 14.60)	3.83 (0.77 - 4.85)	17.17	97
20+25+25	2.94	3.68	3.68				10.30 (3.20 - 13.00)	2.71 (0.77 - 4.25)	12.15	97
20+25+35	2.75	3.44	4.81				11.00 (3.20 - 13.70)	3.12 (0.77 - 4.44)	13.98	97
20+25+42	2.60	3.25	5.46				11.30 (3.20 - 13.90)	3.31 (0.77 - 4.57)	14.84	97
20+25+50	2.44	3.05	6.11				11.60 (3.20 - 14.20)	3.50 (0.77 - 4.75)	15.69	97
20+25+60	2.29	2.86	6.86				12.00 (3.20 - 14.50)	3.75 (0.77 - 4.94)	16.81	97
20+25+71	2.12	2.65	7.53				12.30 (3.20 - 14.60)	3.88 (0.77 - 4.85)	17.39	97
20+35+35	2.53	4.43	4.43				11.40 (3.20 - 14.00)	3.37 (0.77 - 4.63)	15.11	97
20+35+42	2.41	4.22	5.07				11.70 (3.20 - 14.20)	3.56 (0.77 - 4.75)	15.96	97
20+35+50	2.29	4.00	5.71				12.00 (3.20 - 14.50)	3.75 (0.77 - 4.94)	16.81	97
20+35+60	2.14	3.74	6.42				12.30 (3.20 - 14.60)	3.88 (0.77 - 4.85)	17.39	97
20+35+71	2.00	3.50	7.10				12.60 (3.20 - 14.70)	4.00 (0.77 - 4.75)	17.93	97
20+42+42	2.31	4.85	4.85				12.00 (3.20 - 14.50)	3.75 (0.77 - 4.94)	16.81	97
20+42+50	2.18	4.58	5.45				12.20 (3.20 - 14.60)	3.83 (0.77 - 4.85)	17.17	97
20+42+60	2.05	4.30	6.15				12.50 (3.20 - 14.70)	3.96 (0.77 - 4.75)	17.75	97
20+42+71	1.91	4.01	6.78				12.70 (3.20 - 14.70)	4.01 (0.77 - 4.75)	17.97	97
20+50+50	2.07	5.17	5.17				12.40 (3.20 - 14.60)	3.92 (0.77 - 4.85)	17.57	97
20+50+60	1.95	4.88	5.86				12.70 (3.20 - 14.70)	4.01 (0.77 - 4.75)	17.97	97
20+50+71	1.83	4.57	6.50				12.90 (3.20 - 14.80)	4.03 (0.77 - 4.56)	18.06	97
20+60+60	1.84	5.53	5.53				12.90 (3.20 - 14.80)	4.03 (0.77 - 4.56)	18.06	97
20+60+71	1.74	5.21	6.16				13.10 (3.20 - 14.80)	4.05 (0.77 - 4.56)	18.15	97
20+71+71	1.64	5.83	5.83				13.30 (3.20 - 15.00)	3.94 (0.77 - 4.58)	17.66	97
22+22+22	3.30	3.30	3.30				9.90 (3.20 - 12.60)	2.49 (0.77 - 4.19)	11.16	97
22+22+25	3.25	3.25	3.70				10.20 (3.20 - 12.90)	2.66 (0.77 - 4.23)	11.92	97
22+22+35	3.06	3.06	4.87				11.00 (3.20 - 13.60)	3.12 (0.77 - 4.38)	13.98	97

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
22+22+42	2.87	2.87	5.47				11.20 (3.20 - 13.90)	3.24 (0.77 - 4.57)	14.52	97
22+22+50	2.71	2.71	6.17				11.60 (3.20 - 14.10)	3.50 (0.77 - 4.69)	15.69	97
22+22+60	2.54	2.54	6.92				12.00 (3.20 - 14.50)	3.75 (0.77 - 4.94)	16.81	97
22+22+71	2.35	2.35	7.59				12.30 (3.20 - 14.60)	3.88 (0.77 - 4.85)	17.39	97
22+25+25	3.21	3.65	3.65				10.50 (3.20 - 13.20)	2.82 (0.77 - 4.28)	12.64	97
22+25+35	2.98	3.38	4.74				11.10 (3.20 - 13.70)	3.18 (0.77 - 4.44)	14.25	97
22+25+42	2.82	3.20	5.38				11.40 (3.20 - 14.00)	3.37 (0.77 - 4.63)	15.11	97
22+25+50	2.65	3.02	6.03				11.70 (3.20 - 14.20)	3.56 (0.77 - 4.75)	15.96	97
22+25+60	2.49	2.83	6.79				12.10 (3.20 - 14.50)	3.79 (0.77 - 4.94)	16.99	97
22+25+71	2.31	2.63	7.46				12.40 (3.20 - 14.60)	3.92 (0.77 - 4.85)	17.57	97
22+35+35	2.75	4.38	4.38				11.50 (3.20 - 14.10)	3.43 (0.77 - 4.69)	15.37	97
22+35+42	2.62	4.17	5.01				11.80 (3.20 - 14.30)	3.62 (0.77 - 4.82)	16.23	97
22+35+50	2.49	3.96	5.65				12.10 (3.20 - 14.50)	3.79 (0.77 - 4.94)	16.99	97
22+35+60	2.31	3.68	6.31				12.30 (3.20 - 14.60)	3.88 (0.77 - 4.85)	17.39	97
22+35+71	2.17	3.45	6.99				12.60 (3.20 - 14.70)	4.00 (0.77 - 4.75)	17.93	97
22+42+42	2.49	4.75	4.75				12.00 (3.20 - 14.50)	3.75 (0.77 - 4.94)	16.81	97
22+42+50	2.37	4.53	5.39				12.30 (3.20 - 14.60)	3.88 (0.77 - 4.85)	17.39	97
22+42+60	2.22	4.23	6.05				12.50 (3.20 - 14.70)	3.96 (0.77 - 4.75)	17.75	97
22+42+71	2.09	3.98	6.73				12.80 (3.20 - 14.70)	4.02 (0.77 - 4.75)	18.02	97
22+50+50	2.25	5.12	5.12				12.50 (3.20 - 14.70)	3.96 (0.77 - 4.75)	17.75	97
22+50+60	2.12	4.81	5.77				12.70 (3.20 - 14.70)	4.01 (0.77 - 4.75)	17.97	97
22+50+71	2.00	4.55	6.45				13.00 (3.20 - 14.80)	4.04 (0.77 - 4.56)	18.11	97
22+60+60	2.00	5.45	5.45				12.90 (3.20 - 14.80)	4.03 (0.77 - 4.56)	18.06	97
22+60+71	1.90	5.18	6.13				13.20 (3.20 - 14.90)	4.00 (0.77 - 4.57)	17.93	97
22+71+71	1.78	5.76	5.76				13.30 (3.20 - 15.00)	3.94 (0.77 - 4.58)	17.66	97
25+25+25	3.60	3.60	3.60				10.80 (3.20 - 13.50)	2.99 (0.77 - 4.32)	13.40	97
25+25+35	3.29	3.29	4.61				11.20 (3.20 - 13.80)	3.24 (0.77 - 4.51)	14.52	97
25+25+42	3.13	3.13	5.25				11.50 (3.20 - 14.10)	3.43 (0.77 - 4.69)	15.37	97
25+25+50	2.95	2.95	5.90				11.80 (3.20 - 14.30)	3.62 (0.77 - 4.82)	16.23	97
25+25+60	2.75	2.75	6.60				12.10 (3.20 - 14.50)	3.79 (0.77 - 4.94)	16.99	97
25+25+71	2.58	2.58	7.33				12.50 (3.20 - 14.70)	3.96 (0.77 - 4.75)	17.75	97
25+35+35	3.05	4.27	4.27				11.60 (3.20 - 14.20)	3.50 (0.77 - 4.75)	15.69	97
25+35+42	2.92	4.08	4.90				11.90 (3.20 - 14.40)	3.69 (0.77 - 4.88)	16.54	97
25+35+50	2.75	3.85	5.50				12.10 (3.20 - 14.50)	3.79 (0.77 - 4.94)	16.99	97
25+35+60	2.58	3.62	6.20				12.40 (3.20 - 14.60)	3.92 (0.77 - 4.85)	17.57	97
25+35+71	2.42	3.39	6.88				12.70 (3.20 - 14.70)	4.01 (0.77 - 4.75)	17.97	97
25+42+42	2.78	4.66	4.66				12.10 (3.20 - 14.50)	3.79 (0.77 - 4.94)	16.99	97
25+42+50	2.63	4.42	5.26				12.30 (3.20 - 14.60)	3.88 (0.77 - 4.85)	17.39	97
25+42+60	2.48	4.17	5.95				12.60 (3.20 - 14.70)	4.00 (0.77 - 4.75)	17.93	97
25+42+71	2.34	3.93	6.64				12.90 (3.20 - 14.80)	4.03 (0.77 - 4.56)	18.06	97
25+50+50	2.52	5.04	5.04				12.60 (3.20 - 14.70)	4.00 (0.77 - 4.75)	17.93	97
25+50+60	2.37	4.74	5.69				12.80 (3.20 - 14.70)	4.02 (0.77 - 4.75)	18.02	97
25+50+71	2.23	4.45	6.32				13.00 (3.20 - 14.80)	4.04 (0.77 - 4.56)	18.11	97
25+60+60	2.24	5.38	5.38				13.00 (3.20 - 14.80)	4.04 (0.77 - 4.56)	18.11	97
25+60+71	2.12	5.08	6.01				13.20 (3.20 - 14.90)	4.00 (0.77 - 4.57)	17.93	97
25+71+71	2.01	5.70	5.70				13.40 (3.20 - 15.10)	3.89 (0.76 - 4.60)	17.44	97

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
35+35+35	4.00	4.00	4.00				12.00 (3.20 - 14.50)	3.75 (0.77 - 4.94)	16.81	97
35+35+42	3.81	3.81	4.58				12.20 (3.20 - 14.60)	3.83 (0.77 - 4.85)	17.17	97
35+35+50	3.62	3.62	5.17				12.40 (3.20 - 14.60)	3.92 (0.77 - 4.85)	17.57	97
35+35+60	3.42	3.42	5.86				12.70 (3.20 - 14.70)	4.01 (0.77 - 4.75)	17.97	97
35+35+71	3.20	3.20	6.50				12.90 (3.20 - 14.80)	4.03 (0.77 - 4.56)	18.06	97
35+42+42	3.65	4.38	4.38				12.40 (3.20 - 14.60)	3.92 (0.77 - 4.85)	17.57	97
35+42+50	3.47	4.17	4.96				12.60 (3.20 - 14.70)	4.00 (0.77 - 4.75)	17.93	97
35+42+60	3.27	3.92	5.61				12.80 (3.20 - 14.70)	4.02 (0.77 - 4.75)	18.02	97
35+42+71	3.10	3.72	6.28				13.10 (3.20 - 14.80)	4.05 (0.77 - 4.56)	18.15	97
35+50+50	3.32	4.74	4.74				12.80 (3.20 - 14.70)	4.02 (0.77 - 4.75)	18.02	97
35+50+60	3.14	4.48	5.38				13.00 (3.20 - 14.80)	4.04 (0.77 - 4.56)	18.11	97
35+50+71	2.96	4.23	6.01				13.20 (3.20 - 14.90)	4.00 (0.77 - 4.57)	17.93	97
35+60+60	2.98	5.11	5.11				13.20 (3.20 - 14.90)	4.00 (0.77 - 4.57)	17.93	97
35+60+71	2.83	4.84	5.73				13.40 (3.20 - 15.10)	3.89 (0.76 - 4.60)	17.44	97
35+71+71	2.69	5.46	5.46				13.60 (3.20 - 15.30)	3.78 (0.76 - 4.62)	16.94	97
42+42+42	4.20	4.20	4.20				12.60 (3.20 - 14.70)	4.00 (0.77 - 4.75)	17.93	97
42+42+50	4.01	4.01	4.78				12.80 (3.20 - 14.70)	4.02 (0.77 - 4.75)	18.02	97
42+42+60	3.79	3.79	5.42				13.00 (3.20 - 14.80)	4.04 (0.77 - 4.56)	18.11	97
42+42+71	3.58	3.58	6.05				13.20 (3.20 - 14.90)	4.00 (0.77 - 4.57)	17.93	97
42+50+50	3.82	4.54	4.54				12.90 (3.20 - 14.80)	4.03 (0.77 - 4.56)	18.06	97
42+50+60	3.62	4.31	5.17				13.10 (3.20 - 14.80)	4.05 (0.77 - 4.56)	18.15	97
42+50+71	3.43	4.08	5.79				13.30 (3.20 - 15.00)	3.94 (0.77 - 4.58)	17.66	97
42+60+60	3.45	4.93	4.93				13.30 (3.20 - 15.00)	3.94 (0.77 - 4.58)	17.66	97
42+60+71	3.28	4.68	5.54				13.50 (3.20 - 15.20)	3.83 (0.76 - 4.61)	17.17	97
50+50+50	4.37	4.37	4.37				13.10 (3.20 - 14.80)	4.05 (0.77 - 4.56)	18.15	97
50+50+60	4.16	4.16	4.99				13.30 (3.20 - 15.00)	3.94 (0.77 - 4.58)	17.66	97
50+50+71	3.95	3.95	5.61				13.50 (3.20 - 15.20)	3.83 (0.76 - 4.61)	17.17	97
50+60+60	3.94	4.73	4.73				13.40 (3.20 - 15.10)	3.89 (0.76 - 4.60)	17.44	97
60+60+60	4.53	4.53	4.53				13.60 (3.20 - 15.30)	3.78 (0.76 - 4.62)	16.94	97
15+15+15+15	1.70	1.70	1.70	1.70			6.80 (3.10 - 9.90)	1.50 (0.79 - 3.23)	6.59	99
15+15+15+20	1.68	1.68	1.68	2.25			7.30 (3.10 - 9.90)	1.69 (0.79 - 3.23)	7.42	99
15+15+15+22	1.68	1.68	1.68	2.46			7.50 (3.10 - 10.20)	1.76 (0.79 - 3.33)	7.73	99
15+15+15+25	1.67	1.67	1.67	2.79			7.80 (3.10 - 10.70)	1.87 (0.79 - 3.50)	8.21	99
15+15+15+35	1.65	1.65	1.65	3.85			8.80 (3.10 - 13.20)	2.24 (0.79 - 4.33)	9.84	99
15+15+15+42	1.91	1.91	1.91	5.36			11.10 (3.20 - 14.40)	2.74 (0.76 - 4.09)	12.03	99
15+15+15+50	1.86	1.86	1.86	6.21			11.80 (3.20 - 14.80)	2.98 (0.76 - 4.18)	13.09	99
15+15+15+60	1.74	1.74	1.74	6.97			12.20 (3.20 - 14.90)	3.19 (0.76 - 4.25)	14.01	99
15+15+15+71	1.62	1.62	1.62	7.65			12.50 (3.20 - 14.90)	3.37 (0.76 - 4.25)	14.80	99
15+15+20+20	1.67	1.67	2.23	2.23			7.80 (3.10 - 10.70)	1.87 (0.79 - 3.50)	8.21	99
15+15+20+22	1.67	1.67	2.22	2.44			8.00 (3.10 - 11.10)	1.94 (0.79 - 3.63)	8.52	99
15+15+20+25	1.66	1.66	2.21	2.77			8.30 (3.10 - 11.60)	2.06 (0.79 - 3.80)	9.05	99
15+15+20+35	1.84	1.84	2.45	4.28			10.40 (3.20 - 14.10)	2.58 (0.77 - 4.15)	11.33	99
15+15+20+42	1.89	1.89	2.52	5.30			11.60 (3.20 - 14.70)	2.89 (0.76 - 4.12)	12.69	99
15+15+20+50	1.80	1.80	2.40	6.00			12.00 (3.20 - 14.90)	3.07 (0.76 - 4.25)	13.48	99
15+15+20+60	1.68	1.68	2.24	6.71			12.30 (3.20 - 14.90)	3.25 (0.76 - 4.25)	14.27	99
15+15+20+71	1.56	1.56	2.08	7.39			12.60 (3.20 - 15.00)	3.43 (0.76 - 4.72)	15.06	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+15+22+22	1.66	1.66	2.44	2.44			8.20 (3.10 - 11.40)	2.02 (0.79 - 3.73)	8.87 99
15+15+22+25	1.66	1.66	2.43	2.76			8.50 (3.10 - 11.90)	2.13 (0.79 - 3.90)	9.35 99
15+15+22+35	1.91	1.91	2.81	4.47			11.10 (3.20 - 14.40)	2.74 (0.76 - 4.09)	12.03 99
15+15+22+42	1.87	1.87	2.74	5.23			11.70 (3.20 - 14.80)	2.94 (0.76 - 4.18)	12.91 99
15+15+22+50	1.78	1.78	2.61	5.93			12.10 (3.20 - 14.90)	3.13 (0.76 - 4.25)	13.75 99
15+15+22+60	1.66	1.66	2.44	6.64			12.40 (3.20 - 14.90)	3.31 (0.76 - 4.25)	14.54 99
15+15+22+71	1.55	1.55	2.27	7.33			12.70 (3.20 - 15.00)	3.49 (0.76 - 4.72)	15.33 99
15+15+25+25	1.65	1.65	2.75	2.75			8.80 (3.10 - 13.20)	2.24 (0.79 - 4.33)	9.84 99
15+15+25+35	1.92	1.92	3.19	4.47			11.50 (3.20 - 14.70)	2.85 (0.76 - 4.12)	12.52 99
15+15+25+42	1.84	1.84	3.07	5.15			11.90 (3.20 - 14.80)	3.03 (0.76 - 4.18)	13.31 99
15+15+25+50	1.74	1.74	2.90	5.81			12.20 (3.20 - 14.90)	3.19 (0.76 - 4.25)	14.01 99
15+15+25+60	1.63	1.63	2.72	6.52			12.50 (3.20 - 14.90)	3.37 (0.76 - 4.25)	14.80 99
15+15+25+71	1.52	1.52	2.54	7.21			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59 99
15+15+35+35	1.80	1.80	4.20	4.20			12.00 (3.20 - 14.90)	3.07 (0.76 - 4.25)	13.48 99
15+15+35+42	1.71	1.71	3.99	4.79			12.20 (3.20 - 14.90)	3.19 (0.76 - 4.25)	14.01 99
15+15+35+50	1.63	1.63	3.80	5.43			12.50 (3.20 - 14.90)	3.37 (0.76 - 4.25)	14.80 99
15+15+35+60	1.54	1.54	3.58	6.14			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59 99
15+15+35+71	1.44	1.44	3.37	6.84			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38 99
15+15+42+42	1.63	1.63	4.57	4.57			12.40 (3.20 - 14.90)	3.31 (0.76 - 4.25)	14.54 99
15+15+42+50	1.56	1.56	4.37	5.20			12.70 (3.20 - 15.00)	3.49 (0.76 - 4.72)	15.33 99
15+15+42+60	1.48	1.48	4.14	5.91			13.00 (3.20 - 15.00)	3.67 (0.76 - 4.72)	16.12 99
15+15+42+71	1.38	1.38	3.88	6.55			13.20 (3.20 - 15.00)	3.77 (0.76 - 4.72)	16.56 99
15+15+50+50	1.49	1.49	4.96	4.96			12.90 (3.20 - 15.00)	3.61 (0.76 - 4.72)	15.85 99
15+15+50+60	1.41	1.41	4.71	5.66			13.20 (3.20 - 15.00)	3.79 (0.76 - 4.72)	16.64 99
15+15+50+71	1.31	1.31	4.37	6.21			13.20 (3.20 - 15.00)	3.72 (0.76 - 4.72)	16.34 99
15+15+60+60	1.32	1.32	5.28	5.28			13.20 (3.20 - 15.00)	3.72 (0.76 - 4.72)	16.34 99
15+15+60+71	1.23	1.23	4.92	5.82			13.20 (3.20 - 15.10)	3.65 (0.76 - 4.50)	16.03 99
15+15+71+71	1.10	1.10	5.20	5.20			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81 99
15+20+20+20	1.66	2.21	2.21	2.21			8.30 (3.10 - 11.60)	2.06 (0.79 - 3.80)	9.05 99
15+20+20+22	1.66	2.21	2.21	2.43			8.50 (3.10 - 11.90)	2.13 (0.79 - 3.90)	9.35 99
15+20+20+25	1.65	2.20	2.20	2.75			8.80 (3.10 - 13.20)	2.24 (0.79 - 4.33)	9.84 99
15+20+20+35	1.92	2.56	2.56	4.47			11.50 (3.20 - 14.70)	2.85 (0.76 - 4.12)	12.52 99
15+20+20+42	1.84	2.45	2.45	5.15			11.90 (3.20 - 14.80)	3.03 (0.76 - 4.18)	13.31 99
15+20+20+50	1.74	2.32	2.32	5.81			12.20 (3.20 - 14.90)	3.19 (0.76 - 4.25)	14.01 99
15+20+20+60	1.63	2.17	2.17	6.52			12.50 (3.20 - 14.90)	3.37 (0.76 - 4.25)	14.80 99
15+20+20+71	1.52	2.03	2.03	7.21			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59 99
15+20+22+22	1.65	2.20	2.42	2.42			8.70 (3.10 - 12.20)	2.20 (0.79 - 4.00)	9.66 99
15+20+22+25	1.74	2.32	2.55	2.90			9.50 (3.10 - 13.60)	2.39 (0.78 - 4.25)	10.50 99
15+20+22+35	1.89	2.52	2.77	4.41			11.60 (3.20 - 14.70)	2.89 (0.76 - 4.12)	12.69 99
15+20+22+42	1.82	2.42	2.67	5.09			12.00 (3.20 - 14.90)	3.07 (0.76 - 4.25)	13.48 99
15+20+22+50	1.71	2.28	2.51	5.70			12.20 (3.20 - 14.90)	3.19 (0.76 - 4.25)	14.01 99
15+20+22+60	1.60	2.14	2.35	6.41			12.50 (3.20 - 14.90)	3.37 (0.76 - 4.25)	14.80 99
15+20+22+71	1.50	2.00	2.20	7.10			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59 99
15+20+25+25	1.84	2.45	3.06	3.06			10.40 (3.20 - 14.10)	2.58 (0.77 - 4.15)	11.33 99
15+20+25+35	1.86	2.48	3.11	4.35			11.80 (3.20 - 14.80)	2.98 (0.76 - 4.18)	13.09 99
15+20+25+42	1.78	2.37	2.97	4.98			12.10 (3.20 - 14.90)	3.13 (0.76 - 4.25)	13.75 99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+20+25+50	1.68	2.24	2.80	5.59			12.30 (3.20 - 14.90)	3.25 (0.76 - 4.25)	14.27	99
15+20+25+60	1.58	2.10	2.63	6.30			12.60 (3.20 - 15.00)	3.43 (0.76 - 4.72)	15.06	99
15+20+25+71	1.48	1.97	2.46	6.99			12.90 (3.20 - 15.00)	3.61 (0.76 - 4.72)	15.85	99
15+20+35+35	1.74	2.32	4.07	4.07			12.20 (3.20 - 14.90)	3.19 (0.76 - 4.25)	14.01	99
15+20+35+42	1.66	2.21	3.88	4.65			12.40 (3.20 - 14.90)	3.31 (0.76 - 4.25)	14.54	99
15+20+35+50	1.58	2.10	3.68	5.25			12.60 (3.20 - 15.00)	3.43 (0.76 - 4.72)	15.06	99
15+20+35+60	1.49	1.98	3.47	5.95			12.90 (3.20 - 15.00)	3.61 (0.76 - 4.72)	15.85	99
15+20+35+71	1.40	1.87	3.28	6.65			13.20 (3.20 - 15.00)	3.78 (0.76 - 4.72)	16.60	99
15+20+42+42	1.59	2.12	4.45	4.45			12.60 (3.20 - 14.90)	3.43 (0.76 - 4.25)	15.06	99
15+20+42+50	1.51	2.02	4.23	5.04			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59	99
15+20+42+60	1.43	1.91	4.02	5.74			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
15+20+42+71	1.34	1.78	3.75	6.33			13.20 (3.20 - 15.00)	3.74 (0.76 - 4.72)	16.43	99
15+20+50+50	1.46	1.94	4.85	4.85			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
15+20+50+60	1.37	1.82	4.55	5.46			13.20 (3.20 - 15.00)	3.76 (0.76 - 4.72)	16.51	99
15+20+50+71	1.27	1.69	4.23	6.01			13.20 (3.20 - 15.10)	3.68 (0.76 - 4.50)	16.16	99
15+20+60+60	1.28	1.70	5.11	5.11			13.20 (3.20 - 15.10)	3.69 (0.76 - 4.50)	16.21	99
15+20+60+71	1.19	1.59	4.77	5.65			13.20 (3.20 - 15.10)	3.61 (0.76 - 4.50)	15.85	99
15+20+71+71	1.07	1.42	5.05	5.05			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
15+22+22+22	1.69	2.47	2.47	2.47			9.10 (3.10 - 13.40)	2.30 (0.79 - 4.29)	10.10	99
15+22+22+25	1.80	2.65	2.65	3.01			10.10 (3.20 - 13.90)	2.52 (0.78 - 4.19)	11.07	99
15+22+22+35	1.87	2.74	2.74	4.36			11.70 (3.20 - 14.80)	2.94 (0.76 - 4.18)	12.91	99
15+22+22+42	1.78	2.61	2.61	4.99			12.00 (3.20 - 14.90)	3.07 (0.76 - 4.25)	13.48	99
15+22+22+50	1.69	2.48	2.48	5.64			12.30 (3.20 - 14.90)	3.25 (0.76 - 4.25)	14.27	99
15+22+22+60	1.59	2.33	2.33	6.35			12.60 (3.20 - 14.90)	3.43 (0.76 - 4.25)	15.06	99
15+22+22+71	1.49	2.18	2.18	7.05			12.90 (3.20 - 15.00)	3.61 (0.76 - 4.72)	15.85	99
15+22+25+25	1.91	2.81	3.19	3.19			11.10 (3.20 - 14.40)	2.74 (0.76 - 4.09)	12.03	99
15+22+25+35	1.84	2.70	3.07	4.29			11.90 (3.20 - 14.80)	3.03 (0.76 - 4.18)	13.31	99
15+22+25+42	1.75	2.56	2.91	4.89			12.10 (3.20 - 14.90)	3.13 (0.76 - 4.25)	13.75	99
15+22+25+50	1.66	2.44	2.77	5.54			12.40 (3.20 - 14.90)	3.31 (0.76 - 4.25)	14.54	99
15+22+25+60	1.56	2.29	2.60	6.25			12.70 (3.20 - 15.00)	3.49 (0.76 - 4.72)	15.33	99
15+22+25+71	1.47	2.15	2.44	6.94			13.00 (3.20 - 15.00)	3.67 (0.76 - 4.72)	16.12	99
15+22+35+35	1.71	2.51	3.99	3.99			12.20 (3.20 - 14.90)	3.19 (0.76 - 4.25)	14.01	99
15+22+35+42	1.63	2.39	3.81	4.57			12.40 (3.20 - 14.90)	3.31 (0.76 - 4.25)	14.54	99
15+22+35+50	1.56	2.29	3.64	5.20			12.70 (3.20 - 15.00)	3.49 (0.76 - 4.72)	15.33	99
15+22+35+60	1.48	2.17	3.45	5.91			13.00 (3.20 - 15.00)	3.67 (0.76 - 4.72)	16.12	99
15+22+35+71	1.38	2.03	3.23	6.55			13.20 (3.20 - 15.00)	3.77 (0.76 - 4.72)	16.56	99
15+22+42+42	1.56	2.29	4.37	4.37			12.60 (3.20 - 15.00)	3.43 (0.76 - 4.72)	15.06	99
15+22+42+50	1.50	2.20	4.20	5.00			12.90 (3.20 - 15.00)	3.61 (0.76 - 4.72)	15.85	99
15+22+42+60	1.42	2.09	3.99	5.70			13.20 (3.20 - 15.00)	3.79 (0.76 - 4.72)	16.64	99
15+22+42+71	1.32	1.94	3.70	6.25			13.20 (3.20 - 15.00)	3.72 (0.76 - 4.72)	16.34	99
15+22+50+50	1.43	2.10	4.78	4.78			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
15+22+50+60	1.35	1.98	4.49	5.39			13.20 (3.20 - 15.00)	3.74 (0.76 - 4.72)	16.43	99
15+22+50+71	1.25	1.84	4.18	5.93			13.20 (3.20 - 15.10)	3.67 (0.76 - 4.50)	16.12	99
15+22+60+60	1.26	1.85	5.04	5.04			13.20 (3.20 - 15.10)	3.67 (0.76 - 4.50)	16.12	99
15+22+60+71	1.18	1.73	4.71	5.58			13.20 (3.20 - 15.10)	3.60 (0.76 - 4.50)	15.81	99
15+22+71+71	1.06	1.55	5.00	5.00			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+25+25+25	1.92	3.19	3.19	3.19			11.50 (3.20 - 14.70)	2.85 (0.76 - 4.12)	12.52	99
15+25+25+35	1.80	3.00	3.00	4.20			12.00 (3.20 - 14.90)	3.07 (0.76 - 4.25)	13.48	99
15+25+25+42	1.71	2.85	2.85	4.79			12.20 (3.20 - 14.90)	3.19 (0.76 - 4.25)	14.01	99
15+25+25+50	1.63	2.72	2.72	5.43			12.50 (3.20 - 14.90)	3.37 (0.76 - 4.25)	14.80	99
15+25+25+60	1.54	2.56	2.56	6.14			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59	99
15+25+25+71	1.44	2.41	2.41	6.84			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
15+25+35+35	1.68	2.80	3.91	3.91			12.30 (3.20 - 14.90)	3.25 (0.76 - 4.25)	14.27	99
15+25+35+42	1.60	2.67	3.74	4.49			12.50 (3.20 - 14.90)	3.37 (0.76 - 4.25)	14.80	99
15+25+35+50	1.54	2.56	3.58	5.12			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59	99
15+25+35+60	1.46	2.43	3.40	5.82			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
15+25+35+71	1.36	2.26	3.16	6.42			13.20 (3.20 - 15.00)	3.75 (0.76 - 4.72)	16.47	99
15+25+42+42	1.54	2.56	4.30	4.30			12.70 (3.20 - 15.00)	3.49 (0.76 - 4.72)	15.33	99
15+25+42+50	1.48	2.46	4.14	4.92			13.00 (3.20 - 15.00)	3.67 (0.76 - 4.72)	16.12	99
15+25+42+60	1.39	2.32	3.90	5.58			13.20 (3.20 - 15.00)	3.78 (0.76 - 4.72)	16.60	99
15+25+42+71	1.29	2.16	3.62	6.13			13.20 (3.20 - 15.00)	3.70 (0.76 - 4.72)	16.25	99
15+25+50+50	1.41	2.36	4.71	4.71			13.20 (3.20 - 15.00)	3.79 (0.76 - 4.72)	16.64	99
15+25+50+60	1.32	2.20	4.40	5.28			13.20 (3.20 - 15.00)	3.72 (0.76 - 4.72)	16.34	99
15+25+50+71	1.23	2.05	4.10	5.82			13.20 (3.20 - 15.10)	3.65 (0.76 - 4.50)	16.03	99
15+25+60+60	1.24	2.06	4.95	4.95			13.20 (3.20 - 15.10)	3.65 (0.76 - 4.50)	16.03	99
15+25+60+71	1.11	1.84	4.42	5.23			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
15+35+35+35	1.58	3.68	3.68	3.68			12.60 (3.20 - 15.00)	3.43 (0.76 - 4.72)	15.06	99
15+35+35+42	1.51	3.53	3.53	4.23			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59	99
15+35+35+50	1.46	3.40	3.40	4.85			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
15+35+35+60	1.37	3.19	3.19	5.46			13.20 (3.20 - 15.00)	3.76 (0.76 - 4.72)	16.51	99
15+35+35+71	1.27	2.96	2.96	6.01			13.20 (3.20 - 15.10)	3.68 (0.76 - 4.50)	16.16	99
15+35+42+42	1.46	3.40	4.07	4.07			13.00 (3.20 - 15.00)	3.67 (0.76 - 4.72)	16.12	99
15+35+42+50	1.39	3.25	3.90	4.65			13.20 (3.20 - 15.00)	3.78 (0.76 - 4.72)	16.60	99
15+35+42+60	1.30	3.04	3.65	5.21			13.20 (3.20 - 15.00)	3.71 (0.76 - 4.72)	16.29	99
15+35+42+71	1.21	2.83	3.40	5.75			13.20 (3.20 - 15.10)	3.63 (0.76 - 4.50)	15.94	99
15+35+50+50	1.32	3.08	4.40	4.40			13.20 (3.20 - 15.00)	3.72 (0.76 - 4.72)	16.34	99
15+35+50+60	1.24	2.89	4.13	4.95			13.20 (3.20 - 15.10)	3.65 (0.76 - 4.50)	16.03	99
15+35+50+71	1.11	2.58	3.68	5.23			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
15+35+60+60	1.11	2.59	4.45	4.45			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
15+42+42+42	1.40	3.93	3.93	3.93			13.20 (3.20 - 15.00)	3.78 (0.76 - 4.72)	16.60	99
15+42+42+50	1.33	3.72	3.72	4.43			13.20 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
15+42+42+60	1.25	3.49	3.49	4.98			13.20 (3.20 - 15.10)	3.66 (0.76 - 4.50)	16.07	99
15+42+42+71	1.11	3.11	3.11	5.26			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
15+42+50+50	1.26	3.53	4.20	4.20			13.20 (3.20 - 15.10)	3.67 (0.76 - 4.50)	16.12	99
15+42+50+60	1.19	3.32	3.95	4.74			13.20 (3.20 - 15.10)	3.61 (0.76 - 4.50)	15.85	99
15+42+50+71	1.06	2.97	3.54	5.03			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
15+42+60+60	1.07	2.99	4.27	4.27			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
15+50+50+50	1.20	4.00	4.00	4.00			13.20 (3.20 - 15.10)	3.62 (0.76 - 4.50)	15.90	99
15+50+50+60	1.08	3.60	3.60	4.32			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
20+20+20+20	2.20	2.20	2.20	2.20			8.80 (3.10 - 13.20)	2.24 (0.79 - 4.33)	9.84	99
20+20+20+22	2.32	2.32	2.32	2.55			9.50 (3.10 - 13.60)	2.39 (0.78 - 4.25)	10.50	99
20+20+20+25	2.45	2.45	2.45	3.06			10.40 (3.20 - 14.10)	2.58 (0.77 - 4.15)	11.33	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
20+20+20+35	2.48	2.48	2.48	4.35			11.80 (3.20 - 14.80)	2.98 (0.76 - 4.18)	13.09	99
20+20+20+42	2.37	2.37	2.37	4.98			12.10 (3.20 - 14.90)	3.13 (0.76 - 4.25)	13.75	99
20+20+20+50	2.24	2.24	2.24	5.59			12.30 (3.20 - 14.90)	3.25 (0.76 - 4.25)	14.27	99
20+20+20+60	2.10	2.10	2.10	6.30			12.60 (3.20 - 15.00)	3.43 (0.76 - 4.72)	15.06	99
20+20+20+71	1.97	1.97	1.97	6.99			12.90 (3.20 - 15.00)	3.61 (0.76 - 4.72)	15.85	99
20+20+22+22	2.40	2.40	2.65	2.65			10.10 (3.20 - 13.90)	2.52 (0.78 - 4.19)	11.07	99
20+20+22+25	2.55	2.55	2.81	3.19			11.10 (3.20 - 14.40)	2.74 (0.76 - 4.09)	12.03	99
20+20+22+35	2.45	2.45	2.70	4.29			11.90 (3.20 - 14.80)	3.03 (0.76 - 4.18)	13.31	99
20+20+22+42	2.33	2.33	2.56	4.89			12.10 (3.20 - 14.90)	3.13 (0.76 - 4.25)	13.75	99
20+20+22+50	2.21	2.21	2.44	5.54			12.40 (3.20 - 14.90)	3.31 (0.76 - 4.25)	14.54	99
20+20+22+60	2.08	2.08	2.29	6.25			12.70 (3.20 - 15.00)	3.49 (0.76 - 4.72)	15.33	99
20+20+22+71	1.95	1.95	2.15	6.94			13.00 (3.20 - 15.00)	3.67 (0.76 - 4.72)	16.12	99
20+20+25+25	2.56	2.56	3.19	3.19			11.50 (3.20 - 14.70)	2.85 (0.76 - 4.12)	12.52	99
20+20+25+35	2.40	2.40	3.00	4.20			12.00 (3.20 - 14.90)	3.07 (0.76 - 4.25)	13.48	99
20+20+25+42	2.28	2.28	2.85	4.79			12.20 (3.20 - 14.90)	3.19 (0.76 - 4.25)	14.01	99
20+20+25+50	2.17	2.17	2.72	5.43			12.50 (3.20 - 14.90)	3.37 (0.76 - 4.25)	14.80	99
20+20+25+60	2.05	2.05	2.56	6.14			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59	99
20+20+25+71	1.93	1.93	2.41	6.84			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
20+20+35+35	2.24	2.24	3.91	3.91			12.30 (3.20 - 14.90)	3.25 (0.76 - 4.25)	14.27	99
20+20+35+42	2.14	2.14	3.74	4.49			12.50 (3.20 - 14.90)	3.37 (0.76 - 4.25)	14.80	99
20+20+35+50	2.05	2.05	3.58	5.12			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59	99
20+20+35+60	1.94	1.94	3.40	5.82			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
20+20+35+71	1.81	1.81	3.16	6.42			13.20 (3.20 - 15.00)	3.75 (0.76 - 4.72)	16.47	99
20+20+42+42	2.05	2.05	4.30	4.30			12.70 (3.20 - 15.00)	3.49 (0.76 - 4.72)	15.33	99
20+20+42+50	1.97	1.97	4.14	4.92			13.00 (3.20 - 15.00)	3.67 (0.76 - 4.72)	16.12	99
20+20+42+60	1.86	1.86	3.90	5.58			13.20 (3.20 - 15.00)	3.78 (0.76 - 4.72)	16.60	99
20+20+42+71	1.73	1.73	3.62	6.13			13.20 (3.20 - 15.00)	3.70 (0.76 - 4.72)	16.25	99
20+20+50+50	1.89	1.89	4.71	4.71			13.20 (3.20 - 15.00)	3.79 (0.76 - 4.72)	16.64	99
20+20+50+60	1.76	1.76	4.40	5.28			13.20 (3.20 - 15.00)	3.72 (0.76 - 4.72)	16.34	99
20+20+50+71	1.64	1.64	4.10	5.82			13.20 (3.20 - 15.10)	3.65 (0.76 - 4.50)	16.03	99
20+20+60+60	1.65	1.65	4.95	4.95			13.20 (3.20 - 15.10)	3.65 (0.76 - 4.50)	16.03	99
20+20+60+71	1.47	1.47	4.42	5.23			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
20+22+22+22	2.51	2.76	2.76	2.76			10.80 (3.20 - 14.30)	2.67 (0.77 - 4.11)	11.73	99
20+22+22+25	2.58	2.84	2.84	3.23			11.50 (3.20 - 14.60)	2.85 (0.76 - 4.05)	12.52	99
20+22+22+35	2.42	2.67	2.67	4.24			12.00 (3.20 - 14.90)	3.07 (0.76 - 4.25)	13.48	99
20+22+22+42	2.30	2.53	2.53	4.83			12.20 (3.20 - 14.90)	3.19 (0.76 - 4.25)	14.01	99
20+22+22+50	2.18	2.39	2.39	5.44			12.40 (3.20 - 14.90)	3.31 (0.76 - 4.25)	14.54	99
20+22+22+60	2.05	2.25	2.25	6.15			12.70 (3.20 - 15.00)	3.49 (0.76 - 4.72)	15.33	99
20+22+22+71	1.94	2.13	2.13	6.89			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
20+22+25+25	2.52	2.77	3.15	3.15			11.60 (3.20 - 14.70)	2.89 (0.76 - 4.12)	12.69	99
20+22+25+35	2.37	2.61	2.97	4.15			12.10 (3.20 - 14.90)	3.13 (0.76 - 4.25)	13.75	99
20+22+25+42	2.26	2.48	2.82	4.74			12.30 (3.20 - 14.90)	3.25 (0.76 - 4.25)	14.27	99
20+22+25+50	2.14	2.35	2.67	5.34			12.50 (3.20 - 14.90)	3.37 (0.76 - 4.25)	14.80	99
20+22+25+60	2.02	2.22	2.52	6.05			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59	99
20+22+25+71	1.90	2.09	2.37	6.74			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
20+22+35+35	2.21	2.44	3.88	3.88			12.40 (3.20 - 14.90)	3.31 (0.76 - 4.25)	14.54	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
20+22+35+42	2.12	2.33	3.71	4.45			12.60 (3.20 - 14.90)	3.43 (0.76 - 4.25)	15.06 99
20+22+35+50	2.02	2.22	3.53	5.04			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59 99
20+22+35+60	1.91	2.10	3.35	5.74			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38 99
20+22+35+71	1.78	1.96	3.12	6.33			13.20 (3.20 - 15.00)	3.74 (0.76 - 4.72)	16.43 99
20+22+42+42	2.03	2.23	4.27	4.27			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59 99
20+22+42+50	1.94	2.13	4.07	4.85			13.00 (3.20 - 15.00)	3.67 (0.76 - 4.72)	16.12 99
20+22+42+60	1.83	2.02	3.85	5.50			13.20 (3.20 - 15.00)	3.76 (0.76 - 4.72)	16.51 99
20+22+42+71	1.70	1.87	3.58	6.05			13.20 (3.20 - 15.10)	3.69 (0.76 - 4.50)	16.21 99
20+22+50+50	1.86	2.05	4.65	4.65			13.20 (3.20 - 15.00)	3.78 (0.76 - 4.72)	16.60 99
20+22+50+60	1.74	1.91	4.34	5.21			13.20 (3.20 - 15.00)	3.71 (0.76 - 4.72)	16.29 99
20+22+50+71	1.62	1.78	4.05	5.75			13.20 (3.20 - 15.10)	3.63 (0.76 - 4.50)	15.94 99
20+22+60+60	1.63	1.79	4.89	4.89			13.20 (3.20 - 15.10)	3.64 (0.76 - 4.50)	15.99 99
20+22+60+71	1.46	1.60	4.37	5.17			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81 99
20+25+25+25	2.48	3.11	3.11	3.11			11.80 (3.20 - 14.80)	2.98 (0.76 - 4.18)	13.09 99
20+25+25+35	2.32	2.90	2.90	4.07			12.20 (3.20 - 14.90)	3.19 (0.76 - 4.25)	14.01 99
20+25+25+42	2.21	2.77	2.77	4.65			12.40 (3.20 - 14.90)	3.31 (0.76 - 4.25)	14.54 99
20+25+25+50	2.10	2.63	2.63	5.25			12.60 (3.20 - 15.00)	3.43 (0.76 - 4.72)	15.06 99
20+25+25+60	1.98	2.48	2.48	5.95			12.90 (3.20 - 15.00)	3.61 (0.76 - 4.72)	15.85 99
20+25+25+71	1.87	2.34	2.34	6.65			13.20 (3.20 - 15.00)	3.78 (0.76 - 4.72)	16.60 99
20+25+35+35	2.17	2.72	3.80	3.80			12.50 (3.20 - 14.90)	3.37 (0.76 - 4.25)	14.80 99
20+25+35+42	2.08	2.60	3.64	4.37			12.70 (3.20 - 15.00)	3.49 (0.76 - 4.72)	15.33 99
20+25+35+50	1.98	2.48	3.47	4.96			12.90 (3.20 - 15.00)	3.61 (0.76 - 4.72)	15.85 99
20+25+35+60	1.89	2.36	3.30	5.66			13.20 (3.20 - 15.00)	3.79 (0.76 - 4.72)	16.64 99
20+25+35+71	1.75	2.19	3.06	6.21			13.20 (3.20 - 15.00)	3.72 (0.76 - 4.72)	16.34 99
20+25+42+42	2.00	2.50	4.20	4.20			12.90 (3.20 - 15.00)	3.61 (0.76 - 4.72)	15.85 99
20+25+42+50	1.91	2.39	4.02	4.78			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38 99
20+25+42+60	1.80	2.24	3.77	5.39			13.20 (3.20 - 15.00)	3.74 (0.76 - 4.72)	16.43 99
20+25+42+71	1.67	2.09	3.51	5.93			13.20 (3.20 - 15.10)	3.67 (0.76 - 4.50)	16.12 99
20+25+50+50	1.82	2.28	4.55	4.55			13.20 (3.20 - 15.00)	3.76 (0.76 - 4.72)	16.51 99
20+25+50+60	1.70	2.13	4.26	5.11			13.20 (3.20 - 15.10)	3.69 (0.76 - 4.50)	16.21 99
20+25+50+71	1.59	1.99	3.98	5.65			13.20 (3.20 - 15.10)	3.61 (0.76 - 4.50)	15.85 99
20+25+60+60	1.60	2.00	4.80	4.80			13.20 (3.20 - 15.10)	3.62 (0.76 - 4.50)	15.90 99
20+25+60+71	1.43	1.79	4.30	5.08			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81 99
20+35+35+35	2.05	3.58	3.58	3.58			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59 99
20+35+35+42	1.97	3.45	3.45	4.14			13.00 (3.20 - 15.00)	3.67 (0.76 - 4.72)	16.12 99
20+35+35+50	1.89	3.30	3.30	4.71			13.20 (3.20 - 15.00)	3.79 (0.76 - 4.72)	16.64 99
20+35+35+60	1.76	3.08	3.08	5.28			13.20 (3.20 - 15.00)	3.72 (0.76 - 4.72)	16.34 99
20+35+35+71	1.64	2.87	2.87	5.82			13.20 (3.20 - 15.10)	3.65 (0.76 - 4.50)	16.03 99
20+35+42+42	1.90	3.32	3.99	3.99			13.20 (3.20 - 15.00)	3.79 (0.76 - 4.72)	16.64 99
20+35+42+50	1.80	3.14	3.77	4.49			13.20 (3.20 - 15.00)	3.74 (0.76 - 4.72)	16.43 99
20+35+42+60	1.68	2.94	3.53	5.04			13.20 (3.20 - 15.10)	3.67 (0.76 - 4.50)	16.12 99
20+35+42+71	1.57	2.75	3.30	5.58			13.20 (3.20 - 15.10)	3.60 (0.76 - 4.50)	15.81 99
20+35+50+50	1.70	2.98	4.26	4.26			13.20 (3.20 - 15.10)	3.69 (0.76 - 4.50)	16.21 99
20+35+50+60	1.60	2.80	4.00	4.80			13.20 (3.20 - 15.10)	3.62 (0.76 - 4.50)	15.90 99
20+35+50+71	1.43	2.51	3.58	5.08			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81 99
20+35+60+60	1.44	2.52	4.32	4.32			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81 99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
20+42+42+42	1.81	3.80	3.80	3.80			13.20 (3.20 - 15.00)	3.75 (0.76 - 4.72)	16.47	99
20+42+42+50	1.71	3.60	3.60	4.29			13.20 (3.20 - 15.10)	3.70 (0.76 - 4.50)	16.25	99
20+42+42+60	1.61	3.38	3.38	4.83			13.20 (3.20 - 15.10)	3.63 (0.76 - 4.50)	15.94	99
20+42+42+71	1.44	3.02	3.02	5.11			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
20+42+50+50	1.63	3.42	4.07	4.07			13.20 (3.20 - 15.10)	3.64 (0.76 - 4.50)	15.99	99
20+42+50+60	1.47	3.08	3.66	4.40			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
20+50+50+50	1.48	3.71	3.71	3.71			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
20+50+50+60	1.40	3.50	3.50	4.20			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
22+22+22+22	2.85	2.85	2.85	2.85			11.40 (3.20 - 14.60)	2.80 (0.76 - 4.05)	12.30	99
22+22+22+25	2.80	2.80	2.80	3.19			11.60 (3.20 - 14.70)	2.89 (0.76 - 4.12)	12.69	99
22+22+22+35	2.61	2.61	2.61	4.16			12.00 (3.20 - 14.90)	3.07 (0.76 - 4.25)	13.48	99
22+22+22+42	2.49	2.49	2.49	4.74			12.20 (3.20 - 14.90)	3.19 (0.76 - 4.25)	14.01	99
22+22+22+50	2.37	2.37	2.37	5.39			12.50 (3.20 - 14.90)	3.37 (0.76 - 4.25)	14.80	99
22+22+22+60	2.23	2.23	2.23	6.10			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59	99
22+22+22+71	2.10	2.10	2.10	6.79			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
22+22+25+25	2.74	2.74	3.11	3.11			11.70 (3.20 - 14.80)	2.94 (0.76 - 4.18)	12.91	99
22+22+25+35	2.56	2.56	2.91	4.07			12.10 (3.20 - 14.90)	3.13 (0.76 - 4.25)	13.75	99
22+22+25+42	2.44	2.44	2.77	4.65			12.30 (3.20 - 14.90)	3.25 (0.76 - 4.25)	14.27	99
22+22+25+50	2.33	2.33	2.65	5.29			12.60 (3.20 - 14.90)	3.43 (0.76 - 4.25)	15.06	99
22+22+25+60	2.20	2.20	2.50	6.00			12.90 (3.20 - 15.00)	3.61 (0.76 - 4.72)	15.85	99
22+22+25+71	2.07	2.07	2.36	6.69			13.20 (3.20 - 15.00)	3.79 (0.76 - 4.72)	16.64	99
22+22+35+35	2.39	2.39	3.81	3.81			12.40 (3.20 - 14.90)	3.31 (0.76 - 4.25)	14.54	99
22+22+35+42	2.29	2.29	3.64	4.37			12.60 (3.20 - 15.00)	3.43 (0.76 - 4.72)	15.06	99
22+22+35+50	2.20	2.20	3.50	5.00			12.90 (3.20 - 15.00)	3.61 (0.76 - 4.72)	15.85	99
22+22+35+60	2.09	2.09	3.32	5.70			13.20 (3.20 - 15.00)	3.79 (0.76 - 4.72)	16.64	99
22+22+35+71	1.94	1.94	3.08	6.25			13.20 (3.20 - 15.00)	3.72 (0.76 - 4.72)	16.34	99
22+22+42+42	2.20	2.20	4.20	4.20			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59	99
22+22+42+50	2.12	2.12	4.05	4.82			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
22+22+42+60	1.99	1.99	3.80	5.42			13.20 (3.20 - 15.00)	3.75 (0.76 - 4.72)	16.47	99
22+22+42+71	1.85	1.85	3.53	5.97			13.20 (3.20 - 15.10)	3.67 (0.76 - 4.50)	16.12	99
22+22+50+50	2.02	2.02	4.58	4.58			13.20 (3.20 - 15.00)	3.76 (0.76 - 4.72)	16.51	99
22+22+50+60	1.89	1.89	4.29	5.14			13.20 (3.20 - 15.10)	3.70 (0.76 - 4.50)	16.25	99
22+22+50+71	1.76	1.76	4.00	5.68			13.20 (3.20 - 15.10)	3.62 (0.76 - 4.50)	15.90	99
22+22+60+60	1.77	1.77	4.83	4.83			13.20 (3.20 - 15.10)	3.63 (0.76 - 4.50)	15.94	99
22+22+60+71	1.58	1.58	4.32	5.11			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
22+25+25+25	2.70	3.07	3.07	3.07			11.90 (3.20 - 14.80)	3.03 (0.76 - 4.18)	13.31	99
22+25+25+35	2.51	2.85	2.85	3.99			12.20 (3.20 - 14.90)	3.19 (0.76 - 4.25)	14.01	99
22+25+25+42	2.39	2.72	2.72	4.57			12.40 (3.20 - 14.90)	3.31 (0.76 - 4.25)	14.54	99
22+25+25+50	2.29	2.60	2.60	5.20			12.70 (3.20 - 15.00)	3.49 (0.76 - 4.72)	15.33	99
22+25+25+60	2.17	2.46	2.46	5.91			13.00 (3.20 - 15.00)	3.67 (0.76 - 4.72)	16.12	99
22+25+25+71	2.03	2.31	2.31	6.55			13.20 (3.20 - 15.00)	3.77 (0.76 - 4.72)	16.56	99
22+25+35+35	2.35	2.67	3.74	3.74			12.50 (3.20 - 14.90)	3.37 (0.76 - 4.25)	14.80	99
22+25+35+42	2.25	2.56	3.58	4.30			12.70 (3.20 - 15.00)	3.49 (0.76 - 4.72)	15.33	99
22+25+35+50	2.17	2.46	3.45	4.92			13.00 (3.20 - 15.00)	3.67 (0.76 - 4.72)	16.12	99
22+25+35+60	2.05	2.32	3.25	5.58			13.20 (3.20 - 15.00)	3.78 (0.76 - 4.72)	16.60	99
22+25+35+71	1.90	2.16	3.02	6.13			13.20 (3.20 - 15.00)	3.70 (0.76 - 4.72)	16.25	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
22+25+42+42	2.17	2.46	4.14	4.14			12.90 (3.20 - 15.00)	3.61 (0.76 - 4.72)	15.85	99
22+25+42+50	2.09	2.37	3.99	4.75			13.20 (3.20 - 15.00)	3.79 (0.76 - 4.72)	16.64	99
22+25+42+60	1.95	2.21	3.72	5.32			13.20 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
22+25+42+71	1.82	2.06	3.47	5.86			13.20 (3.20 - 15.10)	3.65 (0.76 - 4.50)	16.03	99
22+25+50+50	1.98	2.24	4.49	4.49			13.20 (3.20 - 15.00)	3.74 (0.76 - 4.72)	16.43	99
22+25+50+60	1.85	2.10	4.20	5.04			13.20 (3.20 - 15.10)	3.67 (0.76 - 4.50)	16.12	99
22+25+50+71	1.73	1.96	3.93	5.58			13.20 (3.20 - 15.10)	3.60 (0.76 - 4.50)	15.81	99
22+25+60+60	1.74	1.98	4.74	4.74			13.20 (3.20 - 15.10)	3.61 (0.76 - 4.50)	15.85	99
22+25+60+71	1.56	1.77	4.25	5.03			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
22+35+35+35	2.22	3.53	3.53	3.53			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59	99
22+35+35+42	2.13	3.40	3.40	4.07			13.00 (3.20 - 15.00)	3.67 (0.76 - 4.72)	16.12	99
22+35+35+50	2.05	3.25	3.25	4.65			13.20 (3.20 - 15.00)	3.78 (0.76 - 4.72)	16.60	99
22+35+35+60	1.91	3.04	3.04	5.21			13.20 (3.20 - 15.00)	3.71 (0.76 - 4.72)	16.29	99
22+35+35+71	1.78	2.83	2.83	5.75			13.20 (3.20 - 15.10)	3.63 (0.76 - 4.50)	15.94	99
22+35+42+42	2.06	3.28	3.93	3.93			13.20 (3.20 - 15.00)	3.78 (0.76 - 4.72)	16.60	99
22+35+42+50	1.95	3.10	3.72	4.43			13.20 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
22+35+42+60	1.83	2.91	3.49	4.98			13.20 (3.20 - 15.10)	3.66 (0.76 - 4.50)	16.07	99
22+35+42+71	1.63	2.59	3.11	5.26			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
22+35+50+50	1.85	2.94	4.20	4.20			13.20 (3.20 - 15.10)	3.67 (0.76 - 4.50)	16.12	99
22+35+50+60	1.74	2.77	3.95	4.74			13.20 (3.20 - 15.10)	3.61 (0.76 - 4.50)	15.85	99
22+35+50+71	1.56	2.48	3.54	5.03			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
22+35+60+60	1.57	2.49	4.27	4.27			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
22+42+42+42	1.96	3.75	3.75	3.75			13.20 (3.20 - 15.00)	3.74 (0.76 - 4.72)	16.43	99
22+42+42+50	1.86	3.55	3.55	4.23			13.20 (3.20 - 15.10)	3.68 (0.76 - 4.50)	16.16	99
22+42+42+60	1.75	3.34	3.34	4.77			13.20 (3.20 - 15.10)	3.61 (0.76 - 4.50)	15.85	99
22+42+42+71	1.57	2.99	2.99	5.05			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
22+42+50+50	1.77	3.38	4.02	4.02			13.20 (3.20 - 15.10)	3.63 (0.76 - 4.50)	15.94	99
22+42+50+60	1.59	3.04	3.62	4.34			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
22+50+50+50	1.61	3.66	3.66	3.66			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
25+25+25+25	3.00	3.00	3.00	3.00			12.00 (3.20 - 14.90)	3.07 (0.76 - 4.25)	13.48	99
25+25+25+35	2.80	2.80	2.80	3.91			12.30 (3.20 - 14.90)	3.25 (0.76 - 4.25)	14.27	99
25+25+25+42	2.67	2.67	2.67	4.49			12.50 (3.20 - 14.90)	3.37 (0.76 - 4.25)	14.80	99
25+25+25+50	2.56	2.56	2.56	5.12			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59	99
25+25+25+60	2.43	2.43	2.43	5.82			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
25+25+25+71	2.26	2.26	2.26	6.42			13.20 (3.20 - 15.00)	3.75 (0.76 - 4.72)	16.47	99
25+25+35+35	2.63	2.63	3.68	3.68			12.60 (3.20 - 15.00)	3.43 (0.76 - 4.72)	15.06	99
25+25+35+42	2.52	2.52	3.53	4.23			12.80 (3.20 - 15.00)	3.55 (0.76 - 4.72)	15.59	99
25+25+35+50	2.43	2.43	3.40	4.85			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
25+25+35+60	2.28	2.28	3.19	5.46			13.20 (3.20 - 15.00)	3.76 (0.76 - 4.72)	16.51	99
25+25+35+71	2.12	2.12	2.96	6.01			13.20 (3.20 - 15.10)	3.68 (0.76 - 4.50)	16.16	99
25+25+42+42	2.43	2.43	4.07	4.07			13.00 (3.20 - 15.00)	3.67 (0.76 - 4.72)	16.12	99
25+25+42+50	2.32	2.32	3.90	4.65			13.20 (3.20 - 15.00)	3.78 (0.76 - 4.72)	16.60	99
25+25+42+60	2.17	2.17	3.65	5.21			13.20 (3.20 - 15.00)	3.71 (0.76 - 4.72)	16.29	99
25+25+42+71	2.02	2.02	3.40	5.75			13.20 (3.20 - 15.10)	3.63 (0.76 - 4.50)	15.94	99
25+25+50+50	2.20	2.20	4.40	4.40			13.20 (3.20 - 15.00)	3.72 (0.76 - 4.72)	16.34	99
25+25+50+60	2.06	2.06	4.13	4.95			13.20 (3.20 - 15.10)	3.65 (0.76 - 4.50)	16.03	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
25+25+50+71	1.84	1.84	3.68	5.23			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
25+25+60+60	1.85	1.85	4.45	4.45			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
25+35+35+35	2.48	3.47	3.47	3.47			12.90 (3.20 - 15.00)	3.61 (0.76 - 4.72)	15.85	99
25+35+35+42	2.39	3.35	3.35	4.02			13.10 (3.20 - 15.00)	3.73 (0.76 - 4.72)	16.38	99
25+35+35+50	2.28	3.19	3.19	4.55			13.20 (3.20 - 15.00)	3.76 (0.76 - 4.72)	16.51	99
25+35+35+60	2.13	2.98	2.98	5.11			13.20 (3.20 - 15.10)	3.69 (0.76 - 4.50)	16.21	99
25+35+35+71	1.99	2.78	2.78	5.65			13.20 (3.20 - 15.10)	3.61 (0.76 - 4.50)	15.85	99
25+35+42+42	2.29	3.21	3.85	3.85			13.20 (3.20 - 15.00)	3.76 (0.76 - 4.72)	16.51	99
25+35+42+50	2.17	3.04	3.65	4.34			13.20 (3.20 - 15.00)	3.71 (0.76 - 4.72)	16.29	99
25+35+42+60	2.04	2.85	3.42	4.89			13.20 (3.20 - 15.10)	3.64 (0.76 - 4.50)	15.99	99
25+35+42+71	1.82	2.55	3.06	5.17			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
25+35+50+50	2.06	2.89	4.13	4.13			13.20 (3.20 - 15.10)	3.65 (0.76 - 4.50)	16.03	99
25+35+50+60	1.85	2.59	3.71	4.45			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
25+35+60+60	1.75	2.45	4.20	4.20			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
25+42+42+42	2.19	3.67	3.67	3.67			13.20 (3.20 - 15.00)	3.72 (0.76 - 4.72)	16.34	99
25+42+42+50	2.08	3.49	3.49	4.15			13.20 (3.20 - 15.10)	3.66 (0.76 - 4.50)	16.07	99
25+42+42+60	1.86	3.13	3.13	4.47			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
25+42+42+71	1.75	2.94	2.94	4.97			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
25+42+50+50	1.98	3.32	3.95	3.95			13.20 (3.20 - 15.10)	3.61 (0.76 - 4.50)	15.85	99
25+42+50+60	1.78	2.99	3.56	4.27			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
25+50+50+50	1.80	3.60	3.60	3.60			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
35+35+35+35	3.30	3.30	3.30	3.30			13.20 (3.20 - 15.00)	3.79 (0.76 - 4.72)	16.64	99
35+35+35+42	3.14	3.14	3.14	3.77			13.20 (3.20 - 15.00)	3.74 (0.76 - 4.72)	16.43	99
35+35+35+50	2.98	2.98	2.98	4.26			13.20 (3.20 - 15.10)	3.69 (0.76 - 4.50)	16.21	99
35+35+35+60	2.80	2.80	2.80	4.80			13.20 (3.20 - 15.10)	3.62 (0.76 - 4.50)	15.90	99
35+35+35+71	2.51	2.51	2.51	5.08			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
35+35+42+42	3.00	3.00	3.60	3.60			13.20 (3.20 - 15.10)	3.70 (0.76 - 4.50)	16.25	99
35+35+42+50	2.85	2.85	3.42	4.07			13.20 (3.20 - 15.10)	3.64 (0.76 - 4.50)	15.99	99
35+35+42+60	2.56	2.56	3.08	4.40			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
35+35+50+50	2.59	2.59	3.71	3.71			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
35+35+50+60	2.45	2.45	3.50	4.20			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
35+42+42+42	2.87	3.44	3.44	3.44			13.20 (3.20 - 15.10)	3.65 (0.76 - 4.50)	16.03	99
35+42+42+50	2.61	3.13	3.13	3.73			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
35+42+42+60	2.46	2.96	2.96	4.22			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
35+42+50+50	2.49	2.99	3.56	3.56			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
42+42+42+42	3.30	3.30	3.30	3.30			13.20 (3.20 - 15.10)	3.60 (0.76 - 4.50)	15.81	99
42+42+42+50	3.01	3.01	3.01	3.58			12.60 (3.20 - 14.20)	3.60 (0.76 - 4.50)	15.81	99
15+15+15+15+15	1.70	1.70	1.70	1.70	1.70		8.50 (3.40 - 13.80)	1.91 (0.80 - 5.22)	8.39	99
15+15+15+15+20	1.69	1.69	1.69	1.69	2.25		9.00 (3.40 - 14.00)	2.11 (0.80 - 5.30)	9.27	99
15+15+15+15+22	1.68	1.68	1.68	1.68	2.47		9.20 (3.40 - 14.10)	2.20 (0.80 - 5.33)	9.66	99
15+15+15+15+25	1.68	1.68	1.68	1.68	2.79		9.50 (3.40 - 14.20)	2.32 (0.80 - 5.37)	10.19	99
15+15+15+15+35	1.66	1.66	1.66	1.66	3.87		10.50 (3.40 - 14.70)	2.73 (0.80 - 5.56)	11.99	99
15+15+15+15+42	1.68	1.68	1.68	1.68	4.69		11.40 (3.40 - 15.00)	2.97 (0.79 - 5.25)	13.04	99
15+15+15+15+50	1.79	1.79	1.79	1.79	5.95		13.10 (3.50 - 15.20)	3.13 (0.77 - 4.46)	13.75	99
15+15+15+15+60	1.66	1.66	1.66	1.66	6.65		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49	99
15+15+15+15+71	1.53	1.53	1.53	1.53	7.26		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+15+15+20+20	1.68	1.68	1.68	2.24	2.24		9.50 (3.40 - 14.20)	2.32 (0.80 - 5.37)	10.19 99
15+15+15+20+22	1.67	1.67	1.67	2.23	2.45		9.70 (3.40 - 14.30)	2.40 (0.80 - 5.41)	10.54 99
15+15+15+20+25	1.67	1.67	1.67	2.22	2.78		10.00 (3.40 - 14.50)	2.52 (0.80 - 5.49)	11.07 99
15+15+15+20+35	1.65	1.65	1.65	2.20	3.85		11.00 (3.40 - 14.90)	2.93 (0.80 - 5.64)	12.87 99
15+15+15+20+42	1.75	1.75	1.75	2.34	4.91		12.50 (3.50 - 15.10)	3.07 (0.78 - 4.85)	13.48 99
15+15+15+20+50	1.72	1.72	1.72	2.30	5.74		13.20 (3.50 - 15.30)	3.22 (0.77 - 4.57)	14.14 99
15+15+15+20+60	1.61	1.61	1.61	2.14	6.43		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89 99
15+15+15+20+71	1.48	1.48	1.48	1.97	7.00		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
15+15+15+22+22	1.67	1.67	1.67	2.45	2.45		9.90 (3.40 - 14.40)	2.48 (0.80 - 5.45)	10.89 99
15+15+15+22+25	1.66	1.66	1.66	2.44	2.77		10.20 (3.40 - 14.50)	2.60 (0.80 - 5.49)	11.42 99
15+15+15+22+35	1.68	1.68	1.68	2.46	3.91		11.40 (3.40 - 15.00)	2.97 (0.79 - 5.25)	13.04 99
15+15+15+22+42	1.78	1.78	1.78	2.60	4.97		12.90 (3.50 - 15.20)	3.11 (0.77 - 4.46)	13.66 99
15+15+15+22+50	1.69	1.69	1.69	2.48	5.64		13.20 (3.50 - 15.40)	3.22 (0.77 - 4.69)	14.14 99
15+15+15+22+60	1.58	1.58	1.58	2.32	6.33		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89 99
15+15+15+22+71	1.46	1.46	1.46	2.14	6.89		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
15+15+15+25+25	1.66	1.66	1.66	2.76	2.76		10.50 (3.40 - 14.70)	2.73 (0.80 - 5.56)	11.99 99
15+15+15+25+35	1.73	1.73	1.73	2.88	4.03		12.10 (3.50 - 15.10)	3.03 (0.79 - 4.85)	13.31 99
15+15+15+25+42	1.75	1.75	1.75	2.92	4.91		13.10 (3.50 - 15.30)	3.13 (0.77 - 4.57)	13.75 99
15+15+15+25+50	1.66	1.66	1.66	2.77	5.54		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49 99
15+15+15+25+60	1.55	1.55	1.55	2.58	6.18		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89 99
15+15+15+25+71	1.43	1.43	1.43	2.38	6.75		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
15+15+15+35+35	1.72	1.72	1.72	4.02	4.02		13.20 (3.50 - 15.30)	3.22 (0.77 - 4.57)	14.14 99
15+15+15+35+42	1.64	1.64	1.64	3.82	4.58		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49 99
15+15+15+35+50	1.55	1.55	1.55	3.61	5.15		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89 99
15+15+15+35+60	1.44	1.44	1.44	3.35	5.74		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
15+15+15+35+71	1.33	1.33	1.33	3.11	6.30		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+15+15+42+42	1.56	1.56	1.56	4.36	4.36		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89 99
15+15+15+42+50	1.47	1.47	1.47	4.11	4.89		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
15+15+15+42+60	1.37	1.37	1.37	3.83	5.47		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+15+15+42+71	1.27	1.27	1.27	3.56	6.02		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+15+15+50+50	1.39	1.39	1.39	4.62	4.62		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+15+15+50+60	1.30	1.30	1.30	4.32	5.19		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+15+15+50+71	1.21	1.21	1.21	4.04	5.73		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+15+15+60+60	1.22	1.22	1.22	4.87	4.87		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+15+15+60+71	1.14	1.14	1.14	4.57	5.41		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
15+15+20+20+20	1.67	1.67	2.22	2.22	2.22		10.00 (3.40 - 14.50)	2.52 (0.80 - 5.49)	11.07 99
15+15+20+20+22	1.66	1.66	2.22	2.22	2.44		10.20 (3.40 - 14.50)	2.60 (0.80 - 5.49)	11.42 99
15+15+20+20+25	1.66	1.66	2.21	2.21	2.76		10.50 (3.40 - 14.70)	2.73 (0.80 - 5.56)	11.99 99
15+15+20+20+35	1.73	1.73	2.30	2.30	4.03		12.10 (3.50 - 15.10)	3.03 (0.79 - 4.85)	13.31 99
15+15+20+20+42	1.75	1.75	2.34	2.34	4.91		13.10 (3.50 - 15.30)	3.13 (0.77 - 4.57)	13.75 99
15+15+20+20+50	1.66	1.66	2.22	2.22	5.54		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49 99
15+15+20+20+60	1.55	1.55	2.06	2.06	6.18		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89 99
15+15+20+20+71	1.43	1.43	1.90	1.90	6.75		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
15+15+20+22+22	1.66	1.66	2.21	2.43	2.43		10.40 (3.40 - 14.60)	2.69 (0.80 - 5.53)	11.81 99
15+15+20+22+25	1.65	1.65	2.21	2.43	2.76		10.70 (3.40 - 14.80)	2.81 (0.80 - 5.60)	12.34 99
15+15+20+22+35	1.75	1.75	2.34	2.57	4.09		12.50 (3.50 - 15.10)	3.07 (0.78 - 4.85)	13.48 99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+15+20+22+42	1.74	1.74	2.32	2.55	4.86		13.20 (3.50 - 15.30)	3.22 (0.77 - 4.57)	14.14	99
15+15+20+22+50	1.64	1.64	2.18	2.40	5.45		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49	99
15+15+20+22+60	1.52	1.52	2.03	2.23	6.09		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+20+22+71	1.41	1.41	1.87	2.06	6.65		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+20+25+25	1.65	1.65	2.20	2.75	2.75		11.00 (3.40 - 14.90)	2.93 (0.80 - 5.64)	12.87	99
15+15+20+25+35	1.79	1.79	2.38	2.98	4.17		13.10 (3.50 - 15.20)	3.13 (0.77 - 4.46)	13.75	99
15+15+20+25+42	1.69	1.69	2.26	2.82	4.74		13.20 (3.50 - 15.40)	3.22 (0.77 - 4.69)	14.14	99
15+15+20+25+50	1.61	1.61	2.14	2.68	5.36		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+15+20+25+60	1.49	1.49	1.99	2.48	5.96		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+20+25+71	1.38	1.38	1.84	2.29	6.52		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+20+35+35	1.66	1.66	2.22	3.88	3.88		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49	99
15+15+20+35+42	1.58	1.58	2.11	3.69	4.43		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+15+20+35+50	1.49	1.49	1.99	3.47	4.96		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+20+35+60	1.39	1.39	1.85	3.23	5.54		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+20+35+71	1.29	1.29	1.72	3.01	6.10		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+20+42+42	1.50	1.50	2.00	4.20	4.20		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+20+42+50	1.42	1.42	1.89	3.96	4.72		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+20+42+60	1.32	1.32	1.76	3.70	5.29		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+20+42+71	1.23	1.23	1.64	3.45	5.84		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+15+20+50+50	1.34	1.34	1.79	4.47	4.47		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+20+50+60	1.26	1.26	1.68	4.19	5.03		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+15+20+50+71	1.18	1.18	1.57	3.92	5.56		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+15+20+60+60	1.18	1.18	1.58	4.73	4.73		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+15+22+22+22	1.66	1.66	2.43	2.43	2.43		10.60 (3.40 - 14.70)	2.77 (0.80 - 5.56)	12.17	99
15+15+22+22+25	1.65	1.65	2.42	2.42	2.75		10.90 (3.40 - 14.90)	2.89 (0.80 - 5.64)	12.69	99
15+15+22+22+35	1.78	1.78	2.60	2.60	4.14		12.90 (3.50 - 15.20)	3.11 (0.77 - 4.46)	13.66	99
15+15+22+22+42	1.71	1.71	2.50	2.50	4.78		13.20 (3.50 - 15.40)	3.22 (0.77 - 4.69)	14.14	99
15+15+22+22+50	1.62	1.62	2.38	2.38	5.40		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+15+22+22+60	1.50	1.50	2.20	2.20	6.00		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+22+22+71	1.39	1.39	2.03	2.03	6.56		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+22+25+25	1.68	1.68	2.46	2.79	2.79		11.40 (3.40 - 15.00)	2.97 (0.79 - 5.25)	13.04	99
15+15+22+25+35	1.75	1.75	2.57	2.92	4.09		13.10 (3.50 - 15.30)	3.13 (0.77 - 4.57)	13.75	99
15+15+22+25+42	1.68	1.68	2.46	2.79	4.69		13.30 (3.50 - 15.40)	3.30 (0.77 - 4.69)	14.49	99
15+15+22+25+50	1.58	1.58	2.32	2.64	5.28		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+15+22+25+60	1.47	1.47	2.15	2.45	5.87		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+22+25+71	1.36	1.36	1.99	2.26	6.43		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+22+35+35	1.64	1.64	2.40	3.82	3.82		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49	99
15+15+22+35+42	1.56	1.56	2.29	3.64	4.36		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+15+22+35+50	1.47	1.47	2.15	3.42	4.89		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+22+35+60	1.37	1.37	2.01	3.19	5.47		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+22+35+71	1.27	1.27	1.87	2.97	6.02		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+15+22+42+42	1.48	1.48	2.17	4.14	4.14		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+22+42+50	1.40	1.40	2.05	3.91	4.65		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+22+42+60	1.31	1.31	1.91	3.65	5.22		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+22+42+71	1.22	1.22	1.79	3.41	5.77		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+15+22+50+50	1.32	1.32	1.94	4.41	4.41		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+15+22+50+60	1.24	1.24	1.82	4.14	4.96		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+15+22+50+71	1.16	1.16	1.70	3.87	5.50		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+15+22+60+60	1.17	1.17	1.71	4.67	4.67		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+15+25+25+25	1.73	1.73	2.88	2.88	2.88		12.10 (3.50 - 15.10)	3.03 (0.79 - 4.85)	13.31	99
15+15+25+25+35	1.72	1.72	2.87	2.87	4.02		13.20 (3.50 - 15.30)	3.22 (0.77 - 4.57)	14.14	99
15+15+25+25+42	1.64	1.64	2.73	2.73	4.58		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49	99
15+15+25+25+50	1.55	1.55	2.58	2.58	5.15		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+15+25+25+60	1.44	1.44	2.39	2.39	5.74		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+25+25+71	1.33	1.33	2.22	2.22	6.30		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+25+35+35	1.61	1.61	2.68	3.75	3.75		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+15+25+35+42	1.52	1.52	2.54	3.55	4.26		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+25+35+50	1.44	1.44	2.39	3.35	4.79		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+25+35+60	1.34	1.34	2.23	3.13	5.36		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+25+35+71	1.25	1.25	2.08	2.91	5.91		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+15+25+42+42	1.45	1.45	2.41	4.05	4.05		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+25+42+50	1.37	1.37	2.28	3.83	4.56		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+25+42+60	1.28	1.28	2.13	3.58	5.12		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+15+25+42+71	1.20	1.20	1.99	3.35	5.66		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+15+25+50+50	1.30	1.30	2.16	4.32	4.32		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+25+50+60	1.22	1.22	2.03	4.06	4.87		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+15+25+50+71	1.14	1.14	1.90	3.81	5.41		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+15+25+60+60	1.15	1.15	1.91	4.59	4.59		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+15+35+35+35	1.49	1.49	3.47	3.47	3.47		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+35+35+42	1.42	1.42	3.30	3.30	3.96		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+15+35+35+50	1.34	1.34	3.13	3.13	4.47		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+35+35+60	1.26	1.26	2.93	2.93	5.03		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+15+35+35+71	1.18	1.18	2.74	2.74	5.56		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+15+35+42+42	1.35	1.35	3.15	3.78	3.78		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+35+42+50	1.28	1.28	2.99	3.58	4.27		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+15+35+42+60	1.20	1.20	2.81	3.37	4.81		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+15+35+42+71	1.13	1.13	2.63	3.16	5.34		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+15+35+50+50	1.22	1.22	2.84	4.06	4.06		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+15+35+50+60	1.15	1.15	2.68	3.83	4.59		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+15+42+42+42	1.29	1.29	3.61	3.61	3.61		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+15+42+42+50	1.23	1.23	3.43	3.43	4.09		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+15+42+42+60	1.16	1.16	3.23	3.23	4.62		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+15+42+50+50	1.17	1.17	3.27	3.90	3.90		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+15+50+50+50	1.12	1.12	3.72	3.72	3.72		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+20+20+20	1.66	2.21	2.21	2.21	2.21		10.50 (3.40 - 14.70)	2.73 (0.80 - 5.56)	11.99	99
15+20+20+20+22	1.65	2.21	2.21	2.21	2.43		10.70 (3.40 - 14.80)	2.81 (0.80 - 5.60)	12.34	99
15+20+20+20+25	1.65	2.20	2.20	2.20	2.75		11.00 (3.40 - 14.90)	2.93 (0.80 - 5.64)	12.87	99
15+20+20+20+35	1.79	2.38	2.38	2.38	4.17		13.10 (3.50 - 15.20)	3.13 (0.77 - 4.46)	13.75	99
15+20+20+20+42	1.69	2.26	2.26	2.26	4.74		13.20 (3.50 - 15.40)	3.22 (0.77 - 4.69)	14.14	99
15+20+20+20+50	1.61	2.14	2.14	2.14	5.36		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+20+20+20+60	1.49	1.99	1.99	1.99	5.96		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+20+20+71	1.38	1.84	1.84	1.84	6.52		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+20+20+22+22	1.65	2.20	2.20	2.42	2.42		10.90 (3.40 - 14.90)	2.89 (0.80 - 5.64)	12.69	99
15+20+20+22+25	1.68	2.24	2.24	2.46	2.79		11.40 (3.40 - 15.00)	2.97 (0.79 - 5.25)	13.04	99
15+20+20+22+35	1.75	2.34	2.34	2.57	4.09		13.10 (3.50 - 15.30)	3.13 (0.77 - 4.57)	13.75	99
15+20+20+22+42	1.68	2.24	2.24	2.46	4.69		13.30 (3.50 - 15.40)	3.30 (0.77 - 4.69)	14.49	99
15+20+20+22+50	1.58	2.11	2.11	2.32	5.28		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+20+20+22+60	1.47	1.96	1.96	2.15	5.87		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+20+22+71	1.36	1.81	1.81	1.99	6.43		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+20+25+25	1.73	2.30	2.30	2.88	2.88		12.10 (3.50 - 15.10)	3.03 (0.79 - 4.85)	13.31	99
15+20+20+25+35	1.72	2.30	2.30	2.87	4.02		13.20 (3.50 - 15.30)	3.22 (0.77 - 4.57)	14.14	99
15+20+20+25+42	1.64	2.18	2.18	2.73	4.58		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49	99
15+20+20+25+50	1.55	2.06	2.06	2.58	5.15		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+20+20+25+60	1.44	1.91	1.91	2.39	5.74		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+20+25+71	1.33	1.77	1.77	2.22	6.30		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+20+35+35	1.61	2.14	2.14	3.75	3.75		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+20+20+35+42	1.52	2.03	2.03	3.55	4.26		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+20+35+50	1.44	1.91	1.91	3.35	4.79		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+20+35+60	1.34	1.79	1.79	3.13	5.36		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+20+35+71	1.25	1.66	1.66	2.91	5.91		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+20+20+42+42	1.45	1.93	1.93	4.05	4.05		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+20+42+50	1.37	1.82	1.82	3.83	4.56		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+20+42+60	1.28	1.71	1.71	3.58	5.12		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+20+20+42+71	1.20	1.60	1.60	3.35	5.66		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+20+20+50+50	1.30	1.73	1.73	4.32	4.32		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+20+50+60	1.22	1.62	1.62	4.06	4.87		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+20+20+50+71	1.14	1.52	1.52	3.81	5.41		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+20+60+60	1.15	1.53	1.53	4.59	4.59		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+22+22+22	1.66	2.22	2.44	2.44	2.44		11.20 (3.40 - 14.90)	2.95 (0.80 - 5.64)	12.96	99
15+20+22+22+25	1.70	2.27	2.50	2.50	2.84		11.80 (3.40 - 15.00)	3.01 (0.79 - 5.25)	13.22	99
15+20+22+22+35	1.74	2.32	2.55	2.55	4.05		13.20 (3.50 - 15.30)	3.22 (0.77 - 4.57)	14.14	99
15+20+22+22+42	1.65	2.20	2.42	2.42	4.62		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49	99
15+20+22+22+50	1.56	2.08	2.29	2.29	5.19		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+20+22+22+60	1.45	1.93	2.12	2.12	5.78		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+22+22+71	1.34	1.79	1.97	1.97	6.34		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+22+25+25	1.75	2.34	2.57	2.92	2.92		12.50 (3.50 - 15.10)	3.07 (0.78 - 4.85)	13.48	99
15+20+22+25+35	1.69	2.26	2.48	2.82	3.95		13.20 (3.50 - 15.40)	3.22 (0.77 - 4.69)	14.14	99
15+20+22+25+42	1.62	2.16	2.38	2.70	4.54		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+20+22+25+50	1.52	2.03	2.23	2.54	5.08		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+22+25+60	1.42	1.89	2.08	2.36	5.66		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+22+25+71	1.31	1.75	1.93	2.19	6.22		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+22+35+35	1.58	2.11	2.32	3.69	3.69		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+20+22+35+42	1.50	2.00	2.20	3.50	4.20		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+22+35+50	1.42	1.89	2.08	3.30	4.72		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+22+35+60	1.32	1.76	1.94	3.09	5.29		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+22+35+71	1.23	1.64	1.81	2.88	5.84		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+20+22+42+42	1.43	1.90	2.09	3.99	3.99		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+22+42+50	1.35	1.80	1.98	3.78	4.50		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+20+22+42+60	1.26	1.69	1.85	3.54	5.06		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+20+22+42+71	1.18	1.58	1.73	3.31	5.60		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+22+50+50	1.28	1.71	1.88	4.27	4.27		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+20+22+50+60	1.20	1.60	1.77	4.01	4.81		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+20+22+50+71	1.13	1.51	1.66	3.76	5.34		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+22+60+60	1.14	1.51	1.67	4.54	4.54		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+25+25+25	1.79	2.38	2.98	2.98	2.98		13.10 (3.50 - 15.20)	3.13 (0.77 - 4.46)	13.75	99
15+20+25+25+35	1.66	2.22	2.77	2.77	3.88		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49	99
15+20+25+25+42	1.58	2.11	2.64	2.64	4.43		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+20+25+25+50	1.49	1.99	2.48	2.48	4.96		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+25+25+60	1.39	1.85	2.31	2.31	5.54		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+25+25+71	1.29	1.72	2.15	2.15	6.10		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+25+35+35	1.55	2.06	2.58	3.61	3.61		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+20+25+35+42	1.47	1.96	2.45	3.42	4.11		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+25+35+50	1.39	1.85	2.31	3.23	4.62		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+25+35+60	1.30	1.73	2.16	3.03	5.19		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+25+35+71	1.21	1.61	2.02	2.83	5.73		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+20+25+42+42	1.40	1.86	2.33	3.91	3.91		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+25+42+50	1.32	1.76	2.20	3.70	4.41		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+25+42+60	1.24	1.65	2.07	3.47	4.96		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+20+25+42+71	1.16	1.55	1.94	3.25	5.50		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+25+50+50	1.26	1.68	2.09	4.19	4.19		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+20+25+50+60	1.18	1.58	1.97	3.94	4.73		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+25+60+60	1.12	1.49	1.86	4.47	4.47		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+35+35+35	1.44	1.91	3.35	3.35	3.35		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+20+35+35+42	1.37	1.82	3.19	3.19	3.83		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+35+35+50	1.30	1.73	3.03	3.03	4.32		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+35+35+60	1.22	1.62	2.84	2.84	4.87		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+20+35+35+71	1.14	1.52	2.66	2.66	5.41		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+35+42+42	1.31	1.74	3.05	3.65	3.65		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+20+35+42+50	1.24	1.65	2.90	3.47	4.14		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+20+35+42+60	1.17	1.56	2.73	3.27	4.67		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+35+50+50	1.18	1.58	2.76	3.94	3.94		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+35+50+60	1.12	1.49	2.61	3.72	4.47		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+42+42+42	1.25	1.66	3.50	3.50	3.50		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+20+42+42+50	1.19	1.59	3.33	3.33	3.96		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+42+42+60	1.12	1.50	3.14	3.14	4.49		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+20+42+50+50	1.14	1.51	3.18	3.79	3.79		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+22+22+22+22	1.69	2.48	2.48	2.48	2.48		11.60 (3.40 - 15.00)	2.99 (0.79 - 5.25)	13.13	99
15+22+22+22+25	1.74	2.55	2.55	2.55	2.90		12.30 (3.50 - 15.10)	3.05 (0.78 - 4.85)	13.39	99
15+22+22+22+35	1.71	2.50	2.50	2.50	3.98		13.20 (3.50 - 15.40)	3.22 (0.77 - 4.69)	14.14	99
15+22+22+22+42	1.63	2.40	2.40	2.40	4.58		13.40 (3.50 - 15.50)	3.39 (0.77 - 4.80)	14.89	99
15+22+22+22+50	1.53	2.25	2.25	2.25	5.11		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+22+22+22+60	1.43	2.09	2.09	2.09	5.70		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+22+22+22+71	1.32	1.94	1.94	1.94	6.26		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+22+22+25+25	1.78	2.60	2.60	2.96	2.96		12.90 (3.50 - 15.20)	3.11 (0.77 - 4.46)	13.66	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
15+22+22+25+35	1.68	2.46	2.46	2.79	3.91		13.30 (3.50 - 15.40)	3.30 (0.77 - 4.69)	14.49 99
15+22+22+25+42	1.60	2.34	2.34	2.66	4.47		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89 99
15+22+22+25+50	1.50	2.20	2.20	2.50	5.00		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
15+22+22+25+60	1.40	2.05	2.05	2.33	5.58		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+22+22+25+71	1.30	1.90	1.90	2.16	6.14		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+22+22+35+35	1.56	2.29	2.29	3.64	3.64		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89 99
15+22+22+35+42	1.48	2.17	2.17	3.45	4.14		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
15+22+22+35+50	1.40	2.05	2.05	3.26	4.65		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+22+22+35+60	1.31	1.91	1.91	3.05	5.22		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+22+22+35+71	1.22	1.79	1.79	2.84	5.77		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+22+22+42+42	1.41	2.06	2.06	3.94	3.94		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
15+22+22+42+50	1.33	1.95	1.95	3.73	4.44		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+22+22+42+60	1.25	1.83	1.83	3.50	4.99		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+22+22+42+71	1.17	1.71	1.71	3.27	5.53		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
15+22+22+50+50	1.26	1.85	1.85	4.21	4.21		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+22+22+50+60	1.19	1.74	1.74	3.96	4.76		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
15+22+22+50+71	1.12	1.64	1.64	3.72	5.29		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
15+22+22+60+60	1.12	1.65	1.65	4.49	4.49		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
15+22+25+25+25	1.75	2.57	2.92	2.92	2.92		13.10 (3.50 - 15.30)	3.13 (0.77 - 4.57)	13.75 99
15+22+25+25+35	1.64	2.40	2.73	2.73	3.82		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49 99
15+22+25+25+42	1.56	2.29	2.60	2.60	4.36		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89 99
15+22+25+25+50	1.47	2.15	2.45	2.45	4.89		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
15+22+25+25+60	1.37	2.01	2.28	2.28	5.47		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+22+25+25+71	1.27	1.87	2.12	2.12	6.02		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+22+25+35+35	1.52	2.23	2.54	3.55	3.55		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
15+22+25+35+42	1.45	2.12	2.41	3.37	4.05		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
15+22+25+35+50	1.37	2.01	2.28	3.19	4.56		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+22+25+35+60	1.28	1.88	2.13	2.99	5.12		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+22+25+35+71	1.20	1.75	1.99	2.79	5.66		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+22+25+42+42	1.38	2.02	2.29	3.85	3.85		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+22+25+42+50	1.31	1.91	2.18	3.65	4.35		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+22+25+42+60	1.23	1.80	2.04	3.43	4.90		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+22+25+42+71	1.15	1.68	1.91	3.22	5.44		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
15+22+25+50+50	1.24	1.82	2.07	4.14	4.14		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+22+25+50+60	1.17	1.71	1.95	3.90	4.67		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
15+22+35+35+35	1.42	2.08	3.30	3.30	3.30		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
15+22+35+35+42	1.35	1.98	3.15	3.15	3.78		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+22+35+35+50	1.28	1.88	2.99	2.99	4.27		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+22+35+35+60	1.20	1.77	2.81	2.81	4.81		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+22+35+35+71	1.13	1.66	2.63	2.63	5.34		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
15+22+35+42+42	1.29	1.89	3.01	3.61	3.61		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
15+22+35+42+50	1.23	1.80	2.86	3.43	4.09		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+22+35+42+60	1.16	1.69	2.70	3.23	4.62		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
15+22+35+50+50	1.17	1.71	2.73	3.90	3.90		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
15+22+42+42+42	1.23	1.81	3.45	3.45	3.45		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
15+22+42+42+50	1.18	1.72	3.29	3.29	3.92		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+22+42+50+50	1.12	1.65	3.14	3.74	3.74		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+25+25+25+25	1.72	2.87	2.87	2.87	2.87		13.20 (3.50 - 15.30)	3.22 (0.77 - 4.57)	14.14	99
15+25+25+25+35	1.61	2.68	2.68	2.68	3.75		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
15+25+25+25+42	1.52	2.54	2.54	2.54	4.26		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+25+25+25+50	1.44	2.39	2.39	2.39	4.79		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+25+25+25+60	1.34	2.23	2.23	2.23	5.36		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+25+25+25+71	1.25	2.08	2.08	2.08	5.91		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+25+25+35+35	1.49	2.48	2.48	3.47	3.47		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+25+25+35+42	1.42	2.36	2.36	3.30	3.96		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
15+25+25+35+50	1.34	2.23	2.23	3.13	4.47		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+25+25+35+60	1.26	2.09	2.09	2.93	5.03		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+25+25+35+71	1.18	1.96	1.96	2.74	5.56		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+25+25+42+42	1.35	2.25	2.25	3.78	3.78		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+25+25+42+50	1.28	2.13	2.13	3.58	4.27		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+25+25+42+60	1.20	2.01	2.01	3.37	4.81		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+25+25+42+71	1.13	1.88	1.88	3.16	5.34		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+25+25+50+50	1.22	2.03	2.03	4.06	4.06		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+25+25+50+60	1.15	1.91	1.91	3.83	4.59		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+25+35+35+35	1.39	2.31	3.23	3.23	3.23		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+25+35+35+42	1.32	2.20	3.09	3.09	3.70		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+25+35+35+50	1.26	2.09	2.93	2.93	4.19		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+25+35+35+60	1.18	1.97	2.76	2.76	4.73		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+25+35+42+42	1.26	2.11	2.95	3.54	3.54		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+25+35+42+50	1.20	2.01	2.81	3.37	4.01		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+25+35+42+60	1.14	1.89	2.65	3.18	4.54		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+25+35+50+50	1.15	1.91	2.68	3.83	3.83		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+25+42+42+42	1.21	2.02	3.39	3.39	3.39		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+25+42+42+50	1.16	1.93	3.23	3.23	3.85		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+35+35+35+35	1.30	3.03	3.03	3.03	3.03		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
15+35+35+35+42	1.24	2.90	2.90	2.90	3.47		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
15+35+35+35+50	1.18	2.76	2.76	2.76	3.94		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+35+35+35+60	1.12	2.61	2.61	2.61	4.47		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+35+35+42+42	1.19	2.78	2.78	3.33	3.33		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+35+35+42+50	1.14	2.65	2.65	3.18	3.79		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+35+42+42+42	1.14	2.66	3.20	3.20	3.20		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+20+20+20+20	2.20	2.20	2.20	2.20	2.20		11.00 (3.40 - 14.90)	2.93 (0.80 - 5.64)	12.87	99
20+20+20+20+22	2.24	2.24	2.24	2.24	2.46		11.40 (3.40 - 15.00)	2.97 (0.79 - 5.25)	13.04	99
20+20+20+20+25	2.30	2.30	2.30	2.30	2.88		12.10 (3.50 - 15.10)	3.03 (0.79 - 4.85)	13.31	99
20+20+20+20+35	2.30	2.30	2.30	2.30	4.02		13.20 (3.50 - 15.30)	3.22 (0.77 - 4.57)	14.14	99
20+20+20+20+42	2.18	2.18	2.18	2.18	4.58		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49	99
20+20+20+20+50	2.06	2.06	2.06	2.06	5.15		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
20+20+20+20+60	1.91	1.91	1.91	1.91	5.74		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+20+20+20+71	1.77	1.77	1.77	1.77	6.30		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+20+22+22	2.27	2.27	2.27	2.50	2.50		11.80 (3.40 - 15.00)	3.01 (0.79 - 5.25)	13.22	99
20+20+20+22+25	2.34	2.34	2.34	2.57	2.92		12.50 (3.50 - 15.10)	3.07 (0.78 - 4.85)	13.48	99
20+20+20+22+35	2.26	2.26	2.26	2.48	3.95		13.20 (3.50 - 15.40)	3.22 (0.77 - 4.69)	14.14	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
20+20+20+22+42	2.16	2.16	2.16	2.38	4.54		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
20+20+20+22+50	2.03	2.03	2.03	2.23	5.08		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+20+20+22+60	1.89	1.89	1.89	2.08	5.66		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+20+20+22+71	1.75	1.75	1.75	1.93	6.22		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+20+25+25	2.38	2.38	2.38	2.98	2.98		13.10 (3.50 - 15.20)	3.13 (0.77 - 4.46)	13.75	99
20+20+20+25+35	2.22	2.22	2.22	2.77	3.88		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49	99
20+20+20+25+42	2.11	2.11	2.11	2.64	4.43		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
20+20+20+25+50	1.99	1.99	1.99	2.48	4.96		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+20+20+25+60	1.85	1.85	1.85	2.31	5.54		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+20+25+71	1.72	1.72	1.72	2.15	6.10		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+20+35+35	2.06	2.06	2.06	3.61	3.61		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
20+20+20+35+42	1.96	1.96	1.96	3.42	4.11		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+20+20+35+50	1.85	1.85	1.85	3.23	4.62		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+20+35+60	1.73	1.73	1.73	3.03	5.19		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+20+35+71	1.61	1.61	1.61	2.83	5.73		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+20+42+42	1.86	1.86	1.86	3.91	3.91		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+20+42+50	1.76	1.76	1.76	3.70	4.41		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+20+42+60	1.65	1.65	1.65	3.47	4.96		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+20+42+71	1.55	1.55	1.55	3.25	5.50		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+20+20+50+50	1.68	1.68	1.68	4.19	4.19		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+20+50+60	1.58	1.58	1.58	3.94	4.73		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+20+20+60+60	1.49	1.49	1.49	4.47	4.47		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+20+22+22+22	2.32	2.32	2.55	2.55	2.55		12.30 (3.50 - 15.10)	3.05 (0.78 - 4.85)	13.39	99
20+20+22+22+25	2.37	2.37	2.60	2.60	2.96		12.90 (3.50 - 15.20)	3.11 (0.77 - 4.46)	13.66	99
20+20+22+22+35	2.24	2.24	2.46	2.46	3.91		13.30 (3.50 - 15.40)	3.30 (0.77 - 4.69)	14.49	99
20+20+22+22+42	2.13	2.13	2.34	2.34	4.47		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
20+20+22+22+50	2.00	2.00	2.20	2.20	5.00		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+20+22+22+60	1.86	1.86	2.05	2.05	5.58		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+22+22+71	1.73	1.73	1.90	1.90	6.14		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+22+25+25	2.34	2.34	2.57	2.92	2.92		13.10 (3.50 - 15.30)	3.13 (0.77 - 4.57)	13.75	99
20+20+22+25+35	2.18	2.18	2.40	2.73	3.82		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49	99
20+20+22+25+42	2.08	2.08	2.29	2.60	4.36		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
20+20+22+25+50	1.96	1.96	2.15	2.45	4.89		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+20+22+25+60	1.82	1.82	2.01	2.28	5.47		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+22+25+71	1.70	1.70	1.87	2.12	6.02		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+22+35+35	2.03	2.03	2.23	3.55	3.55		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+20+22+35+42	1.93	1.93	2.12	3.37	4.05		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+20+22+35+50	1.82	1.82	2.01	3.19	4.56		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+22+35+60	1.71	1.71	1.88	2.99	5.12		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+22+35+71	1.60	1.60	1.75	2.79	5.66		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+22+42+42	1.84	1.84	2.02	3.85	3.85		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+22+42+50	1.74	1.74	1.91	3.65	4.35		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+22+42+60	1.63	1.63	1.80	3.43	4.90		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+22+42+71	1.53	1.53	1.68	3.22	5.44		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+20+22+50+50	1.65	1.65	1.82	4.14	4.14		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+22+50+60	1.56	1.56	1.71	3.90	4.67		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
20+20+25+25+25	2.30	2.30	2.87	2.87	2.87		13.20 (3.50 - 15.30)	3.22 (0.77 - 4.57)	14.14	99
20+20+25+25+35	2.14	2.14	2.68	2.68	3.75		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
20+20+25+25+42	2.03	2.03	2.54	2.54	4.26		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+20+25+25+50	1.91	1.91	2.39	2.39	4.79		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+20+25+25+60	1.79	1.79	2.23	2.23	5.36		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+25+25+71	1.66	1.66	2.08	2.08	5.91		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+25+35+35	1.99	1.99	2.48	3.47	3.47		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+20+25+35+42	1.89	1.89	2.36	3.30	3.96		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+20+25+35+50	1.79	1.79	2.23	3.13	4.47		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+25+35+60	1.68	1.68	2.09	2.93	5.03		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+25+35+71	1.57	1.57	1.96	2.74	5.56		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+20+25+42+42	1.80	1.80	2.25	3.78	3.78		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+25+42+50	1.71	1.71	2.13	3.58	4.27		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+25+42+60	1.60	1.60	2.01	3.37	4.81		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+25+42+71	1.51	1.51	1.88	3.16	5.34		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+20+25+50+50	1.62	1.62	2.03	4.06	4.06		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+25+50+60	1.53	1.53	1.91	3.83	4.59		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+20+35+35+35	1.85	1.85	3.23	3.23	3.23		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+35+35+42	1.76	1.76	3.09	3.09	3.70		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+20+35+35+50	1.68	1.68	2.93	2.93	4.19		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+35+35+60	1.58	1.58	2.76	2.76	4.73		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+20+35+42+42	1.69	1.69	2.95	3.54	3.54		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+35+42+50	1.60	1.60	2.81	3.37	4.01		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+35+42+60	1.51	1.51	2.65	3.18	4.54		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+20+35+50+50	1.53	1.53	2.68	3.83	3.83		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+20+42+42+42	1.61	1.61	3.39	3.39	3.39		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+20+42+42+50	1.54	1.54	3.23	3.23	3.85		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+22+22+22+22	2.35	2.59	2.59	2.59	2.59		12.70 (3.50 - 15.10)	3.09 (0.78 - 4.85)	13.57	99
20+22+22+22+25	2.36	2.60	2.60	2.60	2.95		13.10 (3.50 - 15.20)	3.13 (0.77 - 4.46)	13.75	99
20+22+22+22+35	2.20	2.42	2.42	2.42	3.85		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49	99
20+22+22+22+42	2.09	2.30	2.30	2.30	4.40		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
20+22+22+22+50	1.97	2.17	2.17	2.17	4.93		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+22+22+22+60	1.84	2.02	2.02	2.02	5.51		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+22+22+22+71	1.71	1.88	1.88	1.88	6.06		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+22+22+25+25	2.32	2.55	2.55	2.89	2.89		13.20 (3.50 - 15.30)	3.22 (0.77 - 4.57)	14.14	99
20+22+22+25+35	2.16	2.38	2.38	2.70	3.78		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
20+22+22+25+42	2.05	2.25	2.25	2.56	4.30		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
20+22+22+25+50	1.93	2.12	2.12	2.41	4.82		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+22+22+25+60	1.80	1.98	1.98	2.25	5.40		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+22+22+25+71	1.68	1.84	1.84	2.09	5.95		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+22+22+35+35	2.00	2.20	2.20	3.50	3.50		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+22+22+35+42	1.90	2.09	2.09	3.33	3.99		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
20+22+22+35+50	1.80	1.98	1.98	3.15	4.50		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+22+22+35+60	1.69	1.85	1.85	2.95	5.06		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+22+22+35+71	1.58	1.73	1.73	2.76	5.60		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+22+22+42+42	1.81	1.99	1.99	3.80	3.80		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)						Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F			
20+22+22+42+50	1.72	1.89	1.89	3.61	4.29		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
20+22+22+42+60	1.61	1.78	1.78	3.39	4.84		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
20+22+22+42+71	1.51	1.67	1.67	3.18	5.38		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
20+22+22+50+50	1.63	1.80	1.80	4.09	4.09		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
20+22+22+50+60	1.54	1.69	1.69	3.85	4.62		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
20+22+25+25+25	2.26	2.48	2.82	2.82	2.82		13.20 (3.50 - 15.40)	3.22 (0.77 - 4.69)	14.14 99
20+22+25+25+35	2.11	2.32	2.64	2.64	3.69		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89 99
20+22+25+25+42	2.00	2.20	2.50	2.50	4.20		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
20+22+25+25+50	1.89	2.08	2.36	2.36	4.72		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
20+22+25+25+60	1.76	1.94	2.20	2.20	5.29		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
20+22+25+25+71	1.64	1.81	2.06	2.06	5.84		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
20+22+25+35+35	1.96	2.15	2.45	3.42	3.42		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
20+22+25+35+42	1.86	2.05	2.33	3.26	3.91		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
20+22+25+35+50	1.76	1.94	2.20	3.09	4.41		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
20+22+25+35+60	1.65	1.82	2.07	2.90	4.96		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
20+22+25+35+71	1.55	1.70	1.94	2.71	5.50		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
20+22+25+42+42	1.77	1.95	2.22	3.73	3.73		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
20+22+25+42+50	1.69	1.85	2.11	3.54	4.21		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
20+22+25+42+60	1.59	1.74	1.98	3.33	4.76		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
20+22+25+42+71	1.49	1.64	1.86	3.13	5.29		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
20+22+25+50+50	1.60	1.77	2.01	4.01	4.01		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
20+22+25+50+60	1.51	1.67	1.89	3.79	4.54		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
20+22+35+35+35	1.82	2.01	3.19	3.19	3.19		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
20+22+35+35+42	1.74	1.91	3.05	3.05	3.65		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
20+22+35+35+50	1.65	1.82	2.90	2.90	4.14		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
20+22+35+35+60	1.56	1.71	2.73	2.73	4.67		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
20+22+35+42+42	1.66	1.83	2.91	3.50	3.50		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
20+22+35+42+50	1.59	1.74	2.78	3.33	3.96		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
20+22+35+42+60	1.50	1.65	2.62	3.14	4.49		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
20+22+35+50+50	1.51	1.67	2.65	3.79	3.79		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
20+22+42+42+42	1.60	1.75	3.35	3.35	3.35		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
20+22+42+42+50	1.52	1.68	3.20	3.20	3.81		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
20+25+25+25+25	2.22	2.77	2.77	2.77	2.77		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49 99
20+25+25+25+35	2.06	2.58	2.58	2.58	3.61		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89 99
20+25+25+25+42	1.96	2.45	2.45	2.45	4.11		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
20+25+25+25+50	1.85	2.31	2.31	2.31	4.62		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
20+25+25+25+60	1.73	2.16	2.16	2.16	5.19		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
20+25+25+25+71	1.61	2.02	2.02	2.02	5.73		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
20+25+25+35+35	1.91	2.39	2.39	3.35	3.35		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84 99
20+25+25+35+42	1.82	2.28	2.28	3.19	3.83		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
20+25+25+35+50	1.73	2.16	2.16	3.03	4.32		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
20+25+25+35+60	1.62	2.03	2.03	2.84	4.87		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
20+25+25+35+71	1.52	1.90	1.90	2.66	5.41		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99
20+25+25+42+42	1.74	2.18	2.18	3.65	3.65		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80 99
20+25+25+42+50	1.65	2.07	2.07	3.47	4.14		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76 99
20+25+25+42+60	1.56	1.95	1.95	3.27	4.67		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71 99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
20+25+25+50+50	1.58	1.97	1.97	3.94	3.94		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+25+25+50+60	1.49	1.86	1.86	3.72	4.47		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+25+35+35+35	1.79	2.23	3.13	3.13	3.13		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
20+25+35+35+42	1.71	2.13	2.99	2.99	3.58		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+25+35+35+50	1.62	2.03	2.84	2.84	4.06		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+25+35+35+60	1.53	1.91	2.68	2.68	4.59		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+25+35+42+42	1.63	2.04	2.86	3.43	3.43		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+25+35+42+50	1.56	1.95	2.73	3.27	3.90		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+25+35+50+50	1.49	1.86	2.61	3.72	3.72		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+25+42+42+42	1.57	1.96	3.29	3.29	3.29		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+25+42+42+50	1.50	1.87	3.14	3.14	3.74		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+35+35+35+35	1.68	2.93	2.93	2.93	2.93		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+35+35+35+42	1.60	2.81	2.81	2.81	3.37		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
20+35+35+35+50	1.53	2.68	2.68	2.68	3.83		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
20+35+35+42+42	1.54	2.70	2.70	3.23	3.23		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+22+22+22+22	2.62	2.62	2.62	2.62	2.62		13.10 (3.50 - 15.20)	3.13 (0.77 - 4.46)	13.75	99
22+22+22+22+25	2.57	2.57	2.57	2.57	2.92		13.20 (3.50 - 15.30)	3.22 (0.77 - 4.57)	14.14	99
22+22+22+22+35	2.40	2.40	2.40	2.40	3.81		13.40 (3.50 - 15.50)	3.39 (0.77 - 4.80)	14.89	99
22+22+22+22+42	2.27	2.27	2.27	2.27	4.33		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
22+22+22+22+50	2.14	2.14	2.14	2.14	4.86		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
22+22+22+22+60	1.99	1.99	1.99	1.99	5.43		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+22+22+22+71	1.85	1.85	1.85	1.85	5.98		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+22+22+25+25	2.50	2.50	2.50	2.84	2.84		13.20 (3.50 - 15.40)	3.22 (0.77 - 4.69)	14.14	99
22+22+22+25+35	2.34	2.34	2.34	2.66	3.72		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
22+22+22+25+42	2.22	2.22	2.22	2.52	4.23		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
22+22+22+25+50	2.09	2.09	2.09	2.38	4.75		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
22+22+22+25+60	1.95	1.95	1.95	2.22	5.32		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+22+22+25+71	1.82	1.82	1.82	2.07	5.87		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+22+22+35+35	2.17	2.17	2.17	3.45	3.45		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
22+22+22+35+42	2.06	2.06	2.06	3.28	3.94		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
22+22+22+35+50	1.95	1.95	1.95	3.11	4.44		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+22+22+35+60	1.83	1.83	1.83	2.91	4.99		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+22+22+35+71	1.71	1.71	1.71	2.73	5.53		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+22+22+42+42	1.97	1.97	1.97	3.75	3.75		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+22+22+42+50	1.87	1.87	1.87	3.56	4.24		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+22+22+42+60	1.75	1.75	1.75	3.35	4.79		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+22+22+42+71	1.65	1.65	1.65	3.14	5.32		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+22+22+50+50	1.78	1.78	1.78	4.04	4.04		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+22+22+50+60	1.68	1.68	1.68	3.81	4.57		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+22+25+25+25	2.46	2.46	2.79	2.79	2.79		13.30 (3.50 - 15.40)	3.30 (0.77 - 4.69)	14.49	99
22+22+25+25+35	2.29	2.29	2.60	2.60	3.64		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
22+22+25+25+42	2.17	2.17	2.46	2.46	4.14		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
22+22+25+25+50	2.05	2.05	2.33	2.33	4.65		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+22+25+25+60	1.91	1.91	2.18	2.18	5.22		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+22+25+25+71	1.79	1.79	2.03	2.03	5.77		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+22+25+35+35	2.12	2.12	2.41	3.37	3.37		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
22+22+25+35+42	2.02	2.02	2.29	3.21	3.85		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+22+25+35+50	1.91	1.91	2.18	3.05	4.35		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+22+25+35+60	1.80	1.80	2.04	2.86	4.90		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+22+25+35+71	1.68	1.68	1.91	2.68	5.44		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+22+25+42+42	1.93	1.93	2.19	3.68	3.68		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+22+25+42+50	1.83	1.83	2.08	3.50	4.16		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+22+25+42+60	1.72	1.72	1.96	3.29	4.70		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+22+25+50+50	1.74	1.74	1.98	3.96	3.96		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+22+25+50+60	1.65	1.65	1.87	3.74	4.49		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+22+35+35+35	1.98	1.98	3.15	3.15	3.15		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+22+35+35+42	1.89	1.89	3.01	3.01	3.61		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+22+35+35+50	1.80	1.80	2.86	2.86	4.09		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+22+35+35+60	1.69	1.69	2.70	2.70	4.62		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+22+35+42+42	1.81	1.81	2.88	3.45	3.45		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+22+35+42+50	1.72	1.72	2.74	3.29	3.92		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+22+35+50+50	1.65	1.65	2.62	3.74	3.74		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+22+42+42+42	1.73	1.73	3.31	3.31	3.31		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+22+42+42+50	1.66	1.66	3.16	3.16	3.76		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+25+25+25+25	2.40	2.73	2.73	2.73	2.73		13.30 (3.50 - 15.50)	3.30 (0.77 - 4.80)	14.49	99
22+25+25+25+35	2.23	2.54	2.54	2.54	3.55		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
22+25+25+25+42	2.12	2.41	2.41	2.41	4.05		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
22+25+25+25+50	2.01	2.28	2.28	2.28	4.56		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+25+25+25+60	1.88	2.13	2.13	2.13	5.12		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+25+25+25+71	1.75	1.99	1.99	1.99	5.66		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+25+25+35+35	2.08	2.36	2.36	3.30	3.30		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
22+25+25+35+42	1.98	2.25	2.25	3.15	3.78		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+25+25+35+50	1.88	2.13	2.13	2.99	4.27		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+25+25+35+60	1.77	2.01	2.01	2.81	4.81		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+25+25+35+71	1.66	1.88	1.88	2.63	5.34		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+25+25+42+42	1.89	2.15	2.15	3.61	3.61		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+25+25+42+50	1.80	2.04	2.04	3.43	4.09		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+25+25+42+60	1.69	1.93	1.93	3.23	4.62		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+25+25+50+50	1.71	1.95	1.95	3.90	3.90		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+25+35+35+35	1.94	2.20	3.09	3.09	3.09		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
22+25+35+35+42	1.85	2.11	2.95	2.95	3.54		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+25+35+35+50	1.77	2.01	2.81	2.81	4.01		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+25+35+35+60	1.67	1.89	2.65	2.65	4.54		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+25+35+42+42	1.78	2.02	2.83	3.39	3.39		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+25+35+42+50	1.69	1.93	2.70	3.23	3.85		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+25+42+42+42	1.70	1.94	3.25	3.25	3.25		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+35+35+35+35	1.82	2.90	2.90	2.90	2.90		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
22+35+35+35+42	1.74	2.78	2.78	2.78	3.33		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+35+35+35+50	1.67	2.65	2.65	2.65	3.79		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
22+35+35+42+42	1.68	2.66	2.66	3.20	3.20		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
25+25+25+25+25	2.68	2.68	2.68	2.68	2.68		13.40 (3.50 - 15.60)	3.39 (0.77 - 4.91)	14.89	99
25+25+25+25+35	2.48	2.48	2.48	2.48	3.47		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
25+25+25+25+42	2.36	2.36	2.36	2.36	3.96		13.40 (3.50 - 15.60)	3.38 (0.77 - 4.90)	14.84	99
25+25+25+25+50	2.23	2.23	2.23	2.23	4.47		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
25+25+25+25+60	2.09	2.09	2.09	2.09	5.03		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
25+25+25+25+71	1.96	1.96	1.96	1.96	5.56		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
25+25+25+35+35	2.31	2.31	2.31	3.23	3.23		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
25+25+25+35+42	2.20	2.20	2.20	3.09	3.70		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
25+25+25+35+50	2.09	2.09	2.09	2.93	4.19		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
25+25+25+35+60	1.97	1.97	1.97	2.76	4.73		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
25+25+25+42+42	2.11	2.11	2.11	3.54	3.54		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
25+25+25+42+50	2.01	2.01	2.01	3.37	4.01		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
25+25+25+42+60	1.89	1.89	1.89	3.18	4.54		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
25+25+25+50+50	1.91	1.91	1.91	3.83	3.83		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
25+25+35+35+35	2.16	2.16	3.03	3.03	3.03		13.40 (3.50 - 15.60)	3.37 (0.77 - 4.89)	14.80	99
25+25+35+35+42	2.07	2.07	2.90	2.90	3.47		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
25+25+35+35+50	1.97	1.97	2.76	2.76	3.94		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
25+25+35+35+60	1.86	1.86	2.61	2.61	4.47		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
25+25+35+42+42	1.98	1.98	2.78	3.33	3.33		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
25+25+35+42+50	1.89	1.89	2.65	3.18	3.79		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
25+25+42+42+42	1.90	1.90	3.20	3.20	3.20		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
25+35+35+35+35	2.03	2.84	2.84	2.84	2.84		13.40 (3.50 - 15.60)	3.36 (0.77 - 4.88)	14.76	99
25+35+35+35+42	1.95	2.73	2.73	2.73	3.27		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
25+35+35+35+50	1.86	2.61	2.61	2.61	3.72		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
25+35+35+42+42	1.87	2.62	2.62	3.14	3.14		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
35+35+35+35+35	2.68	2.68	2.68	2.68	2.68		13.40 (3.50 - 15.60)	3.35 (0.77 - 4.87)	14.71	99
15+15+15+15+15+15	1.70	1.70	1.70	1.70	1.70	1.70	10.20 (3.40 - 15.90)	2.37 (0.79 - 6.02)	10.41	99
15+15+15+15+15+20	1.69	1.69	1.69	1.69	1.69	2.25	10.70 (3.40 - 15.90)	2.61 (0.79 - 6.02)	11.46	99
15+15+15+15+15+22	1.69	1.69	1.69	1.69	1.69	2.47	10.90 (3.40 - 15.90)	2.71 (0.79 - 6.02)	11.90	99
15+15+15+15+15+25	1.68	1.68	1.68	1.68	1.68	2.80	11.20 (3.40 - 15.90)	2.85 (0.79 - 6.02)	12.52	99
15+15+15+15+15+35	1.66	1.66	1.66	1.66	1.66	3.88	12.20 (3.40 - 16.00)	3.34 (0.79 - 6.01)	14.67	99
15+15+15+15+15+42	1.65	1.65	1.65	1.65	1.65	4.63	12.90 (3.40 - 16.00)	3.68 (0.79 - 6.01)	16.16	99
15+15+15+15+15+50	1.62	1.62	1.62	1.62	1.62	5.40	13.50 (3.40 - 16.20)	3.71 (0.78 - 5.69)	16.29	99
15+15+15+15+15+60	1.56	1.56	1.56	1.56	1.56	6.22	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+15+15+15+15+71	1.44	1.44	1.44	1.44	1.44	6.81	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+15+15+15+20+20	1.68	1.68	1.68	1.68	2.24	2.24	11.20 (3.40 - 15.90)	2.85 (0.79 - 6.02)	12.52	99
15+15+15+15+20+22	1.68	1.68	1.68	1.68	2.24	2.46	11.40 (3.40 - 15.90)	2.95 (0.79 - 6.02)	12.96	99
15+15+15+15+20+25	1.67	1.67	1.67	1.67	2.23	2.79	11.70 (3.40 - 16.00)	3.10 (0.79 - 6.01)	13.61	99
15+15+15+15+20+35	1.66	1.66	1.66	1.66	2.21	3.87	12.70 (3.40 - 16.00)	3.58 (0.79 - 6.01)	15.72	99
15+15+15+15+20+42	1.64	1.64	1.64	1.64	2.18	4.58	13.30 (3.40 - 16.10)	3.78 (0.79 - 5.85)	16.60	99
15+15+15+15+20+50	1.60	1.60	1.60	1.60	2.14	5.35	13.90 (3.50 - 16.40)	3.56 (0.77 - 5.36)	15.63	99
15+15+15+15+20+60	1.50	1.50	1.50	1.50	2.00	6.00	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+15+15+15+20+71	1.39	1.39	1.39	1.39	1.85	6.58	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+15+22+22	1.67	1.67	1.67	1.67	2.45	2.45	11.60 (3.40 - 15.90)	3.05 (0.79 - 6.02)	13.39	99
15+15+15+15+22+25	1.67	1.67	1.67	1.67	2.45	2.78	11.90 (3.40 - 16.00)	3.19 (0.79 - 6.01)	14.01	99
15+15+15+15+22+35	1.65	1.65	1.65	1.65	2.43	3.86	12.90 (3.40 - 16.00)	3.68 (0.79 - 6.01)	16.16	99
15+15+15+15+22+42	1.63	1.63	1.63	1.63	2.40	4.57	13.50 (3.40 - 16.20)	3.71 (0.78 - 5.69)	16.29	99
15+15+15+15+22+50	1.59	1.59	1.59	1.59	2.33	5.30	14.00 (3.50 - 16.50)	3.52 (0.76 - 5.20)	15.46	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+15+15+15+22+60	1.48	1.48	1.48	1.48	2.17	5.92	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+15+15+15+22+71	1.37	1.37	1.37	1.37	2.01	6.50	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+15+25+25	1.66	1.66	1.66	1.66	2.77	2.77	12.20 (3.40 - 16.00)	3.34 (0.79 - 6.01)	14.67	99
15+15+15+15+25+35	1.65	1.65	1.65	1.65	2.75	3.85	13.20 (3.40 - 16.00)	3.82 (0.79 - 6.01)	16.78	99
15+15+15+15+25+42	1.62	1.62	1.62	1.62	2.70	4.53	13.70 (3.50 - 16.30)	3.63 (0.77 - 5.52)	15.94	99
15+15+15+15+25+50	1.56	1.56	1.56	1.56	2.59	5.19	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+15+15+15+25+60	1.45	1.45	1.45	1.45	2.41	5.79	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+15+15+15+25+71	1.35	1.35	1.35	1.35	2.24	6.37	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+15+35+35	1.60	1.60	1.60	1.60	3.74	3.74	13.90 (3.50 - 16.40)	3.56 (0.77 - 5.36)	15.63	99
15+15+15+15+35+42	1.53	1.53	1.53	1.53	3.58	4.29	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+15+15+15+35+50	1.45	1.45	1.45	1.45	3.38	4.83	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+15+15+15+35+60	1.35	1.35	1.35	1.35	3.16	5.42	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+15+35+71	1.27	1.27	1.27	1.27	2.95	5.99	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+15+42+42	1.46	1.46	1.46	1.46	4.08	4.08	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+15+15+15+42+50	1.38	1.38	1.38	1.38	3.87	4.61	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+15+42+60	1.30	1.30	1.30	1.30	3.63	5.19	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+15+42+71	1.21	1.21	1.21	1.21	3.40	5.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+15+50+50	1.31	1.31	1.31	1.31	4.38	4.38	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+15+50+60	1.24	1.24	1.24	1.24	4.12	4.94	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+15+60+60	1.17	1.17	1.17	1.17	4.67	4.67	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+20+20+20	1.67	1.67	1.67	2.23	2.23	2.23	11.70 (3.40 - 16.00)	3.10 (0.79 - 6.01)	13.61	99
15+15+15+20+20+22	1.67	1.67	1.67	2.22	2.22	2.45	11.90 (3.40 - 16.00)	3.19 (0.79 - 6.01)	14.01	99
15+15+15+20+20+25	1.66	1.66	1.66	2.22	2.22	2.77	12.20 (3.40 - 16.00)	3.34 (0.79 - 6.01)	14.67	99
15+15+15+20+20+35	1.65	1.65	1.65	2.20	2.20	3.85	13.20 (3.40 - 16.00)	3.82 (0.79 - 6.01)	16.78	99
15+15+15+20+20+42	1.62	1.62	1.62	2.16	2.16	4.53	13.70 (3.50 - 16.30)	3.63 (0.77 - 5.52)	15.94	99
15+15+15+20+20+50	1.56	1.56	1.56	2.07	2.07	5.19	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+15+15+20+20+60	1.45	1.45	1.45	1.93	1.93	5.79	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+15+15+20+20+71	1.35	1.35	1.35	1.79	1.79	6.37	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+20+22+22	1.67	1.67	1.67	2.22	2.44	2.44	12.10 (3.40 - 16.00)	3.29 (0.79 - 6.01)	14.45	99
15+15+15+20+22+25	1.66	1.66	1.66	2.21	2.44	2.77	12.40 (3.40 - 16.00)	3.43 (0.79 - 6.01)	15.06	99
15+15+15+20+22+35	1.64	1.64	1.64	2.18	2.40	3.82	13.30 (3.40 - 16.10)	3.78 (0.79 - 5.85)	16.60	99
15+15+15+20+22+42	1.60	1.60	1.60	2.14	2.35	4.49	13.80 (3.50 - 16.40)	3.60 (0.77 - 5.36)	15.81	99
15+15+15+20+22+50	1.53	1.53	1.53	2.04	2.25	5.11	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+15+15+20+22+60	1.43	1.43	1.43	1.90	2.10	5.71	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+15+15+20+22+71	1.33	1.33	1.33	1.77	1.95	6.29	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+20+25+25	1.66	1.66	1.66	2.21	2.76	2.76	12.70 (3.40 - 16.00)	3.58 (0.79 - 6.01)	15.72	99
15+15+15+20+25+35	1.62	1.62	1.62	2.16	2.70	3.78	13.50 (3.40 - 16.20)	3.71 (0.78 - 5.69)	16.29	99
15+15+15+20+25+42	1.59	1.59	1.59	2.12	2.65	4.45	14.00 (3.50 - 16.50)	3.52 (0.76 - 5.20)	15.46	99
15+15+15+20+25+50	1.50	1.50	1.50	2.00	2.50	5.00	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+15+15+20+25+60	1.40	1.40	1.40	1.87	2.33	5.60	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+20+25+71	1.30	1.30	1.30	1.74	2.17	6.17	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+20+35+35	1.56	1.56	1.56	2.07	3.63	3.63	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+15+15+20+35+42	1.48	1.48	1.48	1.97	3.45	4.14	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+15+15+20+35+50	1.40	1.40	1.40	1.87	3.27	4.67	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+20+35+60	1.31	1.31	1.31	1.75	3.06	5.25	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+20+35+71	1.23	1.23	1.23	1.64	2.87	5.81	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+15+15+20+42+42	1.41	1.41	1.41	1.88	3.95	3.95	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+20+42+50	1.34	1.34	1.34	1.78	3.75	4.46	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+20+42+60	1.26	1.26	1.26	1.68	3.52	5.03	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+20+42+71	1.18	1.18	1.18	1.57	3.30	5.58	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+20+50+50	1.27	1.27	1.27	1.70	4.24	4.24	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+20+50+60	1.20	1.20	1.20	1.60	4.00	4.80	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+22+22+22	1.66	1.66	1.66	2.44	2.44	2.44	12.30 (3.40 - 16.00)	3.39 (0.79 - 6.01)	14.89	99
15+15+15+22+22+25	1.66	1.66	1.66	2.43	2.43	2.76	12.60 (3.40 - 16.00)	3.53 (0.79 - 6.01)	15.50	99
15+15+15+22+22+35	1.63	1.63	1.63	2.40	2.40	3.81	13.50 (3.40 - 16.20)	3.71 (0.78 - 5.69)	16.29	99
15+15+15+22+22+42	1.59	1.59	1.59	2.33	2.33	4.46	13.90 (3.50 - 16.50)	3.56 (0.76 - 5.20)	15.63	99
15+15+15+22+22+50	1.51	1.51	1.51	2.22	2.22	5.04	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+15+15+22+22+60	1.41	1.41	1.41	2.07	2.07	5.64	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+22+22+71	1.31	1.31	1.31	1.93	1.93	6.21	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+22+25+25	1.65	1.65	1.65	2.43	2.76	2.76	12.90 (3.40 - 16.00)	3.68 (0.79 - 6.01)	16.16	99
15+15+15+22+25+35	1.62	1.62	1.62	2.37	2.70	3.78	13.70 (3.50 - 16.30)	3.63 (0.77 - 5.52)	15.94	99
15+15+15+22+25+42	1.57	1.57	1.57	2.30	2.61	4.39	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+15+15+22+25+50	1.48	1.48	1.48	2.17	2.46	4.93	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+15+15+22+25+60	1.38	1.38	1.38	2.03	2.30	5.53	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+22+25+71	1.29	1.29	1.29	1.89	2.15	6.10	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+22+35+35	1.53	1.53	1.53	2.25	3.58	3.58	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+15+15+22+35+42	1.46	1.46	1.46	2.14	3.40	4.08	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+15+15+22+35+50	1.38	1.38	1.38	2.03	3.22	4.61	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+22+35+60	1.30	1.30	1.30	1.90	3.02	5.19	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+22+35+71	1.21	1.21	1.21	1.78	2.83	5.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+22+42+42	1.39	1.39	1.39	2.04	3.89	3.89	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+22+42+50	1.32	1.32	1.32	1.94	3.70	4.40	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+22+42+60	1.24	1.24	1.24	1.82	3.48	4.97	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+22+42+71	1.17	1.17	1.17	1.71	3.27	5.52	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+22+50+50	1.26	1.26	1.26	1.84	4.19	4.19	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+22+50+60	1.19	1.19	1.19	1.74	3.95	4.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+25+25+25	1.65	1.65	1.65	2.75	2.75	2.75	13.20 (3.40 - 16.00)	3.82 (0.79 - 6.01)	16.78	99
15+15+15+25+25+35	1.60	1.60	1.60	2.67	2.67	3.74	13.90 (3.50 - 16.40)	3.56 (0.77 - 5.36)	15.63	99
15+15+15+25+25+42	1.53	1.53	1.53	2.55	2.55	4.29	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+15+15+25+25+50	1.45	1.45	1.45	2.41	2.41	4.83	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+15+15+25+25+60	1.35	1.35	1.35	2.26	2.26	5.42	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+25+25+71	1.27	1.27	1.27	2.11	2.11	5.99	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+25+35+35	1.50	1.50	1.50	2.50	3.50	3.50	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+15+15+25+35+42	1.43	1.43	1.43	2.38	3.33	4.00	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+15+15+25+35+50	1.35	1.35	1.35	2.26	3.16	4.52	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+25+35+60	1.27	1.27	1.27	2.12	2.97	5.09	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+25+35+71	1.19	1.19	1.19	1.99	2.78	5.65	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+25+42+42	1.36	1.36	1.36	2.27	3.82	3.82	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+25+42+50	1.30	1.30	1.30	2.16	3.63	4.32	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+25+42+60	1.22	1.22	1.22	2.03	3.42	4.88	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+25+50+50	1.24	1.24	1.24	2.06	4.12	4.12	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+25+50+60	1.17	1.17	1.17	1.94	3.89	4.67	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+15+15+35+35+35	1.40	1.40	1.40	3.27	3.27	3.27	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+35+35+42	1.34	1.34	1.34	3.12	3.12	3.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+35+35+50	1.27	1.27	1.27	2.97	2.97	4.24	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+35+35+60	1.20	1.20	1.20	2.80	2.80	4.80	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+35+42+42	1.28	1.28	1.28	2.99	3.59	3.59	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+35+42+50	1.22	1.22	1.22	2.85	3.42	4.07	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+35+50+50	1.17	1.17	1.17	2.72	3.89	3.89	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+42+42+42	1.23	1.23	1.23	3.44	3.44	3.44	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+15+42+42+50	1.17	1.17	1.17	3.28	3.28	3.91	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+20+20+20	1.66	1.66	2.22	2.22	2.22	2.22	12.20 (3.40 - 16.00)	3.34 (0.79 - 6.01)	14.67	99
15+15+20+20+20+22	1.66	1.66	2.21	2.21	2.21	2.44	12.40 (3.40 - 16.00)	3.43 (0.79 - 6.01)	15.06	99
15+15+20+20+20+25	1.66	1.66	2.21	2.21	2.21	2.76	12.70 (3.40 - 16.00)	3.58 (0.79 - 6.01)	15.72	99
15+15+20+20+20+35	1.62	1.62	2.16	2.16	2.16	3.78	13.50 (3.40 - 16.20)	3.71 (0.78 - 5.69)	16.29	99
15+15+20+20+20+42	1.59	1.59	2.12	2.12	2.12	4.45	14.00 (3.50 - 16.50)	3.52 (0.76 - 5.20)	15.46	99
15+15+20+20+20+50	1.50	1.50	2.00	2.00	2.00	5.00	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+15+20+20+20+60	1.40	1.40	1.87	1.87	1.87	5.60	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+20+20+71	1.30	1.30	1.74	1.74	1.74	6.17	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+20+22+22	1.66	1.66	2.21	2.21	2.43	2.43	12.60 (3.40 - 16.00)	3.53 (0.79 - 6.01)	15.50	99
15+15+20+20+22+25	1.65	1.65	2.21	2.21	2.43	2.76	12.90 (3.40 - 16.00)	3.68 (0.79 - 6.01)	16.16	99
15+15+20+20+22+35	1.62	1.62	2.16	2.16	2.37	3.78	13.70 (3.50 - 16.30)	3.63 (0.77 - 5.52)	15.94	99
15+15+20+20+22+42	1.57	1.57	2.09	2.09	2.30	4.39	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+15+20+20+22+50	1.48	1.48	1.97	1.97	2.17	4.93	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+15+20+20+22+60	1.38	1.38	1.84	1.84	2.03	5.53	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+20+22+71	1.29	1.29	1.72	1.72	1.89	6.10	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+20+25+25	1.65	1.65	2.20	2.20	2.75	2.75	13.20 (3.40 - 16.00)	3.82 (0.79 - 6.01)	16.78	99
15+15+20+20+25+35	1.60	1.60	2.14	2.14	2.67	3.74	13.90 (3.50 - 16.40)	3.56 (0.77 - 5.36)	15.63	99
15+15+20+20+25+42	1.53	1.53	2.04	2.04	2.55	4.29	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+15+20+20+25+50	1.45	1.45	1.93	1.93	2.41	4.83	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+15+20+20+25+60	1.35	1.35	1.81	1.81	2.26	5.42	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+20+25+71	1.27	1.27	1.69	1.69	2.11	5.99	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+20+35+35	1.50	1.50	2.00	2.00	3.50	3.50	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+15+20+20+35+42	1.43	1.43	1.90	1.90	3.33	4.00	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+15+20+20+35+50	1.35	1.35	1.81	1.81	3.16	4.52	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+20+35+60	1.27	1.27	1.70	1.70	2.97	5.09	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+20+35+71	1.19	1.19	1.59	1.59	2.78	5.65	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+20+42+42	1.36	1.36	1.82	1.82	3.82	3.82	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+20+42+50	1.30	1.30	1.73	1.73	3.63	4.32	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+20+42+60	1.22	1.22	1.63	1.63	3.42	4.88	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+20+50+50	1.24	1.24	1.65	1.65	4.12	4.12	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+20+50+60	1.17	1.17	1.56	1.56	3.89	4.67	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+22+22+22	1.66	1.66	2.21	2.43	2.43	2.43	12.80 (3.40 - 16.00)	3.63 (0.79 - 6.01)	15.94	99
15+15+20+22+22+25	1.65	1.65	2.20	2.42	2.42	2.75	13.10 (3.40 - 16.00)	3.77 (0.79 - 6.01)	16.56	99
15+15+20+22+22+35	1.60	1.60	2.14	2.35	2.35	3.74	13.80 (3.50 - 16.40)	3.60 (0.77 - 5.36)	15.81	99
15+15+20+22+22+42	1.54	1.54	2.06	2.26	2.26	4.32	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+15+20+22+22+50	1.46	1.46	1.94	2.14	2.14	4.86	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+15+20+22+22+60	1.36	1.36	1.82	2.00	2.00	5.45	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+15+20+22+22+71	1.27	1.27	1.70	1.87	1.87	6.02	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+22+25+25	1.64	1.64	2.18	2.40	2.73	2.73	13.30 (3.40 - 16.10)	3.78 (0.79 - 5.85)	16.60	99
15+15+20+22+25+35	1.59	1.59	2.12	2.33	2.65	3.71	14.00 (3.50 - 16.50)	3.52 (0.76 - 5.20)	15.46	99
15+15+20+22+25+42	1.51	1.51	2.01	2.22	2.52	4.23	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+15+20+22+25+50	1.43	1.43	1.90	2.10	2.38	4.76	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+15+20+22+25+60	1.34	1.34	1.78	1.96	2.23	5.35	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+22+25+71	1.25	1.25	1.67	1.83	2.08	5.92	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+22+35+35	1.48	1.48	1.97	2.17	3.45	3.45	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+15+20+22+35+42	1.41	1.41	1.88	2.07	3.29	3.95	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+22+35+50	1.34	1.34	1.78	1.96	3.12	4.46	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+22+35+60	1.26	1.26	1.68	1.84	2.93	5.03	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+22+35+71	1.18	1.18	1.57	1.73	2.75	5.58	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+22+42+42	1.35	1.35	1.79	1.97	3.77	3.77	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+22+42+50	1.28	1.28	1.71	1.88	3.59	4.27	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+22+42+60	1.21	1.21	1.61	1.77	3.38	4.83	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+22+50+50	1.22	1.22	1.63	1.79	4.07	4.07	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+25+25+25	1.62	1.62	2.16	2.70	2.70	2.70	13.50 (3.40 - 16.20)	3.71 (0.78 - 5.69)	16.29	99
15+15+20+25+25+35	1.56	1.56	2.07	2.59	2.59	3.63	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+15+20+25+25+42	1.48	1.48	1.97	2.46	2.46	4.14	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+15+20+25+25+50	1.40	1.40	1.87	2.33	2.33	4.67	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+25+25+60	1.31	1.31	1.75	2.19	2.19	5.25	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+25+25+71	1.23	1.23	1.64	2.05	2.05	5.81	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+25+35+35	1.45	1.45	1.93	2.41	3.38	3.38	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+15+20+25+35+42	1.38	1.38	1.84	2.30	3.22	3.87	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+25+35+50	1.31	1.31	1.75	2.19	3.06	4.38	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+25+35+60	1.24	1.24	1.65	2.06	2.88	4.94	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+25+42+42	1.32	1.32	1.76	2.20	3.70	3.70	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+25+42+50	1.26	1.26	1.68	2.10	3.52	4.19	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+25+42+60	1.19	1.19	1.58	1.98	3.32	4.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+25+50+50	1.20	1.20	1.60	2.00	4.00	4.00	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+35+35+35	1.35	1.35	1.81	3.16	3.16	3.16	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+35+35+42	1.30	1.30	1.73	3.02	3.02	3.63	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+35+35+50	1.24	1.24	1.65	2.88	2.88	4.12	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+35+35+60	1.17	1.17	1.56	2.72	2.72	4.67	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+35+42+42	1.24	1.24	1.66	2.90	3.48	3.48	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+35+42+50	1.19	1.19	1.58	2.77	3.32	3.95	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+20+42+42+42	1.19	1.19	1.59	3.34	3.34	3.34	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+22+22+22	1.65	1.65	2.42	2.42	2.42	2.42	13.00 (3.40 - 16.00)	3.72 (0.79 - 6.01)	16.34	99
15+15+22+22+22+25	1.65	1.65	2.42	2.42	2.42	2.75	13.30 (3.40 - 16.00)	3.78 (0.79 - 6.01)	16.60	99
15+15+22+22+22+35	1.59	1.59	2.33	2.33	2.33	3.71	13.90 (3.50 - 16.50)	3.56 (0.76 - 5.20)	15.63	99
15+15+22+22+22+42	1.52	1.52	2.23	2.23	2.23	4.26	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+15+22+22+22+50	1.44	1.44	2.11	2.11	2.11	4.79	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+15+22+22+22+60	1.35	1.35	1.97	1.97	1.97	5.38	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+22+22+71	1.26	1.26	1.84	1.84	1.84	5.95	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+22+25+25	1.63	1.63	2.40	2.40	2.72	2.72	13.50 (3.40 - 16.20)	3.71 (0.78 - 5.69)	16.29	99
15+15+22+22+25+35	1.57	1.57	2.30	2.30	2.61	3.66	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+15+22+22+25+42	1.49	1.49	2.18	2.18	2.48	4.17	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+15+22+22+25+50	1.41	1.41	2.07	2.07	2.35	4.70	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+22+25+60	1.32	1.32	1.94	1.94	2.20	5.28	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+22+25+71	1.24	1.24	1.81	1.81	2.06	5.85	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+22+35+35	1.46	1.46	2.14	2.14	3.40	3.40	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+15+22+22+35+42	1.39	1.39	2.04	2.04	3.25	3.89	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+22+35+50	1.32	1.32	1.94	1.94	3.08	4.40	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+22+35+60	1.24	1.24	1.82	1.82	2.90	4.97	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+22+35+71	1.17	1.17	1.71	1.71	2.72	5.52	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+22+42+42	1.33	1.33	1.95	1.95	3.72	3.72	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+22+42+50	1.27	1.27	1.86	1.86	3.54	4.22	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+22+42+60	1.19	1.19	1.75	1.75	3.34	4.77	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+22+50+50	1.21	1.21	1.77	1.77	4.02	4.02	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+25+25+25	1.62	1.62	2.37	2.70	2.70	2.70	13.70 (3.50 - 16.30)	3.63 (0.77 - 5.52)	15.94	99
15+15+22+25+25+35	1.53	1.53	2.25	2.55	2.55	3.58	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+15+22+25+25+42	1.46	1.46	2.14	2.43	2.43	4.08	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+15+22+25+25+50	1.38	1.38	2.03	2.30	2.30	4.61	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+25+25+60	1.30	1.30	1.90	2.16	2.16	5.19	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+25+25+71	1.21	1.21	1.78	2.02	2.02	5.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+25+35+35	1.43	1.43	2.10	2.38	3.33	3.33	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+15+22+25+35+42	1.36	1.36	2.00	2.27	3.18	3.82	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+25+35+50	1.30	1.30	1.90	2.16	3.02	4.32	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+25+35+60	1.22	1.22	1.79	2.03	2.85	4.88	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+25+42+42	1.30	1.30	1.91	2.17	3.65	3.65	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+25+42+50	1.24	1.24	1.82	2.07	3.48	4.14	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+25+42+60	1.17	1.17	1.72	1.96	3.28	4.69	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+25+50+50	1.19	1.19	1.74	1.98	3.95	3.95	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+35+35+35	1.34	1.34	1.96	3.12	3.12	3.12	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+35+35+42	1.28	1.28	1.88	2.99	2.99	3.59	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+35+35+50	1.22	1.22	1.79	2.85	2.85	4.07	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+35+42+42	1.23	1.23	1.80	2.87	3.44	3.44	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+35+42+50	1.17	1.17	1.72	2.74	3.28	3.91	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+22+42+42+42	1.18	1.18	1.73	3.30	3.30	3.30	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+25+25+25+25	1.60	1.60	2.67	2.67	2.67	2.67	13.90 (3.50 - 16.40)	3.56 (0.77 - 5.36)	15.63	99
15+15+25+25+25+35	1.50	1.50	2.50	2.50	2.50	3.50	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+15+25+25+25+42	1.43	1.43	2.38	2.38	2.38	4.00	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+15+25+25+25+50	1.35	1.35	2.26	2.26	2.26	4.52	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+25+25+25+60	1.27	1.27	2.12	2.12	2.12	5.09	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+25+25+25+71	1.19	1.19	1.99	1.99	1.99	5.65	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+25+25+35+35	1.40	1.40	2.33	2.33	3.27	3.27	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+25+25+35+42	1.34	1.34	2.23	2.23	3.12	3.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+25+25+35+50	1.27	1.27	2.12	2.12	2.97	4.24	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+25+25+35+60	1.20	1.20	2.00	2.00	2.80	4.80	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+25+25+42+42	1.28	1.28	2.13	2.13	3.59	3.59	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+25+25+42+50	1.22	1.22	2.03	2.03	3.42	4.07	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+25+25+50+50	1.17	1.17	1.94	1.94	3.89	3.89	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+15+25+35+35+35	1.31	1.31	2.19	3.06	3.06	3.06	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+25+35+35+42	1.26	1.26	2.10	2.93	2.93	3.52	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+25+35+35+50	1.20	1.20	2.00	2.80	2.80	4.00	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+25+35+42+42	1.21	1.21	2.01	2.82	3.38	3.38	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+35+35+35+35	1.24	1.24	2.88	2.88	2.88	2.88	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+15+35+35+35+42	1.19	1.19	2.77	2.77	2.77	3.32	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+20+20+20	1.66	2.21	2.21	2.21	2.21	2.21	12.70 (3.40 - 16.00)	3.58 (0.79 - 6.01)	15.72	99
15+20+20+20+20+22	1.65	2.21	2.21	2.21	2.21	2.43	12.90 (3.40 - 16.00)	3.68 (0.79 - 6.01)	16.16	99
15+20+20+20+20+25	1.65	2.20	2.20	2.20	2.20	2.75	13.20 (3.40 - 16.00)	3.82 (0.79 - 6.01)	16.78	99
15+20+20+20+20+35	1.60	2.14	2.14	2.14	2.14	3.74	13.90 (3.50 - 16.40)	3.56 (0.77 - 5.36)	15.63	99
15+20+20+20+20+42	1.53	2.04	2.04	2.04	2.04	4.29	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+20+20+20+20+50	1.45	1.93	1.93	1.93	1.93	4.83	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+20+20+20+20+60	1.35	1.81	1.81	1.81	1.81	5.42	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+20+20+71	1.27	1.69	1.69	1.69	1.69	5.99	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+20+22+22	1.65	2.20	2.20	2.20	2.42	2.42	13.10 (3.40 - 16.00)	3.77 (0.79 - 6.01)	16.56	99
15+20+20+20+22+25	1.64	2.18	2.18	2.18	2.40	2.73	13.30 (3.40 - 16.10)	3.78 (0.79 - 5.85)	16.60	99
15+20+20+20+22+35	1.59	2.12	2.12	2.12	2.33	3.71	14.00 (3.50 - 16.50)	3.52 (0.76 - 5.20)	15.46	99
15+20+20+20+22+42	1.51	2.01	2.01	2.01	2.22	4.23	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+20+20+20+22+50	1.43	1.90	1.90	1.90	2.10	4.76	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+20+20+20+22+60	1.34	1.78	1.78	1.78	1.96	5.35	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+20+22+71	1.25	1.67	1.67	1.67	1.83	5.92	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+20+25+25	1.62	2.16	2.16	2.16	2.70	2.70	13.50 (3.40 - 16.20)	3.71 (0.78 - 5.69)	16.29	99
15+20+20+20+25+35	1.56	2.07	2.07	2.07	2.59	3.63	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+20+20+20+25+42	1.48	1.97	1.97	1.97	2.46	4.14	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+20+20+20+25+50	1.40	1.87	1.87	1.87	2.33	4.67	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+20+25+60	1.31	1.75	1.75	1.75	2.19	5.25	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+20+25+71	1.23	1.64	1.64	1.64	2.05	5.81	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+20+35+35	1.45	1.93	1.93	1.93	3.38	3.38	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+20+20+20+35+42	1.38	1.84	1.84	1.84	3.22	3.87	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+20+35+50	1.31	1.75	1.75	1.75	3.06	4.38	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+20+35+60	1.24	1.65	1.65	1.65	2.88	4.94	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+20+42+42	1.32	1.76	1.76	1.76	3.70	3.70	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+20+42+50	1.26	1.68	1.68	1.68	3.52	4.19	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+20+42+60	1.19	1.58	1.58	1.58	3.32	4.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+20+50+50	1.20	1.60	1.60	1.60	4.00	4.00	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+22+22+22	1.65	2.20	2.20	2.42	2.42	2.42	13.30 (3.40 - 16.00)	3.78 (0.79 - 6.01)	16.60	99
15+20+20+22+22+25	1.63	2.18	2.18	2.40	2.40	2.72	13.50 (3.40 - 16.20)	3.71 (0.78 - 5.69)	16.29	99
15+20+20+22+22+35	1.57	2.09	2.09	2.30	2.30	3.66	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+20+20+22+22+42	1.49	1.99	1.99	2.18	2.18	4.17	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+20+20+22+22+50	1.41	1.88	1.88	2.07	2.07	4.70	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+22+22+60	1.32	1.76	1.76	1.94	1.94	5.28	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+22+22+71	1.24	1.65	1.65	1.81	1.81	5.85	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+22+25+25	1.62	2.16	2.16	2.37	2.70	2.70	13.70 (3.50 - 16.30)	3.63 (0.77 - 5.52)	15.94	99
15+20+20+22+25+35	1.53	2.04	2.04	2.25	2.55	3.58	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+20+20+22+25+42	1.46	1.94	1.94	2.14	2.43	4.08	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+20+20+22+25+50	1.38	1.84	1.84	2.03	2.30	4.61	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+20+20+22+25+60	1.30	1.73	1.73	1.90	2.16	5.19	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+22+25+71	1.21	1.62	1.62	1.78	2.02	5.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+22+35+35	1.43	1.90	1.90	2.10	3.33	3.33	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+20+20+22+35+42	1.36	1.82	1.82	2.00	3.18	3.82	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+22+35+50	1.30	1.73	1.73	1.90	3.02	4.32	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+22+35+60	1.22	1.63	1.63	1.79	2.85	4.88	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+22+42+42	1.30	1.74	1.74	1.91	3.65	3.65	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+22+42+50	1.24	1.66	1.66	1.82	3.48	4.14	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+22+42+60	1.17	1.56	1.56	1.72	3.28	4.69	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+22+50+50	1.19	1.58	1.58	1.74	3.95	3.95	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+25+25+25	1.60	2.14	2.14	2.67	2.67	2.67	13.90 (3.50 - 16.40)	3.56 (0.77 - 5.36)	15.63	99
15+20+20+25+25+35	1.50	2.00	2.00	2.50	2.50	3.50	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+20+20+25+25+42	1.43	1.90	1.90	2.38	2.38	4.00	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+20+20+25+25+50	1.35	1.81	1.81	2.26	2.26	4.52	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+25+25+60	1.27	1.70	1.70	2.12	2.12	5.09	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+25+25+71	1.19	1.59	1.59	1.99	1.99	5.65	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+25+35+35	1.40	1.87	1.87	2.33	3.27	3.27	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+25+35+42	1.34	1.78	1.78	2.23	3.12	3.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+25+35+50	1.27	1.70	1.70	2.12	2.97	4.24	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+25+35+60	1.20	1.60	1.60	2.00	2.80	4.80	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+25+42+42	1.28	1.71	1.71	2.13	3.59	3.59	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+25+42+50	1.22	1.63	1.63	2.03	3.42	4.07	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+25+50+50	1.17	1.56	1.56	1.94	3.89	3.89	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+35+35+35	1.31	1.75	1.75	3.06	3.06	3.06	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+35+35+42	1.26	1.68	1.68	2.93	2.93	3.52	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+35+35+50	1.20	1.60	1.60	2.80	2.80	4.00	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+20+35+42+42	1.21	1.61	1.61	2.82	3.38	3.38	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+22+22+22	1.63	2.18	2.40	2.40	2.40	2.40	13.40 (3.40 - 16.10)	3.75 (0.78 - 5.85)	16.47	99
15+20+22+22+22+25	1.62	2.16	2.37	2.37	2.37	2.70	13.60 (3.50 - 16.30)	3.67 (0.78 - 5.52)	16.12	99
15+20+22+22+22+35	1.54	2.06	2.26	2.26	2.26	3.60	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+20+22+22+22+42	1.47	1.96	2.15	2.15	2.15	4.11	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+20+22+22+22+50	1.39	1.85	2.04	2.04	2.04	4.64	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+22+22+60	1.30	1.74	1.91	1.91	1.91	5.22	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+22+22+71	1.22	1.63	1.79	1.79	1.79	5.78	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+22+25+25	1.60	2.14	2.35	2.35	2.67	2.67	13.80 (3.50 - 16.40)	3.60 (0.77 - 5.36)	15.81	99
15+20+22+22+25+35	1.51	2.01	2.22	2.22	2.52	3.53	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+20+22+22+25+42	1.44	1.92	2.11	2.11	2.40	4.03	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+20+22+22+25+50	1.36	1.82	2.00	2.00	2.27	4.55	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+22+25+60	1.28	1.71	1.88	1.88	2.13	5.12	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+22+25+71	1.20	1.60	1.76	1.76	2.00	5.68	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+22+35+35	1.41	1.88	2.07	2.07	3.29	3.29	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+22+35+42	1.35	1.79	1.97	1.97	3.14	3.77	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+22+35+50	1.28	1.71	1.88	1.88	2.99	4.27	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+22+35+60	1.21	1.61	1.77	1.77	2.82	4.83	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+22+42+42	1.29	1.72	1.89	1.89	3.61	3.61	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+22+42+50	1.23	1.64	1.80	1.80	3.44	4.09	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+20+22+22+50+50	1.17	1.56	1.72	1.72	3.91	3.91	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+25+25+25	1.59	2.12	2.33	2.65	2.65	2.65	14.00 (3.50 - 16.50)	3.52 (0.76 - 5.20)	15.46	99
15+20+22+25+25+35	1.48	1.97	2.17	2.46	2.46	3.45	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+20+22+25+25+42	1.41	1.88	2.07	2.35	2.35	3.95	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+25+25+50	1.34	1.78	1.96	2.23	2.23	4.46	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+25+25+60	1.26	1.68	1.84	2.10	2.10	5.03	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+25+25+71	1.18	1.57	1.73	1.97	1.97	5.58	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+25+35+35	1.38	1.84	2.03	2.30	3.22	3.22	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+25+35+42	1.32	1.76	1.94	2.20	3.08	3.70	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+25+35+50	1.26	1.68	1.84	2.10	2.93	4.19	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+25+35+60	1.19	1.58	1.74	1.98	2.77	4.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+25+42+42	1.27	1.69	1.86	2.11	3.54	3.54	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+25+42+50	1.21	1.61	1.77	2.01	3.38	4.02	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+35+35+35	1.30	1.73	1.90	3.02	3.02	3.02	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+35+35+42	1.24	1.66	1.82	2.90	2.90	3.48	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+35+35+50	1.19	1.58	1.74	2.77	2.77	3.95	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+22+35+42+42	1.19	1.59	1.75	2.78	3.34	3.34	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+25+25+25+25	1.56	2.07	2.59	2.59	2.59	2.59	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+20+25+25+25+35	1.45	1.93	2.41	2.41	2.41	3.38	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+20+25+25+25+42	1.38	1.84	2.30	2.30	2.30	3.87	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+25+25+25+50	1.31	1.75	2.19	2.19	2.19	4.38	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+25+25+25+60	1.24	1.65	2.06	2.06	2.06	4.94	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+25+25+35+35	1.35	1.81	2.26	2.26	3.16	3.16	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+25+25+35+42	1.30	1.73	2.16	2.16	3.02	3.63	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+25+25+35+50	1.24	1.65	2.06	2.06	2.88	4.12	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+25+25+35+60	1.17	1.56	1.94	1.94	2.72	4.67	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+25+25+42+42	1.24	1.66	2.07	2.07	3.48	3.48	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+25+25+42+50	1.19	1.58	1.98	1.98	3.32	3.95	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+25+35+35+35	1.27	1.70	2.12	2.97	2.97	2.97	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+25+35+35+42	1.22	1.63	2.03	2.85	2.85	3.42	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+25+35+35+50	1.17	1.56	1.94	2.72	2.72	3.89	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+25+35+42+42	1.17	1.56	1.96	2.74	3.28	3.28	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+20+35+35+35+35	1.20	1.60	2.80	2.80	2.80	2.80	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+22+22+22	1.62	2.38	2.38	2.38	2.38	2.38	13.50 (3.40 - 16.20)	3.71 (0.78 - 5.69)	16.29	99
15+22+22+22+22+25	1.61	2.35	2.35	2.35	2.35	2.68	13.70 (3.50 - 16.30)	3.63 (0.77 - 5.52)	15.94	99
15+22+22+22+22+35	1.52	2.23	2.23	2.23	2.23	3.55	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+22+22+22+22+42	1.45	2.12	2.12	2.12	2.12	4.06	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+22+22+22+22+50	1.37	2.01	2.01	2.01	2.01	4.58	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+22+22+60	1.29	1.89	1.89	1.89	1.89	5.15	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+22+22+71	1.21	1.77	1.77	1.77	1.77	5.71	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+22+25+25	1.59	2.33	2.33	2.33	2.65	2.65	13.90 (3.50 - 16.50)	3.56 (0.76 - 5.20)	15.63	99
15+22+22+22+25+35	1.49	2.18	2.18	2.18	2.48	3.48	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+22+22+22+25+42	1.42	2.08	2.08	2.08	2.36	3.97	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
15+22+22+22+25+50	1.35	1.97	1.97	1.97	2.24	4.49	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+22+25+60	1.27	1.86	1.86	1.86	2.11	5.06	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+22+25+71	1.19	1.74	1.74	1.74	1.98	5.62	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
15+22+22+22+35+35	1.39	2.04	2.04	2.04	3.25	3.25	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+22+35+42	1.33	1.95	1.95	1.95	3.10	3.72	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+22+35+50	1.27	1.86	1.86	1.86	2.95	4.22	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+22+35+60	1.19	1.75	1.75	1.75	2.78	4.77	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+22+42+42	1.27	1.87	1.87	1.87	3.56	3.56	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+22+42+50	1.21	1.78	1.78	1.78	3.40	4.05	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+25+25+25	1.57	2.30	2.30	2.61	2.61	2.61	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
15+22+22+25+25+35	1.46	2.14	2.14	2.43	2.43	3.40	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
15+22+22+25+25+42	1.39	2.04	2.04	2.32	2.32	3.89	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+25+25+50	1.32	1.94	1.94	2.20	2.20	4.40	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+25+25+60	1.24	1.82	1.82	2.07	2.07	4.97	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+25+25+71	1.17	1.71	1.71	1.94	1.94	5.52	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+25+35+35	1.36	2.00	2.00	2.27	3.18	3.18	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+25+35+42	1.30	1.91	1.91	2.17	3.04	3.65	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+25+35+50	1.24	1.82	1.82	2.07	2.90	4.14	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+25+35+60	1.17	1.72	1.72	1.96	2.74	4.69	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+25+42+42	1.25	1.83	1.83	2.08	3.50	3.50	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+25+42+50	1.19	1.75	1.75	1.99	3.34	3.98	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+35+35+35	1.28	1.88	1.88	2.99	2.99	2.99	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+35+35+42	1.23	1.80	1.80	2.87	2.87	3.44	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+35+35+50	1.17	1.72	1.72	2.74	2.74	3.91	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+22+35+42+42	1.18	1.73	1.73	2.75	3.30	3.30	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+25+35+35+42	1.21	1.77	2.01	2.82	2.82	3.38	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+22+35+35+35+35	1.19	1.74	2.77	2.77	2.77	2.77	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+25+25+25+25+25	1.50	2.50	2.50	2.50	2.50	2.50	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
15+25+25+25+25+35	1.40	2.33	2.33	2.33	2.33	3.27	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+25+25+25+25+42	1.34	2.23	2.23	2.23	2.23	3.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+25+25+25+25+50	1.27	2.12	2.12	2.12	2.12	4.24	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+25+25+25+25+60	1.20	2.00	2.00	2.00	2.00	4.80	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+25+25+25+35+35	1.31	2.19	2.19	2.19	3.06	3.06	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+25+25+25+35+42	1.26	2.10	2.10	2.10	2.93	3.52	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+25+25+25+35+50	1.20	2.00	2.00	2.00	2.80	4.00	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+25+25+25+42+42	1.21	2.01	2.01	2.01	3.38	3.38	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+25+25+35+35+35	1.24	2.06	2.06	2.88	2.88	2.88	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+25+25+35+35+42	1.19	1.98	1.98	2.77	2.77	3.32	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
15+25+35+35+35+35	1.17	1.94	2.72	2.72	2.72	2.72	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+20+20	2.20	2.20	2.20	2.20	2.20	2.20	13.20 (3.40 - 16.00)	3.82 (0.79 - 6.01)	16.78	99
20+20+20+20+20+22	2.18	2.18	2.18	2.18	2.18	2.40	13.30 (3.40 - 16.10)	3.78 (0.79 - 5.85)	16.60	99
20+20+20+20+20+25	2.16	2.16	2.16	2.16	2.16	2.70	13.50 (3.40 - 16.20)	3.71 (0.78 - 5.69)	16.29	99
20+20+20+20+20+35	2.07	2.07	2.07	2.07	2.07	3.63	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
20+20+20+20+20+42	1.97	1.97	1.97	1.97	1.97	4.14	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
20+20+20+20+20+50	1.87	1.87	1.87	1.87	1.87	4.67	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+20+60	1.75	1.75	1.75	1.75	1.75	5.25	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+20+71	1.64	1.64	1.64	1.64	1.64	5.81	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+22+22	2.18	2.18	2.18	2.18	2.40	2.40	13.50 (3.40 - 16.20)	3.71 (0.78 - 5.69)	16.29	99
20+20+20+20+22+25	2.16	2.16	2.16	2.16	2.37	2.70	13.70 (3.50 - 16.30)	3.63 (0.77 - 5.52)	15.94	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
20+20+20+20+22+35	2.04	2.04	2.04	2.04	2.25	3.58	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
20+20+20+20+22+42	1.94	1.94	1.94	1.94	2.14	4.08	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
20+20+20+20+22+50	1.84	1.84	1.84	1.84	2.03	4.61	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+22+60	1.73	1.73	1.73	1.73	1.90	5.19	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+22+71	1.62	1.62	1.62	1.62	1.78	5.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+25+25	2.14	2.14	2.14	2.14	2.67	2.67	13.90 (3.50 - 16.40)	3.56 (0.77 - 5.36)	15.63	99
20+20+20+20+25+35	2.00	2.00	2.00	2.00	2.50	3.50	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
20+20+20+20+25+42	1.90	1.90	1.90	1.90	2.38	4.00	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
20+20+20+20+25+50	1.81	1.81	1.81	1.81	2.26	4.52	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+25+60	1.70	1.70	1.70	1.70	2.12	5.09	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+25+71	1.59	1.59	1.59	1.59	1.99	5.65	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+35+35	1.87	1.87	1.87	1.87	3.27	3.27	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+35+42	1.78	1.78	1.78	1.78	3.12	3.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+35+50	1.70	1.70	1.70	1.70	2.97	4.24	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+35+60	1.60	1.60	1.60	1.60	2.80	4.80	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+42+42	1.71	1.71	1.71	1.71	3.59	3.59	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+42+50	1.63	1.63	1.63	1.63	3.42	4.07	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+20+50+50	1.56	1.56	1.56	1.56	3.89	3.89	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+22+22+22	2.16	2.16	2.16	2.37	2.37	2.37	13.60 (3.50 - 16.30)	3.67 (0.78 - 5.52)	16.12	99
20+20+20+22+22+25	2.14	2.14	2.14	2.35	2.35	2.67	13.80 (3.50 - 16.40)	3.60 (0.77 - 5.36)	15.81	99
20+20+20+22+22+35	2.01	2.01	2.01	2.22	2.22	3.53	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
20+20+20+22+22+42	1.92	1.92	1.92	2.11	2.11	4.03	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
20+20+20+22+22+50	1.82	1.82	1.82	2.00	2.00	4.55	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+22+22+60	1.71	1.71	1.71	1.88	1.88	5.12	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+22+22+71	1.60	1.60	1.60	1.76	1.76	5.68	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+22+25+25	2.12	2.12	2.12	2.33	2.65	2.65	14.00 (3.50 - 16.50)	3.52 (0.76 - 5.20)	15.46	99
20+20+20+22+25+35	1.97	1.97	1.97	2.17	2.46	3.45	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
20+20+20+22+25+42	1.88	1.88	1.88	2.07	2.35	3.95	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+22+25+50	1.78	1.78	1.78	1.96	2.23	4.46	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+22+25+60	1.68	1.68	1.68	1.84	2.10	5.03	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+22+25+71	1.57	1.57	1.57	1.73	1.97	5.58	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+22+35+35	1.84	1.84	1.84	2.03	3.22	3.22	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+22+35+42	1.76	1.76	1.76	1.94	3.08	3.70	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+22+35+50	1.68	1.68	1.68	1.84	2.93	4.19	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+22+35+60	1.58	1.58	1.58	1.74	2.77	4.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+22+42+42	1.69	1.69	1.69	1.86	3.54	3.54	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+22+42+50	1.61	1.61	1.61	1.77	3.38	4.02	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+25+25+25	2.07	2.07	2.07	2.59	2.59	2.59	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
20+20+20+25+25+35	1.93	1.93	1.93	2.41	2.41	3.38	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
20+20+20+25+25+42	1.84	1.84	1.84	2.30	2.30	3.87	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+25+25+50	1.75	1.75	1.75	2.19	2.19	4.38	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+25+25+60	1.65	1.65	1.65	2.06	2.06	4.94	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+25+35+35	1.81	1.81	1.81	2.26	3.16	3.16	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+25+35+42	1.73	1.73	1.73	2.16	3.02	3.63	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+25+35+50	1.65	1.65	1.65	2.06	2.88	4.12	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+25+35+60	1.56	1.56	1.56	1.94	2.72	4.67	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
20+20+20+25+42+42	1.66	1.66	1.66	2.07	3.48	3.48	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+25+42+50	1.58	1.58	1.58	1.98	3.32	3.95	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+35+35+35	1.70	1.70	1.70	2.97	2.97	2.97	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+35+35+42	1.63	1.63	1.63	2.85	2.85	3.42	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+35+35+50	1.56	1.56	1.56	2.72	2.72	3.89	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+20+35+42+42	1.56	1.56	1.56	2.74	3.28	3.28	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+22+22+22	2.14	2.14	2.35	2.35	2.35	2.35	13.70 (3.50 - 16.30)	3.63 (0.77 - 5.52)	15.94	99
20+20+22+22+22+25	2.12	2.12	2.33	2.33	2.33	2.65	13.90 (3.50 - 16.50)	3.56 (0.76 - 5.20)	15.63	99
20+20+22+22+22+35	1.99	1.99	2.18	2.18	2.18	3.48	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
20+20+22+22+22+42	1.89	1.89	2.08	2.08	2.08	3.97	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
20+20+22+22+22+50	1.79	1.79	1.97	1.97	1.97	4.49	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+22+22+60	1.69	1.69	1.86	1.86	1.86	5.06	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+22+22+71	1.58	1.58	1.74	1.74	1.74	5.62	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+22+25+25	2.09	2.09	2.30	2.30	2.61	2.61	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
20+20+22+22+25+35	1.94	1.94	2.14	2.14	2.43	3.40	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
20+20+22+22+25+42	1.85	1.85	2.04	2.04	2.32	3.89	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+22+25+50	1.76	1.76	1.94	1.94	2.20	4.40	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+22+25+60	1.66	1.66	1.82	1.82	2.07	4.97	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+22+25+71	1.56	1.56	1.71	1.71	1.94	5.52	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+22+35+35	1.82	1.82	2.00	2.00	3.18	3.18	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+22+35+42	1.74	1.74	1.91	1.91	3.04	3.65	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+22+35+50	1.66	1.66	1.82	1.82	2.90	4.14	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+22+35+60	1.56	1.56	1.72	1.72	2.74	4.69	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+22+42+42	1.67	1.67	1.83	1.83	3.50	3.50	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+22+42+50	1.59	1.59	1.75	1.75	3.34	3.98	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+25+25+25	2.04	2.04	2.25	2.55	2.55	2.55	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
20+20+22+25+25+35	1.90	1.90	2.10	2.38	2.38	3.33	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
20+20+22+25+25+42	1.82	1.82	2.00	2.27	2.27	3.82	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+25+25+50	1.73	1.73	1.90	2.16	2.16	4.32	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+25+25+60	1.63	1.63	1.79	2.03	2.03	4.88	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+25+35+35	1.78	1.78	1.96	2.23	3.12	3.12	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+25+35+42	1.71	1.71	1.88	2.13	2.99	3.59	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+25+35+50	1.63	1.63	1.79	2.03	2.85	4.07	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+25+42+42	1.64	1.64	1.80	2.05	3.44	3.44	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+25+42+50	1.56	1.56	1.72	1.96	3.28	3.91	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+35+35+35	1.68	1.68	1.84	2.93	2.93	2.93	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+22+35+35+42	1.61	1.61	1.77	2.82	2.82	3.38	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+25+25+25+25	2.00	2.00	2.50	2.50	2.50	2.50	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
20+20+25+25+25+35	1.87	1.87	2.33	2.33	2.33	3.27	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+25+25+25+42	1.78	1.78	2.23	2.23	2.23	3.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+25+25+25+50	1.70	1.70	2.12	2.12	2.12	4.24	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+25+25+25+60	1.60	1.60	2.00	2.00	2.00	4.80	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+25+25+35+35	1.75	1.75	2.19	2.19	3.06	3.06	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+25+25+35+42	1.68	1.68	2.10	2.10	2.93	3.52	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+25+25+35+50	1.60	1.60	2.00	2.00	2.80	4.00	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+25+25+42+42	1.61	1.61	2.01	2.01	3.38	3.38	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
20+20+25+35+35+35	1.65	1.65	2.06	2.88	2.88	2.88	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+25+35+35+42	1.58	1.58	1.98	2.77	2.77	3.32	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+20+35+35+35+35	1.56	1.56	2.72	2.72	2.72	2.72	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+22+22+22	2.14	2.35	2.35	2.35	2.35	2.35	13.90 (3.50 - 16.40)	3.56 (0.77 - 5.36)	15.63	99
20+22+22+22+22+25	2.11	2.32	2.32	2.32	2.32	2.63	14.00 (3.50 - 16.50)	3.52 (0.76 - 5.20)	15.46	99
20+22+22+22+22+35	1.96	2.15	2.15	2.15	2.15	3.43	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
20+22+22+22+22+42	1.87	2.05	2.05	2.05	2.05	3.92	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+22+22+50	1.77	1.95	1.95	1.95	1.95	4.43	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+22+22+60	1.67	1.83	1.83	1.83	1.83	5.00	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+22+22+71	1.56	1.72	1.72	1.72	1.72	5.55	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+22+25+25	2.06	2.26	2.26	2.26	2.57	2.57	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
20+22+22+22+25+35	1.92	2.11	2.11	2.11	2.40	3.36	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
20+22+22+22+25+42	1.83	2.01	2.01	2.01	2.29	3.84	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+22+25+50	1.74	1.91	1.91	1.91	2.17	4.35	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+22+25+60	1.64	1.80	1.80	1.80	2.05	4.91	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+22+35+35	1.79	1.97	1.97	1.97	3.14	3.14	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+22+35+42	1.72	1.89	1.89	1.89	3.01	3.61	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+22+35+50	1.64	1.80	1.80	1.80	2.87	4.09	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+22+42+42	1.65	1.81	1.81	1.81	3.46	3.46	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+22+42+50	1.57	1.73	1.73	1.73	3.30	3.93	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+25+25+25	2.01	2.22	2.22	2.52	2.52	2.52	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
20+22+22+25+25+35	1.88	2.07	2.07	2.35	2.35	3.29	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+25+25+42	1.79	1.97	1.97	2.24	2.24	3.77	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+25+25+50	1.71	1.88	1.88	2.13	2.13	4.27	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+25+25+60	1.61	1.77	1.77	2.01	2.01	4.83	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+25+35+35	1.76	1.94	1.94	2.20	3.08	3.08	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+25+35+42	1.69	1.86	1.86	2.11	2.95	3.54	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+25+35+50	1.61	1.77	1.77	2.01	2.82	4.02	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+25+42+42	1.62	1.78	1.78	2.02	3.40	3.40	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+35+35+35	1.66	1.82	1.82	2.90	2.90	2.90	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+22+35+35+42	1.59	1.75	1.75	2.78	2.78	3.34	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+25+25+25+25	1.97	2.17	2.46	2.46	2.46	2.46	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
20+22+25+25+25+35	1.84	2.03	2.30	2.30	2.30	3.22	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+25+25+25+42	1.76	1.94	2.20	2.20	2.20	3.70	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+25+25+25+50	1.68	1.84	2.10	2.10	2.10	4.19	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+25+25+25+60	1.58	1.74	1.98	1.98	1.98	4.75	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+25+25+35+35	1.73	1.90	2.16	2.16	3.02	3.02	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+25+25+35+42	1.66	1.82	2.07	2.07	2.90	3.48	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+25+25+35+50	1.58	1.74	1.98	1.98	2.77	3.95	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+25+25+42+42	1.59	1.75	1.99	1.99	3.34	3.34	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+25+35+35+35	1.63	1.79	2.03	2.85	2.85	2.85	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+22+25+35+35+42	1.56	1.72	1.96	2.74	2.74	3.28	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+25+25+25+25+25	1.93	2.41	2.41	2.41	2.41	2.41	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
20+25+25+25+25+35	1.81	2.26	2.26	2.26	2.26	3.16	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+25+25+25+25+42	1.73	2.16	2.16	2.16	2.16	3.63	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+25+25+25+25+50	1.65	2.06	2.06	2.06	2.06	4.12	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
20+25+25+25+25+60	1.56	1.94	1.94	1.94	1.94	4.67	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+25+25+25+35+35	1.70	2.12	2.12	2.12	2.97	2.97	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+25+25+25+35+42	1.63	2.03	2.03	2.03	2.85	3.42	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+25+25+25+35+50	1.56	1.94	1.94	1.94	2.72	3.89	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+25+25+25+42+42	1.56	1.96	1.96	1.96	3.28	3.28	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
20+25+25+35+35+35	1.60	2.00	2.00	2.80	2.80	2.80	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+22+22+22	2.33	2.33	2.33	2.33	2.33	2.33	14.00 (3.50 - 16.50)	3.52 (0.76 - 5.20)	15.46	99
22+22+22+22+22+25	2.28	2.28	2.28	2.28	2.28	2.59	14.00 (3.50 - 16.50)	3.51 (0.76 - 5.19)	15.42	99
22+22+22+22+22+35	2.12	2.12	2.12	2.12	2.12	3.38	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
22+22+22+22+22+42	2.03	2.03	2.03	2.03	2.03	3.87	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+22+22+50	1.93	1.93	1.93	1.93	1.93	4.38	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+22+22+60	1.81	1.81	1.81	1.81	1.81	4.94	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+22+25+25	2.23	2.23	2.23	2.23	2.54	2.54	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
22+22+22+22+25+35	2.08	2.08	2.08	2.08	2.36	3.31	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
22+22+22+22+25+42	1.99	1.99	1.99	1.99	2.26	3.79	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+22+25+50	1.89	1.89	1.89	1.89	2.15	4.29	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+22+25+60	1.78	1.78	1.78	1.78	2.02	4.86	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+22+35+35	1.95	1.95	1.95	1.95	3.10	3.10	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+22+35+42	1.87	1.87	1.87	1.87	2.97	3.56	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+22+35+50	1.78	1.78	1.78	1.78	2.83	4.05	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+22+42+42	1.79	1.79	1.79	1.79	3.42	3.42	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+22+42+50	1.71	1.71	1.71	1.71	3.27	3.89	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+25+25+25	2.18	2.18	2.18	2.48	2.48	2.48	14.00 (3.50 - 16.50)	3.50 (0.76 - 5.18)	15.37	99
22+22+22+25+25+35	2.04	2.04	2.04	2.32	2.32	3.25	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+25+25+42	1.95	1.95	1.95	2.22	2.22	3.72	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+25+25+50	1.86	1.86	1.86	2.11	2.11	4.22	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+25+25+60	1.75	1.75	1.75	1.99	1.99	4.77	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+25+35+35	1.91	1.91	1.91	2.17	3.04	3.04	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+25+35+42	1.83	1.83	1.83	2.08	2.92	3.50	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+25+35+50	1.75	1.75	1.75	1.99	2.78	3.98	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+25+42+42	1.76	1.76	1.76	2.00	3.36	3.36	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+35+35+35	1.80	1.80	1.80	2.87	2.87	2.87	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+22+35+35+42	1.73	1.73	1.73	2.75	2.75	3.30	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+25+25+25+25	2.14	2.14	2.43	2.43	2.43	2.43	14.00 (3.50 - 16.50)	3.49 (0.76 - 5.17)	15.33	99
22+22+25+25+25+35	2.00	2.00	2.27	2.27	2.27	3.18	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+25+25+25+42	1.91	1.91	2.17	2.17	2.17	3.65	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+25+25+25+50	1.82	1.82	2.07	2.07	2.07	4.14	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+25+25+25+60	1.72	1.72	1.96	1.96	1.96	4.69	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+25+25+35+35	1.88	1.88	2.13	2.13	2.99	2.99	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+25+25+35+42	1.80	1.80	2.05	2.05	2.87	3.44	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+25+25+35+50	1.72	1.72	1.96	1.96	2.74	3.91	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+25+25+42+42	1.73	1.73	1.97	1.97	3.30	3.30	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+22+25+35+35+35	1.77	1.77	2.01	2.82	2.82	2.82	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+25+25+25+25+25	2.10	2.38	2.38	2.38	2.38	2.38	14.00 (3.50 - 16.50)	3.48 (0.76 - 5.16)	15.28	99
22+25+25+25+25+35	1.96	2.23	2.23	2.23	2.23	3.12	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+25+25+25+25+42	1.88	2.13	2.13	2.13	2.13	3.59	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99

MXZ-6C120VA HEATING

Indoor units combination	Heating capacity (kW)							Outdoor unit power consumption (kW)	Current (A)	Power factor (%)
	Unit A	Unit B	Unit C	Unit D	Unit E	Unit F	Total			
22+25+25+25+25+50	1.79	2.03	2.03	2.03	2.03	4.07	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+25+25+25+35+35	1.84	2.10	2.10	2.10	2.93	2.93	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+25+25+25+35+42	1.77	2.01	2.01	2.01	2.82	3.38	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
22+25+25+35+35+35	1.74	1.98	1.98	2.77	2.77	2.77	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
25+25+25+25+25+25	2.33	2.33	2.33	2.33	2.33	2.33	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
25+25+25+25+25+35	2.19	2.19	2.19	2.19	2.19	3.06	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
25+25+25+25+25+42	2.10	2.10	2.10	2.10	2.10	3.52	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
25+25+25+25+25+50	2.00	2.00	2.00	2.00	2.00	4.00	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
25+25+25+25+35+35	2.06	2.06	2.06	2.06	2.88	2.88	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
25+25+25+25+35+42	1.98	1.98	1.98	1.98	2.77	3.32	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99
25+25+25+35+35+35	1.94	1.94	1.94	2.72	2.72	2.72	14.00 (3.50 - 16.50)	3.47 (0.76 - 5.15)	15.24	99